
GPJN15-12/31.5kA Indoor High Voltage AC Earthing Switch

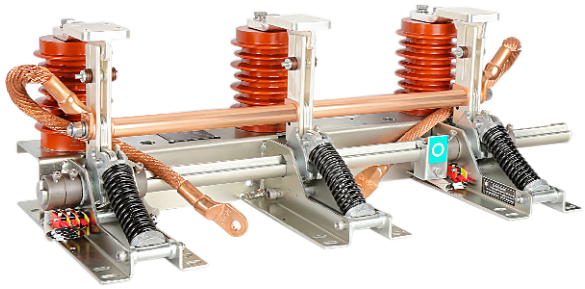

Products model and meaning

GP J N 15 - 12 / 31.5 - □

- Pole distance (mm)
- Rated short-time withstand current (kA)
- Rated voltage (kV)
- Design code
- Indoor
- Earthing switch
- Company feature code

Description

GPJN15-12(7.2)/31.5 type indoor high voltage earthing switch is the assembly type products, its performance meet GB1985-2004 High Voltage AC Disconnector and Earthing Switch and the requirements of standard IEC62271-102:2002. The products suit for power system with 3.6kV-12kV, 3 phase, AC, 50(60)Hz; It has capacity of short-circuit close to protect the electrical equipment from damage, applicable for high voltage switchgear arrangement as the earthing protection when do maintenance.

Standard working condition


1. Altitude sea level not exceeding 1000m;
2. Ambient air temperature: +45℃ ,-25℃ ;
3. Seismic intensity not exceeding 8 degree;
4. Related humidity daily average value not more than 95%, monthly average not more than 90%;
5. Pollution class: II


Special condition: Please specify when ordering.

Main technical data


Items		Unit	Data	
Rated voltage		kV	12	
Rated short-time withstand current		kA	31.5	
Rated short-circuit duration		s	4	
Rated short-circuit close current		kA	80	
Rated peak withstand current		kA	80	
Rated insulation level	Rated short-time power	KV	Phase to earth/ between phase	42
	Rated lighting impulse withstand voltage			75
Mechanical endurance		times	2000	

GPJN15-12/31.5 Earthing switch outline and installation dimension

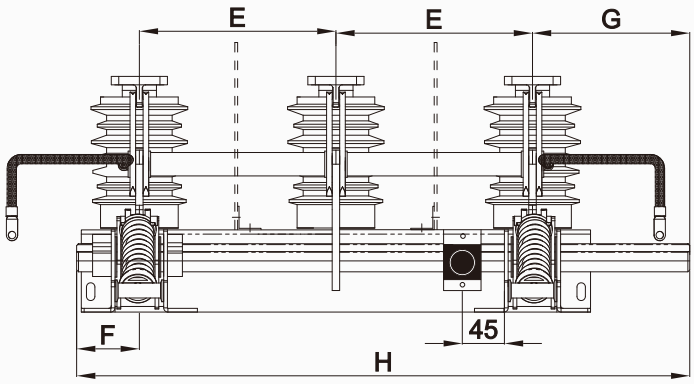

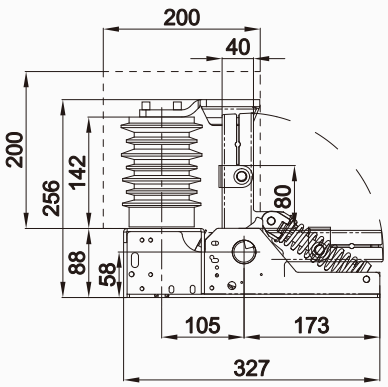


Holing dimension:

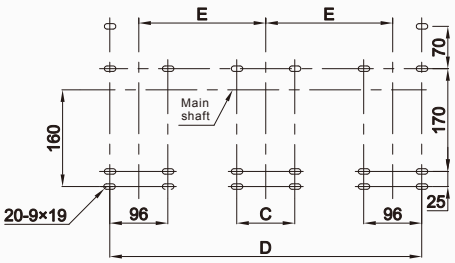


Products model	E	F	G	H	D	C
GPJN15-12/31.5-275	275	75	185	810	646.5	96
GPJN15-12/31.5-250	250	75	160	735	596.5	96
GPJN15-12/31.5-230	230	75	160	695	556.5	96
GPJN15-12/31.5-220	220	75	160	675	536.5	
GPJN15-12/31.5-210	210	75	160	655	516	
GPJN15-12/31.5-200	200	75	160	635	496.5	
GPJN15-12/31.5-180	180	75	160	595	456.5	
GPJN15-12/31.5-165	165	75	160	565	426.5	
GPJN15-12/31.5-150	150	75	140	515	396.5	

Busbar joint surface dimension

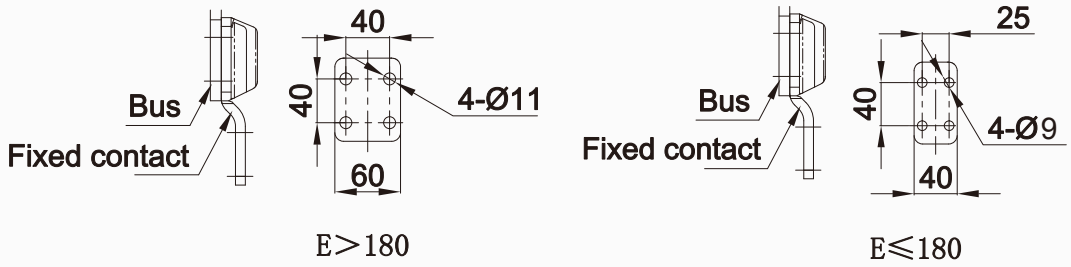

Phase distance 150 shall add insulating plate between phases

GPJN15-17.5/31.5kA Earthing switch outline dimension

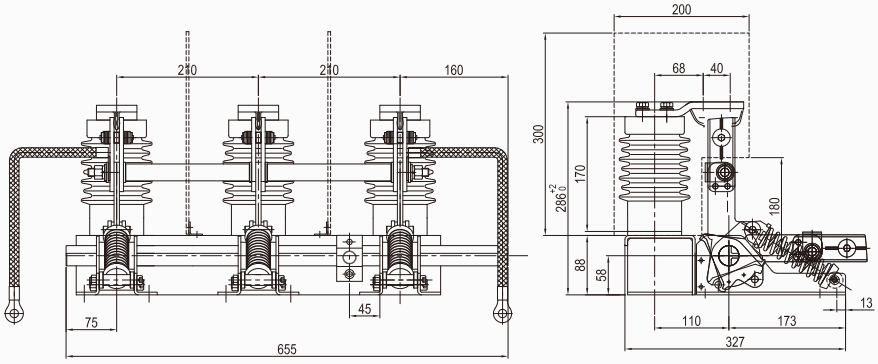

Note: other holing and busbar joint surface dimension, please follow the GPJN15-12/31.5kA. Any other special dimension, please consalt with Greenpower.

Ordering notice

1. When ordering earthing switch, shall specify products model, rated voltage, phase distance, thermal stability current, with or without live indicator device. (If necessary, please specify the monitor model).
2. If flexible connection lengths required longer. (Standard arrangement of the soft connection length L = 240mm).
3. Number of the auxiliary switch, terminal needs to lead or not.
4. Specify the operation direction: Left or right.
   About the operation direction of left or right, which is the easiest to mistake when ordering, so my company will be as follows:
   Stand in the from of the product, insulator in the top face, the movable blade in the bottom, then the main shaft in the left hand is left operating earthing switch, shown in Figure (1).
   Stand from of the product, insulator in the top face, the movable blade in the bottom, then the main shaft in the right hand is right operating earthing switch, shown in Figure (2).

   Since the earthing switch can be installed in any orientation, you carefully check the required operation direction, According to the above instruction of Figure (1) and (2), to select the required left or right operating earthing switch.
5. If any special requirements, please contact with GreenPower to develop detailed specifications.

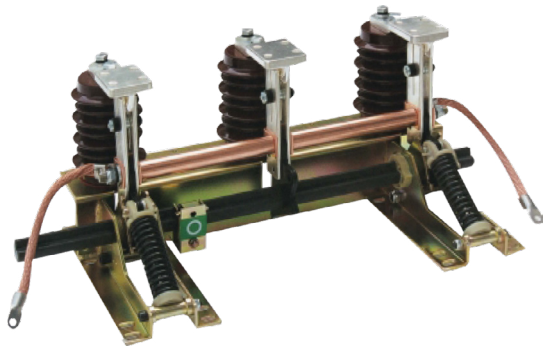


Figure (1) left operating earthing switch


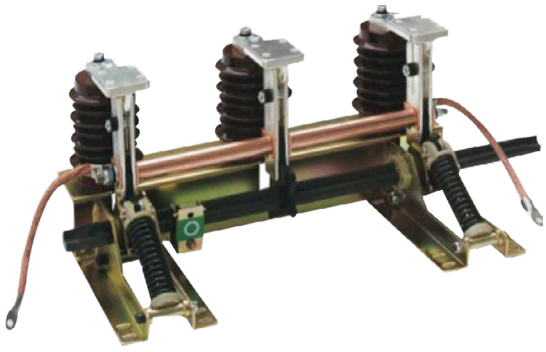


Figure (2) right operating earthing switch

GPJN15-12/40 Indoor High Voltage Earthing Switch

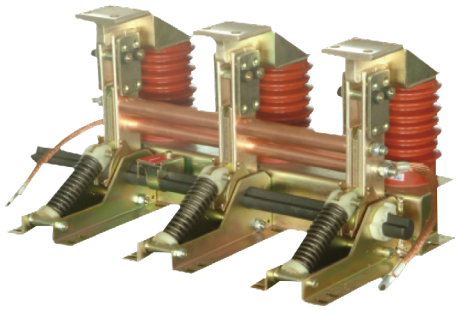

Products model and meaning

GP J N 15 - 12 / 40 - □

- Phase distance (mm)
- Rated short-time withstand current (kA)
- Rated voltage (kV)
- Design no.
- Indoor
- Earthing switch
- Company feature code

General of earthing switch

GPJN15-12(7.2)/40-100 type indoor high voltage earthing switch is the assembly type products, its performance meet GB1985-2004 High Voltage AC Disconnector and Earthing Switch and the requirements of standard IEC62271-102:2002. The products suit for power system with 3-12kV, 3 phase, AC, 50(60) Hz; It has capacity of short-circuit close to protect the electrical equipment from damage, Applicable for high voltage switchgear arrangement as the earthing protection when maintenance.

Standard working condition


1. Altitude sea level not exceeding 1000m;
2. Ambient air temperature: +45℃ ,-25℃ ;
3. Seismic intensity not exceeding 8 degree;
4. Related humidity daily average value not more than 95%, monthly average not more than 90%;
5. Pollution class: II

Special condition: Please specify when ordering.


Main technical data


Items		Unit	Data	
Rated voltage		kV	12	
Rated short-time withstand current		kA	40	
Rated short-circuit duration		s	4	
Rated short-circuit close current		kA	100	
Rated peak withstand current		kA	100	
Rated insulation level	Rated short-time power frequency withstand voltage	kV	Phase to earth/ between phase	42
	Rated lighting impulse withstand voltage			75
Mechanical endurance		times	2000	

GPJN15-12/40 Earthing switch outline and installation dimension

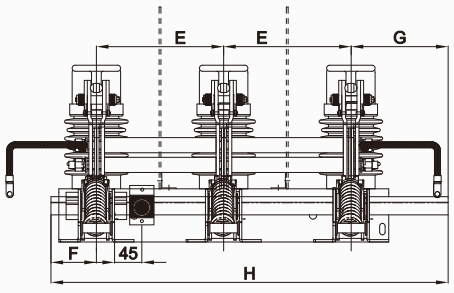


Holing dimension

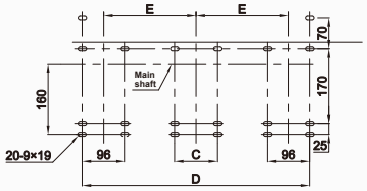



Fixed contact outline dimension




Products model	E	F	G	H	D	C
GPJN15-12/40-275	275	75	185	810	646.5	96
GPJN15-12/40-250	250	75	160	735	596.5	96
GPJN15-12/40-230	230	75	160	695	556.5	
GPJN15-12/40-220	220	75	160	675	536.5	
GPJN15-12/40-210	210	75	160	655	516	
GPJN15-12/40-150	150	75	140	515	396.5	

Ordering notice

1. When ordering earthing switch, please specify product model, right or left operation, phase distance, with or without live indicator device (specify the indicator model).
2. Flexible connect length need extend or not (Standard L=240mm).
3. If any special requirements, please contact with GreenPower to develop detailed specifications.

GPJN15-12/50 Indoor High Voltage Earthing Switch

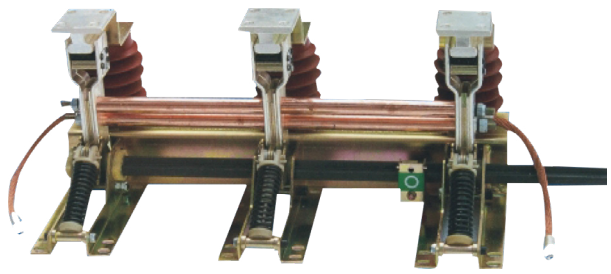

Products model and meaning

GP J N 15 - 12 / 50 - □

- Phase distance (mm)
- Rated short-time withstand current (kA)
- Rated voltage (kV)
- Design No.
- Indoor
- Earthing Switch
- Company feature code

General of earthing switch

GPJN15-12/50 type indoor high voltage earthing switch is the assembly type products, its performance meet GB1985-2004 High Voltage AC Disconnector and Earthing Switch and the requirements of standard IEC62271-102:2002. The products suit for power system with 3-12kV, 3 phase, AC, 50(60) Hz, large capacity and high breaking performance; It has capacity of short-circuit close to protect the electrical equipment from damage, Applicable for high voltage switchgear arrangement as the earthing protection when maintenance.

Standard working condition


1. Altitude sea level not exceeding 1000m;
2. Ambient air temperature: +45℃ ,-25℃ ;
3. Seismic intensity not exceeding 8 degree;
4. Related humidity daily average value not more than 95%, monthly average not more than 90%;
5. Pollution class: II

Special condition: Please specify when ordering.


Main technical data

Items		Unit	Data	
Rated voltage		kV	12	
Rated short-time withstand current(Thermal stability)		kA	50	
Rated short-time duration		s	3	
Rated peak withstand current(Movable stability)		kA	125	
Rated short-circuit close current		kA	125	
Phase distance		mm	210/230/250/275	
Rated insulation level	1min Power frequency withstand voltage	kV	Phase to earth/ between phase	42
	Lighting impulse withstand voltage			75
Mechanical endurance		times	2000	


Outline and installation dimension

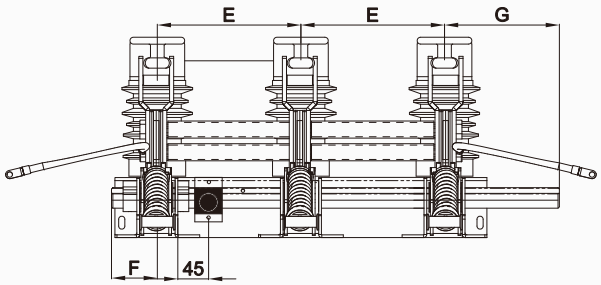


Holing dimension

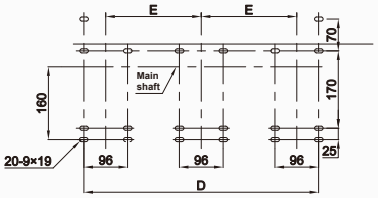

Fixed contact outline dimension





Products model	E	F	G	H	D
GPJN15-12/50-275	275	75	185	810	646
GPJN15-12/50-250	250	75	160	735	596
GPJN15-12/50-230	230	75	160	695	556
GPJN15-12/50-210	210	75	160	695	516
GPJN15-12/50-150	150	75	160	535	396

Ordering notice

1. When ordering earthing switch, please specify product model, right or left operation, phase distance, with or without live indicator device (specify the indicator model).
2. Flexible connect length need extend or not (Standard L=500mm).
3. If any special requirements, please contact with GreenPower to develop detailed specifications.