

RM. Williams Product Integrity Manual

Measurements Skirts

Section 9 Subsection 2.2

2.1 General comments

- 2.1.1 All of the measuring methods which are explained in subsection 2.2 are applicable to skirts.
- 2.1.2 The tolerances to be applied on each of the measurements explained can be found in section 9.6.
- 2.1.3 Any reference made to the right and left is referring to the right or left side of the garment as it is to the wearer or 'as worn'.

RM. Williams Product Integrity Manual

Measurements Skirts

Section 9 Subsection 2.2


2.2 Measurement points – skirts

A	Front length
B	Side length
C	Back length
D	Bottom width
E	Zip fly opening
F	Fly length
G	Fly width
H	Front pocket width
I	Front pocket length
J	Waist
K, L, M & N	Back pocket positioning and measurements
P	High Hip (V measurement)

2.13 Measurement A = Front length

2.13.1 Method


- Smooth out, do not stretch
- Measure skirt flat on the table.
- Measure from the top of the waistband to the hem of the skirt in a straight line at the centre front.

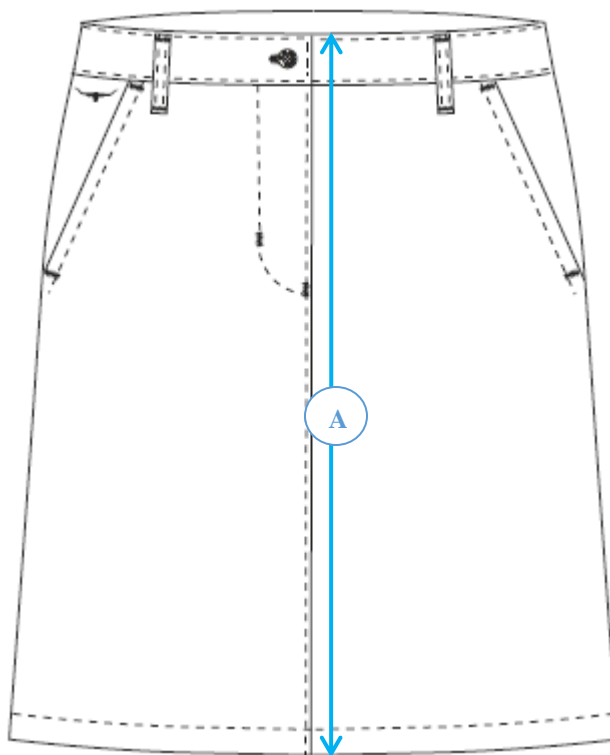

2.14 Measurement B = Side length

2.14.1 Method


- Smooth out, do not stretch
- Measure skirt flat on the table.
- Measure from the top of the waistband to the hem of the skirt in a straight line following the contours of the side seam.

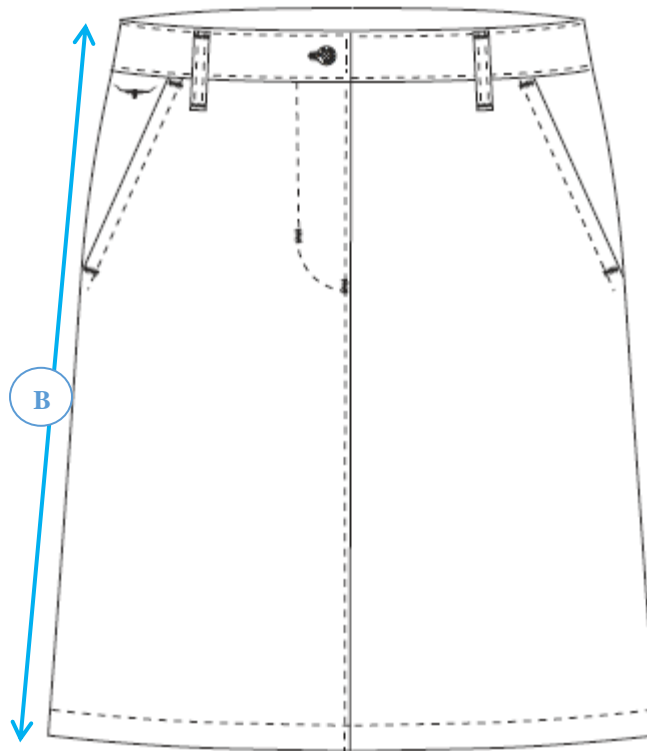

2.15 Measurement C = Back length

2.15.1 Method


- Smooth out, do not stretch
- Measure skirt flat on the table.
- Measure from the top of the waistband to the hem of the skirt in a straight line at the centre back

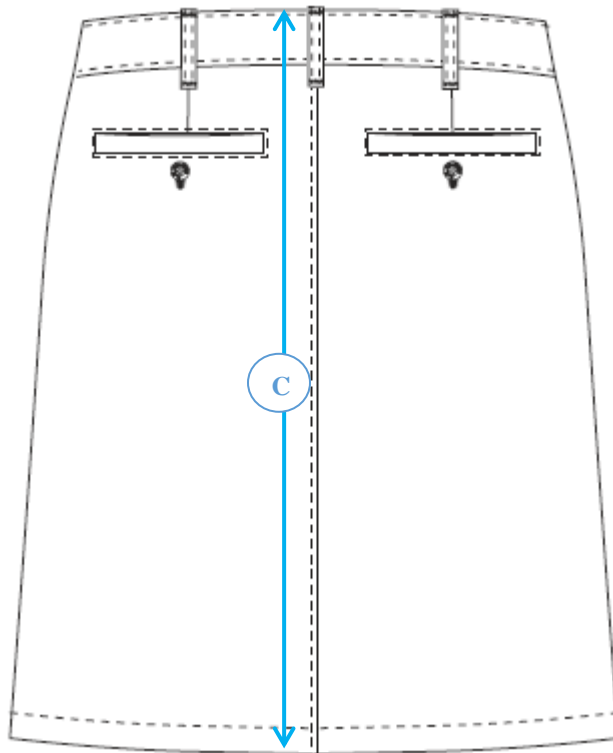

2.16 Measurement D = Bottom width

2.16.1 Method


- Roll the side seams if necessary
- Ensure the skirt is completely flat and that there are no wrinkles.
- Do not stretch
- Measure from edge to edge in a straight line across the hem.
- If the skirt has a slit or vent, fold the skirt in half laying edges of the slit on top of each other.

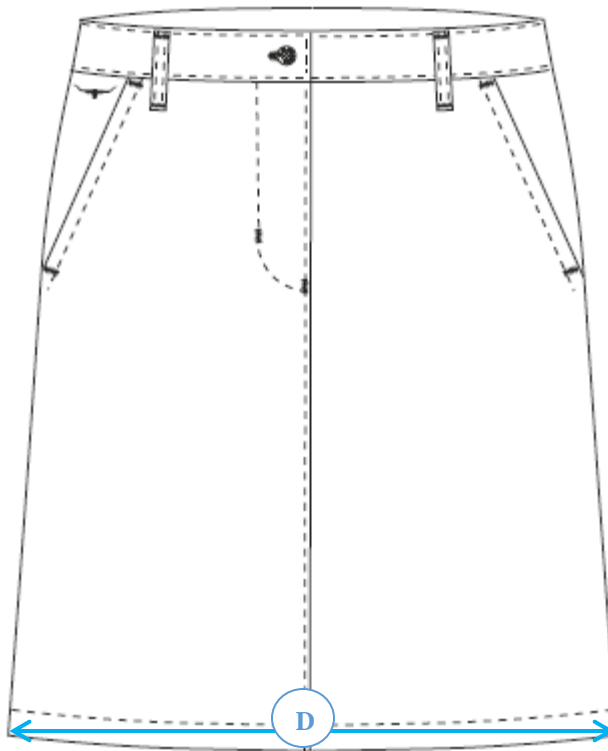

2.17 Measurement E = Zip fly opening

2.17.1 Method


- Lay the garment flat, face up.
- Smooth out, do not stretch
- Garment must be measured flat on the table.
- Waistband button to be open and zip slider down to the lowest point.
- Measure straight down the left side of the zipper from the bottom edge of the waistband to top of the slider.

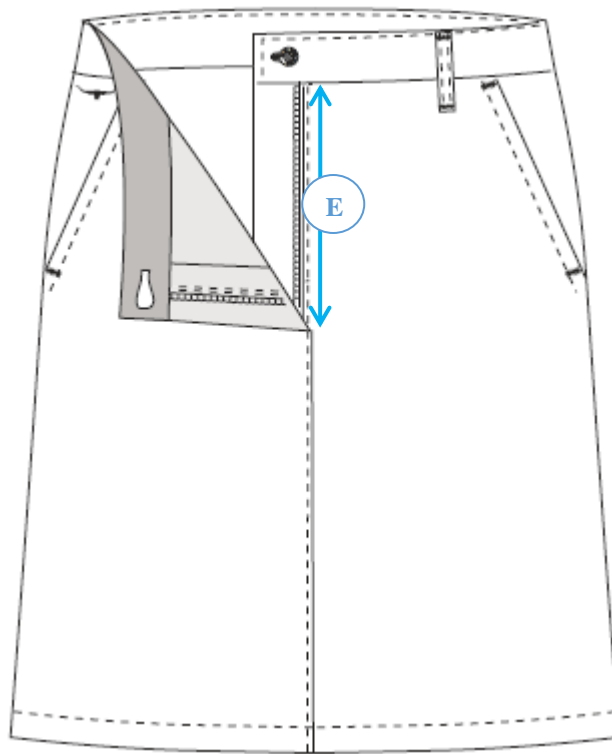

2.26 Measurement F = Fly length

2.26.1 Method


- Lay the garment flat, face up.
- Smooth out, do not stretch
- Garment must be measured flat on the table.
- Measure straight down from the top to the bottom of the fly

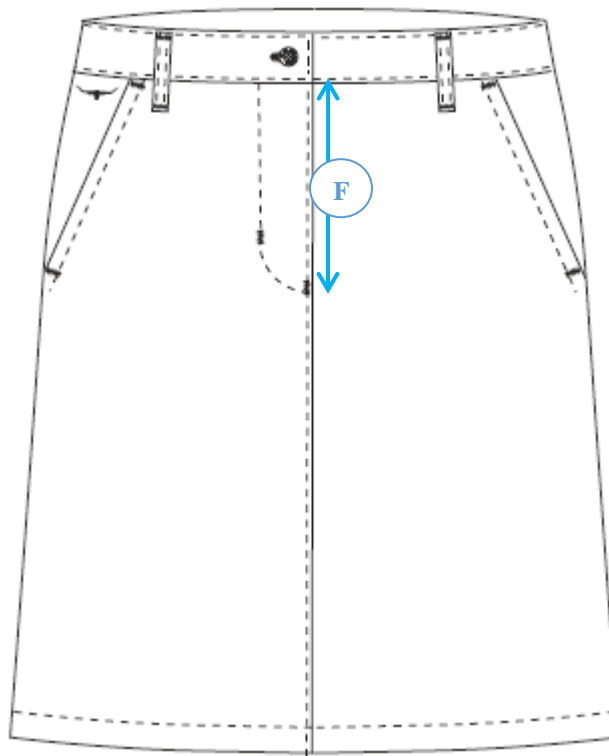

2.27 Measurement G = Fly width

2.27.1 Method

- Lay the garment flat, face up.
- Smooth out, do not stretch
- Garment must be measured flat on the table.
- Measure straight across fly width from edge of fly, straight across to outer stitch line

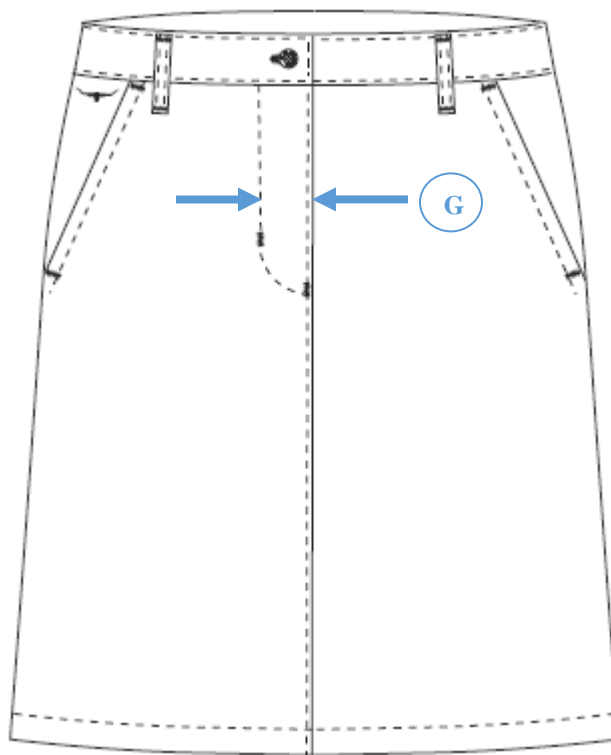



Measurements Skirts

Section 9 Subsection 2.2

2.28 Measurement H = Front pocket width
Measurement I = Front pocket length

2.28.1 Method


- Lay the garment flat & face up.
- Smooth out, do not stretch
- Garment must be measured flat on the table.
- Choose appropriate pocket style as per the examples below
- Measurement H - Measure the left pocket from the pocket edge along waistband to the side seam.
- Measurement I - Measure the left pocket from the bottom of the waistband to the pocket edge along the side seam.

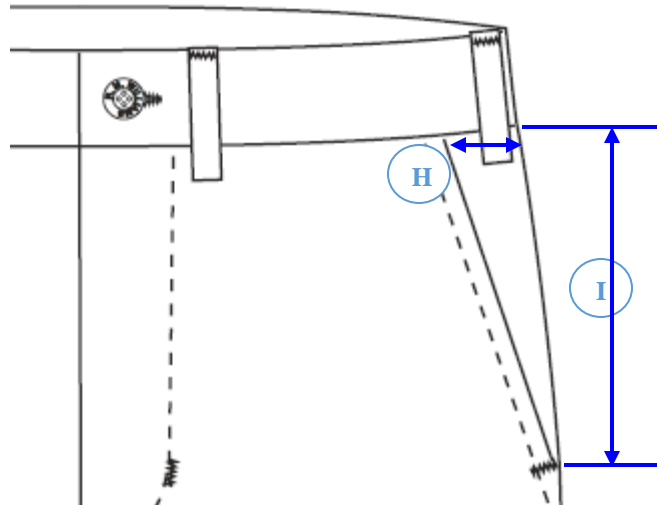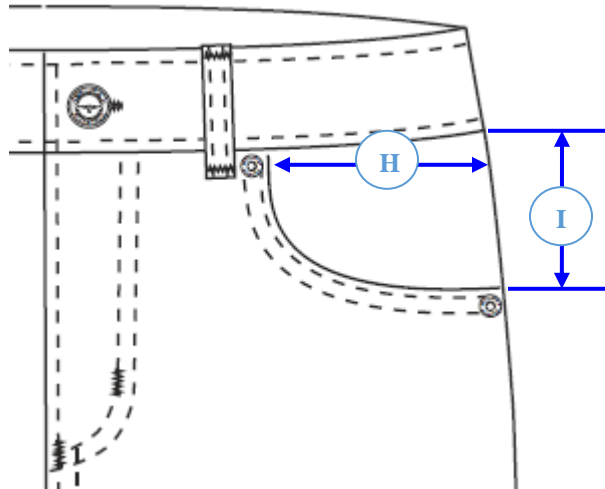

2.29 Measurement J = Waist

2.29.1 Method


- Lay the garment flat & face up with waistband top edges level so that no dipping occurs at the center front.
- Make sure the fly opening is fully fastened.
- There should be no looseness in the waistband
- Do not stretch the waistband
- Measure along top edge of waistband, inside edge to inside edge.
- Double for total waist measurement.

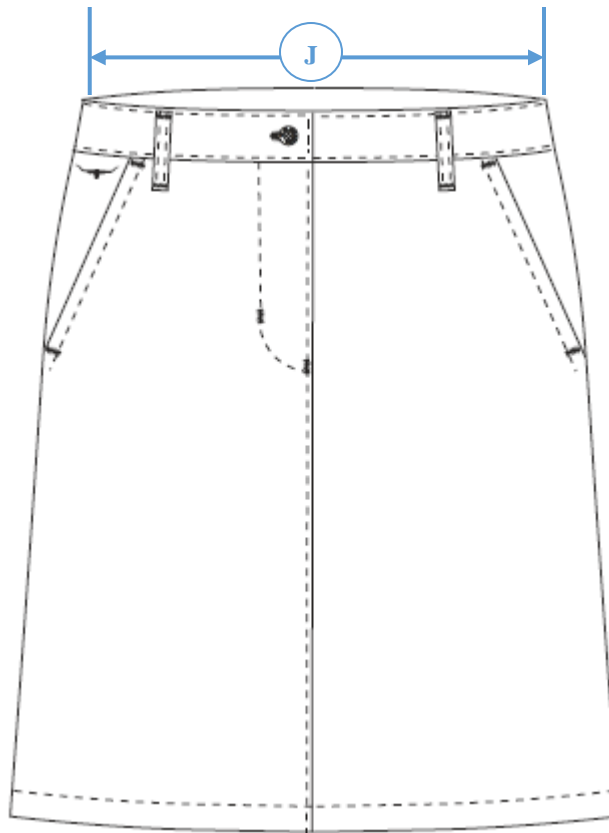

2.30 Measurement K, L, M & N = Back pocket positioning and measurements

2.30.1 Method

- Lay the garment flat, face down.
- Smooth out, do not stretch
- Garment must be measured flat on the table
- Back pocket positioning from waist band (K) – measure straight down vertically from the edge of the waistband to the top pocket edge
- Back pocket positioning from the side seam (L) – measure straight across from the side seam edge to the pocket edge.
- Pocket flap (M) – measure along the vertical edge of the pocket flap.
- Back pocket length (N) – measure along the horizontal pocket length from edge to edge.

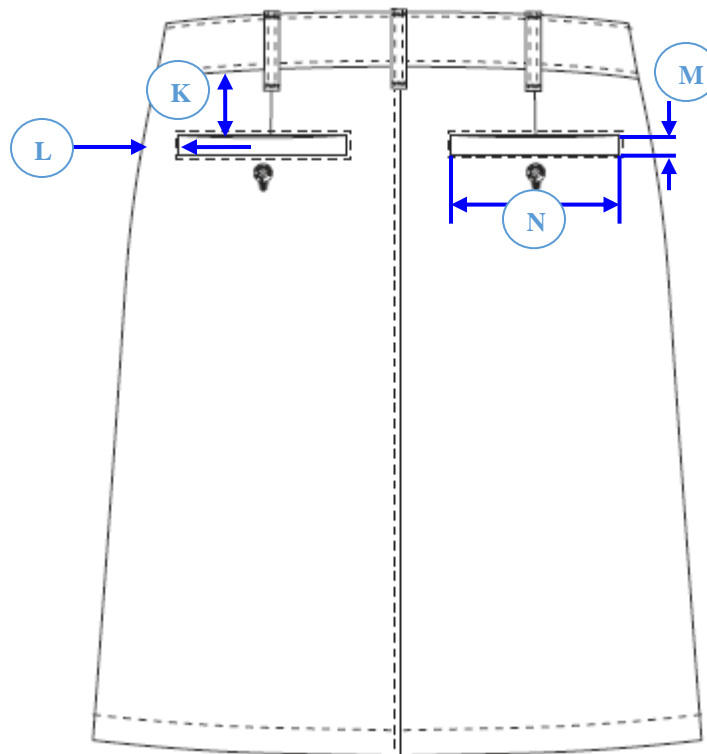

2.4 Measurement P = High hip (v measurement)

2.4.1 Method

- Lay the garment flat & face up with front waistband dipping naturally.
- Make sure the fly opening is fully fastened.
- There should be no looseness, smooth out garment before measuring
- Roll side seams if necessary.
- Find the high hip position by measuring 2.5 inches down from the waist band assembly seam at center front and 2 inches down from the waist band assembly seam at side seam.
- Measure across in a v position from edge to edge as illustrated below.
- Double for total high-hip measurement.

