



TAIWAN OFFICE/ FACTORY

Tsai Jung Cast Co., Ltd.
No. 828, Chang-Sheng Road. Waipu Dist, Taichung City 43865, Taiwan, R.O.C
TEL: 886-4-2683-0880. FAX: 886-4-2683-2908

<http://www.massload.com.tw>

THAILAND OFFICE

No. 71 AGR Building. Room 101, Chareonrath Rd.,
Bangkho, Bangkholaem, Bangkok 10120 THAILAND
TEL: 02 291-6684 to 6
FAX: 02-291-6682



2016



MASSLOAD
財榮壓鑄股份有限公司
<http://www.massload.com.tw>





Tsai Jung Cast Co., Ltd was founded in 1990. The site area occupied 2,000sq. meters. The company makes Die-Cast products as a subcontractor since it was founded. And now we also develop CCTV Housing/Bracket, Dome, aluminum and plastic series products by own brand name of " Massload" export to all of the world.

Tsai Jung Cast Co., Ltd., facility includes Press of Al, Press Machine, Die Casting Machine, CNC Mold Making Machine etc. Inspection equipment: 3D Coordinate Measuring Machine,

Hardness Tester, Fatigue Testing Machine etc. We are confident to provide you the high quality products and the best service. Also, our professional R&D/QC teams continuously develop new products to keep us in proceed and high quality products offer. Currently, Massload Company has 70 employees. OEM & ODM Available. Satisfying all customers' demand always our goal. Looking forward an opportunity to working with you.

01

NEW **CI-607**
Camera Housing

Intelligent Power Integrated Systems
Material: Body Aluminum, ABS Sunshield
Housing Dimension: 360 L x 150W x 140H mm
Adjustable for FOV 130 deg. Camera
IP66 & RoHs

NEW **CI-607S**
Camera Housing

Intelligent Power Integrated Systems
Material: Body Aluminum, Sunshield
Housing Dimension: 290 L x 176W x ψ 90mm
Adjustable for FOV 130 deg. Camera
IP66 & RoHs

02

MCI-701 *Camera Housing*

Outdoor enclosure built in an industrial media converter
Intelligent power systems integrated
SC Multi 2KM/Single 30KM or ST Multi 2 KM
Working on environmental temperature -20degree C ~ 50 degree
IP66/68-ROHS




H2 CI-701 POE *Low Temp Camera Housing*

Extremely low temp environmental application
Intelligent power management technology
Two step PoE to heater and IP camera
Front-window defog heater built-in
Powerful 20W heater built-in
PoE Maximum output: 60W
Compatible with IEEE 802.3at
Working on environmental temperature -30degree C ~60 degree



CI-113 *IXGE 60W UPoE Injector*

Power Input: 100~240VAC /50~60Hz
Power Consumption: 65W
Dimensions: L153 x W84 x H 44 mm

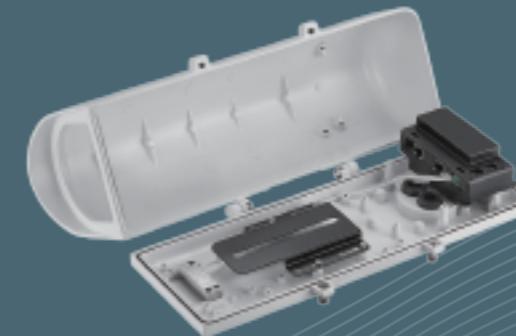

Hi-POE Camera Housing

Outdoor / Indoor application
Intelligent power management technology
PoE/ Hi-PoE power supply for heater, illuminator, fan and IP Network camera
Compatible with IEEE 802.3at and IEEE 802.3af
Maximum 30 Watt or 60 Watt output



NEW ***CI-515***
Bullet Casing

Construction: Die Cast Al-alloy
Max. Cable diameter:Φ10mm
Body Dimension: L150 x W89.6 x H84 mm
Coating :Fluid Spray
Weight : Net: 707 G
Application :Outdoor/Indoor
3 Axis Bracket Application
IP66, ROHS



NEW ***CI-112***
Junction Box

Construction: Aluminum Material
External Dimensions: 168L x 134W x 99.5H mm
Weight: 1276G
Max Load: 10KG
Simple design and easy installation.
Certification : RoHs, IP66, IK10



CI-700

Die Cast Camera Housing

Indoor/Outdoor Side Open Type

Material: Al-alloy

Housing Dimension: L400 x H127 x W95 mm


Certification: RoHS, CE, IP66

Weight: 2,300g

Packing: 6 set/ctn 4.3 meas. (with bracket)

Heater , Blower & POE are all optional

"Patent"

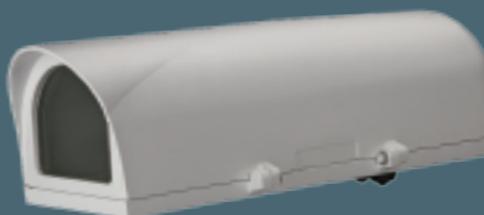

CI-701

Die Cast Camera Housing

Indoor/Outdoor Side Open Type

Material: Al-alloy

Housing Dimension: L 406 x H 109 x W 145 mm

Certification: ROHS,CE,IP68

Weight: 2,200 G

Packing: 6 set/ctn 4.3meas (with bracket)

Heater , Blower & POE are all optional

IR LED range:30M, 50M

"Patent"



CI-702

IP Camera Housing

Indoor/Outdoor Side Open Type

Material: Al-alloy

Housing Dimension: 300 L x 220 H x 100 W mm

Certification: ROHS,CE,IP66

Weight: 1,350 G

Packing: 12 pcs/ctn 2.6meas

Heater & Blower are all optional

IR LED range:30M, 50M

"Patent"



CI-703

Aluminum Camera Housing

Indoor/Outdoor Front Open Type

Material: Aluminum

Housing Dimension: L 270 x φ 100 mm

Certification:RoHS, CE, IP67

Weight:1,200G

Packing: 20 pcs/ctn 4.1meas

Heater & Blower are all optional

IR LED range: 30M, 50M



CI-600

Aluminum Camera Housing

Indoor/Outdoor Top Open Type

Material: Aluminum

Housing Dimension: L 370 x H 115 x W 142 mm

Certification: ROHS,CE,IP66

Weight: 1,200 G

Packing: 12pcs/ctn 3.3meas

Heater & Blower are all optional

IR LED range: 30M, 50M



CI-602

Aluminum Camera Housing

Indoor/Outdoor Side Open Type

Material: Aluminum

Housing Dimension: L 373 x H 115 x W 147 mm

Certification: ROHS,CE,IP66

Weight: 1,100 G

Packing: 12 pcs/ctn 3.1meas

Heater & Blower are all optional

IR LED range: 30M, 50M



CI-605

Die Cast Camera Housing

Indoor/Outdoor Side Open Type

Material: Aluminum

Housing Dimension: L414 x H110 x W145 mm

Certification: RoHS, CE, IP66

Weight: 1,600g

Packing: 8pcs/ ctn 3.5 meas.

Heater & Blower are all optional

IR LED range: 30M & 50M



CI-606

Camera Housing

Indoor/Outdoor Side Open Type

Material: Aluminum

(Front and back side made by plastic)

Housing Dimension: L315 x H110 x W145 mm

Packing: 12 pcs/ ctn 3 meas.

Heater & Blower are all optional

IR LED range: 30M, & 50M

Cable go through from bottom and back case



CI-505

Camera Housing

Indoor/Outdoor Front Open Type
Material: Aluminum
Housing Dimension: L99 x \varnothing 80 mm
Certification: RoHS, CE, IP67
Weight: 320g
Packing: 50 pcs/ ctn 2.4 meas.
IR LED range: 15M



CI-507

Camera Housing

Indoor/Outdoor Front Open Type
Material: Aluminum
Housing Dimension: L140 x \varnothing 67.5 mm
Packing: 50PCS/ctn 2.5 meas
IR LED range: 15M



CI-510

Camera Housing

Indoor/Outdoor Front Open Type
Material: Aluminum
Housing Dimension: L180 x \varnothing 72 mm
Certification: RoHS, CE, IP66
Packing: 20PCS/ctn 1.1meas



CI-513

IP Camera Housing

HOT
Construction: Die-Cast Aluminum
Housing Dimensions: Φ 102mm x L 150 mm
Weight: 550G
Sunshield: Plastic (PP)
Application Use: Outdoor / Indoor
Certification: IP66 weatherproof
RoHS
Vandal-Resistant



CI-512

Die Cast Camera Housing

Indoor/Outdoor Side Open Type
Material: Aluminum
Housing Dimension: 200 L x 81H x 81W mm
Certification: RoHS, IP67
Packing: 20 pcs/ctn



CI-817
Dome Bracket

Material: Aluminum
Certification: RoHS
Color: Beige
Measures:L200 x 127mm
Weight:500g
Max.Load:20KG
Packing:20PCS/ctn 4Meas.



CI-402
Vandal Proof Dome

Application use: Indoor / Outdoor
Material: Al-alloy
Measures: 115 x φ 144.3 mm
Certification: ROHS. IP68, Vandal Certificated
Weight: 1,160 G
Packing: 12 pcs / ctn
Camera Mounting: 3-Axis Bracket
"Patent"



CI-403
Mini Dome

Viewing Window: 2" polycarbonate dome bubble
(anti-fog for option)
Construction: Die-cast aluminum
Housing Dimensions: Φ114 mm x 56mm (Φ 4.5" x 2.2")
Weight: 325.5G (0.7lbs)
Gimbal: Easy 2 axis camera adjustment w/
360° pan and 90° tilt Quick and reliable installation
Certification: IP67 weatherproof
RoHS
Vandal Resistant



CI-405
Plastic Dome

Indoor
Material: ABS
Certification:ROHS
With 3-axis bracket

Cable Management Bracket



CI-812

Material: Al-alloy
Certification: RoHS
Color: Beige, Silver, Black
Weight: 678g
Max. Load: 20kg
Packing: 12 pcs/ctn 1.8 mea



CI-800


Material: Al-alloy
Certification: RoHS
Measures: L213 x 146 x 80 mm
Weight: 690g
Max. Load: 20kg
Packing: 20 pcs/ctn 2.7 meas.
"Patent"



CI-816

Material: Al-alloy
Certification: RoHS
Measures: L213 x 100 x 70 mm
Color: Beige, Silver
Weight: 360g
Max. Load: 20kg
Packing: 20 pcs/ctn 2 meas

camera Housing Bracket

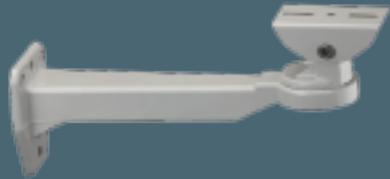

CI-801

Material: Al-alloy
Certification: RoHS
Measures: L294 x 84 x 100 mm
Color: Beige, Silver
Weight: 400g
Max. Load: 10 kg
Packing: 20pcs/ctn 2.6 meas.



CI-807

Material: Al-alloy
Certification: ROHS
Measures: L 248 x 41 mm
Color: Beige, Silver
Weight: 350 G
Max.Load: 10KG
Packing: 20pcs/ctn 2.2 meas



CI-811

Material: Aluminus
Certification: RoHS
Measures: L294 x 84 x 100 mm
Color: Beige & Black
Weight:175g
Max.Load:3KG
Packing:40PCS/ctn 2.1meas



CI-813

Roadway Camera Housing Bracket

Material: Die Cast Al-alloy
Certification: RoHS
Measures: L278 x 131 mm
Color: Beige
Weight: 1,800g
Max. Load: 30kg
Packing: 8 pcs/ctn 3 meas.
The side lid can be opened for installing adapter and repairing.
Cable Management Type
"Patent"



CI-818

Cable Management Bracket

Material: Aluminum
Certification: RoHS,
Measures:L165.2 × 60.9 × 101.5 mm
Weight: 250g
Max Load:7KG
Packing:40PCS /ctn



CI-304

Ceiling Housing Bracket

Material: Metal Iron
Certification: RoHS
Weight: 1,330g
Color: Beige
Max. Load: 10kg



CI-306

Adjustable Ceiling Mount

Material: Aluminum
Certification: RoHS
Color: Beige,White
Weight: 760g
Max. Load: 10kg
Packing: 5 pcs/ctn
Cable Management Type



CI-303

Ceiling Housing Bracket

Material: Aluminum
Certification: RoHS
Color: Beige, Silver
Cable Management Type



CI-305

Adjustable Ceiling Mount


Construction: Extrusion Aluminum
Measures: 683 mm~1551 mm
Coating: Fluid coating
Max Load: 10 KG
Weight: 1,500 G
Application Use: Outdoor / Indoor
Suitable for most of camera housings in the market
Easy installation
Certification: RoHS



CI-808

Pole Mount Bracket

Material: Die Cast Al-alloy
Certification: RoHS
Measures: L182 x W45 x H114 mm
Color: Beige
Weight: 1,200g
Max. Load: 20kg
Packing: 18 pcs/ctn 1.9 meas.
Fit for many kinds of brackets
Suitable for poles with diameter 56.7 mm to 136 mm
With stainless tube thread and screws

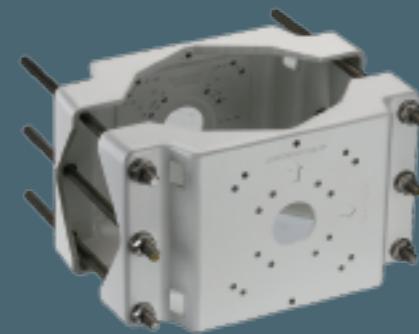

CI-815

Pole Mount Bracket

Material: Die Cast Al-alloy
Certification: RoHS
Measures: L277 x W75 x H168 mm
Color: Beige
Weight: 2,400g
Max. Load: 30kg
Packing: 4 pcs/ctn 1.7 meas.
Fit for many kinds of brackets
Suitable for poles with diameter 70 mm to 120 mm & 120 mm to 230 mm
With stainless tube thread and screws



CI-803A(AA)

Camera Bracket

Material: Al-alloy (AA) ; Plastic (A)
Certification: RoHS
Measures: H68 x φ50.5mm
Color: Beige, Silver, Black
Weight: 60g (Metal); 41g (Plastic)
Max load: 3kg
Packing: 100pcs / ctn 1.5 meas. (Metal)
200pcs / ctn 0.8meas. (Plastic)



CI-803C

Camera Bracket

Material: Al-alloy ; Iron
Certification: RoHS
Measures: H115 x φ75.5 mm
Color: Beige, Silver, Black
Weight: 93g
Max. Load: 3kg
Packing: 100pcs / ctn 0.9 meas



CI-803B

Camera Bracket

Material: Al-alloy
Certification: RoHS
Measures: H115 x φ45mm
Color: Beige, Silver, Black
Weight: 70g
Max. Load: 3kg
Packing: 100pcs / ctn 0.9 meas



CI-803DD(DA)

Camera Bracket

Material: Al-alloy (DD) ; Plastic (DA)
Certification: RoHS
Measures: H110 x φ63 mm
Color: Beige, Silver, Black
Weight: 84g (Metal) ; 54g (Plastic)
Max. Load: 3kg
Packing: 100pcs / ctn 1.9 meas



CI-803G

Web Cam Stand

Material: Al-alloy
Certification: RoHS
Measures: L85 x H97 x W75 mm
Color: White , Black
Weight: 138g
Max. Load: 3kg
Packing: 100pcs / ctn 1.0 meas



CI-803G-I

Web Cam Stand

Material: Al-alloy
Certification: RoHS
Measures: L85 x H67 x W75 mm
Color: White , Black
Weight: 90g
Max. Load: 3kg
Packing: 100pcs / ctn 1.0 meas



CI-802A

Camera Bracket

Material: Aluminum
Certification: RoHS
Measures: L160 x \varnothing 110 mm
Color: Silver
Weight: 276g
Max. Load: 3kg
Packing: 100 pcs/ctn 2.5meas



CI-803GB

Web Cam Stand

Material: Al-alloy
Certification: RoHS
Measures: L85 x H180 x W75 mm
Color: White , Black
Weight: 94g
Max. Load: 3kg
Packing: 100 pcs/ctn



CI-802B

Camera Bracket

Material: Aluminum
Certification: RoHS
Measures: L300 x \varnothing 110 mm
Color: Silver
Weight: 330g
Max. Load: 3kg
Packing: 100 pcs/ctn 2.2meas



CI-805

Camera Bracket

Material: Aluminum
Certification: ROHS
Measures: L1500 x \varnothing 110 mm (Adjustable)
Color: Silver
Max.Load: 3 KG
Packing: 10pcs / ctn
Weight: 330 G