Robustness across three deployment shifts (8 backbones)

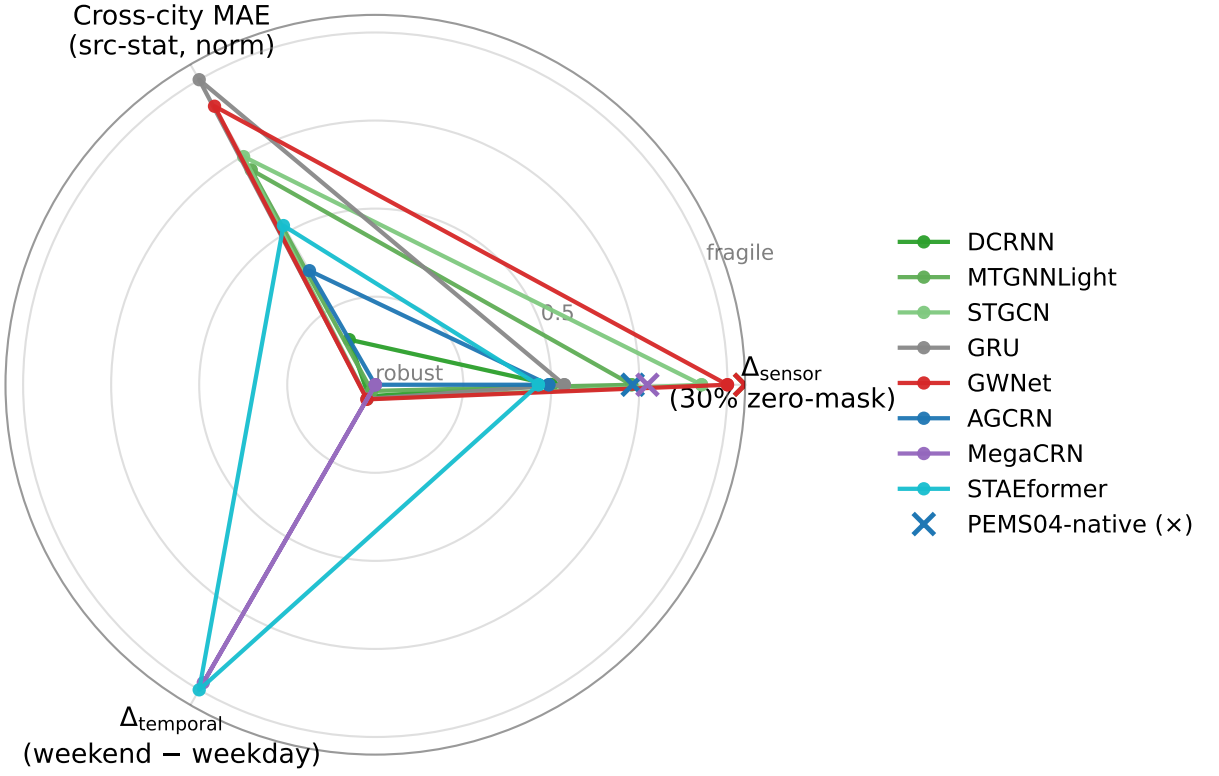

Per-axis min–max normalization (low = robust). Raw ranges: $\Delta_{sensor} \in [-0.048, +0.088]$; X-city $\in [0.163, 0.278]$; $\Delta_{temporal} \in [+0.061, +0.750]$. PEMS04-native ΔSensor overlaid as ×; cross-city Pearson ρ = +0.910.