

Design Document

Simone Mosciatti & Sara Zanzottera

December 9, 2016

Contents

1	Introduction	3
1.1	Purpose	3
1.2	Scope	3
1.3	Definitions, Acronyms, Abbreviations	3
1.4	Document Structure	5
1.5	Reference Documents	5
2	Architectural Design	6
2.1	Design Process Description	6
2.2	Goals Analysis	6
2.3	Components Design	10
2.4	From Abstract Components to Physical Nodes	15
	Physical structure	15
2.5	Communication between nodes	16
	Actual channel implementation	16
2.6	Actual deploy of components into nodes	16
2.7	Main Design Choices	17
	Car to app communication	18
	Interactions with 3rd-parties	18
	Communication protocols	18
2.8	High-Level Architecture	19
2.9	Deployment View	22
2.10	Runtime View	23
2.11	Selected Technologies	24
	RESTful API	25
	MQTT	25
	Distributing the main server	25
	Database	25
3	Algorithm Design	26
4	User Interface Design	27
4.1	Mockups	27
4.2	UX Diagrams	28
4.3	BCE Diagrams	30
5	Requirements Traceability	32
6	Conclusions	35
6.1	Tools used	35
6.2	Hours of work	35

1 Introduction

1.1 Purpose

This Design Document aims to provide to everyone involved in the actual development of the application specific insights about the structure of PowerEnJoy, its architecture's details, the design patterns we chose to implement, but also some details about its high level components, their interactions and general behavior.

1.2 Scope

PowerEnJoy is a digital management system for car sharing that exclusively employs electric cars to provide its service. The system provides all the functionalities normally provided by a car sharing service: registering to the service, find the location of nearby available cars, reserve cars up to a short amount of time, unlock the chosen car once found, ride it and then park it in a safe area, when it will be automatically locked and the fee paid.

In addition, the system gives bonuses and penalties in term of discounts or over-prices depending on the behavior of the user, in order to promote virtuous behaviors.

PowerEnJoy is therefore a inherently distributed system, based on a central server interactions with many distributed nodes. In detail the system can be divided into four main parts:

- a public app, used by customers to access the service
- a centralized backend that provides the service
- the cars' onboard system, that communicates only with the centralized backend
- a reserved frontend, used exclusively by the staff members to better organize their job

All these four components will be examined in more detail in the subsequent sections of the document.

1.3 Definitions, Acronyms, Abbreviations

RASD Requirements and Specification Document.

DD Design Document.

User A customer of PowerEnJoy using the service.

Staff Operator An employee of PowerEnJoy which takes care of the cars.

Ride The action of getting onboard of a PowerEnJoy car, start its engine, drive to destination and park.

Running Time The time an user spends using the PowerEnJoy service.

Issue Any problem a car may incur in, or a user may face while using the service.

Nearby Cars Cars located within a maximum distance to a specific position.

Nearby Issues Issues that are affecting cars close to a specific position.

Booking (Reservation) The act to reserve a car for a limited amount of time for future use by a user.

Reservation's maximum time The maximum amount of time a car can be reserved.

Driver Whoever is driving a regularly booked PowerEnjoy car.

Passenger Whoever is inside a PowerEnjoy car but is not the driver.

Driving License The state's issued driving license of the user.

Notification A form of communication where the user is actively notified of some event.

Issue Report An incoming notification that states a car incurred in an issue.

Fine A fine issued by the local law enforcing officers to a user while driving a PowerEnjoy car.

Pending Bills Bills that a user still needs to pay to PowerEnjoy .

Safe Area A parking area, predefined by the company, where it is possible to safely park the cars of the PowerEnjoy fleet.

Battery Charge The amount of charge that is kept inside the car's battery.

Charging Station Dedicated areas where it is possible to plug the PowerEnjoy cars to charge their batteries.

Car's Onboard System The control system of the car that is able to exchange data with the central system and to relevant operation parameters.

Customer's App An implementation of the system frontend tailored to the need of the customers.

Operator's App An implementation of the system frontend tailored to the need of the staff.

Central System The central system for PowerEnjoy . All the commands and all the data are streamed, analyzed and used here.

Credentials Pair {Username, Password} necessary to access the PowerEnjoy system.

GPS : Global Positioning System is a global navigation satellite system (GNSS) that provides location and time information in all weather conditions, anywhere on or near the Earth where there is an unobstructed line of sight to four or more GPS satellites.

System's Frontend The interface provided to the user of the PowerEnJoy system.

System's Backend The whole technical infrastructure necessary to PowerEnJoy .

1.4 Document Structure

1. Introduction

This sections aims to explain the purpose and the scope of the document, introducing the reader to subsequent sections of the document itself.

2. Architectural Design

This sections will explain the main architectural decision we made.

3. Algorithm Design

In this section we focus on the most critical code section and we provide an in-depth analysis of how they should be structured, eventually providing pseudocode for them.

4. User Interface Design

In this section we carry on the UX design with the help of UX and BCE diagrams, eventually completing them with updated and extended application mockups.

5. Requirements Traceability

In this section we map the requirements stated in the RASD to the actual component or processes that fulfill these requirements.

6. Conclusions

In this section we enumerate the tools we used to redact this document, the hours of work spent by each group member and the (eventual) revision history of the document itself.

1.5 Reference Documents

- *Assignments AA 2016-2017.pdf* (Assignments document given by the teacher)
- *Sample Design Deliverable Discussed on Nov. 2.pdf* (Sample document provided by the teacher)

2 Architectural Design

The overall design process has been carried in a bottom-up approach, starting from the analysis of goals and requirements moving upwards to the definition of the higher level components of the system. In the following sections we provide more details on the designed architecture.

2.1 Design Process Description

The overall design process starts from the analysis of the goals.

Taking forward the considerations made in the RASD, we analyse the interface between the world and the machine: given the list of goals and requirements, we identify what interfaces each node should provide to the world and to other nodes in order to accomplish such goals.

Once the interfaces are identified, we proceed organizing those interfaces into higher-level components, caring at respecting the Single Responsibility principle in order to provide highly decoupled and reusable components.

Once components have been defined, we organize them into an high level architecture and proceed deploying them on the physical nodes of the system. Then we define in detail how they interact with the help of some Sequence Diagrams.

The rest of this section follows this flow, starting from the goals analysis and finally providing the overall design.

2.2 Goals Analysis

In this part of the document we analyze Goals as defined in RASD, in order to list and describe in detail which interactions between users and the system will be performed and how to provide them.

These are named **UI/FunctionalityName** in order to highlight that these functions are related to the interface with users. Indeed a deeper and detailed design of the actual UI is carried out in section 4: User Interfaces.

As we are going to see, many use cases require some specific functionalities to be provided by the backend. These are named **Sy/FunctionalityName**, where “Sy” indicate an abstract system that we are going to model in detail in the next paragraphs.

UI/Registration

Description Users can register to the system.

Requires

- Sy/Register
- Sy/Validate

UI/Login

Description Users can log into the system providing their email and password.

Requires

- Sy/Login

UI/Lookup

Description Users can look for cars near them or near a specific position and range.

Requires

- Sy/GeoLocationCars
- Sy/PositionUser

UI/Book

Description Users can book cars to use within the next hour.

Requires

- Sy/Book

UI/Unbook

Description Users can remove a previously made reservation.

Requires

- Sy/Unbook

UI/Unlock

Description Users can unlock a nearby car that was previously booked.

Requires

- Sy/PositionUser
- Sy/PositionCar
- Sy/Unlock

UI/Ride

Description Users can ride a reserved car.

Requires

- Sy/StartRide
- Sy/EndRide
- Sy/ValidateLicense
- Sy/GeoLocationAreas
- Sy/Lock

UI/SafeAreas

Description Users can locate safe parking areas while driving.

Requires

- Sy/GeoLocationAreas

UI/UnsafeParking

Description The system reacts to unsafe parking. It first tells users they are going to be fined if they leave the car unsafely parked, then it fines users who leaves the car in an unsafe area.

Requires

- Sy/EngineOff
- Sy/Lock
- Sy/UnsafeParkNotification
- Sy/UnsafeParkFine

UI/PowerStation

Description Users can locate and use charging station.

Requires

- Sy/GeoLocationAreas
- Sy/Plugged
- Sy/CarPluggedNotification

UI/Charge

Description Users are charged a fee at the end of the ride or if a reservation expires.

Requires

- Sy/SendFee
- Sy/BookExpire
- Sy/CalculateFee

UI/Payment

Description Users can pay bills through the app and set their default payment method.

Requires

- Sy/MakePayment
- Sy/SetPaymentMethod

UI/ReportIssues

Description Users can report issues to the system.

Requires

- Sy/ReportIssue

UI/FindIssues

Description The staff can locate cars that need their intervention.

Requires

- Sy/GeoLocationIssues

UI/Support

Description The staff can identify and solve car's issues.

Requires

- Sy/Lock
- Sy/Unlock
- Sy/TakeChargeIssue
- Sy/SolveIssue
- Sy/GiveUpIssue

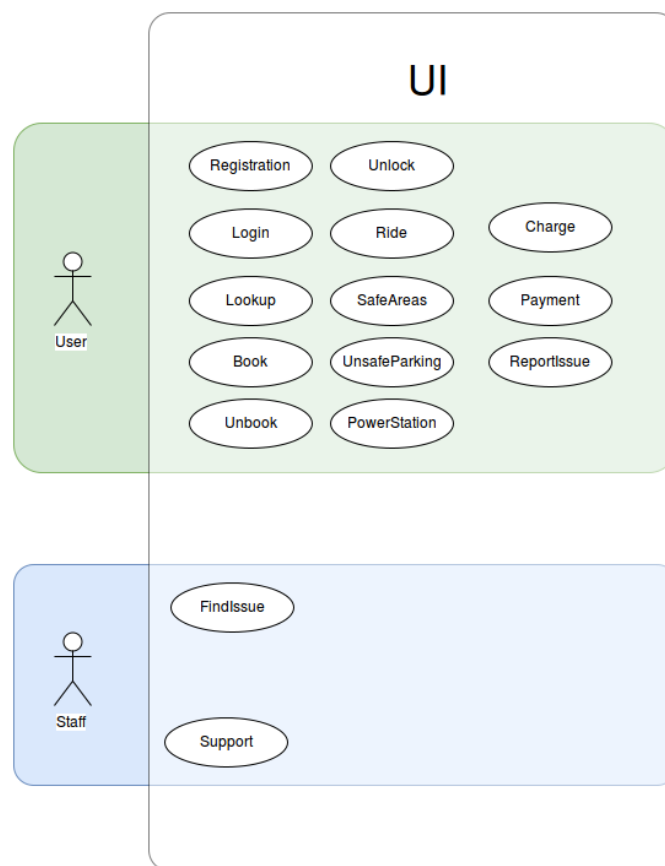


Figure 1: Graphical visualizaition of the UI divided by typology of users.

2.3 Components Design

Now we gather all the functionalities we just described and we organize them into higher-level components, being careful at respecting the responsibilities given to each one of them.

In order to clarify how previously defined “Sy/FunctionalityName” maps with the component’s specific functions, we used a notation **COMPONENT/FunctionalityName** \Leftrightarrow **Sy/FunctionalityName**. The functionality name can vary, according to the context.

USER_MANAGER

Responsability Manages the users.

USER/Register \Leftrightarrow **Sy/Register**

Responsability Registers a new user into the system.

Input Information from the user such as:

- First name
- Last name
- Identity ID
- Password
- Email
- License ID
- Credit card informations: credit card number, control code, expiry date, owner, etc.

Output The ID of the newly created user.

USER/Validate \Leftrightarrow **Sy/Validate**

Responsability Validate the information provided by the user, it makes sure that the user is not already registered into the system, that the License is valid as well the credit card information.

Input Information from the user such as:

- First name
- Last name
- Password
- Email
- License ID
- Credit card informations: credit card number, control code, expiry date, owner, etc.

Output Confirm correctness and validity of the informations.

USER/Login \Leftrightarrow **Sy/Login**

Responsability Allows users to log into the system.

Input Email (considered a unique user ID) and password.

Output A session key, meaning that the user is logged into the system.

USER/SetPaymentMethod \Leftrightarrow **Sy/SetPaymentMethod**

Responsability Update user's information about the preferred payment method.

Input The ID of the user and new payment informations.

Output The payment method data related to this user is updated.

GEOLOCATION

Responsability Locates elements, points and areas of interest around a specific coordinate. "Search" service for elements of interest.

GEOLOCATION/AvailableCars \Leftrightarrow Sy/GeoLocationCars

Responsability Retrives the position of available cars.

Input Search parameters such as:

- Geographical coordinates of the center of the search range (latitude and longitude as provided by GPS sensors)
- Maximum walking distance from the specified position
- Other search settings, like minimum battery level, etc.

Output A set of available cars matching the search parameters.

GEOLOCATION/Areas \Leftrightarrow Sy/GeoLocationAreas

Responsability Retrives the position of areas of interest, such as power stations and safe parking areas.

Input Geographical coordinates of the center of the search range (latitude and longitude as provided by GPS sensors) and a search radius.

Output A set of areas of interest inside the circle of radius provided centered on the coordinates provided.

GEOLOCATION/Issues \Leftrightarrow Sy/GeoLocationIssues

Responsability Retrives the position of cars with some issues.

Input Search parameters such as:

- Geographical coordinates of the center of the search range (latitude and longitude as provided by GPS sensors)
- Radius of the search
- Issue type, Exeption status, and other similar search settings.

Output A set of cars with issues matching the search parameters inside the circle of radius provided centered on the coordinates provided.

POSITION

Responsability Locates elements of interest given their ID. "Lookup" service for elements of interest.

POSITION/Car \Leftrightarrow Sy/PositionCar

Responsability Retrieves the position of a specific car.

Input The ID of the car.

Output The coordinates of the car.

POSITION/User \Leftrightarrow Sy/PositionUser

Responsability Retrieves the position of an user.

Input The ID of the user.

Output The coordinates of the user.

POSITION/Areas

Responsability Retrieves the position of an area of interest.

Input The ID of the area.

Output The coordinates of the area as a set of boundary points.

BOOKING_MANAGER

Responsability Manages reservations.

BOOKING/Book \Leftrightarrow Sy/Book

Responsability Books one available car.

Input The ID of the car and the ID of the user.

Output The car is booked and the ID of the reservation is provided.

BOOKING/Unbook \Leftrightarrow Sy/Unbook

Responsability Removes a reservation.

Input The ID of the user and the ID of the reservation.

Output The reservation is cancelled.

BOOKING/Expire \Leftrightarrow Sy/BookExpire

Responsability Removes an expired reservation and fines the related user.

Input ID of the reservation.

Output The reservation is cancelled and the user is fined.

CAR_MANAGER

Responsability Manages the interactions between users and cars.

CAR/Unlock \Leftrightarrow Sy/Unlock

Responsability Unlocks the car.

Input The ID of the car and the ID of the user asking to unlock.

Output The car is unlocked.

CAR/ValidateLicense \Leftrightarrow Sy/ValidateLicense

Responsability Confirms the scanned license is related to the user who booked the car.

Input The scanned image of the driving license and the ID of the booking

Output The car is unlocked.

CAR/Lock \Leftrightarrow Sy/Lock

Responsability Locks the car.

Input The ID of the car.

Output The car is locked.

CAR/TurnOff ⇔ Sy/EngineOff

Responsability Turns off the engine of a car.

Input The ID of the car.

Output The car is turned off.

CAR/Telemetry

Responsability Retrieves real-time, updated informations about a car.

Input The ID of the car.

Output All the latest informations available about the car.

CAR/SetStatus

Responsability Sets the Exception status of a car to a new value.

Input The ID of the car and the new status.

Output The new status is set.

CAR/Rides

Responsability Retrieve the list of rides done with a specific car in a defined time range.

Input The ID of the car and a time range.

Output The list of rides performed with that car in that time range.

RIDE

Responsability Manage the rides.

RIDE/Start ⇔ Sy/StartRide Responsibility Start counting the time of the ride.

Input The ID of the user and the ID of the booking.

Output The ID of the ride.

RIDE/End ⇔ Sy/EndRide Responsibility Stop counting the time of the ride.

Input The ID of the ride.

Output Stop the count of time for the ride.

BILLING_SYSTEM

Responsability Manages all the fees.

BILL/Calculate ⇔ Sy/CalculatFee

Responsability Calculates the amount of a riding fee.

Input The ID of the ride.

Output The final fee, including eventual discounts or overprices.

BILL/Pay ⇔ Sy/MakePayment

Responsability Requires user to pay a specific bill.

Input The ID of the user and the ID of the ride the bill refers to.

Output The fee is paid.

BILL/UnsafeParkingFine ⇔ Sy/MakePayment

Responsability Requires user to pay a fine for an unsafe parking.

Input The ID of the user and the ID of the car unsafely parked.

Output The fine is paid.

ISSUE MANAGER

Responsability Manages car's issues.

ISSUE/New \Leftrightarrow **Sy/ReportIssue**

Responsability Rise a new issue.

Input ID of the car, ID of the user raising the issue, a title and a description of the issue.

Output The ID of the reported issue.

ISSUE/TakeCharge \Leftrightarrow **Sy/TakeChargeIssue**

Responsability Allows operators taking in charge of a particular issue.

Input The ID of the issue, the ID of the operator.

Output The operator is now responsible for the issue.

ISSUE/Solve \Leftrightarrow **Sy/SolveIssue**

Responsability Allows operators to close an issue marking it as Solved. The system is responsible of allowing this operation only if it can confirm the issue has been solved.

Input The ID of the issue, the ID of the operator.

Output The issue is set as Solved, or set as Closed and another new issue is opened.

ISSUE/GiveUp \Leftrightarrow **Sy/GiveUpIssue**

Responsability Allows operators to give up over an issue.

Input The ID of the issue, the ID of the operator.

Output The issue is no more related to the specified operator and available for others to be taken in charge.

NOTIFIER

Responsability This component takes care to notify user of events.

NOTIFY/SendFee \Leftrightarrow **Sy/SendFee**

Responsability Ask for payment to the user before to actually execute the transaction.

Input The ID of the user and the total to pay.

Output The user is asked to confirm the payment.

NOTIFY/UnsafePark \Leftrightarrow **Sy/UnsafeParkNotification**

Responsability Communicate at the user that he parked in an unsafe area.

Input The ID of the user.

Output The user is prompted to acknowledge that he is aware to have parked in an unsafe area.

NOTIFY/CarPlugged \Leftrightarrow Sy/CarPluggedNotification

Responsability Communicate at the user that he succesfully plugged the car into a power station.

Input The ID of the user.

Output The user is prompt to acknowledge that he plugged the car into a power station.

Qui un Components View simile a quello a pagina 8 dell'esempio... possibilmente con un font un po' piu' grande che nell'esempio.

Non so bene se qui o in fondo alla sezione successiva.

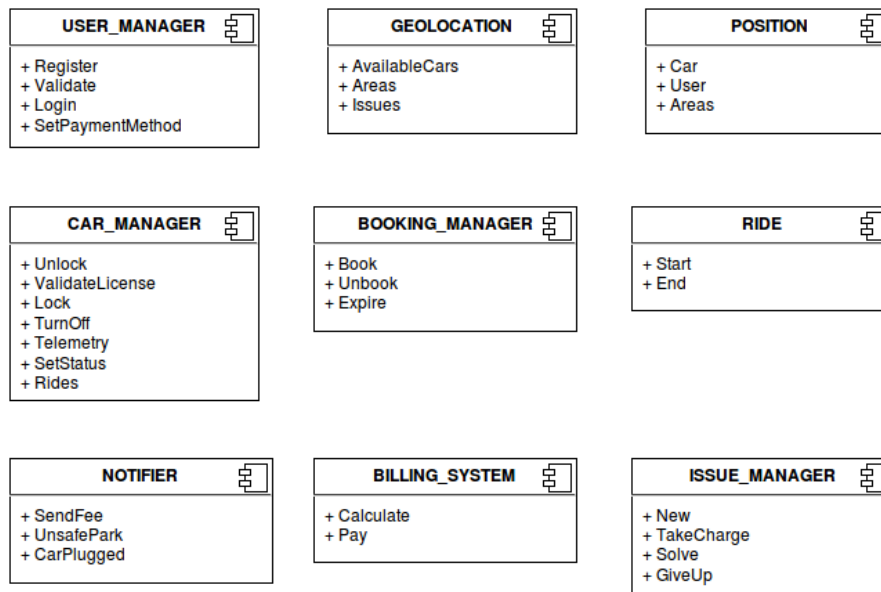


Figure 2: Graphical visualization of the abstract components needed.

2.4 From Abstract Components to Physical Nodes

Now that we have identify the abstract components that, together, provide the fucn-tionality of our project we are going to makes those components real.

In order to actually implements the components we - first - need to know where those components will be deployed and the form of comunication between and intra them.

In the next sub section we are going to explain what physical nodes will compose our system.

Physical structure

Overall there are 3 main identifiable nodes in our system:

- Main Server
- Car Onboard system
- User interface (App, web site, etc...)

We have refer to the User Interface as App through the whole document and we will keep such terminology for sake of clarity, however, must be clear that a whole spectrum of technologies could be used to actually implement the user Interface, not only mobile application.

Also, for the scope of this analysis we often consider the customer's app and the staff's app as a single entity, called simply "app".

2.5 Communication between nodes

Now that our nodes are defined we need to understand the communication between them.

It would have been possible to make each node communicate with each other node, however this raise some concern about the security of the system, especially for the communication between the users and the cars. Of course a well done, and a well tested system should not raise these concerns, however real word engineering is constrained, and the authors believe that a more defensive and conservative approach is more suitable.

Following these consideration we decided that would be more maneagable to have only two communication channel, one between the main server and the user, and another between the main server and the cars.

Actual channel implementation

The communication between the main server and the user will employ a simple Client-Server approach which seems to naturally fit the domain space, it is a well know industry standard and is widely used.

On the other hand, communications between the server and the fleet is clearly more suitable for a **Publisher-Subscriber** pattern. The car has to communicate very often a lot of valuable information to the main servet, and a PubSub pattern achieves high throughput and low latency. Even if the Pub-Sub pattern may not be so widely used and know, our experience suggested that the trade-off is well worth.

2.6 Actual deploy of components into nodes

Now that we have identify the components that we need to deploy, the nodes where those components can be deployed and the communication mechanism between the nodes we are ready to actually decide where to put each component.

Most of the functionality will be invoked by the user, however, logically, the componentthey will reside on the main server.

Some component will be shared between the main server and the user or the car or both.

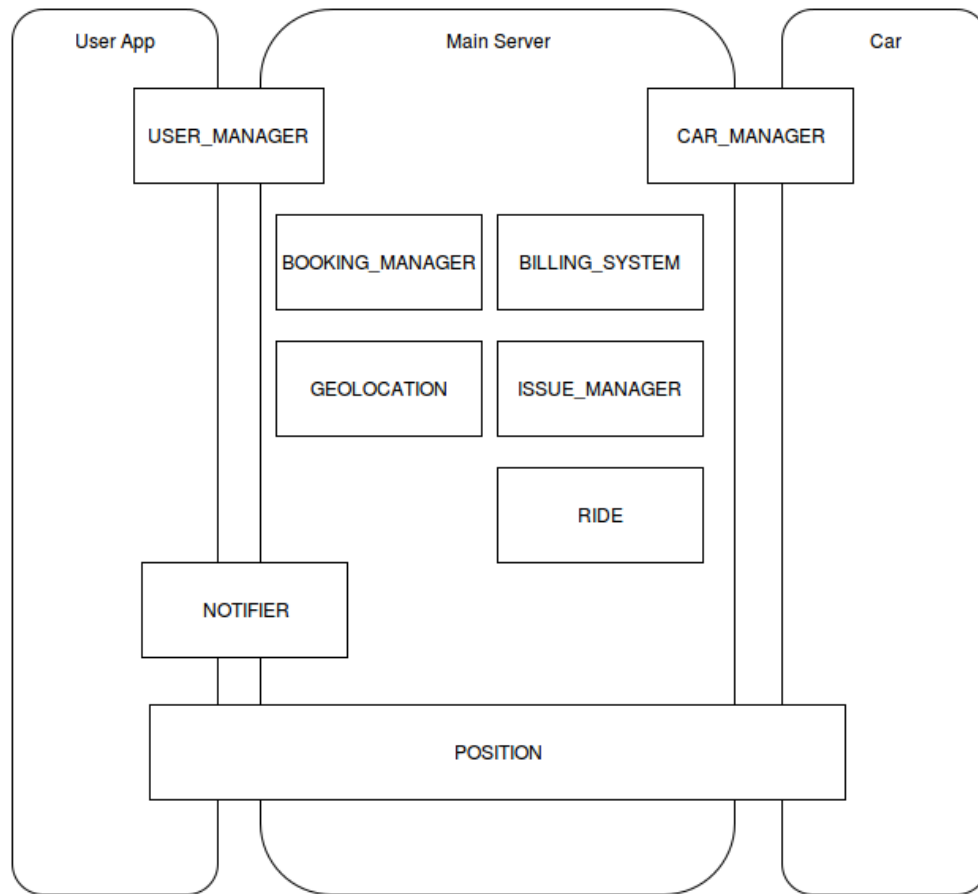


Figure 3: Graphical visualization of the abstract components needed.

REEXPLAIN WHY SOME COMPONENTES ARE SHARED

2.7 Main Design Choices

Asfor the RASD (section 2: Overall Description), the system is be divided into four parts:

- the **customer's app**, used by customers to access the service.
- the **main server**, a centralized backend that provides the service.
- the **cars' onboard system**, that communicates only with the centralized backend.
- the **staff's app**, used exclusively by the staff members to better organize their job.

For the scope of this analysis we often consider the customer's app and the staff's app as a single entity, called simply "app".

At a first glance, the above elements can be organized in a two-tier Client-Server architecture as follows:

- Tier 1, the main server, which handles Application Logic and Data Management.
- Tier 2, comprising mobile apps and cars, hosts the User Interface.

From now on, we design the system basing on these fundamentals elements, defining their roles and interactions.

Now we list the design choices we made, first of all, to enforce the architecture identified above.

Car to app communication

We decide to completely avoid all kinds of communication between the cars and the apps.

The main server is always an intermediary for app-to-car and car-to-app communications, in order for the system to have always full control on these otherwise completely hidden interactions.

Interactions with 3rd-parties

We decided to prevent any access to third-part services to every component but the main server, mainly for security reasons.

The main server will expose the necessary API to apps and cars to allow them retrieving all the informations they need without having them communicating independently with any external service.

Communication protocols

More specific choices has been made on the communication protocols too.

A pure **Client-Server** communication protocol is implemented only for server-to-app and app-to-server communications, as they seem to naturally fit this model.

On the other hand, communications between the server and the fleet is clearly more suitable for a **Publisher-Subscriber** pattern. The car has to communicate very often a lot of valuable information to the main server, and a PubSub pattern achieves high throughput and low latency.

To describe the communication approach in terms of the protocol itself, the car publishes messages about its own status and the server subscribes to those messages. The server is meant to host brokers too.

Moreover, we decided to model the most part of external services as Web services, so the server will communicate with them using a **Service-Oriented** approach.

Here we provide a high-level diagram of the system and some proposed technologies that we will discuss in the last sections of the document.

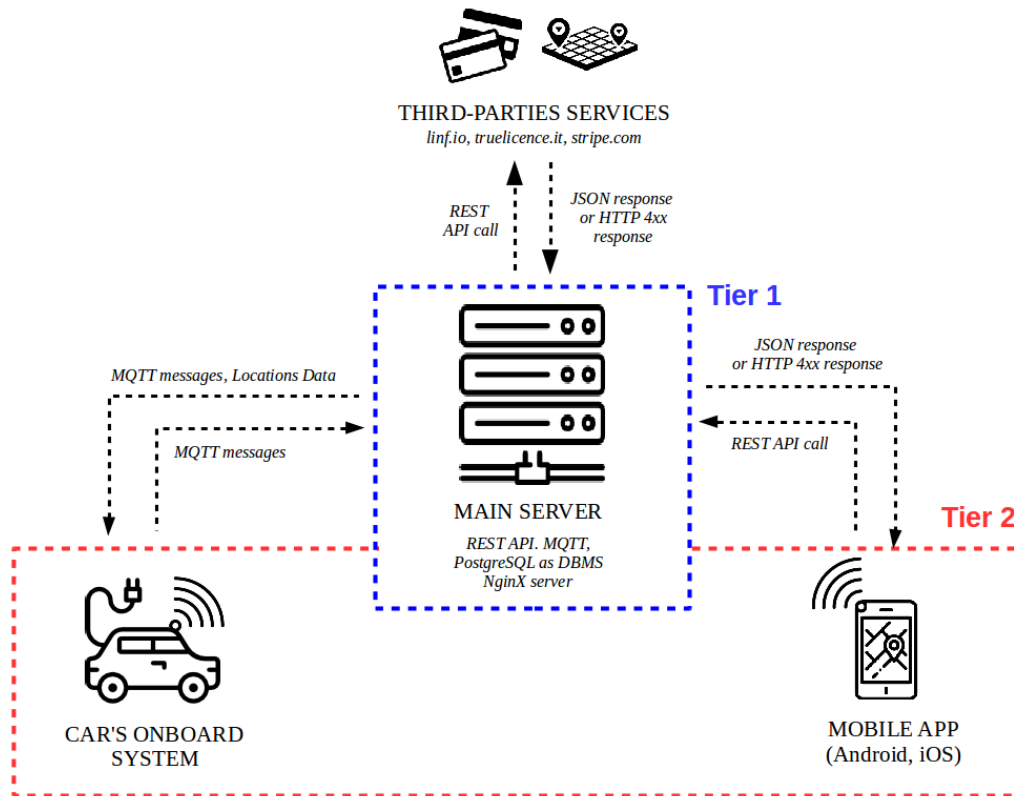


Figure 4: High-level organization of the system's required elements

2.8 High-Level Architecture

Up to this point we defined the logical components of the system in terms of implemented interfaces. We now proceed deploying them on the nodes identified in the first section of the analysis in order to end up with a complete, high-level logical architecture for our system.

USER_MANAGER

Considering that all its three functions are exposed as API by the server to the apps, the component is deployed on the server entirely.

LOCATION

Considering that all its three functions are exposed as API by the server, the component is deployed on the server entirely.

POSITION

Considering that all its three functions are exposed as API by the server, the component is deployed on the server entirely. **Define this better**

BOOKING_MANAGER

Considering that all its three functions are exposed as API by the server, the component is deployed on the server entirely. **What about EXPIRE?**

CAR_MANAGER

This component requires a deeper analysis, as its interfaces are exposed by different elements. In details:

- CAR/Unlock is exposed by Server to Apps
- CAR/Rides is exposed by Server to Apps
- CAR/ValidateLicense is exposed by Server to Cars
- CAR/Lock is exposed by Cars to Server
- CAR/TurnOff is exposed by Cars to Server
- CAR/Telemetry is exposed by Cars to Server
- CAR/SetStatus is exposed by Cars to Server

Thus we create two CAR_MANAGER subcomponents:

REMOTE_CAR_MANAGER

Comprises all the functions exposed by the server:

- CAR/Unlock
- CAR/Rides
- CAR/ValidateLicense

LOCAL_CAR_MANAGER

Comprises all the functions exposed by the cars:

- CAR/Lock
- CAR/TurnOff
- CAR/Telemetry
- CAR/SetStatus

BILLING_SYSTEM

Considering that all its three functions are exposed as API by the server to the customer's apps, the component is deployed on the server entirely. **Recheck PAY : is it on server or on the app?**

ISSUE_MANAGER

Considering that all its three functions are exposed as API by the server to the customer's apps, the component is deployed on the server entirely.

Indeed, ISSUE/Solve involves an interface that is exposed by the car: thus we define another subcomponent, **VALIDATE_SOLVE**, to be deployed on the car to fulfill this function.

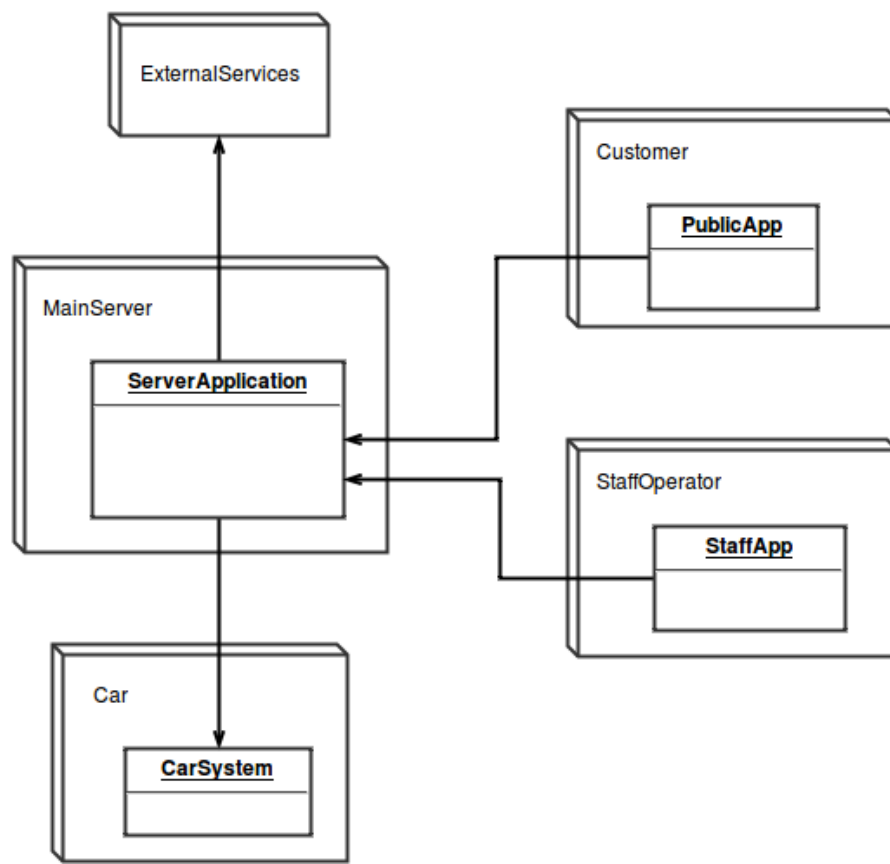


Figure 5: Higher level components of the system

2.9 Deployment View

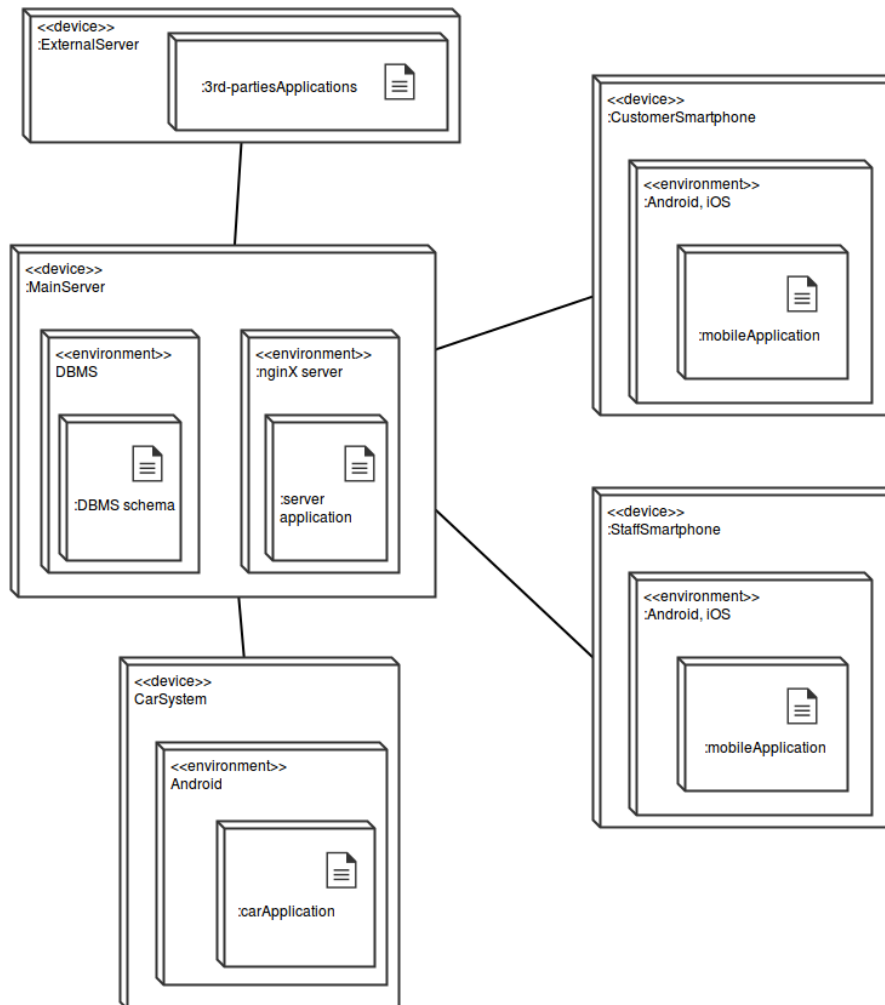


Figure 6: Deployment View of the system

2.10 Runtime View

Register and Login

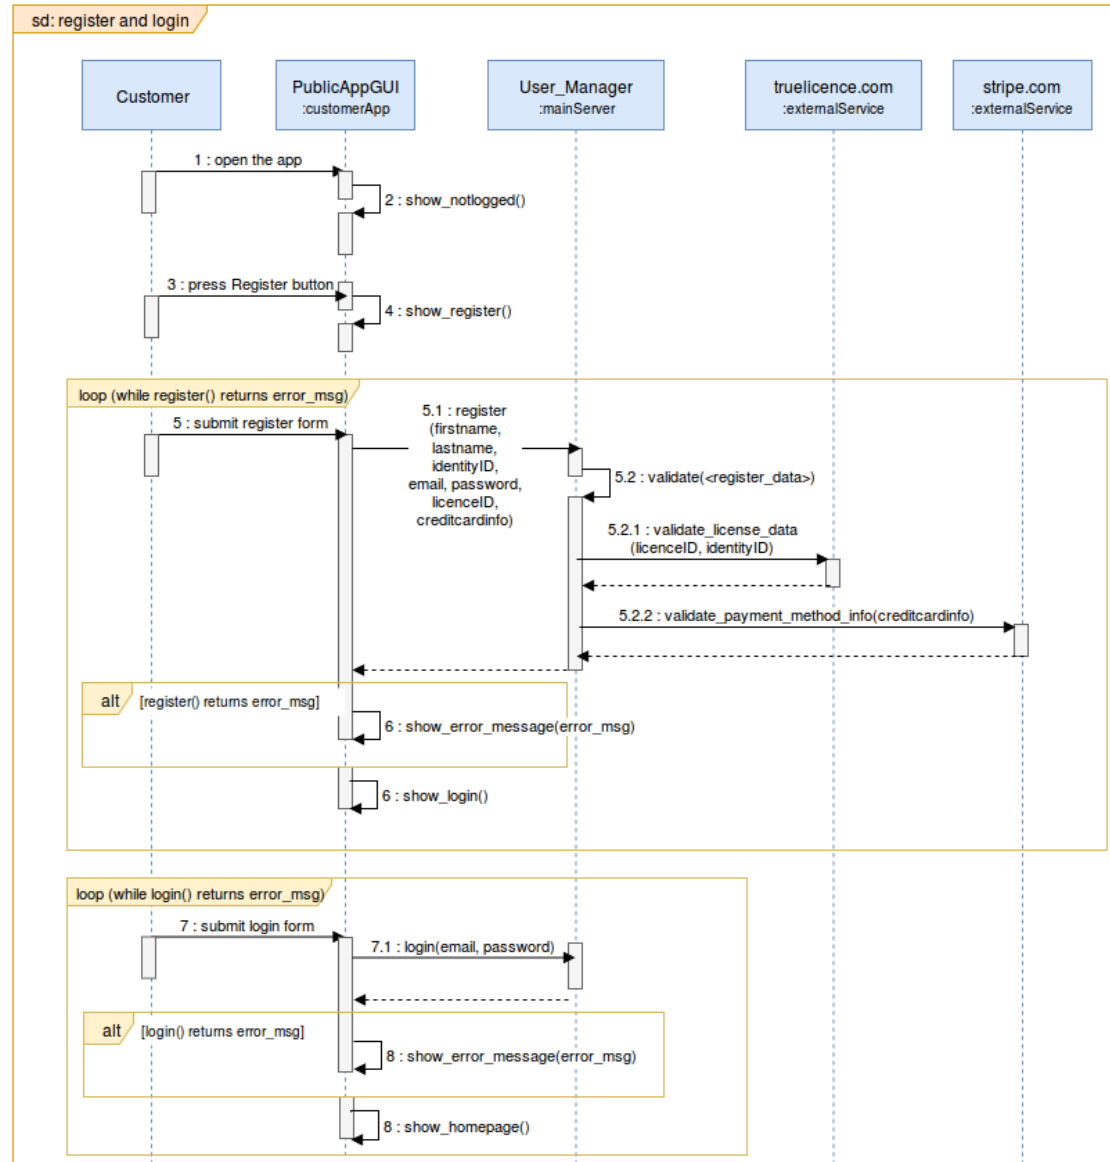


Figure 7: Sequence Diagram for Registration and Login process of customers.

Here we can clearly see how the responsibility of managing users is set to the **User_Manager** component, fully deployed on the main server.

PublicAppGUI is simply responsible of gathering useful data and sending it to User_Manager, which takes care of contacting external services if needed.

When the registration/login process is completed server-side, User_Manager returns control to PublicAppGUI, that is in charge of informing the user about the result of their request and eventually redirected to another page (login after registration is completed successfully, homepage after login is completed successfully).

Lookup and Book

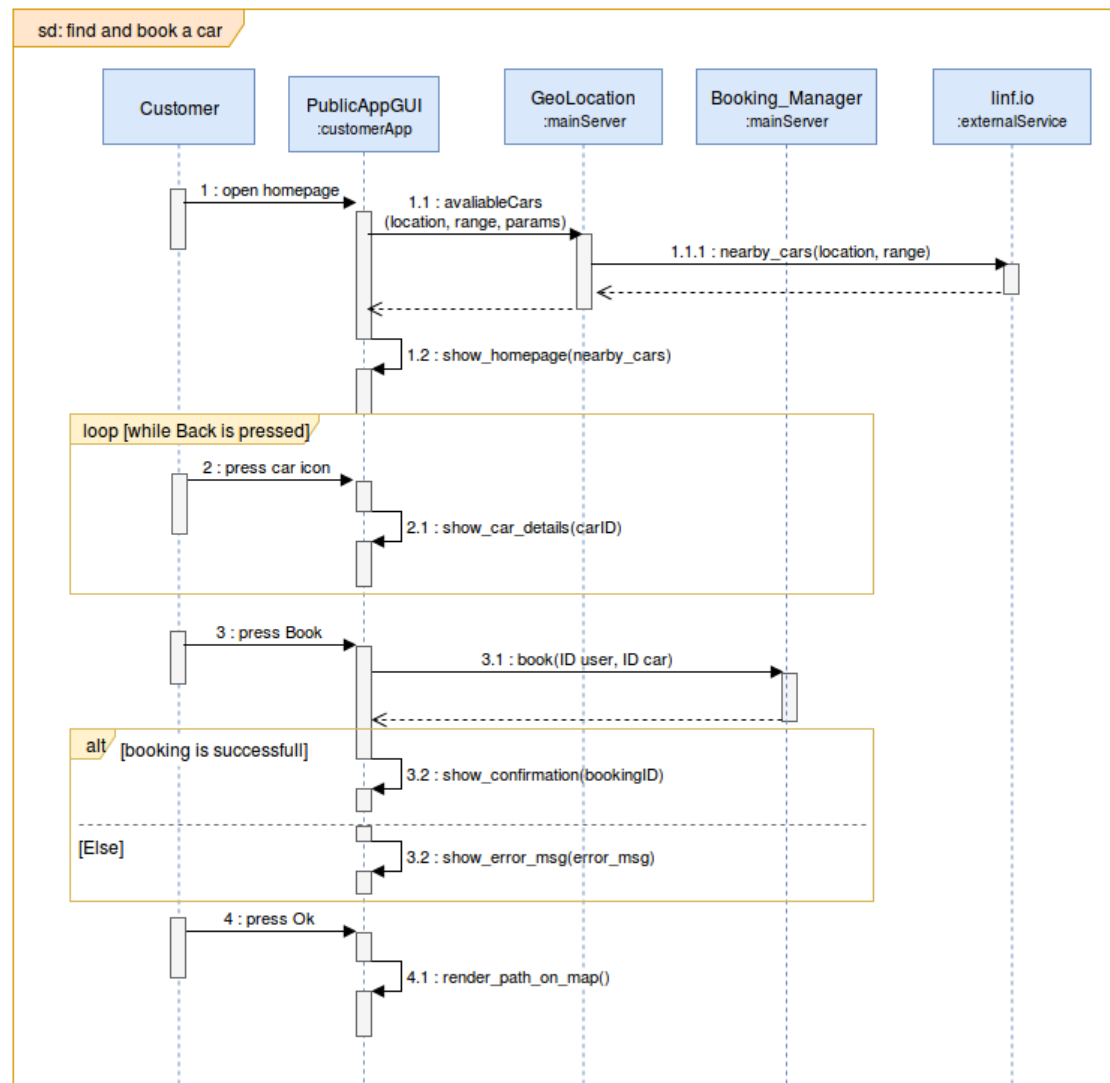


Figure 8: Sequence Diagram for Lookup and Booking process of customers.

2.11 Selected Technologies

Having defined the interface between the several functionality provided by the components, all possible communication technologies may have been chosen. Obviously some choices are more apt than others with the respect of latency, throughput, elegance of the design and other factors; however the whole design will remain intact whichever technology we choose.

Here we simply give some reasonable suggestions for protocols and technologies that seems us a better fit for the system we modeled.

RESTful API

The main server will expose its API in the most conventional way, using the classical HTTP/TCP/IP stack. In particular we provide RESTful interfaces. Model everything as an entity provides enough capabilities to actual implement the whole system while remaining constrained to only the basic REST verb. This helped a lot in keeping the whole API scheme simple to understand and to implement.

Apps consume the REST interface provide by the server, however to implement the communication between the server and the app we will use the long polling strategy.

MQTT

As for now, most of the communication between the server and the car will happens using the PubSub protocol, while some special messages (like, for example, the ValidateSolve function) will stay on a more basic Client-Server approach.

Between all the implementation of the PubSub protocol we chose to use MQTT for its low overhead, its QoS and because it is widely used in the industry.

Distributing the main server

what about this?

Database

what about this?

3 Algorithm Design

[Definition of critical sections of code]

4 User Interface Design

4.1 Mockups

Mockups have already been included in the RASD (section 3.3: Non Functional Requirements)

4.2 UX Diagrams

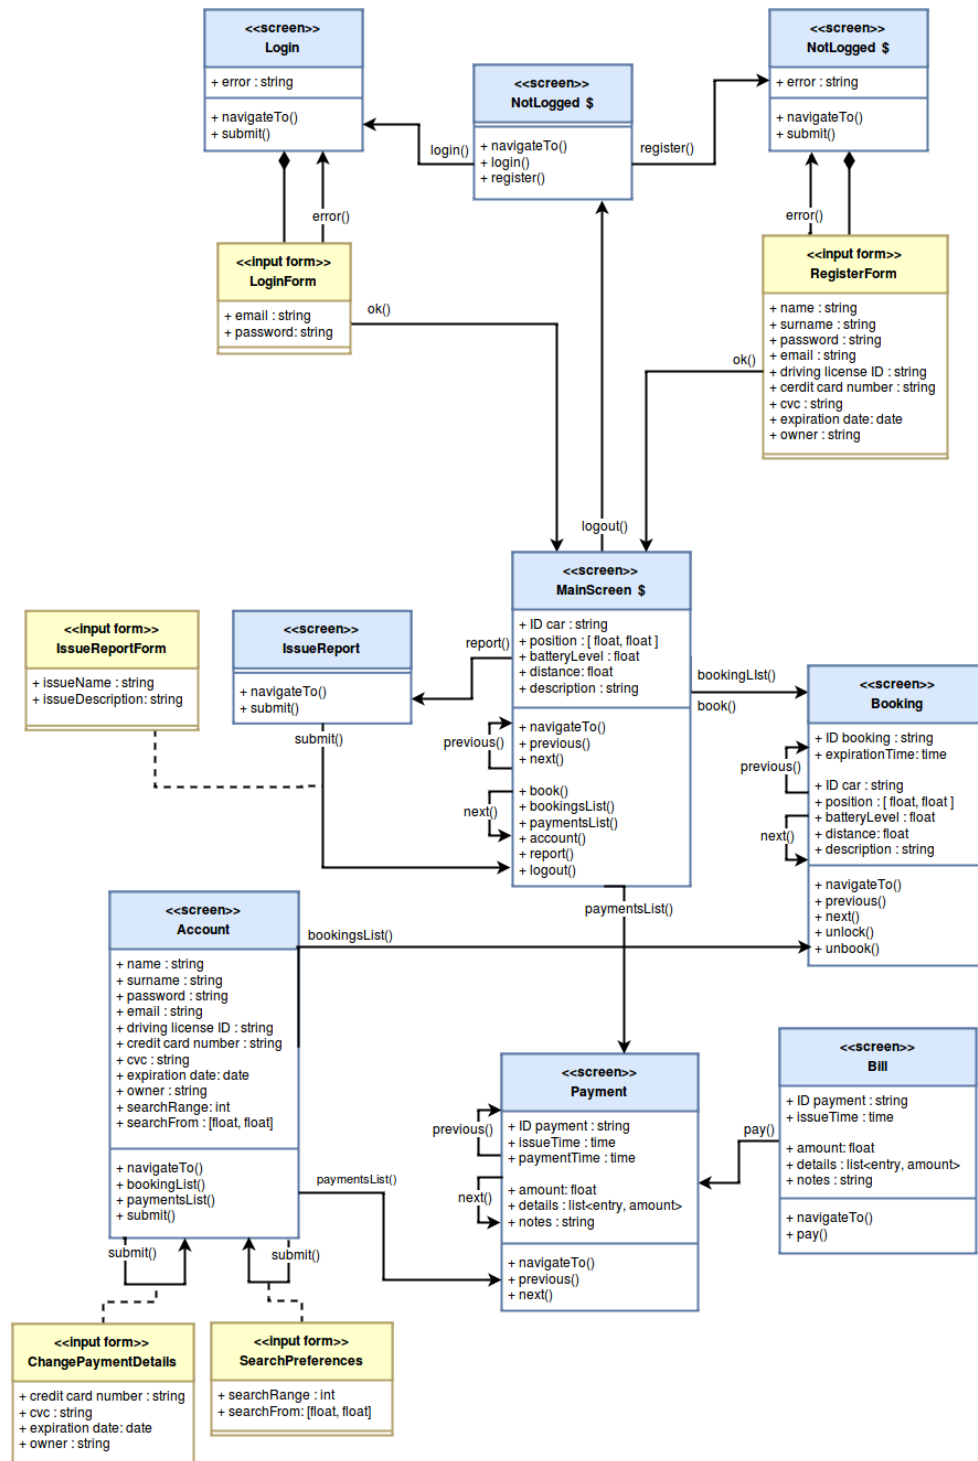


Figure 9: UX Diagram of the interface of customer's application

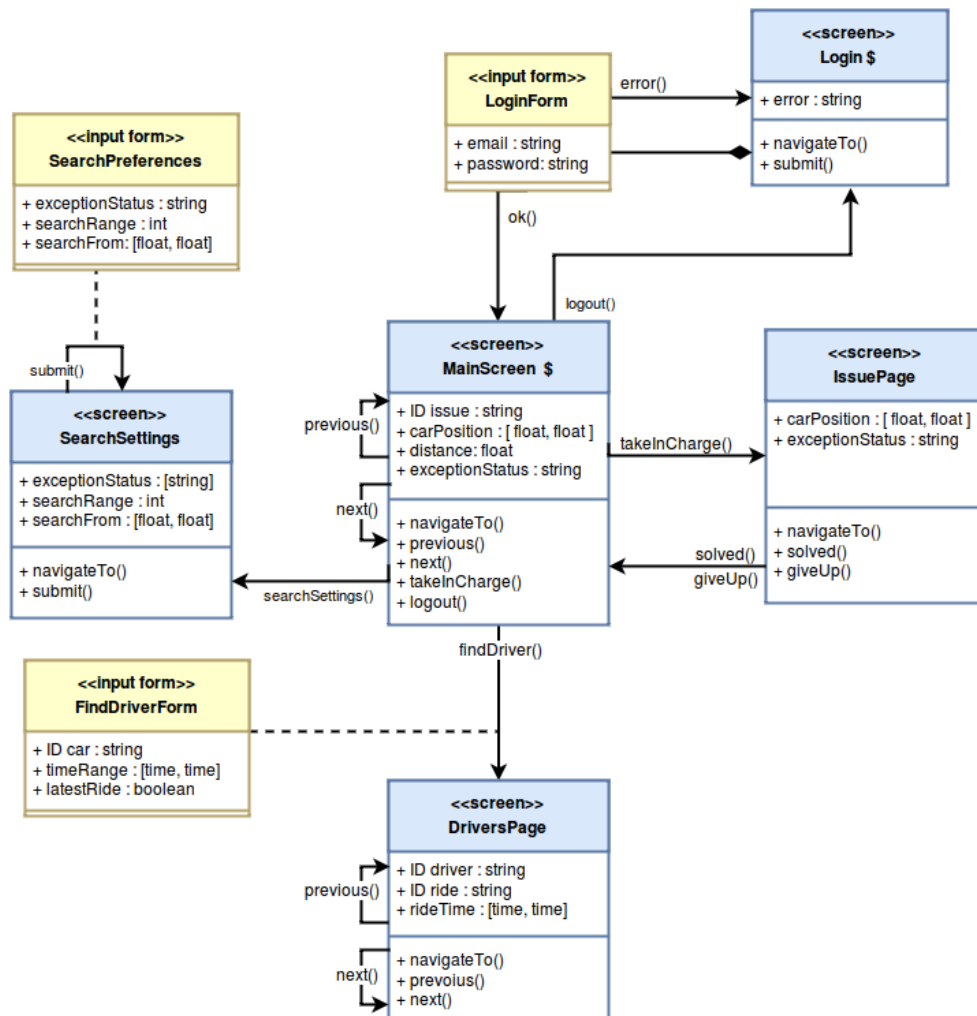


Figure 10: UX Diagram of the interface of staff's application

4.3 BCE Diagrams

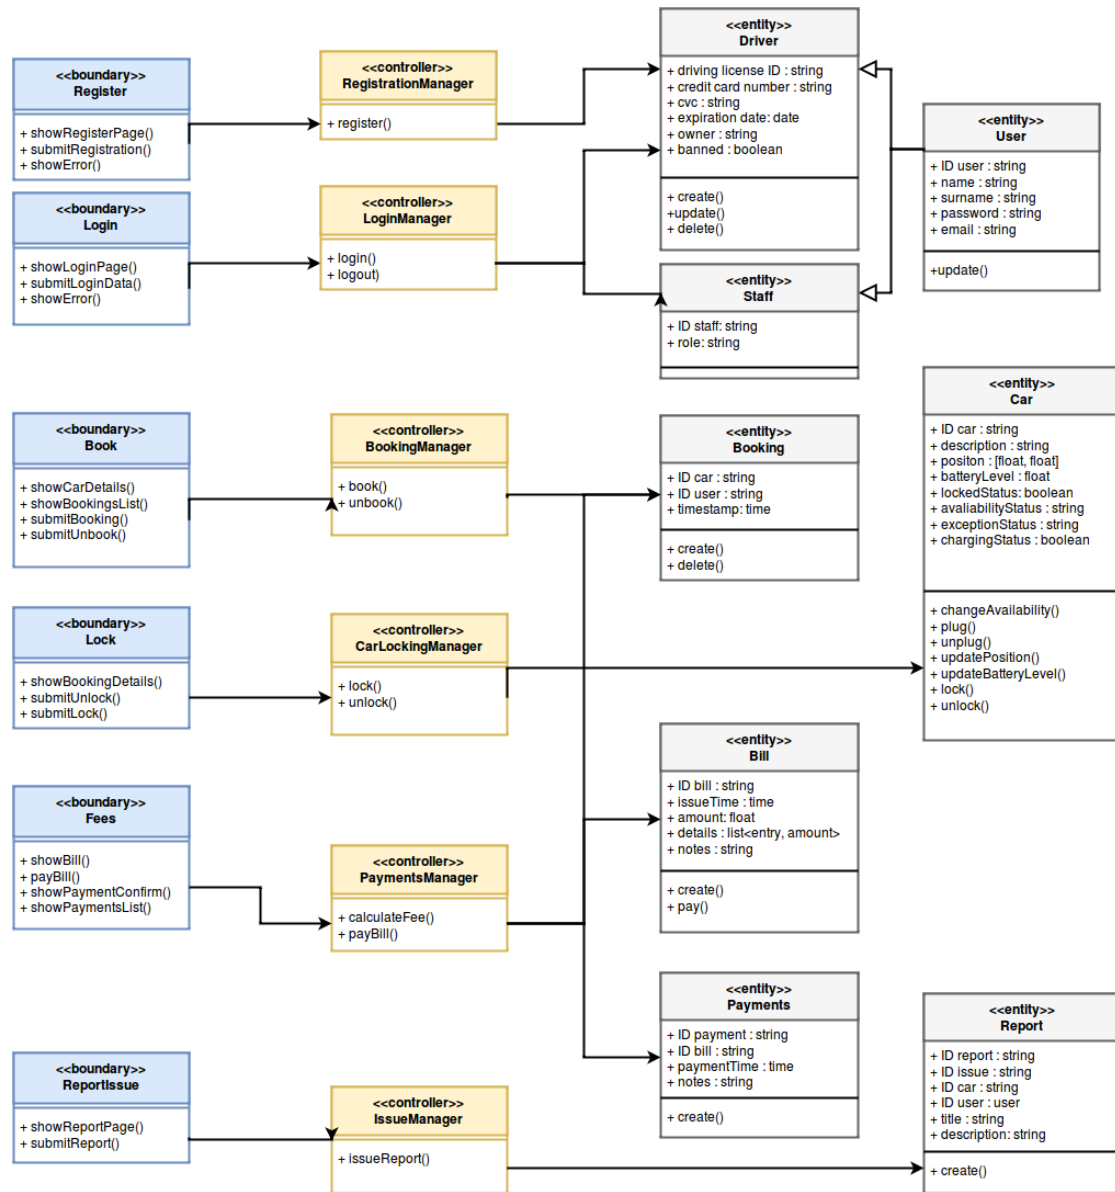


Figure 11: BCE Diagram of the interface of customer's application

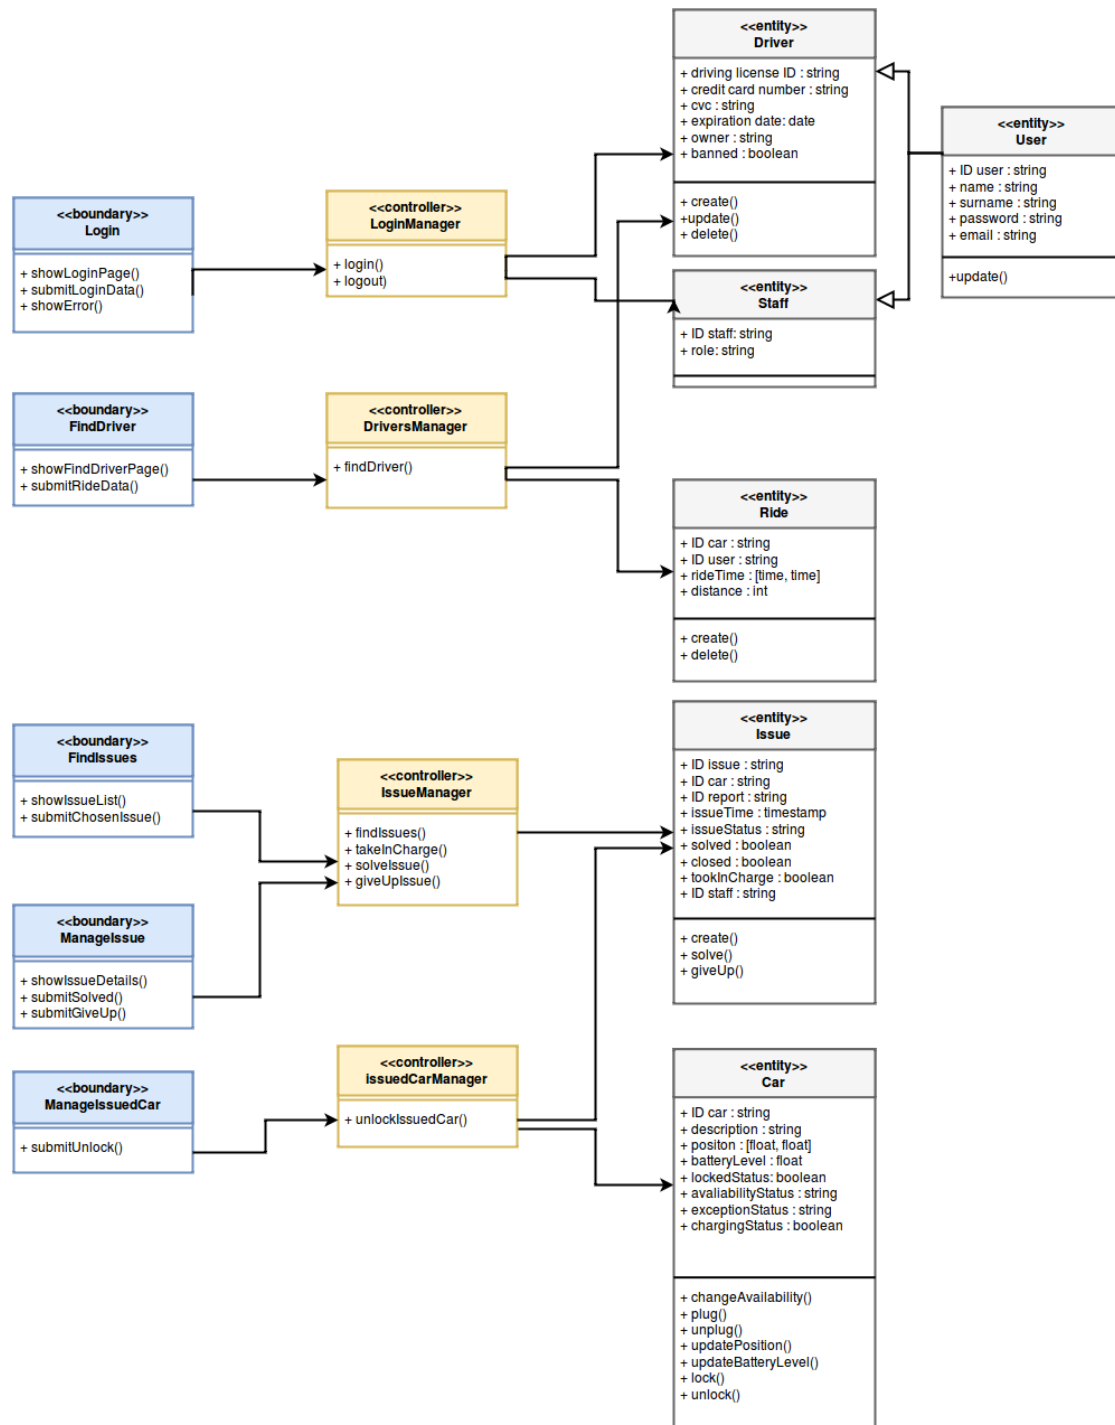


Figure 12: BCE Diagram of the interface of staff's application

5 Requirements Traceability

Lo stesso lavoro fatto nel definire le interfacce, ma a rovescio. Non piu' Interfaccia -> Req soddisfatti, ma Req-> interfaccia che lo soddisfa.

Considering we designed the system using a bottom-up approach, designed components maps in a straightforward way to the goals specified in the RASD. However we provide an explicit mapping of the two.

REGISTRATION Users can register to PowerEnjoy .

- Server: RegistrationController
- Customer's App: RegistrationView (?)

LOGIN Users can login to PowerEnjoy .

- Server: LoginController
- Customer's App: LoginView (?)
- Staff's App: LoginView (?)

LOOKUP Users can find cars nearby a given position, it could be its position or a point in the map.

- Server: CarsLocation
- Customer's App: CarsView (?)

BOOK Users can book a car for a short amount of time.

- Server: BookingController
- Customer's App: BookingView (?)

UNLOCK When users are in proximity of the car they booked, the system can unlock it.

- Server: CarLockController
- Car: LockController
- Customer's App: CarNearby (————— SEE ISSUE #14)

RIDE Users can drive to their destination.

- Server: AuthDriver

- Car: LicenceScanner, EngineController, MQTT publishers, CarGUI

SAFE AREAS Users can locate safe parking areas.

- Server: AreasLocation
- External Services: linf.io
- Car: MQTT publishers, CarGUI

UNSAFE PARKING The system must react to an unsafe parking.

- Server: UnsafeParkingController, IssuesController (?)
- Car: EngineController, LockController (MQTT publishers too?)

POWER STATIONS Users can locate charging stations.

- Server: AreasLocation
- External Services: linf.io
- Car: CarGUI

CHARGE At the end of the ride, users are charged a fee.

- Server: BillingController
- Customer's App: PaymentDetailsView

PAYMENTS Users can pay bills through the app.

- Server: PaymentController
- External Services: stripe.com
- Customer's App: PaymentDetailsView

FIND ISSUES The staff can locate cars that need their intervention.

- Server: IssuesLocation
- Staff's App: IssuesView (?)

SUPPORT The staff can identify and solve car's issues.

- Server: IssuesController

- Staff's App: IssueDetailsView (?)

FINES The system can provide enough details for the staff to manage correctly the fines they receive from local authorities.

- Server: FindDriverController (?)
- Staff's App: FindDriverView (?)

6 Conclusions

6.1 Tools used

During the development of this document we used the following tools:

- **Github** to version control the project
- **L^AT_EX** on TeXworks to redact this document
- **www.draw.io** to draw UML graphs
- **Gimp v.2.8** to mockup the application
- **LibreOffice Draw** to draw the system's overview at section 2.1

6.2 Hours of work

- SZ: 1h on 30/11
- SM: 5h on 2/12
- SZ: 5h on 2/12 SZ: 3h of work on 4/12 (RASD review)
- SZ: 3h on 5/12
- SZ: 4h on 6/12
- SZ: 7h on 7/12