Operation and maintenance instructions


1. In order to ensure that the tonneau cover is kept in the best condition,please check and maintain the track and engine storage box regularly.

2. It is recommended to use a rag for cleaning, or use a high-pressure water gun. Please do not aim at the motor, controller, LED lamp and wiring port when using the high-pressure water gun, and do a good job of waterproof protection.

3. When cleaning the engine storage box, first open the cover and pull the cover to the rear tailgate. Apply lubricant to the rag, wipe the interior of the engine storage box, and check whether the drain pipe is blocked.

4. After regular cleaning, use lubricating oil lubricate the rail, spiral groove and gear mechanisms . The best effect is to use lubricating oil with a small amount of PTFE. If it is not maintained for a long time, use dry lubricating oil, which has better durability and will not attract dust. Avoid using silicone dry lubricant, which is easy to make noise.

5. When the indicator light of the remote controller is obviously weak or not bright, please replace the battery in time. (Battery model: CR2032)

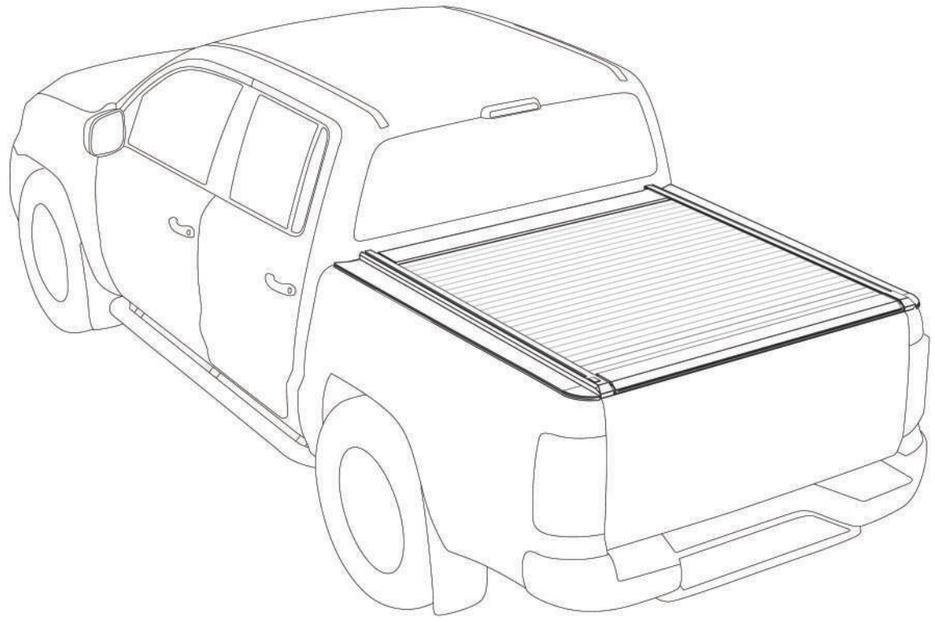


Electric Roller lid


Installation instructions

⚠ Before use, please read all instructions and keep it well.

Products list

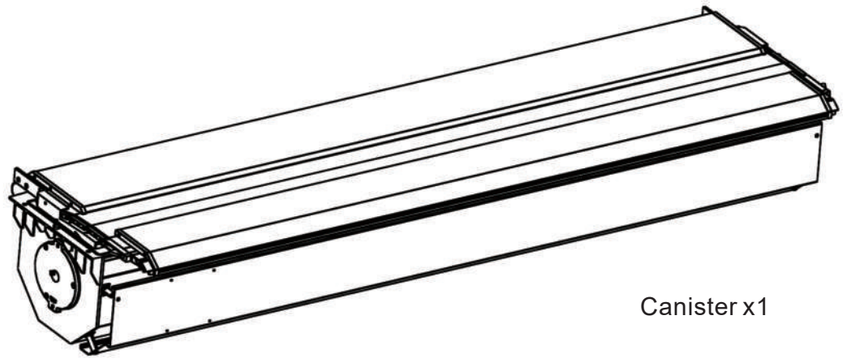


Canister x1

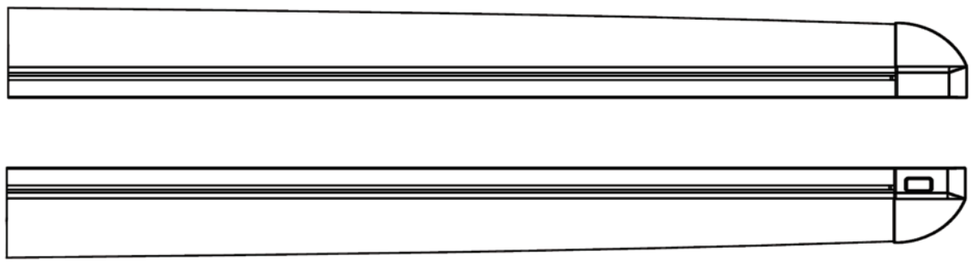

Rail x2

A

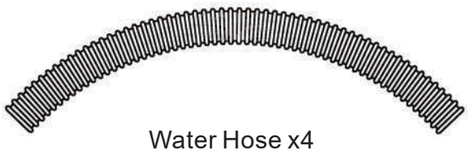

Water Hose x4




Hose Clamp x4


B




Self-locking Nut M6 x8



Bolt M6x30 x8




Washer M6 x8




Nut M6 x8

C




Hexagon Socket Screw M6x12 x4




Washer M6 x4

F



Wire x1

H




Adhesive sponge rubber x1

E



Self-tapping Screw M4 x8



Washer x8


D



Bracket 1 x2




Bracket 2 x4




Bracket 3 x2

Installation method

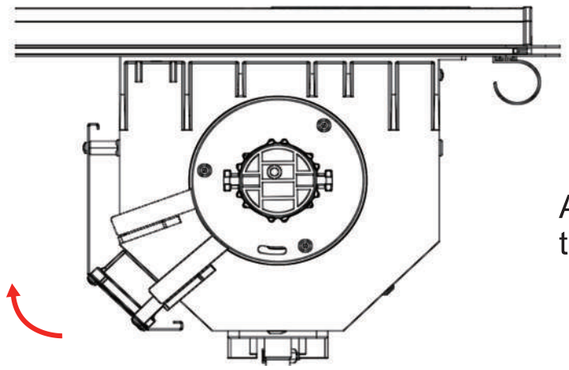


Adjust the clutch to the switch state

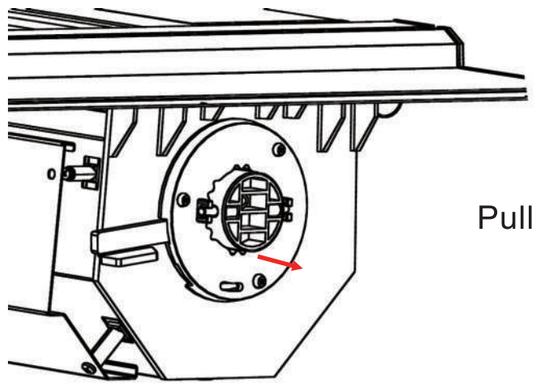


Pull the motor out slightly


Insert the panels into the rail first

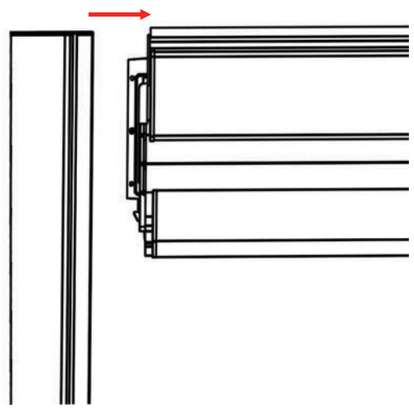


Make the rail and the roller lid match perfectly

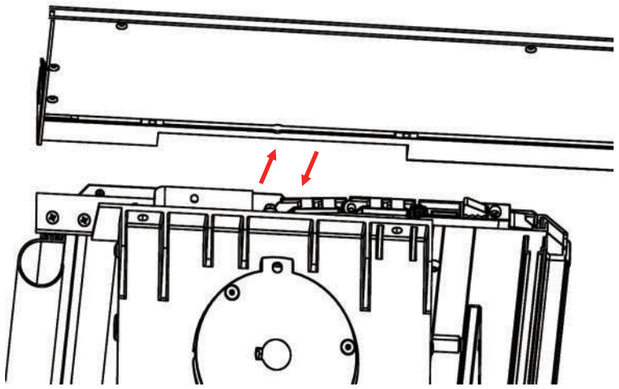


Fix the rails and roller lid by screw **C**

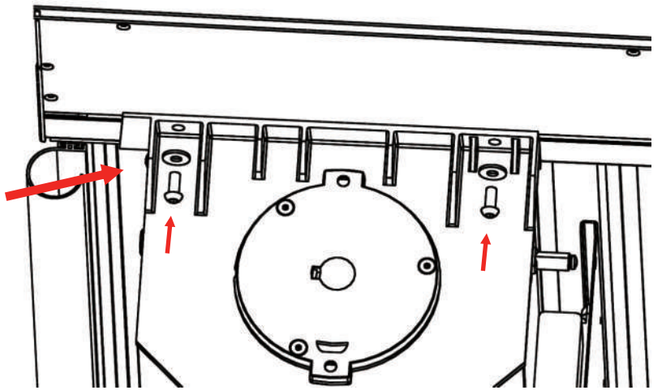


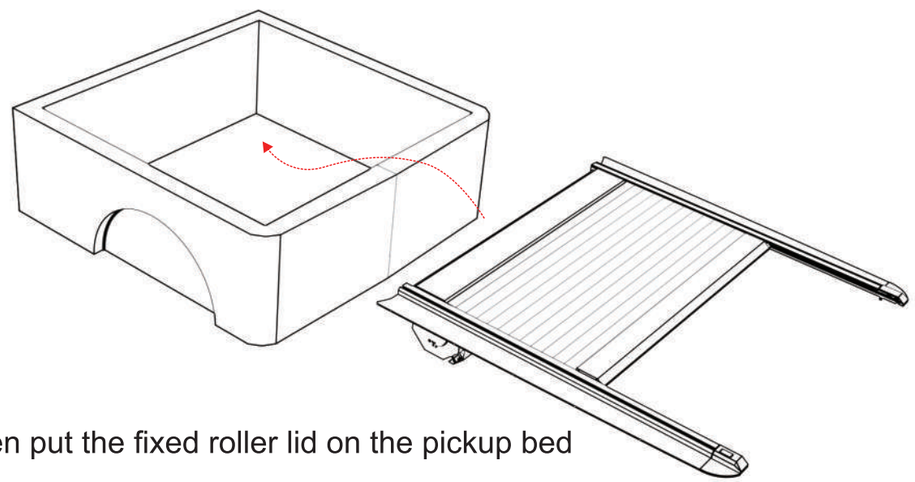


Then put the fixed roller lid on the pickup bed

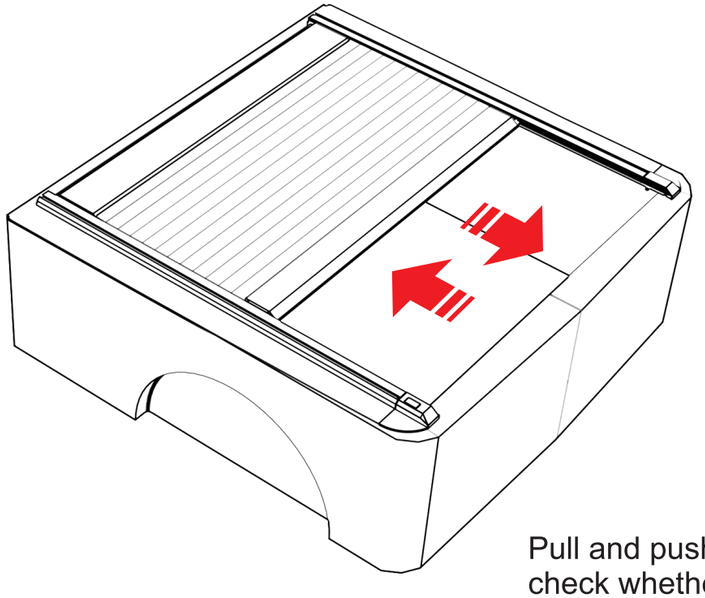


Pull and push the roller lid to check whether can work normally

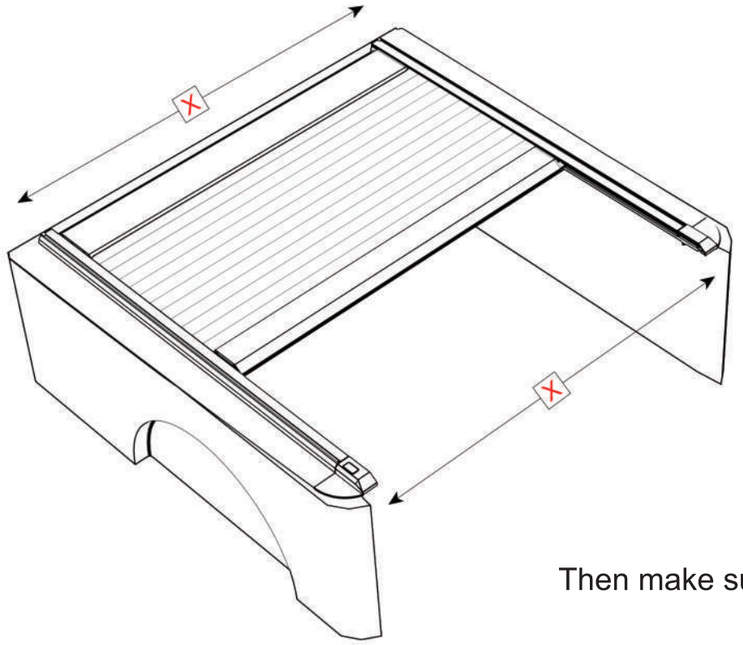


Then make sure **X=X**

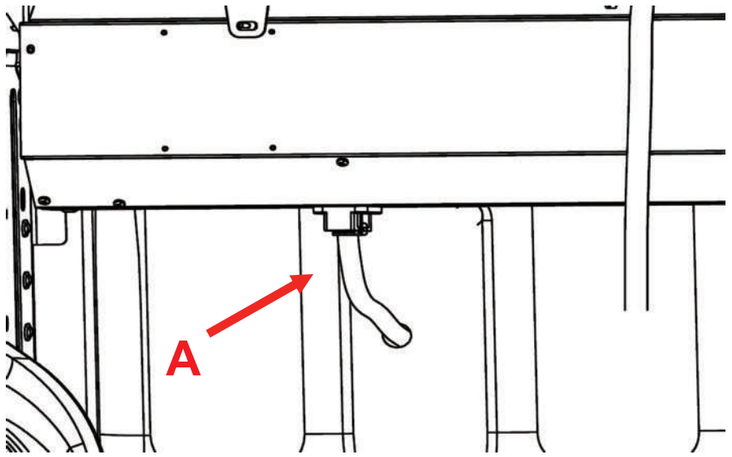


Clip the water hoses on the canister. And choose a suitable place to drill the holes to stretch the hose out of the pickup bed

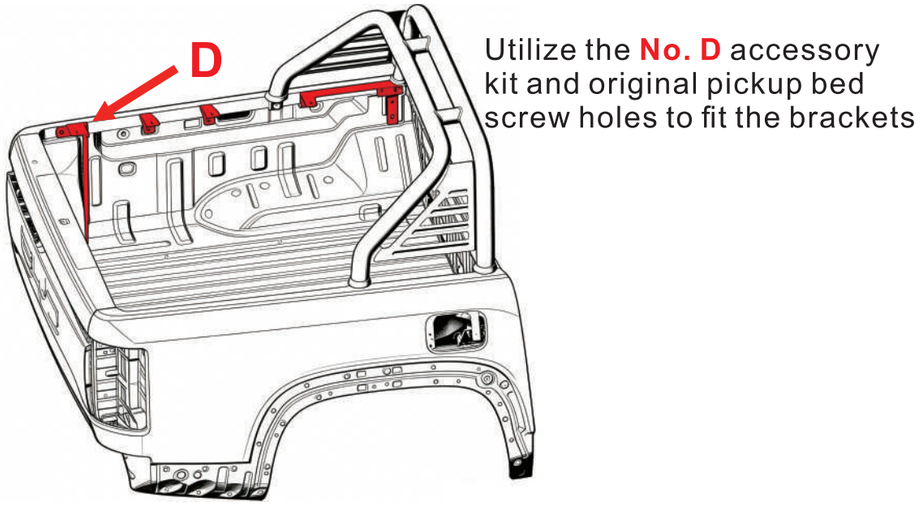


Utilize the **No. D** accessory kit and original pickup bed screw holes to fit the brackets

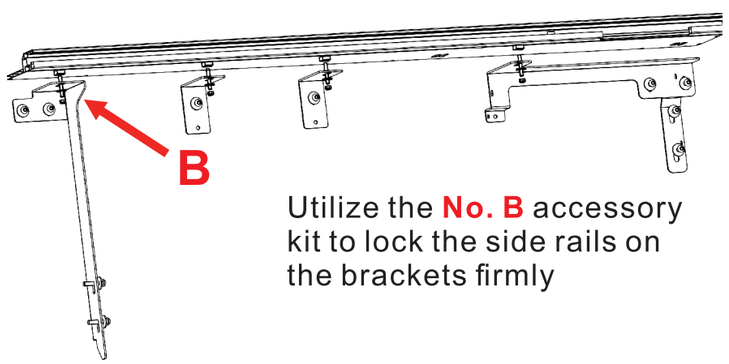


Utilize the **No. B** accessory kit to lock the side rails on the brackets firmly

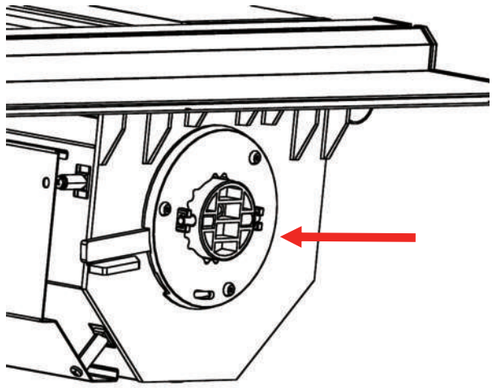

Reset the motor by pushing it in once tonneau cover installed

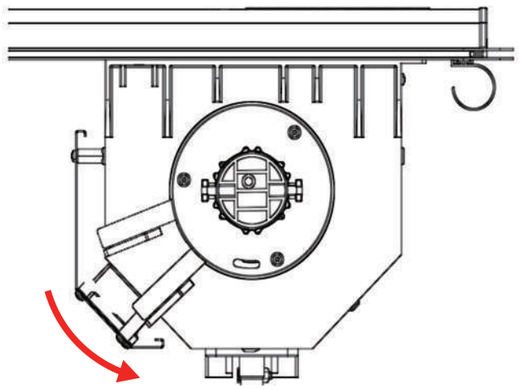

Adjust the clutch to closure state after motor reset

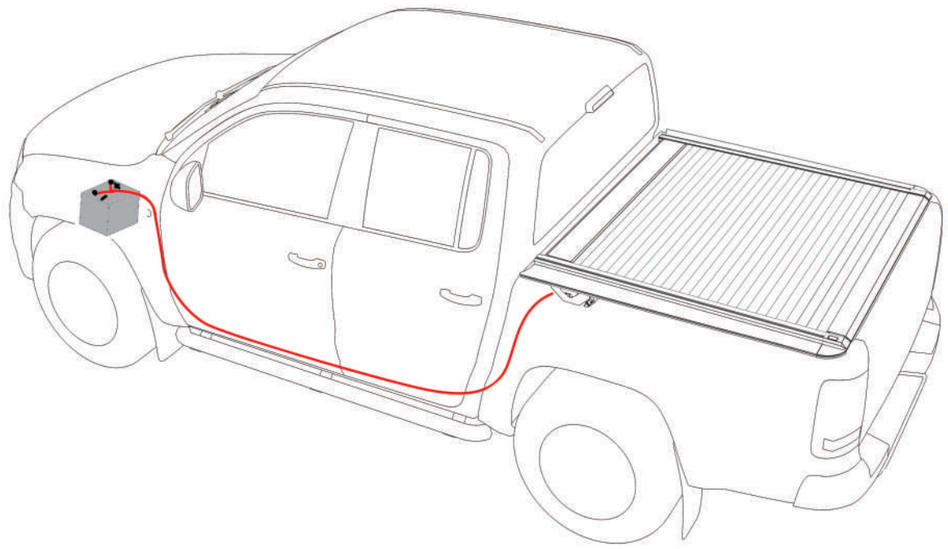

Connect the tonneau cover to the car 12V battery

Tonneau Cover Remote Operation Instruction



APP INSTRUCTION

SCAN AND DOWNLOAD

The LED light will turn on automatically when the tonneau cover opened, and the LED light will turn off automatically after 60 seconds, then can turn on again by the remote.

Mobile phone authorized installation steps: (The initial authorization code is“666666”)

① Download the APP iRoller Plus;


② Turn on the mobile phone Bluetooth;

③ Click the APP and scan Bluetooth, choose “iRoller-Plus”and connect successfully.

④ Modify the authorization code. Click the SETTING icon→authorization code →input new password→confirm modification→Return to previous menu

⑤ Press and hold the remote control STOP “■”for 8 seconds→the buzzer of the host machine sounding→then click the ⬆ ⬇ on the APP immediately→new authorization code Bound (Please remember the new authorization code against your password leakage or embezzlement)


⑥ Turn on the mobile phone Bluetooth→search and connect “HID-Pickup”→input new authorization code→mobile phone authorization finished.

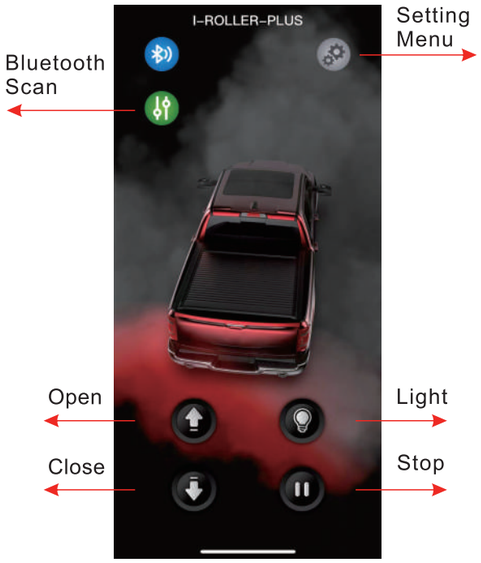


Attention:

1. Tonneau cover will work more powerfully when choose bigger current rate.

2.When the APP can not work due to authorization code missed, just need to repeat the step⑤+Step⑥to reset the authorization code, then the authorization code of “iRoller-Plus”and“HID-Pickup”will be synchronized update.

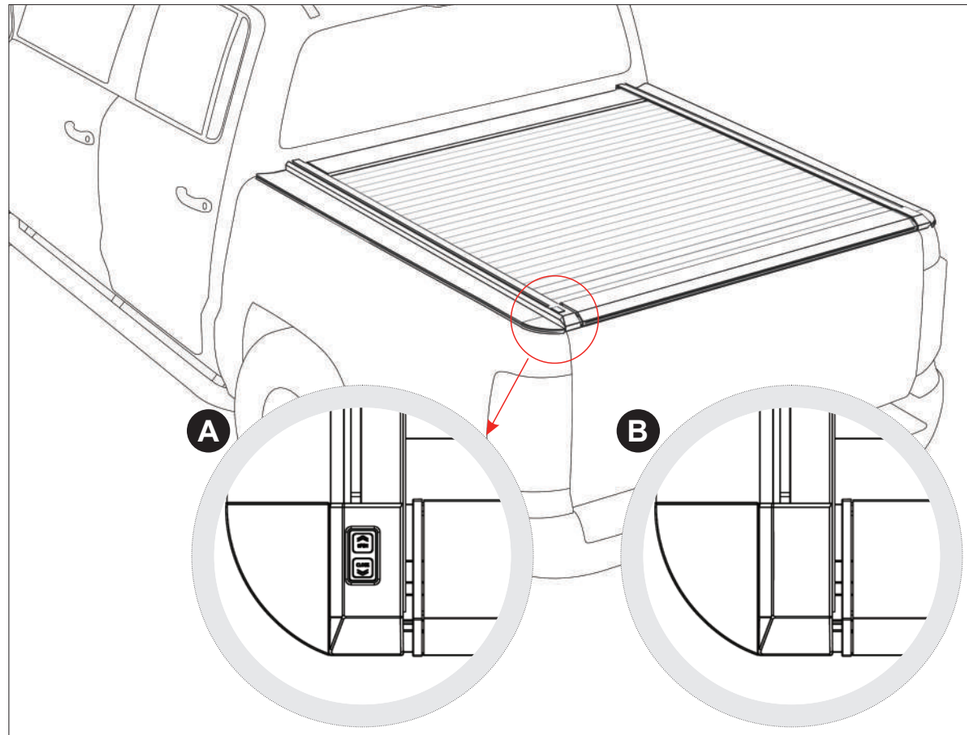


Special Remark: Instruction for the tonneau cover with rail button (Ignore it if not order this model)

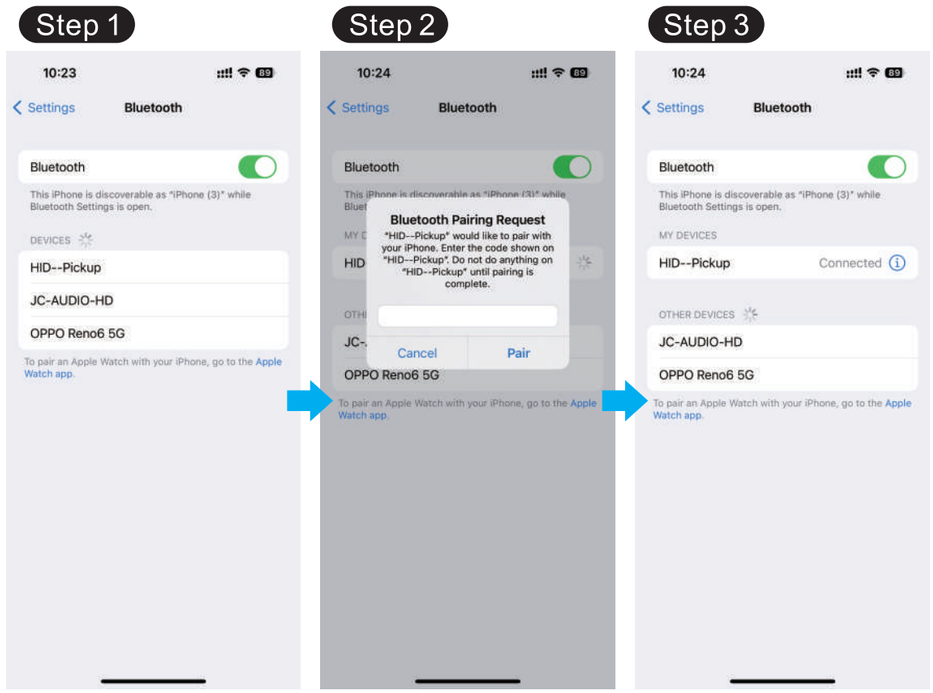

Step 1 Turn on the mobile phone Bluetooth. Search HID--Pickup

Step 2 Input the authorization code“666666”and connect it.
(Attention: The initial authorization code is“666666”, if the password has been modified, please input the new code)

Step 3 It will work once connect successfully.

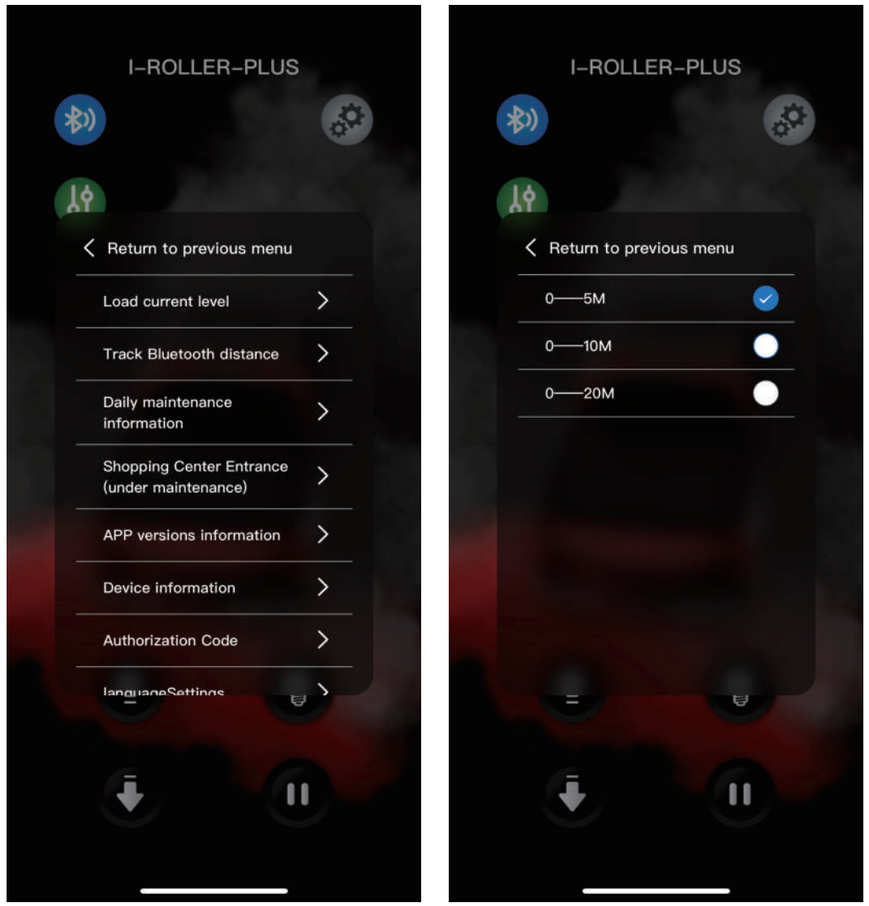

Attention: The rail button will work under the mobile phone Bluetooth connected. The initial working distance is 5M, if you want to change it, please open the APP to reset in accordance with above instruction. (You will hear long buzzer sounding once reset successfully)

Remark:The max working distance for the APP is around 25-30 meters. The rail button’s working distance is the same with the APP when the APP is under “ON” state, please turn off the APP to ensure rail button can work normally within the setting distance.



