

## 26-Port Full Gigabit Managed Industrial PoE switch



- ❖ 22-Port 10/100/1000Base-T + 2 Combo + 2 (100/1000M) SFP
- ❖ L2+ features provide better manageability, security, QoS, and performance.
- ❖ Support L2+ Switching features including 802.1Q VLAN, Mirroring, Port isolation, IGMP Snooping, DHCP Snooping, LLDP, POE+ management, IP Source Guard, ARP inspection, ACLs etc.
- ❖ Support spanning tree STP(802.1D) and RSTP(802.1W).
- ❖ Jumbo frames support up to 9.6K kilobytes.
- ❖ Support enhanced management through WEB, CLI, TELNET, SSH, SNMP.
- ❖ Support cable diagnosis
- ❖ Meet IEEE 802.3at PoE standard. Supports per port PoE configuration function
- ❖ G.8032, support <50ms industrial quick ring protection

### Product Description

This L2+ managed POE+ switch, provides a reliable infrastructure for your business network. It delivers more intelligent features you need to improve the availability of your critical business applications, protects your sensitive information, and optimizes your network bandwidth to deliver information and applications more effectively. It provides the ideal combination of affordability and capabilities for entry level networking of industrial, small business or enterprise application which demands industrial, surveillance, IP Phone, IP Camera or Wireless applications, thus helps you create a more efficient workforce.

In short, it provides security, performance, quality of services, central managed and other network control capabilities. Optimized and customized design and affordable pricing, it best fit for SMB or entry-level enterprise solution. It passed the rigorously testing to deliver excellent performance. As a managed switching solution, it also provides the flexibility to manage and prioritizes suitable-bandwidth traffic such as voice. In addition, it has advance security and gives you tight control to safeguard the network from unauthorized users.

## 26-Port Full Gigabit Managed Industrial PoE switch

**Technical Specifications**

<b>Product</b>	<b>26-Port Full Gigabit Managed Industrial PoE switch (KRN-ISW-MHP-2440G)</b>
<b>Performance</b> (Switching capacity and forwarding rate)	
Capacity in Millions of Packets per Second (mpps) (64-byte packets)	38.69
Switching Capacity in Gigabits per Second (Gbps)	52
<b>Interface</b>	
Ports	22-Port 10/100/1000Base-T + 2 Combo + 2 (100/1000M) SFP
<b>Layer 2 Switching</b>	
Spanning Tree Protocol (STP)	Standard Spanning Tree 802.1d Rapid Spanning Tree (RSTP) 802.1w
G.8032 ERPS	<50ms ring protection for industrial high reliable application
Aggregation	Link Aggregation Control Protocol (LACP) IEEE 802.3ad Up to 13 groups ;Up to 16 ports per group
VLAN	Support up to 4K VLANs simultaneously (out of 4096 VLAN IDs) ;Port-based VLAN; 802.1Q tag-based VLAN
IGMP v1/v2 snooping	IGMP limits bandwidth -intensive multicast traffic to only the requesters; supports 1024 multicast groups (source-specific multicasting is not supported)
<b>Security</b>	
Secure Shell (SSH) Protocol	SSH secures Telnet traffic in or out the switch, SSH v1 and v2 are supported
Secure Sockets Layer (SSL), HTTPS	SSL encrypts the http traffic, allowing advance secure access to the browser-based management GUI in the switch
Port Security	Locks MAC Addresses to ports, and limits the number of learned MAC addresses
DHCP Snooping	prevent unauthorized configuration and use of IP addresses, while providing support for IP Source Guard and ARP detection
IP Source Guard	Prevents datagram with spoofed addresses from being in the network
ARP Inspection	Prevent ARP spoofing attacks and ARP
Storm control	Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port
ACLs	Support for up to 256 entries; Drop or rate limitation based on source and destination MAC, VLAN ID or IP address, protocol, port, differentiated services code point (DSCP) / IP precedence, TCP/ UDP source and destination port s, 802.1p priority, Ethernet type, Internet Control Message Protocol (ICMP) packets, IGMP packets, TCP flag
<b>Quality of Service</b>	
Hardware Priority Queue	Support 8 hardware queues
Scheduling	8 COS queues per port support strict priority and weighted round-robin (WRR)
Classification	Port based; 802.1p(PCP) VLAN priority based;
Rate Limiting	Ingress policer;egress shaping and rate control;per VLAN,per port and flow based


## 26-Port Full Gigabit Managed Industrial PoE switch

**Technical Specifications**

<b>Management</b>		(Web/ SSL, Telnet/ SSH, ping, Trivial File Transfer Protocol (TFTP), SNMP, Syslog)	
Web GUI interface		Built-in switch configuration utility for browser-based device configuration (HTTP/ HTTPS). Supports configuration, system dashboard, maintenance, and monitoring	
Dual Image		Dual image provides independent primary and secondary OS files for backup while upgrading	
Firmware upgrade		Web browser upgrade (HTTP/ HTTPS) and TFTP; Upgrade through console port as well	
Port mirroring		Traffic on a port can be mirrored to another port for analysis with a network analyzer or RMON probe. Up to <b>N-1 (N is Switch's Ports)</b> ports can be mirrored to single destination port. A single session is supported.	
Other management		Single IP management; HTTP/HTTPS; SSH; RADIUS; DHCP Client; SNTP; cable diagnostics; ping; syslog; Telnet client (SSHsecure support)	
<b>Green Ethernet</b>			
Green and Energy-saving Ethernet (EEE)		Compliant IEEE802.3az Energy Efficient Ethernet Task Force. Automatically turns off power on Gigabit Ethernet RJ-45 port when detecting link down or Idle of client. Active mode is resumed without loss of any packets when the switch detects the link up	
Cable length detection		Adjusts the signal strength based on the cable length. Reduces the power consumption for cables shorter.	
<b>General</b>			
Jumbo frames		Frame sizes up to 9KB supported on Gigabit interfaces	
MAC Table		Up to 8K MAC addresses.	
<b>Discovery</b>			
Link Layer Discovery Protocol (LLDP)		Used by network devices for advertising their identities, capabilities, and neighbors on a IEEE 802 local area network, principally wired Ethernet.	
<b>PoE</b>			
PoE Standard:	IEEE802.3at	PoE Port Power:	30W per PoE port, can be customized by Web management software
PoE Ports:	24 ports support PoE	Power Pin Type:	End-span (Mid-span optional)
<b>Minimum Requirements</b>			
Web browser: Mozilla Firefox version 2.5 or later, Microsoft Internet Explorer version 6 or later, Category 5 Ethernet network cable, TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in network			
<b>Environmental (preliminary)</b>			
Dimensions	440x290x44.5mm		
Working Environment	Operating temperature : -40 to 75 °C Storage temperature : -40°C to 75 °C Operating humidity: 10% to 90%, relative, non-condensing		


## 26-Port Full Gigabit Managed Industrial PoE switch

### Product Size Display

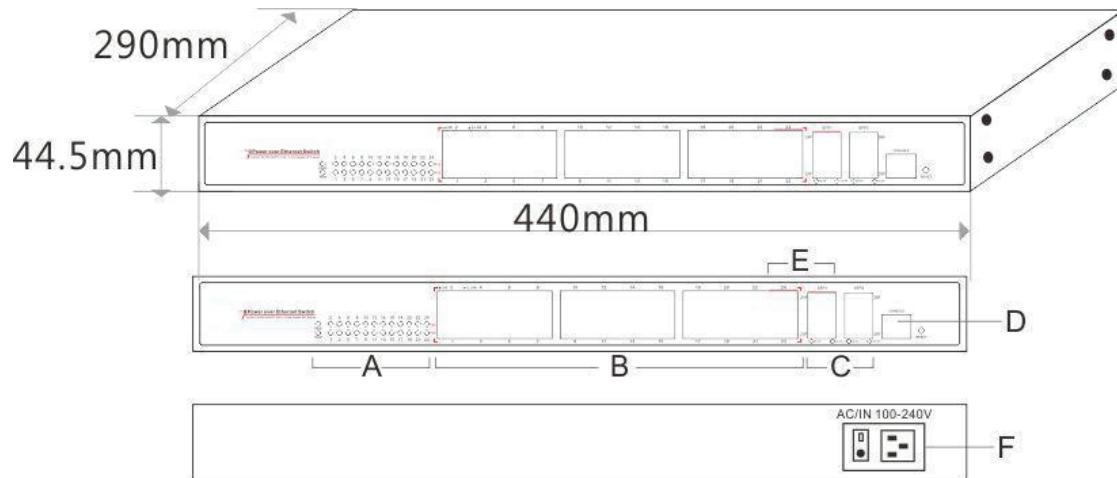

- |                          |                                |
|--------------------------|--------------------------------|
| A.Working LED indicator  | D.CONSOLE Port                 |
| B. 24 Gigabit RJ45 Ports | E.2 Gigabit TP/SFP Combo Ports |
| C. 4 Gigabit SFP Ports   | F.100-240VAC,50/60Hz           |

### Product Application Display

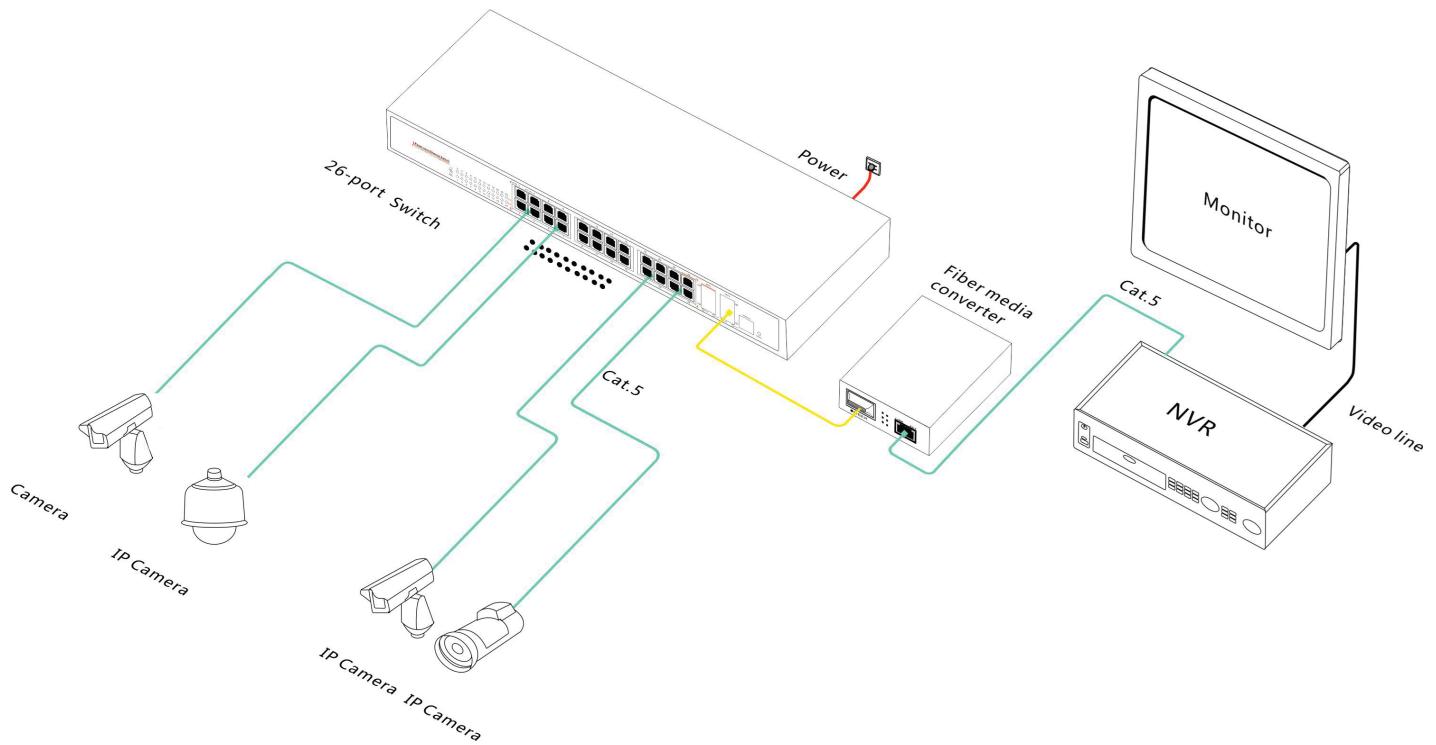

---

## 26-Port Full Gigabit Managed Industrial PoE switch

---

### Product Ordering Information

---

**Product Model:** KRN-ISW-MHP-2440G

**Product Description:** 26-Port gigabit managed Industrial PoE switch, 22-Port 10/100/1000Base-T + 2 Combo + 2 (100/1000M) SFP, port 1-24 supports PoE, IEEE 802.3at standard, 30Wper PoE port and can be customized by Web management software. Total input power is 600W.

**Note:** Default power supply pin type is end-span(1/2+, 3/6-), mid-span(4/5+, 7/8- ) is optional

### Product Packing Lists

---

<b>Packing Lists</b>	26-Port Gigabit Managed Industrial PoE switch ( KRN-ISW-MHP-2440G )
	Power Cable
	User Guide
	Warranty Card