


6. ARDUINO TO 16x2 LCD DISPLAY USING PROTEOUS

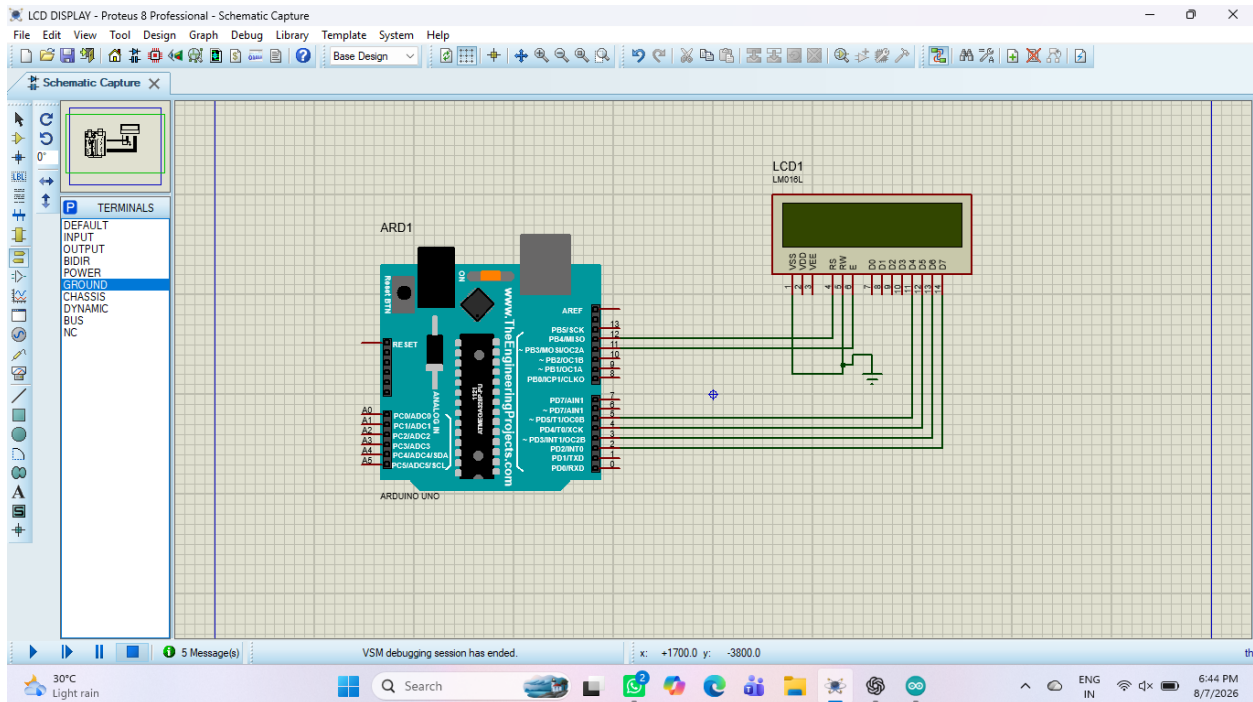

```
exp6 | Arduino 1.8.19
File Edit Sketch Tools Help

exp6

// Initialize the library by associating any needed LCD interface pins
// LCD Pins: RS, Enable, D4, D5, D6, D7
// Arduino Pins: 12, 11, 5, 4, 3, 2

LiquidCrystal lcd(12, 11, 5, 4, 3, 2);

void setup() {
    // Set up the LCD's number of columns and rows
    lcd.begin(16, 2);

    // Print the initial message to the LCD
    lcd.print("hello world!");
}

void loop() {

    // Scroll 13 positions to the left to move the text off-screen completely
    for (int i = 0; i < 13; i++) {
        lcd.scrollDisplayLeft();

        delay(700); // 700 ms delay between each scroll step
    }

    // Optional pause before restarting
    delay(1000);
}

Done compiling.

Sketch uses 1864 bytes (5%) of program storage space. Maximum is 32256 bytes.
Global variables use 59 bytes (2%) of dynamic memory, leaving 1989 bytes for local variables. Maximum is 2048 bytes.
```

