


# ECA1411-EMBEDDED SYSTEM

## LAB MANUAL

### Exp No: 10 PIR SENSOR IN PROTEUS USING ARDUINO

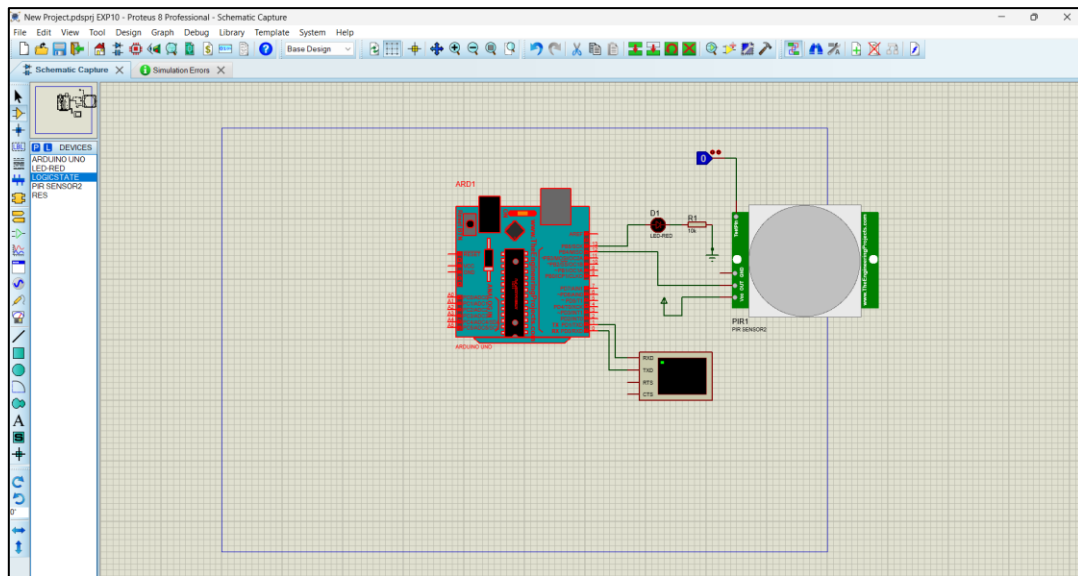

```
EXP10 | Arduino IDE 2.3.10
File Edit Sketch Tools Help
Arduino UNO
EXP10.ino
1 int Status = 13; // LED connected to D13
2 int sensor = 12; // PIR OUT connected to D12
3
4 void setup()
5 {
6   Serial.begin(9600);
7
8   pinMode(sensor, INPUT);
9   pinMode(Status, OUTPUT);
10 }
11
12 void loop()
13 {
14   long state = digitalRead(sensor);
15
16   Serial.println(state);
17
18   if (state == HIGH)
19   {
20     digitalWrite(Status, HIGH);
21     Serial.println("Motion detected!");
22     delay(1000);
23   }
24   else
25   {
26     digitalWrite(Status, LOW);
27   }
28 }
```

Output

Sketch uses 2246 bytes (6%) of program storage space. Maximum is 32256 bytes.  
Global variables use 220 bytes (10%) of dynamic memory, leaving 1828 bytes for local variables. Maximum is 2048 bytes.