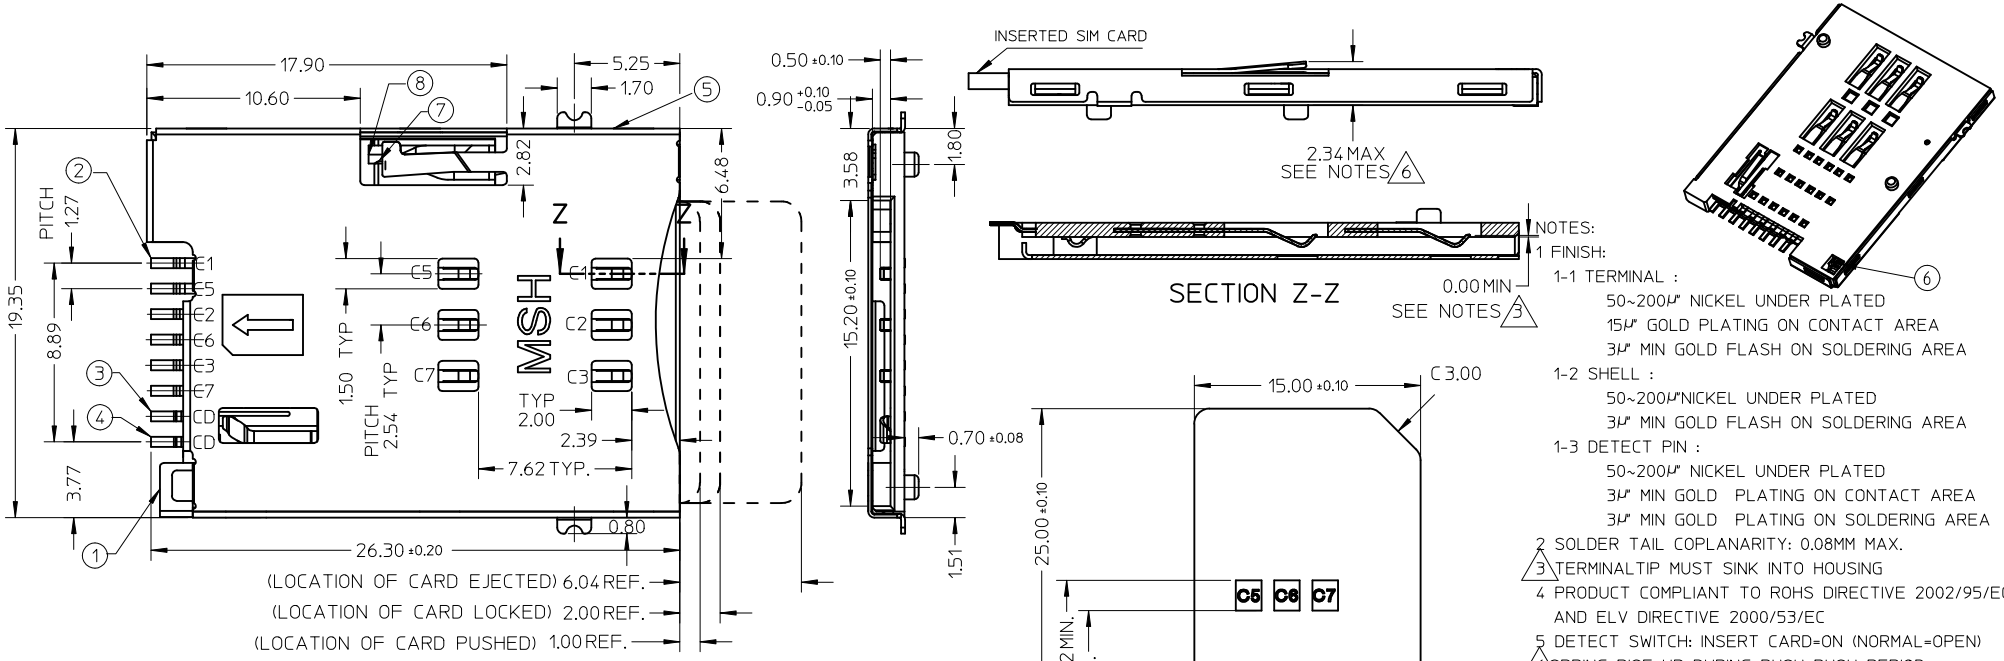













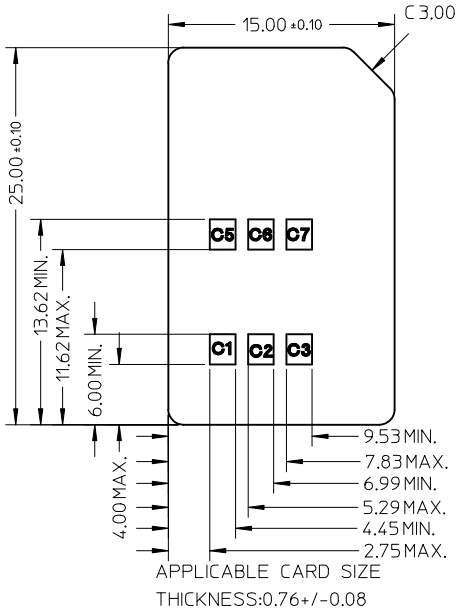


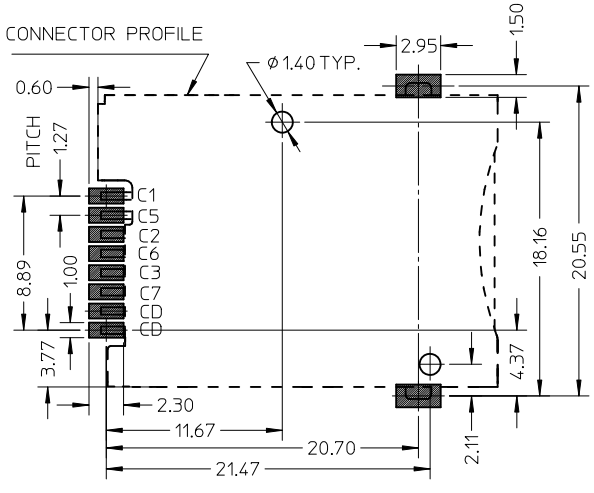


NOTES:
1 FINISH:
1-1 TERMINAL :
50~200μ" NICKEL UNDER PLATED
15μ" GOLD PLATING ON CONTACT AREA
3μ" MIN GOLD FLASH ON SOLDERING AREA
1-2 SHELL :
50~200μ"NICKEL UNDER PLATED
3μ" MIN GOLD FLASH ON SOLDERING AREA
1-3 DETECT PIN :
50~200μ" NICKEL UNDER PLATED
3μ" MIN GOLD PLATING ON CONTACT AREA
3μ" MIN GOLD PLATING ON SOLDERING AREA
2 SOLDER TAIL COPLANARITY: 0.08MM MAX.
3 TERMINALTIP MUST SINK INTO HOUSING
4 PRODUCT COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC
5 DETECT SWITCH: INSERT CARD=ON (NORMAL=OPEN)
6.SPRING RISE UP DURING PUSH-PUSH PERIOD
7.PACKAGE DRAWING: PK-47553-001
8.PRODUCT SPECIFICATION: PS-47553-201

| NO. | DESCRIPTION | Q'TY | MATERIAL |
|---|---|---|---|
| 1 | HOUSING | 1 | HIGH TEMPERATURE THERMOPLASTIC |
| 2 | TERMINAL | 6 | COPPER ALLOY |
| 3 | DETECT PIN LOWER | 1 | COPPER ALLOY |
| 4 | DETECT PIN UPPER | 1 | COPPER ALLOY |
| 5 | SHELLL | 1 | STAINLESS STEEL |
| 6 | COIL SPRING | 1 | PIANO WIRE |
| 7 | HEART CAM | 1 | HIGH TEMPERATURE THERMOPLASTIC |
| 8 | CAM PIN | 1 | STAINLESS STEEL |

NEW DIM TOL CTRL
EC NO: 2011/05/27
DRWN:KHLIM
CH'KD:JTAN02
APPR:
DESCRIPTION
REV
A1

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± --- |
| 2 PLACES | ± 0.15 | ± --- |
| 1 PLACE | ± --- | ± --- |
| ANGULAR ±---° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: LHSHEN DATE: 2007/07/09
CHECKED BY: XUXIANG DATE: 2007/08/30
APPROVED BY: HWWANG DATE: 2007/08/30

TITLE: PUSH PUSH 6 PINS SIM WITH DETECT PIN&POST SALES DRAWING
MOLEX INCORPORATED
MATERIAL NO.: 475532001
DOCUMENT NO.: SD-47553-201
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

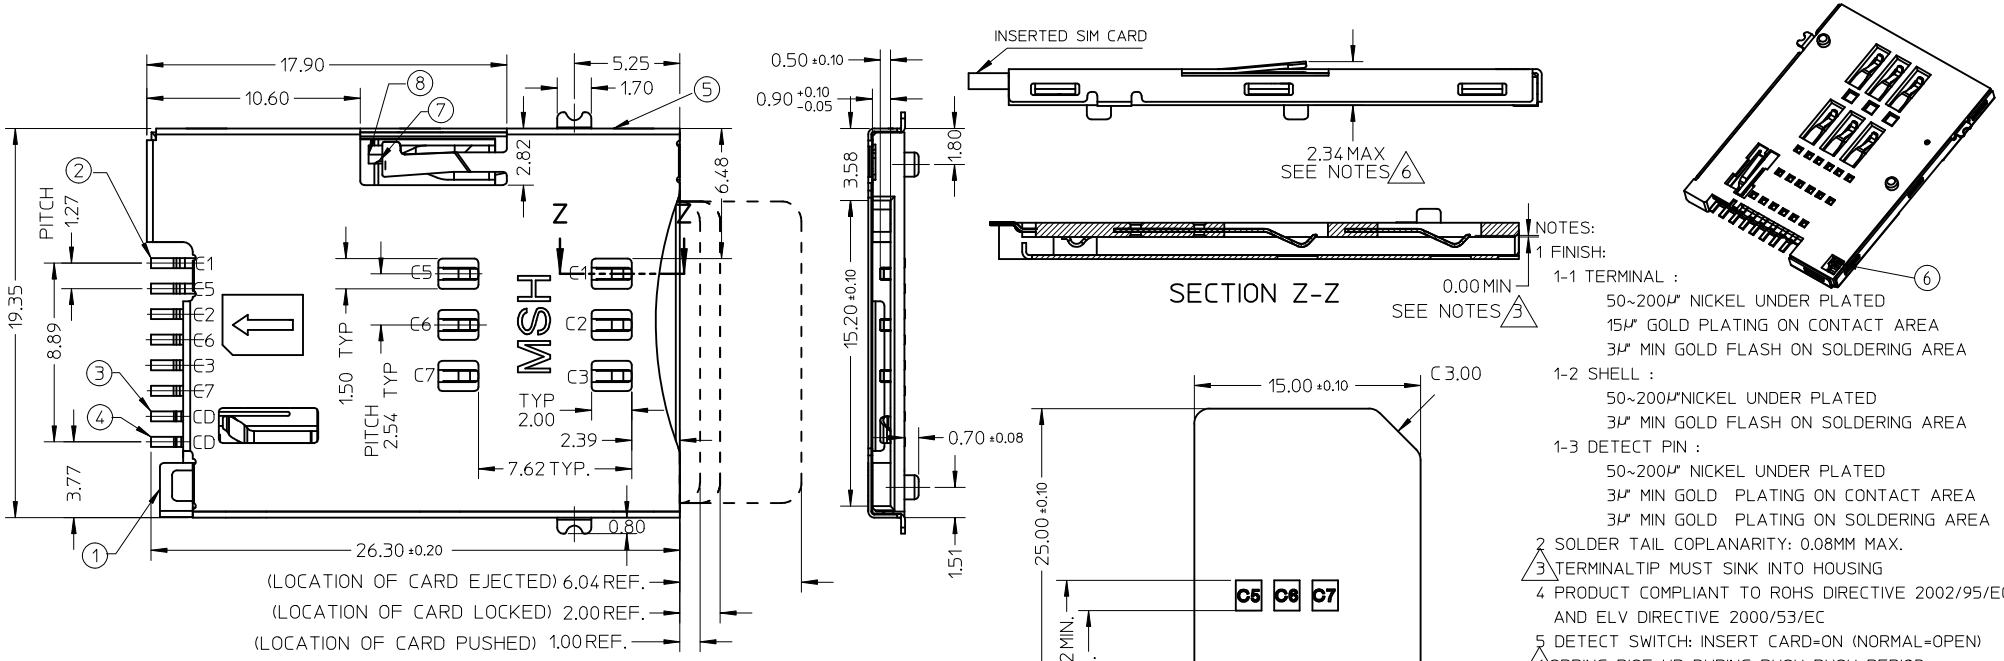













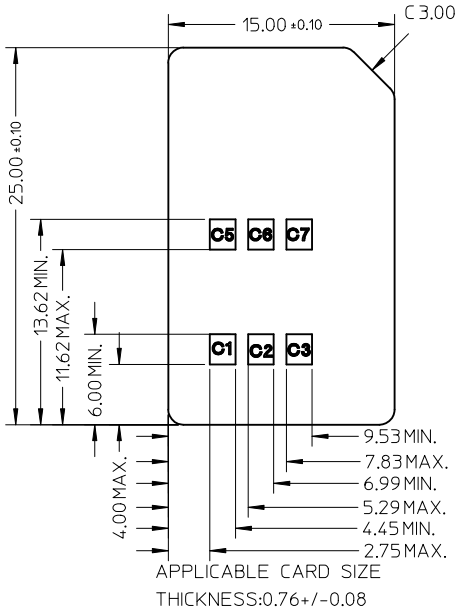


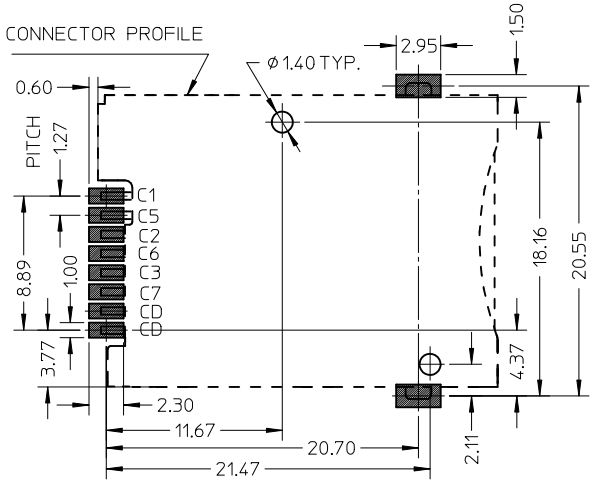


NOTES:
1 FINISH:
1-1 TERMINAL :
50~200μ" NICKEL UNDER PLATED
15μ" GOLD PLATING ON CONTACT AREA
3μ" MIN GOLD FLASH ON SOLDERING AREA
1-2 SHELL :
50~200μ"NICKEL UNDER PLATED
3μ" MIN GOLD FLASH ON SOLDERING AREA
1-3 DETECT PIN :
50~200μ" NICKEL UNDER PLATED
3μ" MIN GOLD PLATING ON CONTACT AREA
3μ" MIN GOLD PLATING ON SOLDERING AREA
2 SOLDER TAIL COPLANARITY: 0.08MM MAX.
3 TERMINALTIP MUST SINK INTO HOUSING
4 PRODUCT COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC
5 DETECT SWITCH: INSERT CARD=ON (NORMAL=OPEN)
6.SPRING RISE UP DURING PUSH-PUSH PERIOD
7.PACKAGE DRAWING: PK-47553-001
8.PRODUCT SPECIFICATION: PS-47553-201

| NO. | DESCRIPTION | Q'TY | MATERIAL |
|---|---|---|---|
| 1 | HOUSING | 1 | HIGH TEMPERATURE THERMOPLASTIC |
| 2 | TERMINAL | 6 | COPPER ALLOY |
| 3 | DETECT PIN LOWER | 1 | COPPER ALLOY |
| 4 | DETECT PIN UPPER | 1 | COPPER ALLOY |
| 5 | SHELLL | 1 | STAINLESS STEEL |
| 6 | COIL SPRING | 1 | PIANO WIRE |
| 7 | HEART CAM | 1 | HIGH TEMPERATURE THERMOPLASTIC |
| 8 | CAM PIN | 1 | STAINLESS STEEL |

NEW DIM TOL CTRL
EC NO: 2011/05/27
DRWN:KHLIM
CH'KD:JTAN02
APPR:
DESCRIPTION
REV
A1

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± --- |
| 2 PLACES | ± 0.15 | ± --- |
| 1 PLACE | ± --- | ± --- |
| ANGULAR ±---° | | |

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: LHSHEN DATE: 2007/07/09
CHECKED BY: XUXIANG DATE: 2007/08/30
APPROVED BY: HWWANG DATE: 2007/08/30

TITLE: PUSH PUSH 6 PINS SIM WITH DETECT PIN&POST SALES DRAWING
MOLEX INCORPORATED
MATERIAL NO.: 475532001
DOCUMENT NO.: SD-47553-201
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION