


10 ft x 10 ft Mobile Chicken Coop Plan Set

4 ft x 10 ft elevated coop house over a mobile pasture run

10 ft x 10 ft mobile run with 4 ft x 10 ft elevated coop

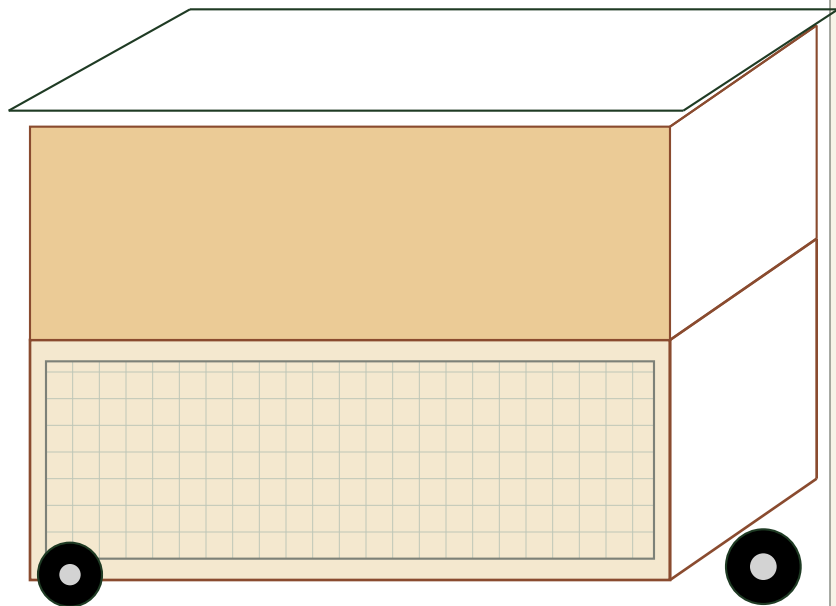

Sheet index

S1 Cover and assumptions | S2 Safety and capacity | S3 Overall dimensions | S4 Materials | S5 Cut list | S6 Base and wheels and tow | S12 Interior | S13 Layer setup | S14 Broiler setup | S15 Build steps 1-8 | S16 Build steps 9-16 | S7 Lower run | S8 Upper floor | S9 Walls and openings | S10 Roof | S11

Primary build assumptions

Footprint	120 in x 120 in outside base frame
Lower run	48 in high hardware-cloth run; open bottom on pasture
Upper coop	48 in x 120 in floor, located over rear 4 ft of base
Roof	Single-slope lightweight roof over upper coop
Mobility	4x6 skids, rear wheels, front tow point; not road towable
Layer use	About 10-12 laying hens with 3 nest boxes and removable roosts
Broiler use	About 30-45 broilers in lower run, moved often
Status	DIY educational plan; not engineered or code-approved

READ BEFORE BUILDING

This is a practical DIY plan set, not a stamped structural design. Wind, snow, slope, soil, towing, predator pressure, and local rules vary. Build a small prototype or mock up critical parts before cutting all material. Use treated lumber where wood contacts ground or weather. Do not exceed the capacity without changing the plan and management system.

Safety, Capacity, and Use Rules

Use this page to decide whether this plan fits your site and flock

SITE AND STRUCTURAL SAFETY

Use on relatively flat pasture only. Do not pull across steep side slopes, ditches, roads, or rough ground that can tip the coop.

The roof and upper coop create wind load. Park broadside exposure away from prevailing storm winds when possible and anchor during storms.

Hardware cloth is for predator resistance. Chicken wire is not a predator barrier.

Use locking latches. Raccoons can open simple hook latches.

Keep wheels chocked when parked. Inspect axle brackets before every move.

CAPACITY GUIDELINES

Recommended layer flock: 10-12 hens. Provide three nest boxes and at least 10 linear ft of roost bar.

Recommended broiler group: 30-45 birds depending on age, heat, ventilation, feeder/waterer space, and move frequency.

Do not try to run maximum layers and maximum broilers at the same time in this exact structure.

Broilers should primarily use the ground-level run; remove or ignore roosts/nests in broiler mode.

In hot weather, reduce stocking and add shade/ventilation.

DISCLAIMERS

These plans are for general DIY educational use only.

Verify local code, zoning, animal-care rules, setbacks, and HOA restrictions if applicable.

Verify wind load, snow load, drainage, soil, slope, and predator pressure for your specific site.

Use manufacturer instructions for roofing, wheels, fasteners, hinges, and latches.

When in doubt, overbuild bracing and reduce flock capacity.

Operating limits

Limit	Plan value	Notes
Movement	Move with ATV, UTV, lawn tractor, or compact tractor	Move slowly. Never move with people inside. Remove hanging feeders/waterers first.
Terrain	Flat or gently sloped pasture	Side slope increases tip risk. Wet soil increases pulling load.
Weather	Moderate climates unless locally modified	High wind and snow require anchors, lower height, or stronger design.
Predators	Use 1/2 in 19 ga hardware cloth	Add a 12-24 in apron where digging predators are a concern.
Maintenance	Inspect before each move	Check wheels, fasteners, hinges, cloth, roof screws, tow point, and rot.


Overall Dimensions and Layout

Coordinate system: front/tow end at Y=0; upper coop at rear Y=72 in to 120 in


KEY LAYOUT CHOICE

This plan uses a 48 in lower run height to keep the coop mobile and to match common 48 in hardware cloth rolls. For a 72 in walk-in run, treat it as a heavy-duty variant: add stronger posts, braces, larger wheels, anchors, and tractor towing.


TOP VIEW - FOOTPRINT AND ZONES

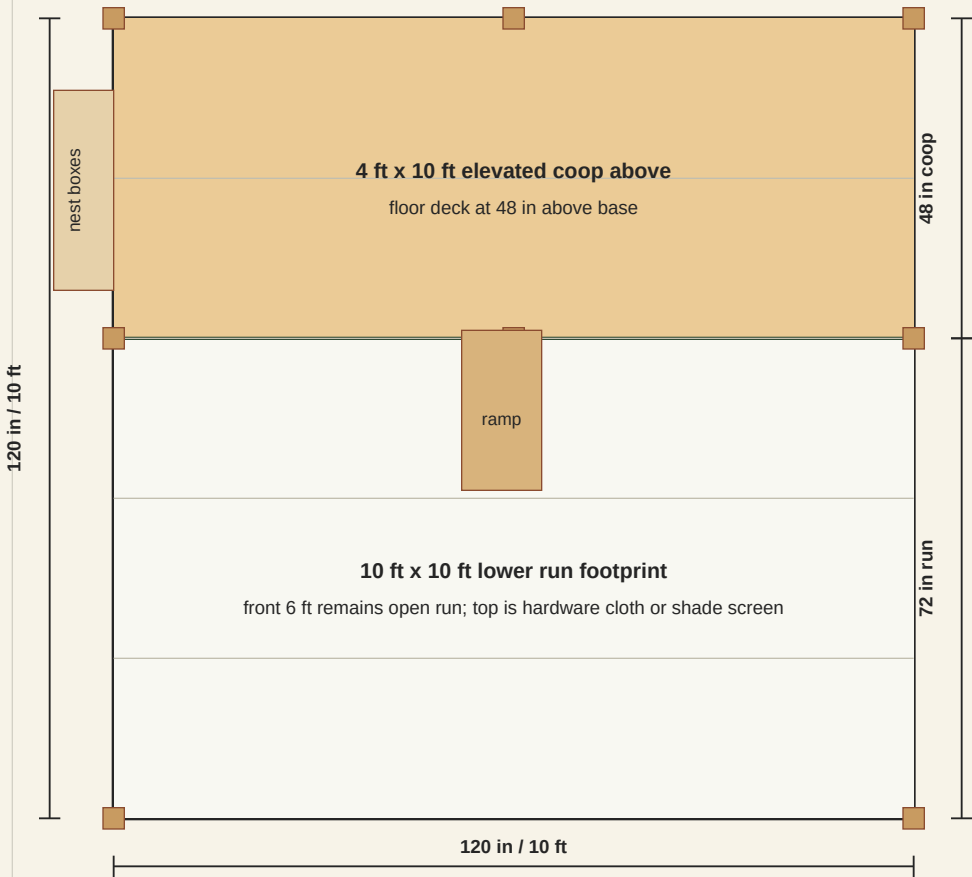

FRONT ELEVATION - TOW END

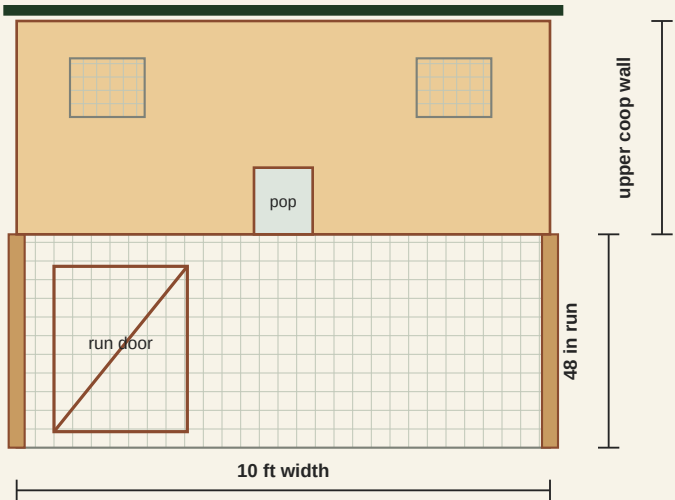

SIDE ELEVATION - MOBILE LOW PROFILE VERSION

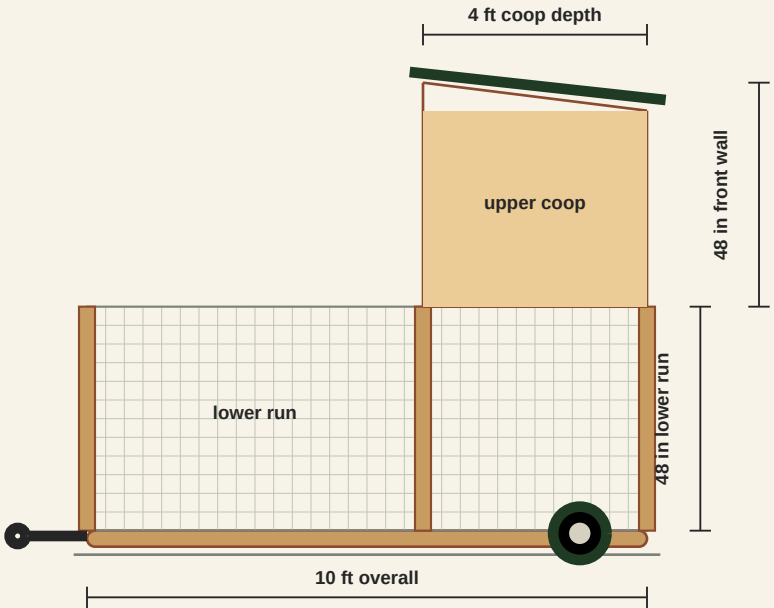

Materials List

Quantities are planning estimates. Buy extra for mistakes, bracing, and local modifications.

Category	Item	Qty	Notes
Skids/base	4x6x10 pressure-treated skid	2	Optional third center skid for rough ground or heavier builds.
Base/deck	2x6x10 pressure-treated lumber	16	Base rails, crossmembers, upper floor ledgers, and joists.
Posts	4x4x8 pressure-treated posts	5	Cut eight 48 in lower posts; one board is allowance/spare.
Framing	2x4x8 exterior/framing lumber	38-45	Walls, top rails, braces, roof rafters, doors, ramp frame.
Battens/purlins	1x4x8 or 2x2x8 strips	18-25	Hardware cloth battens, roof purlins, trim, vent frames.
Floor	3/4 in exterior plywood, 4x8 sheets	2	Upper coop floor. Seal all cut edges.
Walls	1/2 in exterior plywood or siding, 4x8 sheets	4	Upper coop walls, doors, nest boxes.
Roof	Corrugated metal or polycarbonate roofing	Approx. 60 sq ft	Use manufacturer overlap and screw pattern.
Hardware cloth	1/2 in galvanized hardware cloth, 19 ga, 48 in x 100 ft	1 roll	Run walls, top screen, vents, and apron. Avoid chicken wire.
Fasteners	3 in exterior structural/deck screws	5 lb box	Primary framing. Use bolts for high-load connections.
Fasteners	1-5/8 in exterior screws	2 lb box	Plywood and light trim.
Fasteners	3/8 in carriage bolts with washers/nuts	24+	Posts, wheel brackets, tow point, critical joints.
Connectors	Joist hangers for 2x6	14	Upper floor joists and optional base reinforcement.
Openings	Exterior hinges	8-12	Run door, cleanout door, nest hatch, pop door, ramp.
Openings	Locking latches/carabiners	6+	Use predator-resistant two-step latches.
Mobility	2 pneumatic wheels or trailer-rated wheels	2	Minimum 600 lb each; 1000 lb each preferred.
Mobility	Axle/spindle/bracket kit	1	Pin-on wheel brackets or bolted side brackets.
Interior	Nest box material	For 3 boxes	Each box about 12x12x12 in.
Interior	Roost bars	10-12 linear ft	Use removable roosts for layer mode.
Finish	Exterior paint/stain/sealer	As needed	Seal all exposed plywood edges and end grain.


Cut List

Nominal lumber sizes. Verify actual dimensions and square before cutting all pieces.

Part	Material	Qty	Cut length	Use/location
Skids	4x6 PT	2	120 in	Full-length skids under base, left and right.
Base side rails	2x6 PT	2	120 in	Left/right outside rails.
Base front/back rails	2x6 PT	2	117 in	Fit between side rails for 120 in outside width.
Base crossmembers	2x6 PT	4	117 in	At Y=24, 48, 72, 96 in.
Lower posts	4x4 PT	8	48 in	Corners, coop-front line, rear-center support.
Lower top side rails	2x4	2	120 in	Top rail along left/right run walls.
Lower top end rails	2x4	2	117 in	Top rail at front and rear.
Coop front support rail	2x4 or 2x6	1	117 in	At Y=72 in below front edge of upper coop.
Diagonal braces	2x4	12-16	Cut to fit, about 30-36 in	All lower corners and upper support line.
Upper floor ledgers	2x6 PT	2	120 in	Front/back ledgers for 4x10 floor frame.
Upper floor joists	2x6 PT	7	45 in	Between ledgers, 16 in O.C. approx.
Upper floor plywood	3/4 in plywood	1	48x96 in	Main floor panel.
Upper floor plywood infill	3/4 in plywood	1	48x24 in	Completes 4x10 floor.
Front wall plates	2x4	2	120 in	Upper coop front wall, 48 in high.
Front wall studs	2x4	9	45 in	Adjust around pop door/vents.
Back wall plates	2x4	2	120 in	Upper coop back wall, 42 in high.
Back wall studs	2x4	9	39 in	Adjust around cleanout/vent openings.
End wall plates	2x4	4	48 in	Upper coop end walls.
End wall studs	2x4	8	39-45 in	Cut to roof slope.
Roof rafters	2x4	7	56 in	Front-to-back roof rafters with overhang.
Roof purlins	1x4 or 2x4	3	120 in	Run side-to-side across rafters.
Ramp panel	1/2 in plywood	1	12x72 in	Hinged ramp from pop door to lower run.
Ramp cleats	1x2 or scrap	10-12	12 in	Space about 6 in apart.
Nest boxes	1/2 in plywood	3 boxes	12x12x12 in each	External or internal module with collection hatch.

Base Frame, Skids, and Post Locations

Build this square; errors here will carry through the whole coop.

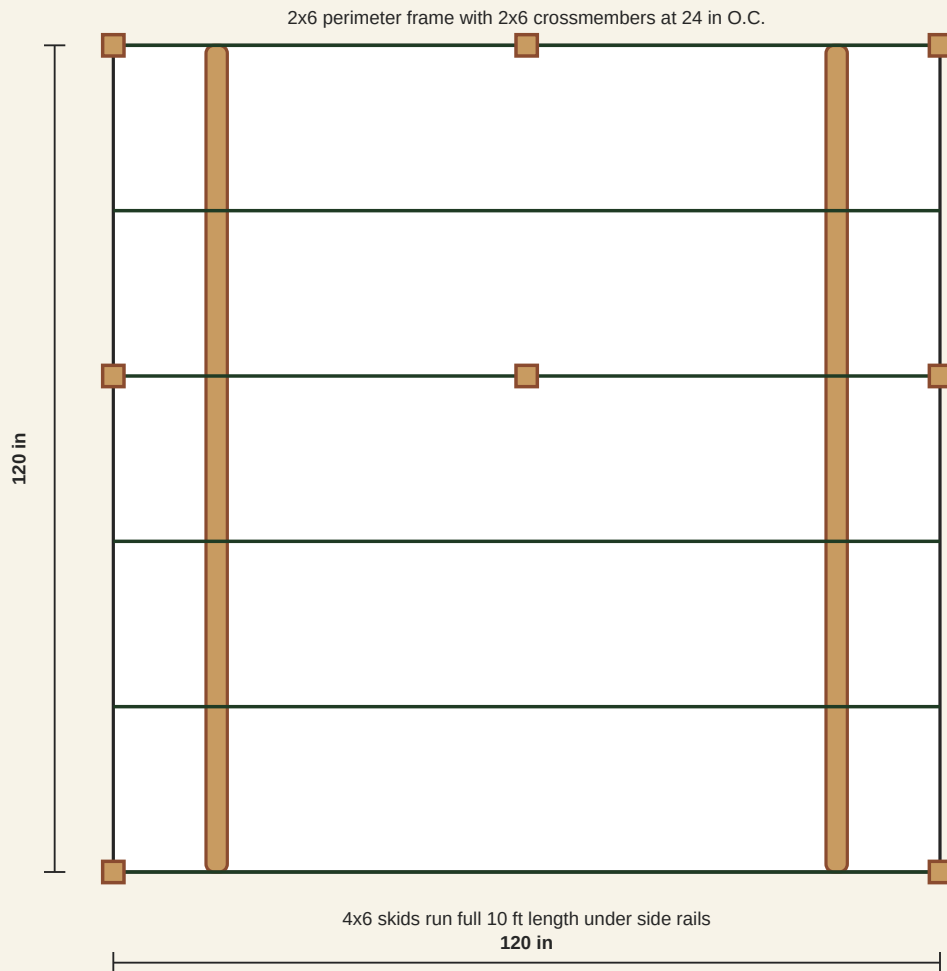

Post layout coordinates

Post ID	X	Y	Use
P1	0 in	0 in	Front-left run corner
P2	120 in	0 in	Front-right run corner
P3	0 in	72 in	Left front support of upper coop
P4	60 in	72 in	Center front support of upper coop
P5	120 in	72 in	Right front support of upper coop
P6	0 in	120 in	Rear-left corner support
P7	60 in	120 in	Rear-center support
P8	120 in	120 in	Rear-right corner support

BASE BUILD NOTES

Assemble the 2x6 rectangle on a flat surface. Measure diagonals until equal, then fasten.

Set the 4x6 skids under the side rails, about 15 in in from each outside edge or directly under the side rails if preferred.


Bolt posts through the base frame where possible. Use temporary braces before installing top rails.

Lower Run Framing and Hardware Cloth

48 in lower run height; open bottom; predator apron recommended.

LOWER RUN ACCESS DOOR


Put a framed access door on the front or side. Suggested size: 30 in wide x 38-42 in high for feed/water handling. Use two hinges, a locking latch, and a carabiner or spring clip.

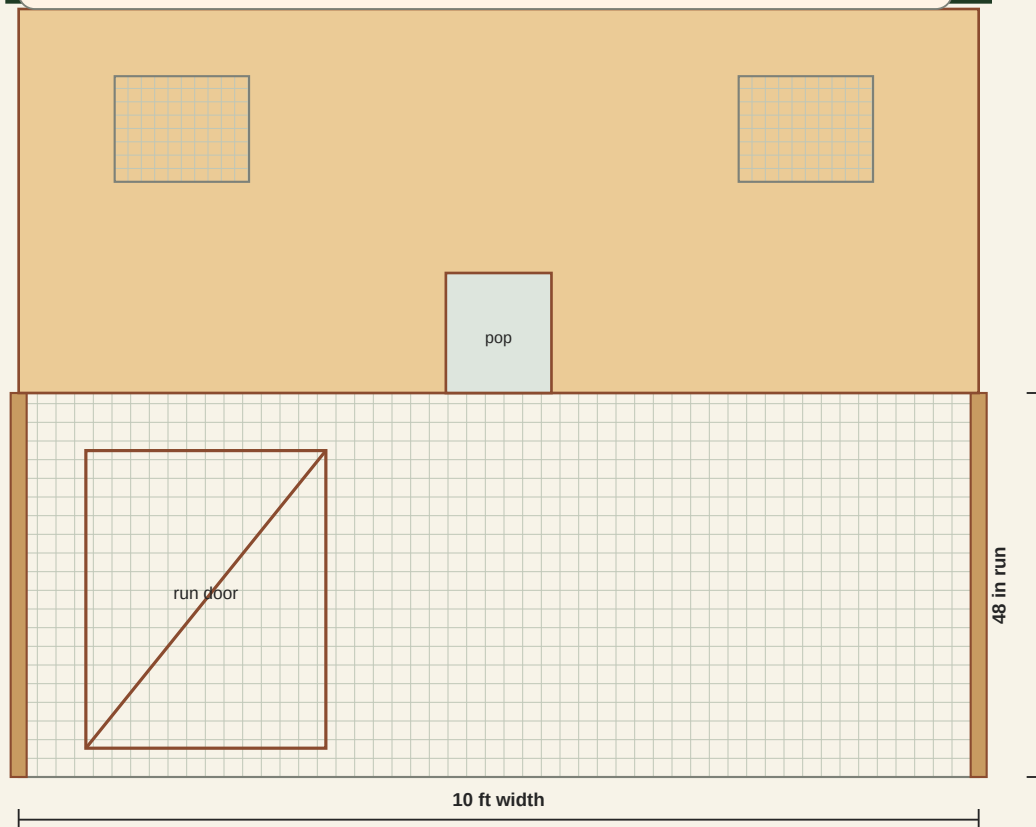

HARDWARE CLOTH DETAIL

Use 1/2 in galvanized hardware cloth, 19 ga minimum.
Attach with screws and fender washers or continuous wood battens.
Staples alone are not enough.
Overlap seams by at least 2 in and fasten both layers.
Add 12-24 in fold-out apron around the base if digging predators are present.

APRON DETAIL

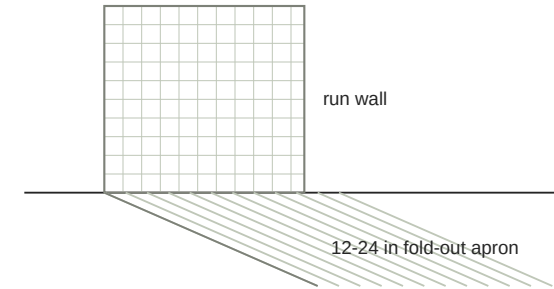


Fasten apron to lower frame; cover with soil, mulch, or pasture growth.


Upper Coop Floor Frame

4 ft x 10 ft floor over rear 4 ft of base; floor height approx. 48 in above base.

UPPER COOP FLOOR FRAME

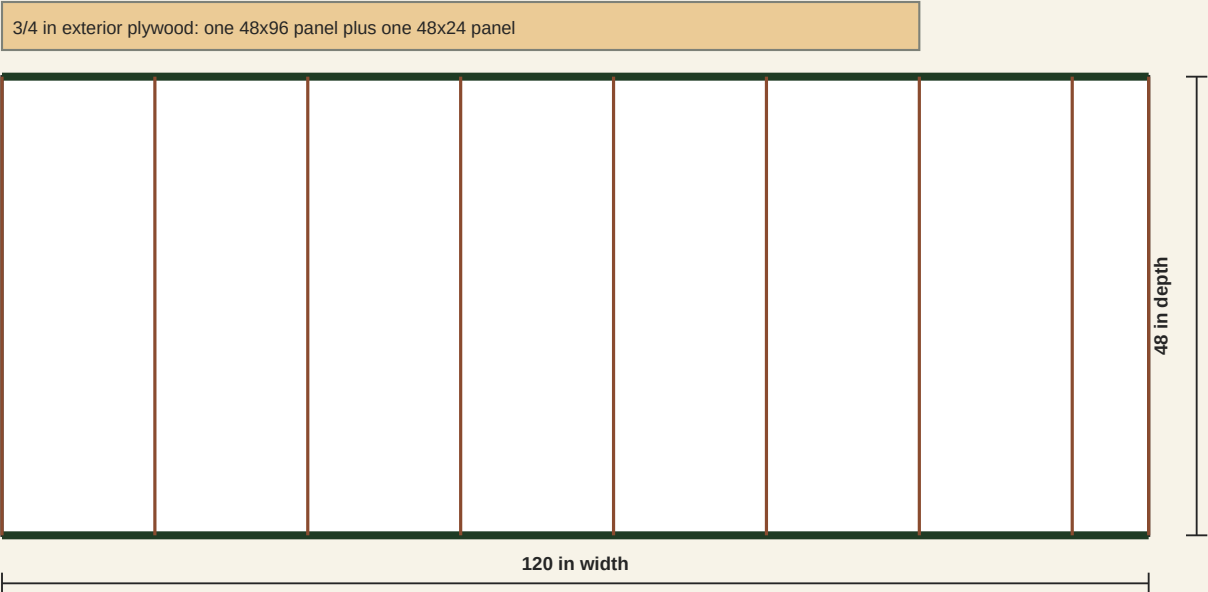

FLOOR EDGE SECTION

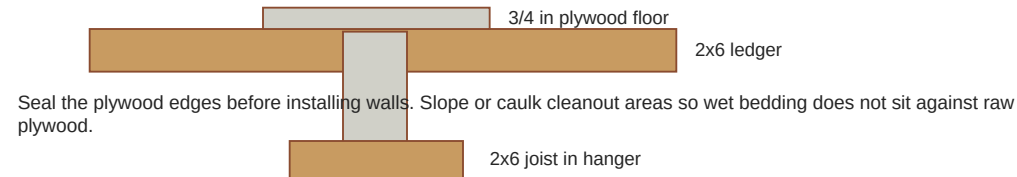

FLOOR BUILD NOTES

Install floor framing square and level before wall framing.
Use joist hangers or structural screws rated for this use.
Glue is optional; screws make later repairs easier.
Paint or seal the top surface before adding bedding.


CLEANOUT ACCESS

The upper coop needs a large cleanout door. Place it on the rear wall or one end wall. Suggested opening: 30x30 in minimum, larger if possible.


Upper Coop Walls, Doors, and Ventilation

Use simple 2x4 wall framing with plywood or exterior siding.

FRONT WALL - HIGH SIDE

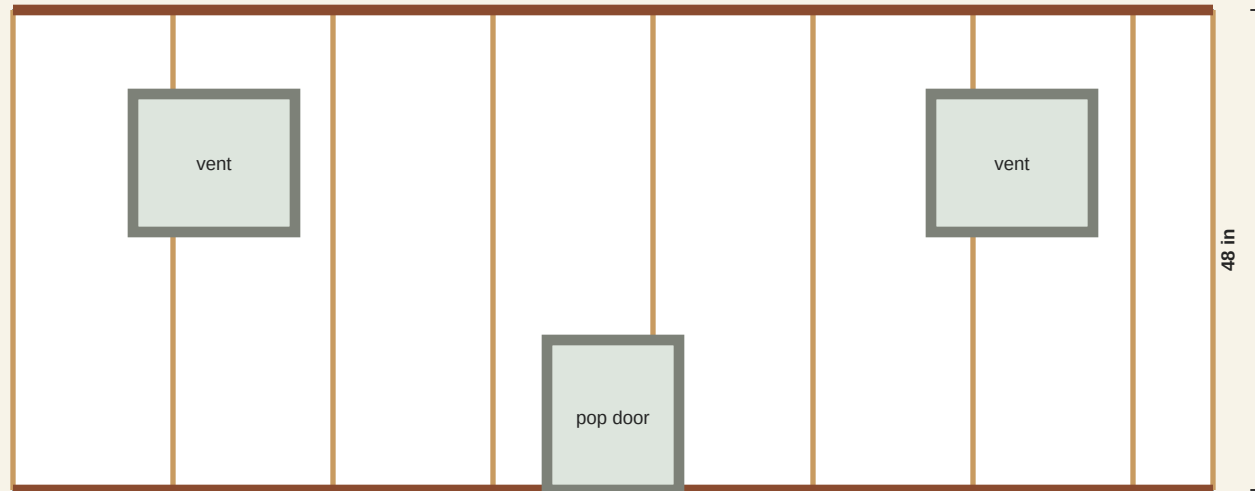

BACK WALL - LOW SIDE

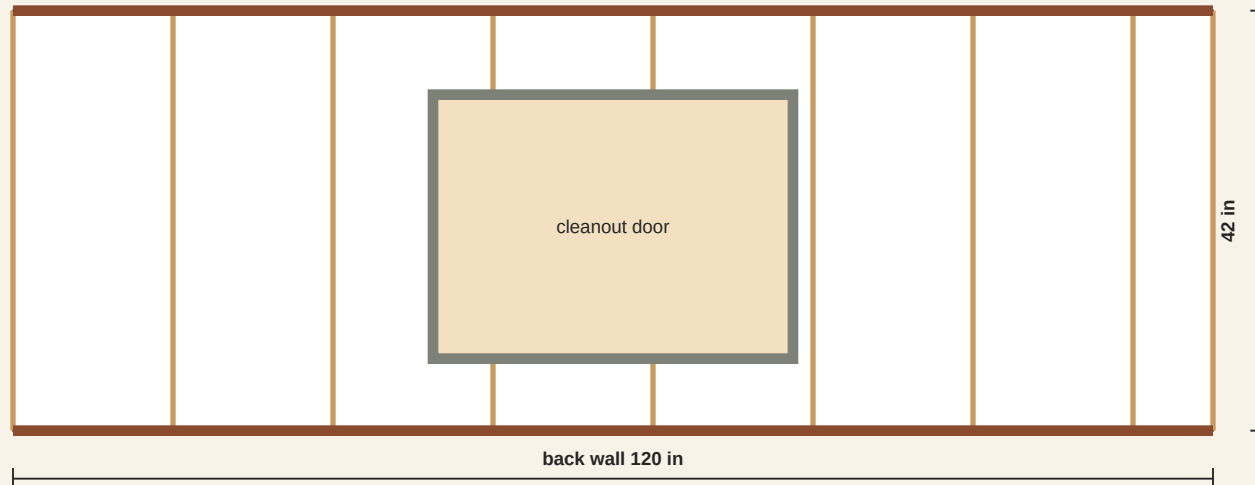

VENTILATION

Keep upper vents open year-round unless severe weather requires temporary covers. Cover every vent with hardware cloth. Add closable shutters in cold/windy climates. Avoid drafts directly at roost height.


OPENING SIZES

Pop door: about 12x14 in.
Cleanout door: 30x30 in minimum.
Vents/windows: total permanent vent area about 4 sq ft or more for this 40 sq ft coop.

Roof Framing and Weather Protection

Lightweight single-slope roof over upper coop; screened top over front run.

ROOF PLAN

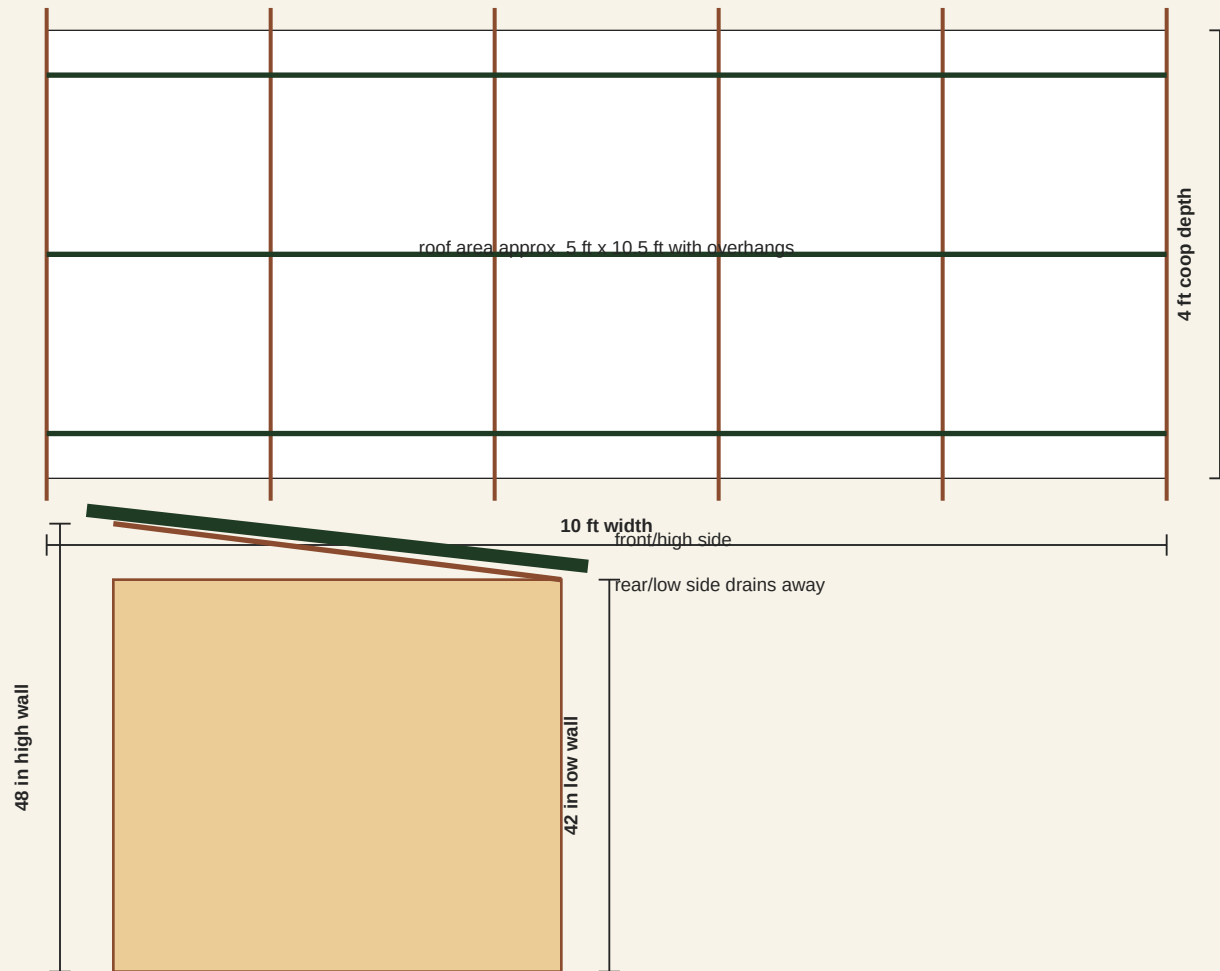

ROOF MATERIAL OPTIONS

Corrugated metal: strong shade, durable, hotter below.
Corrugated polycarbonate: lighter and brighter, less shade.
Use closure strips, roofing screws with washers, and manufacturer overlap details.

FRONT RUN TOP

The front 6 ft x 10 ft run can be covered with hardware cloth, shade cloth, or a light removable tarp over a framed top.
If using a tarp, slope it and remove before storms.

RAIN NOTES

Slope roof away from the pop door and bedding. Add a gutter only if it does not interfere with moving the coop.

PastureFrame Plans - Mobile Chicken Coop Plan Set

DIY educational plans only. Not engineered, stamped, code-approved, or road-legal. Verify local conditions before building.


Wheel, Skid, and Tow System

Use farm/yard movement only. Do not tow on public roads.

WHEEL/TOW LOCATIONS

Use pin-on or bolted wheel brackets tied into the 4x6 skid and 2x6 base rail. Each wheel should be rated at least 600 lb; use higher ratings for rough pasture or the walk-in variant.


4x6 PT skid

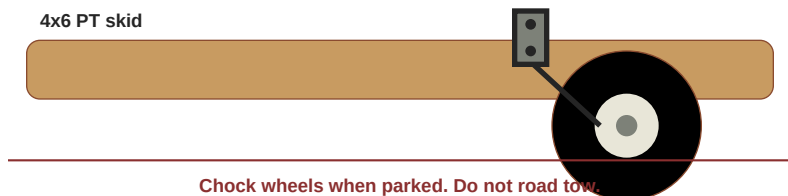

Chock wheels when parked. Do not road tow.

WHEEL SPECIFICATION

Use two large pneumatic or trailer-rated wheels. Minimum 600 lb rating per wheel; 1000 lb each preferred for rough pasture or a heavier build. Mount wheels near the coop end because the upper house makes the rear heavier. Use a bolted axle/spindle bracket tied into both the 4x6 skid and 2x6 base rail. Add removable pins if using a lift-on/lift-off wheel kit.

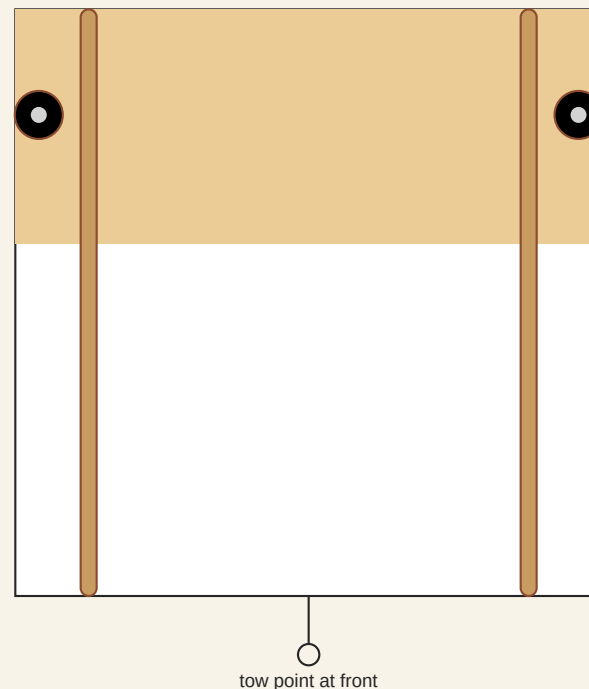

tow point at front


TOWING PROCEDURE

1. Remove or secure feeders, waterers, and loose bedding pans.
2. Close and latch all doors.
3. Check that birds are not under skids or wheels.
4. Lift/tow from the front slowly.
5. After parking, lower skids fully, chock wheels, and inspect cloth edges.

Interior Layout: Nest Boxes, Roosts, Pop Door, and Ramp

Layer mode uses nests and roosts; broiler mode keeps interior simpler.

INTERIOR LAYOUT

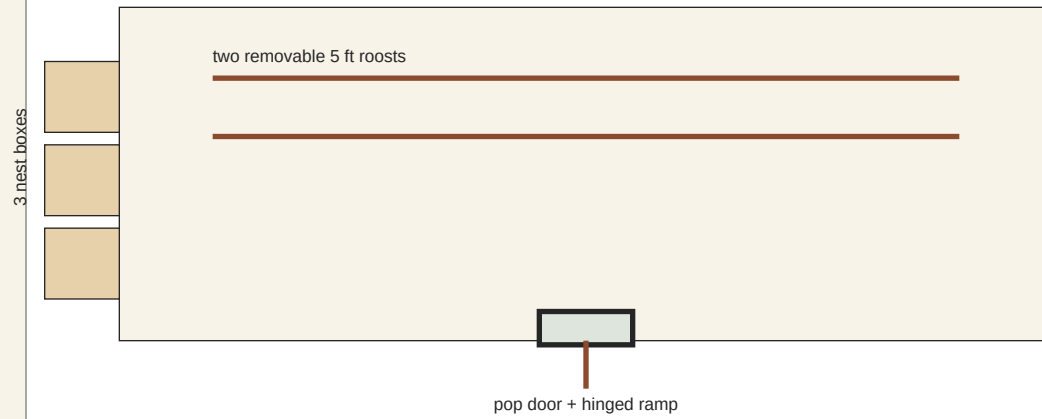


NEST BOX MODULE



Three boxes serve about 10-12 hens.
Add sloped lid or rear egg hatch.

RAMP DETAIL

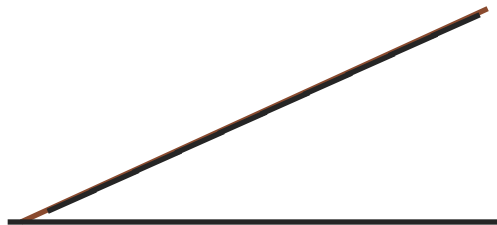

Suggested ramp: 12 in wide x 72 in long with cleats every 6 in.
Hinge at pop door so it can be lifted for cleaning or broiler mode.

ROOST BAR GUIDANCE


Use two removable roost bars about 5-6 ft long each. Place higher than nest boxes but leave headroom below roof.

Use 2x2 with softened edges or a 2x4 laid wide-side-up. Keep roosts removable for cleaning and broiler conversion.

Layer Hen Configuration

Use this setup when the structure is operated as a mobile laying-hen coop.

TOP VIEW - FOOTPRINT AND ZONES

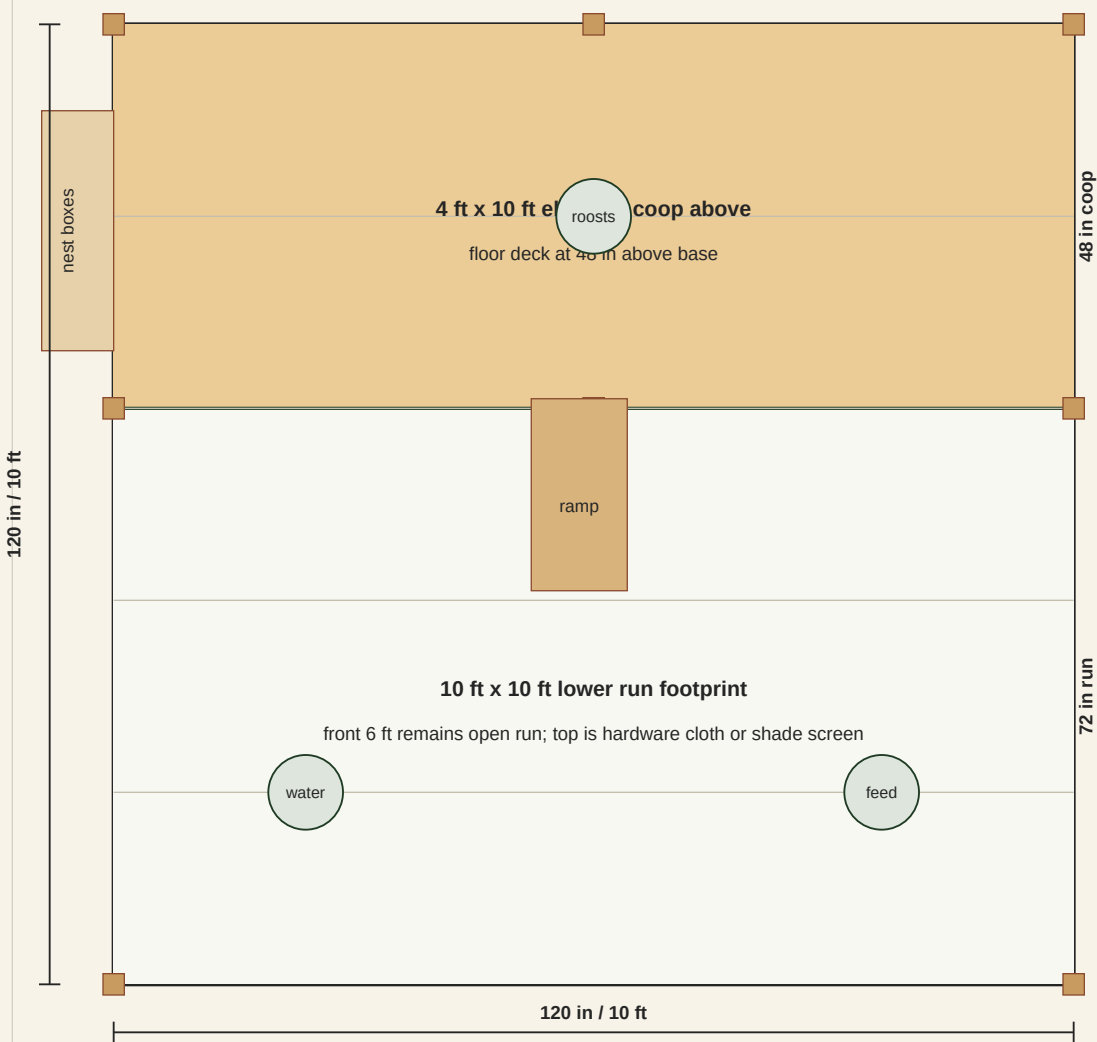

Item	Layer setup
Capacity	10-12 hens recommended.
Nest boxes	3 boxes, about 12x12x12 in each, with bedding and egg access hatch.
Roosts	Two removable bars totaling 10-12 linear ft.
Pop door	Open daily into the lower run; close at night if predator pressure is high.
Feed/water	Keep in lower run or under shade to reduce coop moisture.
Move frequency	Every 3-7 days depending grass condition, manure load, and weather.
Bedding	Use shavings or chopped straw in upper coop; keep dry.


LAYER OPERATION NOTES

Collect eggs daily. Keep nest bedding cleaner than floor bedding.
Watch for heat buildup in summer. Open vents and reduce stocking if needed.
If birds free-range outside the coop, add a secure evening routine.

Broiler Configuration

Use the lower 10 ft x 10 ft run as the main growing space; simplify upper interior.

BROILER MODE TOP VIEW

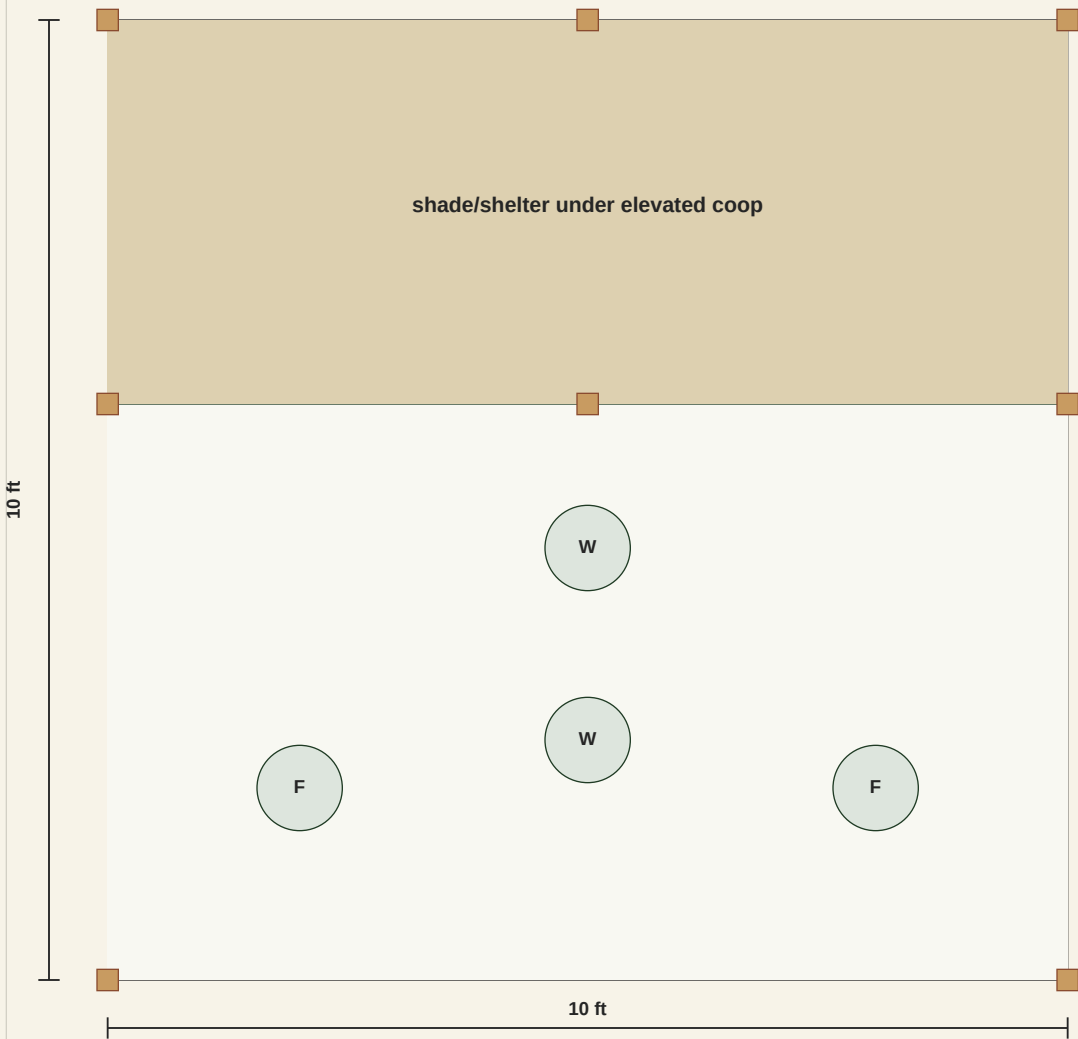

Item	Broiler setup
Capacity	30-45 birds recommended, adjusted for age, heat, and move frequency.
Upper coop	Use as shade/shelter or storage only if birds can access safely. Do not rely on a ramp for heavy broilers.
Roost/nests	Remove roost bars and do not use nest boxes in broiler mode.
Feed/water	Use multiple feeders/waterers at ground level. Keep water shaded.
Move frequency	Often: daily to every few days as birds grow and manure load increases.
Heat caution	Reduce stocking in hot weather; prioritize shade, airflow, and water access.

BROILER DESIGN WARNING


Broilers grow heavy and may not use ramps well. This plan works best as a mobile protected run for broilers, not as a tall sleeping coop for meat birds.

Build Sequence - Steps 1 to 8

Follow the sequence to keep the frame square and mobile.

1	Prep and layout	Pick flat ground. Mark a 10 ft x 10 ft square. Confirm tow direction and where the upper coop will sit.
2	Build base frame	Cut 2x6 rails. Assemble the 120 in x 120 in frame, check diagonals, and install crossmembers at 24 in spacing.
3	Install skids	Attach two 4x6 skids under the base. Bolt where possible. Round or bevel skid fronts for easier pulling.
4	Set lower posts	Install eight 48 in 4x4 posts at the coordinates shown on Sheet 6. Temporarily brace plumb.
5	Install top rails	Add 2x4 or 2x6 top rails around the lower run and at the front edge of the elevated coop.
6	Add diagonal bracing	Brace corners and the coop-support line. The frame should not rack when pushed from the side.
7	Frame upper floor	Install 2x6 ledgers and 45 in joists. Screw down 3/4 in plywood and seal exposed edges.
8	Test square and stiffness	Before walls go up, push/pull the frame and recheck square. Add braces now if it moves.

STRUCTURAL SEQUENCE

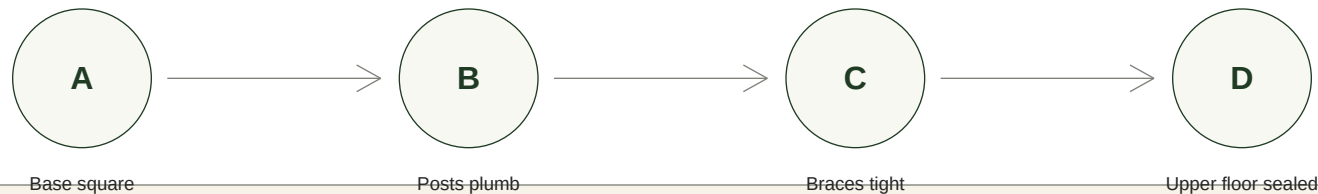

Build Sequence - Steps 9 to 16 and Maintenance

Finish weather shell, hardware cloth, interior, wheels, and testing.

9	Frame coop walls	Build upper front/back/end walls. Include pop door, vents, cleanout door, and nest hatch openings.
10	Sheath and seal	Install plywood/siding. Seal cut edges, screw heads, and end grain. Add trim where water can enter.
11	Install roof	Frame rafters, add purlins, then attach corrugated roofing with proper overlap and washer screws.
12	Install hardware cloth	Cover run walls, vents, windows, top screen, and apron. Use screws with washers or battens.
13	Build doors and ramp	Hang lower run door, cleanout door, pop door, egg hatch, and 12 in x 72 in ramp with cleats.
14	Build interior	Install three nest boxes and removable roost bars for layers. Remove roosts/nests for broiler mode as needed.
15	Install wheels and tow point	Bolt wheel brackets to skids/base. Add front tow eye or tongue. Test movement empty before adding birds.
16	Final inspection	Check for sharp wire, gaps larger than 1/2 in, loose latches, roof leaks, rack, wheel play, and dragging cloth.

Maintenance checklist

Interval	Task
Before every move	Close doors, check birds clear of skids/wheels, inspect tow point, inspect wheel brackets.
Weekly	Tighten visible fasteners, inspect hardware cloth seams, clean wet bedding, check latches.
Monthly	Inspect rot-prone wood, roof screws, axle play, braces, ramps, and nest box hinges.
Seasonally	Repaint/seal exposed wood, adjust ventilation, add storm anchors, repair pasture apron damage.