

Chicken Coop Plan Build Spec

PastureFrame 10x10 Mobile Chicken Coop - Build Spec v1.0

This master checklist turns the 15-step card concept into a build-spec source of truth for the PDF plan set, CAD drawings, Etsy listing images, and pre-publish approval gate. It is not an engineered or code-approved document.

Decision	Final value	Reason / note
Project	10 ft x 10 ft Mobile Chicken Coop Plans with 4 ft x 10 ft Elevated Coop House	Master product requirement and file control point.
Lower run height	48 in final mobile version height	Keeps total height lower for transport and pasture movement.
Upper coop	4 ft x 10 ft elevated house over rear 48 in	Maintains 10x10 footprint while creating enclosed layer housing.
Mobility	4x6 skids + axle wheels + tow tongue	Final system; no small pasture casters.
Wheel position	Near heavier rear/coop end	Reduces tongue lift load and helps movement over uneven pasture.
Layer claim	10-12 laying hens	Conservative capacity for 40 sq ft upper coop.
Broiler claim	30-45 broilers	Conservative pasture-rotation range, management dependent.
Prototype status	CAD/plans-first until prototype photos exist	Do not claim field-tested/built/proven until real prototype photos exist.
Publishing status	Blocked until proof assets are complete	Listing can be drafted, not approved, until blockers are cleared.

1. Final PDF Plan Package Outline From 15 Step Cards

The buyer-facing PDF should expand the 15 step cards into a complete digital plan package with dimensions, checklists, diagrams, and mode-specific setup pages.

Step	Step card	Final PDF page intent
1	Build the base	Build the 10 ft x 10 ft skid base square, flat, and parallel. Install 4x6 skids, 2x6 perimeter rails, and 2x6 cross ties.
2	Add posts and frame	Install 4x4 post lines at the front, at the upper-coop front line, and at the rear. Brace before moving the frame.
3	Build the upper coop floor	Build the 4 ft x 10 ft elevated coop floor over the rear 48 in of the run using 2x6 framing and 3/4 in exterior plywood.
4	Frame the coop walls	Frame upper coop walls with a high front wall and lower rear wall to create roof slope. Include vents, cleanout, hatch, and pop door openings.
5	Add roof to coop	Install rafters, purlins, drip edge, and lightweight corrugated roofing with manufacturer-specified overlap and fasteners.
6	Sheath the coop	Install exterior plywood or T1-11, seal edges, and leave planned openings for ventilation, access doors, egg hatch, and pop door.
7	Install doors and windows	Build predator-resistant cleanout doors, nest access hatch, ventilation shutters/screens, lower run access door, and pop door.
8	Enclose the run	Install 1/2 in 19-ga galvanized hardware cloth on run walls, exposed run roof, vents, and optional predator apron.
9	Add wheels	Install skid + axle wheel system with wheels near the heavier coop end and a tow tongue at the opposite/front end.
10	Finish touches	Install nest boxes, roost bars, ramp, latches, feeders, waterers, paint/stain, caulk, and roof trim.
11	Move and rotate	Test towing on flat ground, move slowly, check wheel hardware, and rotate to fresh pasture before the run is overused.
12	Broiler setup	Use lower run as main grow-out space. Remove roosts/nest use, add extra feeders/waterers, and move frequently.
13	Layer setup	Use upper coop for nesting, roosting, night shelter, and egg collection. Keep nest boxes clean and roosts removable.
14	Daily checks	Check water, feed, latches, hardware cloth, shade, heat stress, bedding, predator damage, and egg collection daily.
15	Final use and maintenance	Inspect fasteners, wheels, roof, hardware cloth, latches, bedding, and mobility after the first week and monthly thereafter.

2. Strict Build-Spec Checklist

Use this section as the source of truth. It corrects the draft post quantity to nine 4x4 posts and locks the mobile lower run height at 48 in.

System	Build-spec item	Required value	Acceptance check	Status
Dimensions	Outside base footprint	120 in x 120 in	Diagonal measurements match within 1/4 in before framing upward	Required
Dimensions	Lower run height	48 in target mobile height	All lower run posts and side elevation use 48 in; no 54 in/72 in mixed into this product	Required
Dimensions	Elevated coop footprint	48 in x 120 in	Coop floor lands over rear 48 in of run; floor is square and supported	Required
Dimensions	Upper coop wall heights	48 in high side / 40 in low side	Roof has approx. 8 in fall across 48 in depth	Required
Frame	Skids	Two 4x6 PT skids, 120 in	Skids are parallel, bevelled at tow/front end, and through-fastened to base as needed	Required
Frame	Base rails	2x6 PT perimeter and cross ties	Base is square; cross ties installed near 48, 72, and 96 in from front	Required
Frame	4x4 post count	Nine 4x4 posts	Three post lines: front, coop-front, rear. Prior 6-post draft is superseded	Corrected
Frame	Diagonal bracing	2x4 braces at sides, rear, and coop support line	Frame cannot rack when pushed before wire/siding is installed	Required
Coop floor	Floor joists	2x6 joists about 16 in O.C.	No unsupported plywood span greater than practical joist spacing	Required
Coop floor	Floor decking	3/4 in exterior plywood	Edges supported, seams fastened, edges sealed	Required
Walls	Siding/sheathing	1/2 in exterior plywood or T1-11	All cut edges primed/sealed; no predator-access gaps	Required
Roof	Rafters	2x4 rafters, approx. 60 in	Overhang included; rafters tied or screwed to wall plates	Required
Roof	Roof material	Lightweight corrugated panels	Panels overlap per manufacturer; roofing screws use washers	Required
Wire	Hardware cloth	1/2 in 19-ga galvanized	Attached with screws plus fender washers or battens every 6-8 in	Required
Wire	Predator apron	12-24 in fold-out optional but recommended	Apron staked or clipped where predator pressure exists	Recommended
Mobility	Wheel size/rating	20 in pneumatic or trailer-rated wheels, 600 lb+ each	Wheel rating exceeds finished load with margin; test roll before birds are inside	Required
Mobility	Axle	3/4 in axle rod or hub/spindle assemblies	Retained with collars/cotter pins; mounts through-bolted	Required
Mobility	Tow tongue	4x4 wood or steel tongue with tow ring/chain	Pull point aligned with skids; safety chain installed	Required
Doors	Lower access door	Approx. 30 in x 42 in	Door swings/latches cleanly; two-step predator latch	Required
Doors	Rear cleanout doors	Two large rear doors	Allow rake/scrape access to full coop floor	Required
Doors	Pop door	Approx. 12 in x 14 in	Locks shut at night; ramp hinge or cleats secure	Required
Interior	Nest boxes	Three boxes about 12 in W x 12 in H x 14 in D	External/rear access hatch; boxes lower than roost bars	Layer mode
Interior	Roost bars	10-12 linear ft total, removable	Bars removable for broiler mode and cleaning	Layer mode
Finish	Surface protection	Exterior paint/stain and sealed plywood edges	No raw plywood edges exposed to weather	Required
Safety	Publication claim	DIY plans only	No engineered/code-approved/field-tested claims unless documented	Blocker

3. Stricter Materials List

This list supersedes the earlier draft materials list where it conflicts. Quantities are planning estimates and should be verified during final drawing.

Category	Item	Qty	Spec / acceptance check
Ground/contact	4x6 pressure-treated skids, 10 ft	2	Bevel tow/front ends; keep skids parallel.
Ground/contact	2x6 pressure-treated lumber, 10 ft	8-10	Base perimeter, cross ties, upper coop floor rims; buy extra for errors.
Posts	4x4 pressure-treated posts, 8 ft	9	Corrected source-of-truth quantity: 3 front, 3 coop-front, 3 rear. Cut to plan heights.
Framing	2x4 exterior/treated lumber, 8 ft	32-40	Lower run rails, upper coop walls, braces, rafters, doors, ramp; buy extra for field fit.
Roof	1x4 or 2x4 purlins, 12 ft	4	Run side-to-side under corrugated roofing.
Sheet goods	3/4 in exterior plywood, 4 ft x 8 ft	2	Upper coop floor.
Sheet goods	1/2 in exterior plywood or T1-11, 4 ft x 8 ft	5	Upper coop walls, doors, shutters, nest hatch, trim.
Wire	1/2 in 19-ga galvanized hardware cloth, 48 in x 100 ft	1 roll	Run walls, open run roof, vents, windows; optional apron.
Roofing	Corrugated roofing panels, approx. 36 in x 72 in	4	Metal/polycarbonate/bitumen; adjust count for panel width and overlap.
Mobility	20 in pneumatic wheels, 600 lb+ rating	2	Use higher rating for rough ground. Verify finished load.
Mobility	3/4 in axle rod or hub/spindle assemblies	1 set	Use washers, collars, cotter pins, and through-bolted brackets.
Mobility	Tow tongue parts: 4x4/steel tongue, tow ring, safety chain	1 set	Tow with ATV, UTV, garden tractor, or compact tractor.
Fasteners	3 in exterior structural screws	2 boxes	Framing connections; predrill near ends.
Fasteners	1-5/8 in exterior screws	1 box	Plywood and siding.
Fasteners	1-1/4 in lath screws + fender washers	1 box each	Hardware cloth attachment; staples alone are not enough.
Fasteners	5/16 in or 3/8 in galvanized bolts, washers, lock nuts	Assorted	Wheel mounts, tow tongue, heavy hinges.
Hardware	Heavy strap hinges	8-12	Doors, cleanout panels, nest hatch.
Hardware	Predator-resistant latches/carabiners	8-10	Use two-step latches on exterior doors.
Interior	Nest boxes, removable roost bars, feeders/waterers	As needed	Layer mode uses nests/roosts; broiler mode removes roosts.
Finish	Exterior paint/stain, caulk, roofing screws, drip edge	As needed	Seal cut ends, plywood edges, roof penetrations.

4. Stricter Cut List

Field-fit items must be checked against final drawings before launch. This cut list should become the PDF v1.0 cut list after the missing diagrams are created.

Section	Part	Nominal material	Qty	Cut length	Acceptance notes
Skids	Left/right skids	4x6 PT	2	120 in	Bevel tow/front ends.
Base	Long side perimeter rails	2x6 PT	2	120 in	Outside base length.
Base	Front/rear perimeter rails	2x6 PT	2	117 in	Fit between long side rails for 120 in outside width.
Base	Base cross ties	2x6 PT	3	117 in	Place near 48, 72, and 96 in from front.
Posts	Front lower-run posts	4x4 PT	3	48 in	Front left, center, right.
Posts	Coop-front/high posts	4x4 PT	3	96 in	48 in lower run + 48 in high coop wall.
Posts	Rear/low posts	4x4 PT	3	88 in	48 in lower run + 40 in low coop wall.
Lower run	Side top/bottom rails	2x4	8	Field cut	Use between post lines; keep square.
Lower run	Front access door stiles	2x4	2	42 in	Use hardware cloth infill.
Lower run	Front access door rails	2x4	2	30 in	Use two-step latch.
Lower run	Diagonal braces	2x4	8	Field cut	Install before moving frame.
Coop floor	Front/rear floor rims	2x6	2	120 in	4 ft x 10 ft floor frame.
Coop floor	End rims and joists	2x6	9	45 in	Approx. 16 in O.C.
Coop floor	Floor plywood main	3/4 in ply	1	48 in x 96 in	Support all edges.
Coop floor	Floor plywood filler	3/4 in ply	1	48 in x 24 in	Complete 4 ft x 10 ft floor.
Coop walls	Front wall plates	2x4	2	120 in	High side.
Coop walls	Front wall studs	2x4	7	45 in	Adjust for openings.
Coop walls	Rear wall plates	2x4	2	120 in	Low side.
Coop walls	Rear wall studs	2x4	7	37 in	Adjust for openings.
Coop walls	End wall framing	2x4	Assorted	Field cut	Slope from 48 in high side to 40 in low side.
Roof	Rafters	2x4	7	60 in	Run front-to-back with overhang.
Roof	Purlins	1x4/2x4	4	132 in	Run side-to-side.
Roof	Roof panels	Corrugated	4	72 in	Overlap per manufacturer.
Doors	Rear cleanout door frames	2x4	2 sets	Field cut	Two rear doors approx. 54 in x 34 in.
Doors	Pop door	1/2 in ply	1	12 in x 14 in	Predator latch required.
Ramp	Ramp deck	1/2 in ply	1	14 in x 60 in	Cleats every 6 in; hinge at pop door.
Nest boxes	Nest dividers/fronts	1/2 in ply	3 boxes	Field cut	Each box approx. 12 in W x 12 in H x 14 in D.
Roosts	Removable roost bars	2x3/2x4	2	60-72 in	Total 10-12 linear ft for 10-12 hens.

5. Missing Drawing Requirements

These drawing requirements are the production brief for the remaining proof assets and Etsy listing images.

Diagram	Purpose	Required labels	Approval criteria
Top view	Shows 10 x 10 footprint, 4 x 10 coop zone, post lines, skids, tow tongue, wheel/axle line	120 in width, 120 in length, 48 in coop depth, 72 in open front run, 9 posts, axle line, tow/front end	Scale clear; all critical dimensions visible; no conflict with cut list.
Side view	Shows 48 in run height, elevated coop, sloped roof, skids, wheels, tow tongue	48 in run height, 96 in high side, 88 in low side, 4 ft coop depth, 10 ft total length	Buildable profile; wheel placement and ground clearance clear.
Exploded frame	Shows build order and major frame assemblies separated	Skids, base frame, post lines, coop floor frame, wall frames, rafters, braces	A builder can identify major assemblies without reading text.
Wheel/skid detail	Shows axle or spindle hardware and tow tongue	20 in wheels, axle, collars, brackets, bolts, skid, tow ring, safety chain	Mounting method is clear enough for hardware purchase and installation.
Nest/roost layout	Shows interior layer configuration	Three nest boxes, roost bars, pop door, ramp, cleanout doors, ventilation	Roost/nest locations do not conflict; cleanout access remains usable.


First plan asset provided in this package:

- drawing_assets/pdf/00_dimensioned_drawing_assets.pdf
- drawing_assets/png/00_draft_plan_assets_contact_sheet.png


6. First Plan Asset Contact Sheet

PastureFrame Chicken Coop - First Draft Plan Assets


Top View - 10 ft x 10 ft Base

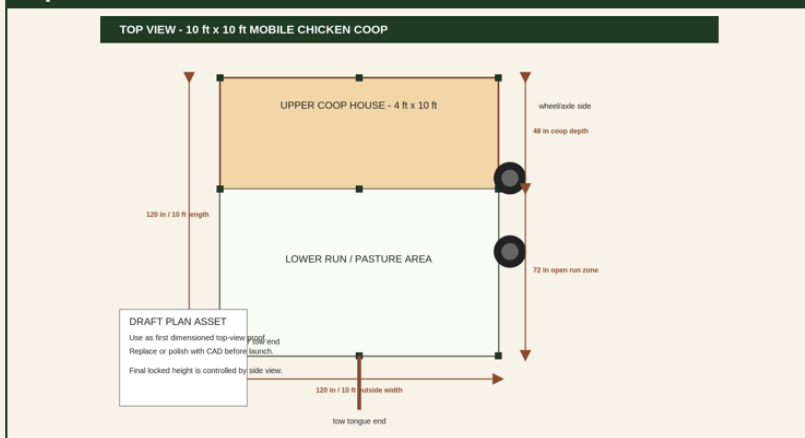


Side Elevation - 48 in Run

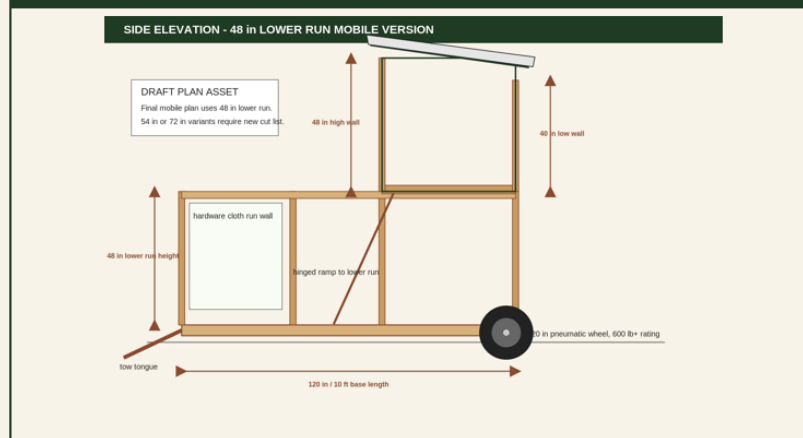

Wheel / Skid / Tow Detail

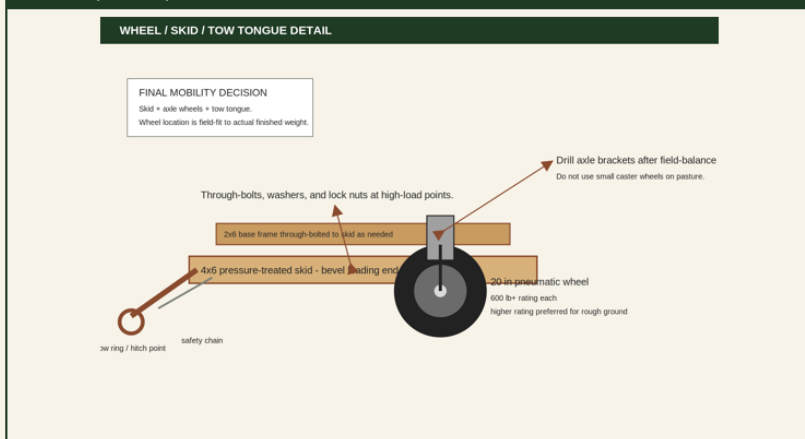

Nest / Roost Layout

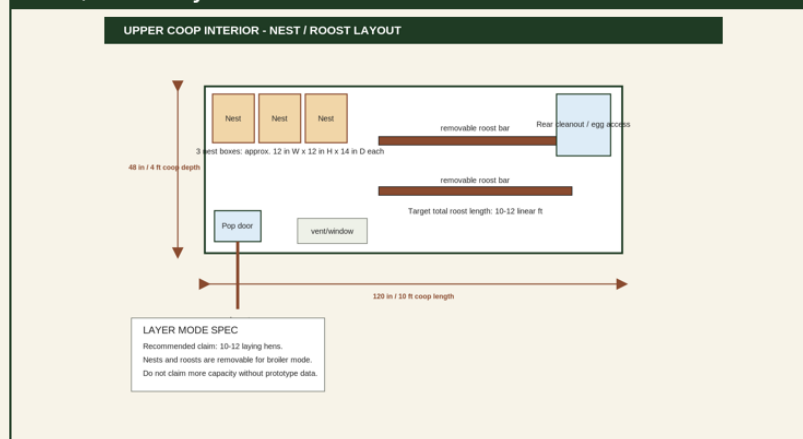

7. Etsy Listing Image Script

PastureFrame image style: deep green header, cream background, warm lumber accents, charcoal labels, practical farm-build tone. Main image must say DIGITAL PLANS - NO PHYSICAL COOP SHIPPED.

#	Image role	PastureFrame script	Required text overlay	Proof/source requirement
1	Hero image	Show finished 10 x 10 mobile coop as a clean CAD render or real prototype photo on pasture.	DIGITAL PLANS - NO PHYSICAL COOP SHIPPED	CAD render or prototype photo required.
2	Dimension overview	Show top and side dimensions with arrows: 10 x 10 base, 4 x 10 upper coop, 48 in lower run.	10 x 10 RUN / 4 x 10 ELEVATED COOP	Dimensioned drawing required.
3	Top view plan	Show front tow end, rear coop end, skids, wheel axle, post lines, open run, coop floor zone.	TOP VIEW PLAN	Top-view proof asset required.
4	Side view plan	Show low mobile profile: 48 in lower run, elevated coop, sloped roof, skids, wheels, tow tongue.	SIDE VIEW + ROOF SLOPE	Side-view proof asset required.
5	Exploded frame	Show frame assemblies separated: skids/base, posts, coop floor, wall frames, rafters, bracing.	FRAME ASSEMBLY	Exploded CAD/sketch required.
6	Wheel/skid system	Close-up of 4x6 skid, axle/wheel, tow tongue, tow ring, safety chain, bolts.	SKID + AXLE WHEEL SYSTEM	Wheel detail drawing required.
7	Layer setup	Show nest boxes, roost bars, pop door, ramp, ventilation, egg hatch.	LAYER MODE: 10-12 HENS	Nest/roost layout required.
8	Broiler setup	Show lower run used for broilers with feeders/waterers, shade, grass rotation notes, roosts removed.	BROILER MODE: 30-45 BIRDS	Broiler layout drawing/render required.
9	What is included	Show PDF covers, materials list, cut list, build steps, diagrams, checklists in branded stack.	WHAT YOU GET	Final product PDF/package mockup required.
10	Disclaimer / buyer clarity	Cream background, PastureFrame green heading, simple icons. State limits clearly.	DIY DIGITAL PLANS - VERIFY LOCAL CONDITIONS	Text-only brand card acceptable.

8. Pre-Publish Blockers

Publishing is blocked until all required proof assets and consistency checks are complete. Draft listing copy is allowed; approval is not.

Blocker	Required before Etsy approval	Why it matters	Status
Proof asset: top view	Dimensioned top-view drawing or CAD screenshot exists	Buyer must see real dimensions before purchase	Needed
Proof asset: side view	Dimensioned side-view drawing or CAD screenshot exists	Confirms mobile height and roof slope	Needed
Proof asset: exploded frame	Exploded frame diagram exists	Shows actual construction logic	Needed
Proof asset: wheel/skid detail	Wheel/skid/tow detail exists	Mobility is a core product promise	Needed
Proof asset: nest/roost layout	Interior layer layout exists	Layer-hen usefulness depends on this	Needed
Claim control	No built/field-tested claim unless prototype photos exist	Avoid false proof claims	Blocked until prototype exists
Plan consistency	PDF, cut list, materials list, and images all use 48 in lower run height	Avoid buyer confusion	Required
Material correction	Post quantity corrected to 9 4x4 posts everywhere	Current draft inconsistency must be fixed	Required
Digital clarity	Main image says DIGITAL PLANS and NO PHYSICAL COOP SHIPPED	Prevents buyer confusion	Required
Safety disclaimers	DIY, local conditions, weather, towing, predator limits all stated	Prevents overclaiming	Required
File test	Etsy upload files open, download, and print correctly	Prevents customer support issues	Required
Human approval	Ashton reviews final product PDF and listing images	Final release gate	Required

9. Proof Asset Tracker

Asset	Minimum acceptable proof	File naming	Status	Notes
Top view	Original dimensioned drawing or CAD screenshot	proof_02_top_view	Draft included	Needs final CAD polish before launch.
Side view	Original dimensioned drawing or CAD screenshot	proof_03_side_view	Draft included	Needs final CAD polish before launch.
Exploded frame	CAD exploded frame or clean hand drawing	proof_04_exploded_frame	Draft included	Needs final CAD polish before launch.
Wheel/skid detail	Dimensioned hardware drawing	proof_05_wheel_skid_tow_detail	Draft included	Hardware-specific dimensions still needed.
Nest/roost layout	Dimensioned interior plan	proof_06_nest_roost_layout	Draft included	Needs final CAD polish before launch.
Prototype photos	Real build photos if claiming built/field-tested	prototype_01_*	Not available	Do not claim prototype-tested until created.

Approval note: If the Etsy listing uses CAD/plans-first assets, the listing must clearly state that. If a physical prototype photo is not available, do not claim the coop has been built, field-tested, engineered, code-approved, or proven under all conditions.