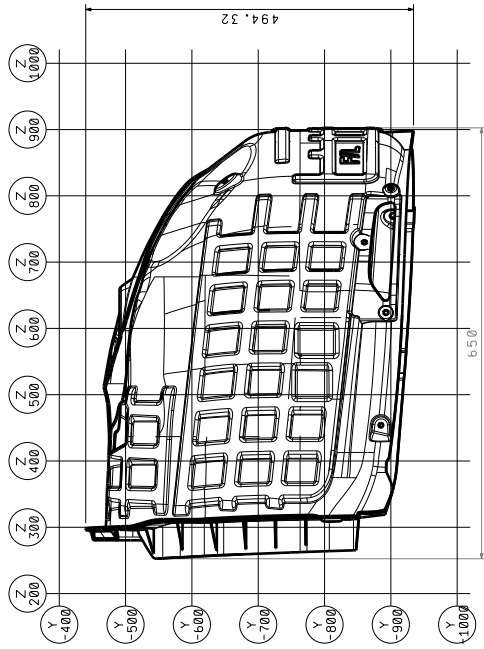
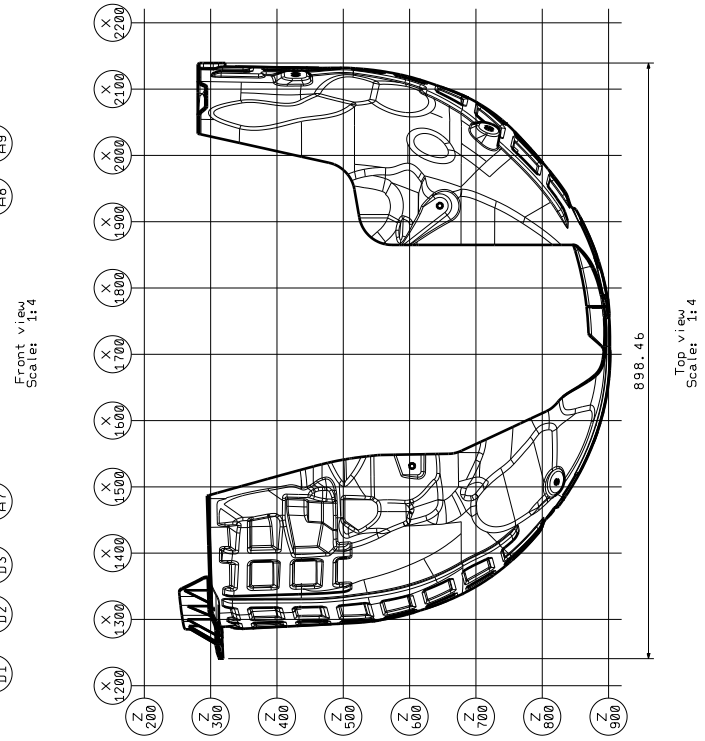
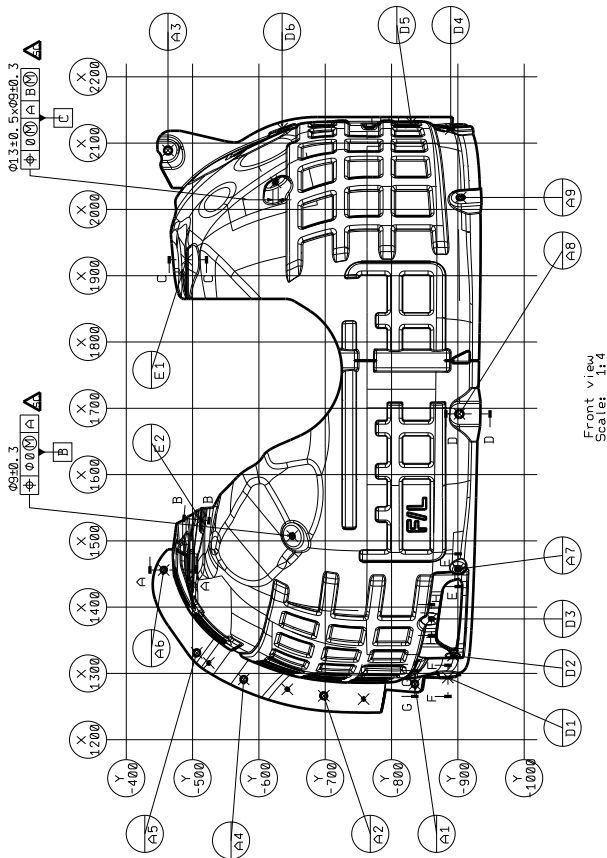


NOTE 1 : GENERAL CONDITIONS
 2 : FLAMMABILITY OF INTERIOR MATERIAL
 3 : EXTERIOR NOISE
 4 : WHEEL GUARD MUD GUARD
 5 : RECYCLING END OF LIFE
 6 : EXTERNAL PROTRUSION

NOTE 2 : GENERAL INFORMATIONS

- 2.1 : ALL DIMENSIONS THAT ARE NOT ON THE DRAWING HAS TO BE TAKEN FROM THE CAD DATA.
- 2.2 : SEE 3D DIGITAL MODEL FOR UNFILLED DIMENSIONS; TRIM TOLERANCE +/- .2MM.
- 2.3 : TOLERANCES OF POSITION HAVE A SURFACE FINISH AS SHOWN IN DRAWING.
- 2.4 : THE UNSPECIFIED SURFACE TOLERANCE +/- .3mm.
- 2.5 : SURFACE SHOULD BE SMOOTH AND HAVE NO DEFECTS SUCH AS SCRATCH, CRACK, SINK SPARK WHICH CAN DECREASE THE PART'S PERFORMANCE.
- 2.6 : THE DIFFERENCES BETWEEN THE LEFT AND RIGHT PARTS IS SYMMETRICAL WITH ITSELF.

PLEASE SPECIAL EXPLANATION WITH C894043963R WILL BE WORKED PML OF THE LEFT SIDE, C894043927R IS PARTICULARLY ASYMETRIC WITH C894043963R.

SIDE FOR SYMERIC PORTION VIEW DETAILS IN 3D DATE:

- * OTHER PERFORMANCE REQUIREMENTS CAN BE FOUND IN DVP.

NOTE 3 : BILL OF MATERIAL
3.1 : MATERIAL: PP/PET
3.2 : GENERAL THICKNESS: 3.5MM+0.5/-1MM
3.3 : THICKNESS AT FIXING POINTS AND TRIM AREAS: 2mm +/-0.5mm

NOTE 4 : MARKING
4.1 : X1325 MARKING REQUIREMENTS (PART IDENTIFICATION INFORMATION : PART NAME, MATERIAL INFORMATION, PART NUMBER, CLOCK (month/year), DATE SHEET INFORMATION), SUBJECT TO THE ACTUAL ENGRAVED INFORMATION ON THE PRODUCT.
4.2 : MARKING TYPE : [MOLDING].

BILL OF MATERIAL									
PART NAME	PART NUMBER	SUPPLIER PART NUMBER	QUANTITY	MATERIAL INFO		SURFACE FINISH	THICKNESS (mm)	WEIGHT (kg)	REMARKS
				MATERIAL	GRADE				
P SHIELD-FR LH WHEEL HOUSE	6384314778	JINRONG	1	✓	✓	✓	1.93	PHEV4EHV	✓
1 MAIN BODY	✓	JINRONG	1	PP-PET 12089sm	✓	Black	2.548-11.1	0.958-044	✓
2 SPOILER-FR LH WH SHIELD	✓	JINRONG	1	TPV	✓	TBD	2.548-14.0	0.077-08.01	✓
3 RIVET 04*11*GASKET 012*05 #6.8	EXT10121928	JINRONG	3	✓	✓	✓	✓	0.081	✓

BILL OF MATERIAL									
PART NAME	PART NUMBER	SUPPLIER PART NUMBER	QUANTITY	MATERIAL INFO		SURFACE FINISH	THICKNESS (mm)	WEIGHT (kg)	REMARKS
				MATERIAL	GRADE				
P SHIELD-FR RH WHEEL HOUSE	638422168H	JINRONG	1	✓	✓	✓	1.93	PHEV4EHV	✓
1 MAIN BODY	✓	JINRONG	1	PP-PET 12089sm	✓	Black	2.548-11.1	0.958-044	✓
2 SPOILER-FR RH WH SHIELD	✓	JINRONG	1	TPV	✓	TBD	2.548-14.0	0.077-08.01	✓
3 RIVET 04*11*GASKET 012*05 #6.8	EXT10121928	JINRONG	3	✓	✓	✓	✓	0.081	✓

1. G04T EXPLANATION OF UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES:

G04T BOTH THE DIMENSIONAL FEATURES OF THE DESCRIBED COMPONENTS AND THE POSITIONS OF THE LOCATING REFERENCES ARE DEFINED BY BASIC DIMENSIONS.

ALL UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES ARE DEFINED ACCORDING TO THE FOLLOWING REQUIREMENTS:

(1) ALL GEOMETRIC TOLERANCES ARE DEFINED ON THE DATUM: A B C D E

(2) SURFACE PROFILE TOLERANCE: (0.1) A (0.05) D (C-E)

(3) CONTOUR TOLERANCE OF TRIMMED SURFACE: (0.1) A (0.05) D (C-E)

(4) POSITION TOLERANCE OF CIRCULAR HOLES: (0.05) A (0.05) D (C-E)

(5) POSITION TOLERANCE OF NON-CIRCULAR HOLES: (0.1) A (0.05) D (C-E)




(6) TOLERANCE OF THE HOLE DIAPETER FOR ALL UNNOTED HOLES/SLOTTED HOLES: ±0.5

(7) FLATNESS TOLERANCE: (0.1) 0

REF	PARTIAL REF	X	Y	COORDINATES
A0	1286.72	-835.07	315.76	✓
A2	1265.78	-637.84	315.64	✓
A3	1268.93	-462.99	294.4	✓
A4	1291.05	-577.11	312.32	✓
A5	1331.11	-506.23	301.43	✓
A6	1351.48	-902.45	696.16	✓
A8	1345.35	-900.24	810.89	✓
A9	12018.06	-984.21	771.47	✓
B	1307.28	-630.32	821.85	✓
C	1307.28	-630.32	821.85	✓
D	1265.78	-637.84	315.64	✓
E	1293.74	-685	454	✓
D1	1326.91	-892.67	624.06	✓
D3	1362.79	-860.17	729.95	✓
D4	1224.17	-889.21	549.15	✓
D5	1272.08	-635.07	478.00	✓
E1	1924.1	-4306.9	645.55	✓
E2	1531.52	-512.37	603.73	✓

INDEX/DRAWING VERSION	DESCRIPTION	DATE
001	TG2 FREEZE	20260610

MODEL TYPE	RG4F1	CUSTOMER	AMPERE	SUPPLIER	JINRONG
COMP. EXPLANATION	PHEV4E-V	PROJECTION		IF PRODUCE/DESIGN/STANDARD	SEE DRAWING
DESIGN RESPONSIBILITY	/	DESIGN RESPONSIBILITIES	SEE DRAWING	PHYSICAL PLUM	PP-RET 1200g±m
FORM EDITOR	/	SUPPLIER IDENTIFICATION	/	UNIT PRICE	SCALE
DESIGNED	/	DATE	11.03	HOUSE SHIELD-FR LH WHEEL HOUSE SHIELD-FR RH WHEEL	1:4
DESIGNED BY	/	DESIGNED BY	Shanghai Launch Technology Co., Ltd.	POST NUMBER	001 1/2 A0
APPROVED	/	APPROVED		DESIGN FILE	

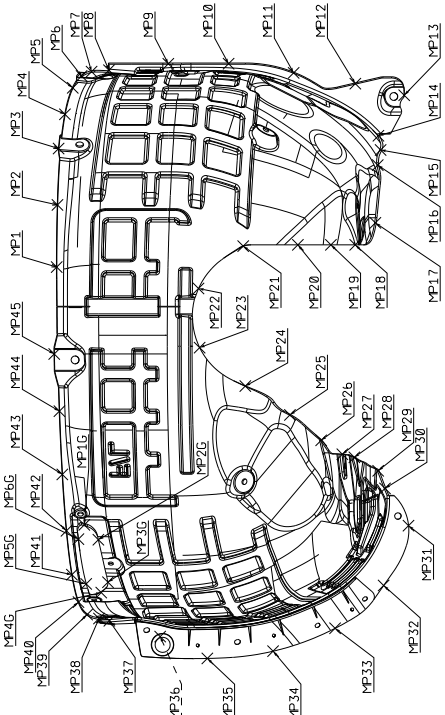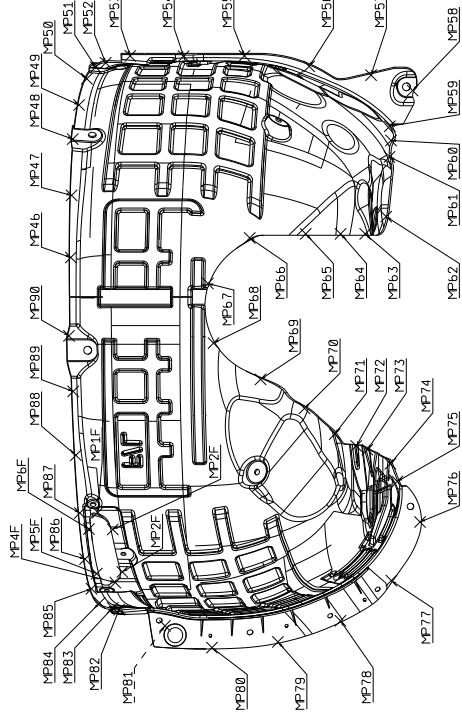

MEASURING POINT	SHIELD-FR LH WHEEL HOUSE				SHIELD-FR RH WHEEL HOUSE			
	X	Y	Z	TOLERANCE ±1.0	X	Y	Z	TOLERANCE ±1.0
M#10	1442.71	886.02	789.13					
M#20	1420.18	-876.05	765.65					
M#30	1356.13	-867.41	686.84					
M#40	1341.15	-877.8	652.43					
M#50	1351.46	-900.17	657.18					
M#60	1437.1	-906.25	770.55					
MEASURING POINT	SHIELD-FR LH WHEEL HOUSE				SHIELD-FR RH WHEEL HOUSE			
MEASURING POINT	X	Y	Z	TOLERANCE ±1.0	X	Y	Z	TOLERANCE ±1.0
M#10	1831.59	932.68	856.53					
M#20	1855.02	932.68	856.53					
M#30	1810.33	935.52	760.43					
M#40	1820.02	931.42	700.51					
M#50	2101.96	-926.07	609.34					
M#60	2119.61	-919.13	516.91					
M#70	2126.37	-931.41	417.48					
M#80	2118.38	-907.33	320.59					
M#90	2118.38	-913.34	281.41					
M#10	2118.38	-913.34	281.41					
M#11	2124.49	-915.06	281.42					
M#12	2108.22	-921.85	281.43					
M#13	2098.76	-947.13	293.14					
M#14	2093.64	-946.03	294.69					
M#15	1995.36	-943.43	408.7					
M#16	1995.36	-943.43	408.7					
M#17	1696.25	-914.38	526.32					
M#18	1865.02	-939.18	608.11					
M#19	1855.02	-929.25	703.47					
M#20	1865.02	-929.25	703.47					
M#21	1865.02	-929.25	703.47					
M#22	1865.02	-929.25	703.47					
M#23	1703.98	-714.31	894.35					
M#24	1652	-647.94	856.58					
M#25	1608.54	-584.76	794.39					
M#26	1570.18	-543.31	712.13					
M#27	1549.21	-517.74	670.8					
M#28	1549.21	-517.74	670.8					
M#29	1574.25	-476.95	430.59					
M#30	1497.61	-473.26	334.25					
M#31	1441.39	-440.3	296.94					
M#32	1441.39	-440.3	296.94					
M#33	1286.65	-500.41	310.82					
M#34	1252.12	-513.93	313.16					
M#35	1274.11	-614.47	315.99					
M#36	1297.98	-690.6	325.71					
M#37	1301.41	-689.52	419.75					
M#38	1307.36	-910.58	518.92					
M#39	1326.2	-916.66	616.78					
M#40	1326.2	-916.66	616.78					
M#41	1326.2	-916.66	616.78					
M#42	1326.2	-916.66	616.78					
M#43	1518.75	-926.11	1833.71					
M#44	1614.15	-928.45	862.91					
M#45	1600.44	-933.94	896.97					
M#46	1831.47	-930.71	857.11					
M#47	1975.15	-931.09	872.94					
M#48	1975.15	-931.09	872.94					
M#49	2051.45	-928.22	698.74					
M#50	2101.03	-923.87	601.49					
M#51	2118.16	-916.93	514.99					
M#52	2125.01	-908.87	415.55					
M#53	2135.53	-878.6	317.67					
M#54	2145.53	-856.7	219.67					
M#55	2135.54	-708.51	708.4					
M#56	2119.75	-610.64	280.4					
M#57	2106.53	-517.13	280.4					
M#58	2089.34	-483.62	291.9					
M#59	2089.34	-483.62	303.09					
M#60	2001.95	-478.56	400.13					
M#61	1995.36	-478.56	400.13					
M#62	1993.13	-476.75	530.7					
M#63	1666.97	-502.45	616.61					
M#64	1867	-533.06	611.8					
M#65	1867.02	-579.58	799.91					
M#66	1868.91	-660.39	854.54					
M#67	1868.91	-660.39	854.54					
M#68	1702.28	-712.43	892.79					
M#69	1647.57	-644.15	891.88					
M#70	1603.77	-592.17	788.69					
M#71	1565.04	-542.29	705.82					
M#72	1547.11	-516.24	614.43					
M#73	1541.53	-505.23	515.59					
M#74	1493.58	-474.26	327.07					
M#75	1493.58	-474.26	327.07					
M#76	1332.4	-441.95	295.99					
M#77	1344.02	-485.29	298.55					
M#78	1283.45	-561.33	309.82					
M#79	1251.56	-635.78	312.43					
M#80	1251.56	-635.78	312.43					
M#81	1262.94	-675.16	315.06					
M#82	1300.13	-693.99	337.73					
M#83	1302.83	-697.97	420.49					
M#84	1310.34	-909.88	532.06					
M#85	1331.72	-915.41	629.41					
M#86	1376.61	-938.93	718.3					
M#87	1376.61	-938.93	718.3					
M#88	1533.11	-974.67	838.16					
M#89	1629.44	-976.61	864.15					
M#90	1713.17	-931.2	889.57					