




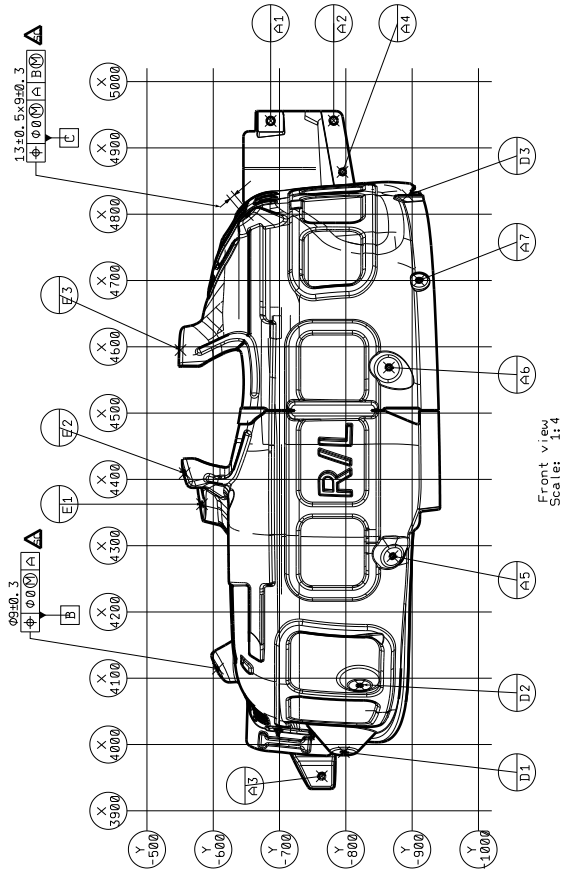

Front view
Scale: 1:4

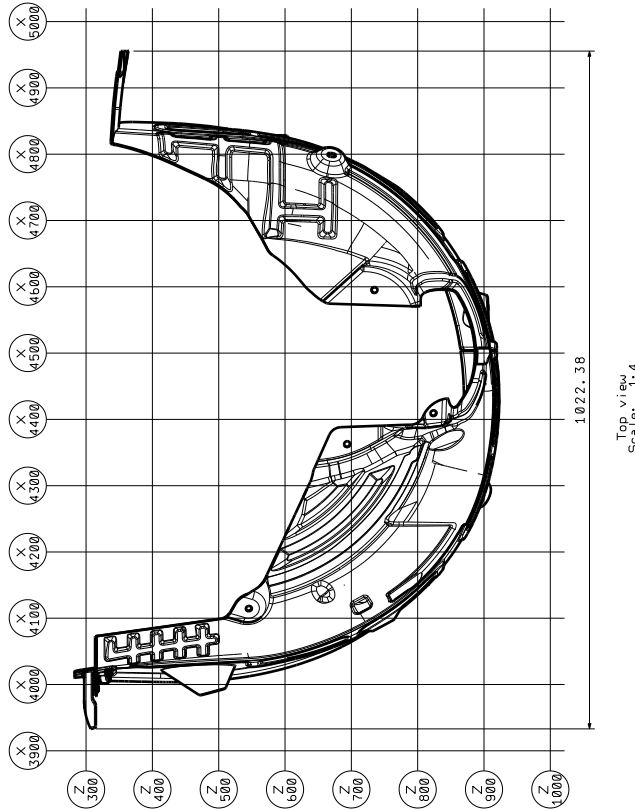

Top view
Scale: 1:4

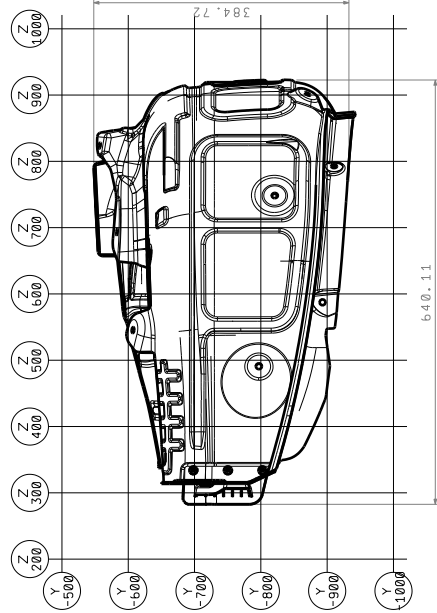

Left view 1:4

BILL OF MATERIAL									
PART NAME	PART NUMBER	SUPPLIER PART NUMBER	QUANTITY	MATERIAL INFO		SURFACE FINISH	THICKNESS (mm)	WEIGHT (kg)	REMARKS
				MATERIAL	GRADE				
P KIT-RH LH UH SHIELD	76749329R	Ji-Rong	1	✓	✓	✓	✓	0.797	LH
1 MAIN BODY	✓	Ji-Rong	1	PR-REF 12805mm	✓	Black	2.548.11	0.75738.93	
2 SPOILER-RH LH UH SHIELD	✓	✓	✓	TPV	✓	TBD	2.548.14	0.07248.97	
3 RIVET 64x11 GASKET 612*05 _{kg.8}	EXT31821028	Ji-Rong	3	✓	✓	✓	✓	0.001	

BILL OF MATERIAL									
PART NAME	PART NUMBER	SUPPLIER PART NUMBER	QUANTITY	MATERIAL INFO		SURFACE FINISH	THICKNESS (mm)	WEIGHT (kg)	REMARKS
				MATERIAL	GRADE				
P KIT-RH RH UH SHIELD	767493318R	Ji-Rong	1	✓	✓	✓	✓	0.706	RH
1 MAIN BODY	✓	Ji-Rong	1	PR-REF 12805mm	✓	Black	2.548.11	0.75538.93	
2 SPOILER-RH RH UH SHIELD	✓	✓	✓	TPV	✓	TBD	2.548.14	0.07248.97	
3 RIVET 64x11 GASKET 612*05 _{kg.8}	EXT31821028	Ji-Rong	3	✓	✓	✓	✓	0.001	

1. G0AT EXPLANATION OF UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES:

G0AT THAT THE GEOMETRIC FEATURES OF THE DESCRIBED COMPONENTS AND THE POSITIONS OF THE LOCATING REFERENCES ARE DEFINED BY BASIC DIMENSIONS.

ALL UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES ARE DEFINED ACCORDING TO THE FOLLOWING REQUIREMENTS:

(1) ALL GEOMETRIC TOLERANCES ARE DEFINED ON THE DATUM: $\boxed{A \mid B \mid D \mid C \mid E}$

(2) SURFACE PROFILE TOLERANCE: $\boxed{\Delta \mid 3.0 \mid A \mid B \mid D \mid C \mid E}$

(3) CONTOUR TOLERANCE OF TRIMMED SURFACE: $\boxed{\Delta \mid 3.0 \mid A \mid B \mid D \mid C \mid E}$

(4) POSITION TOLERANCE OF CIRCULAR HOLES: $\boxed{\Phi \mid 0.3 \mid 0 \mid A \mid B \mid D \mid C \mid E}$

1. GD&T EXPLANATION OF UNSPECIFIED GEOMETRIC

GD&T BOTH THE GEOMETRIC FEATURES OF THE DESCRIBED COMPONENTS AND THE POSITIONS OF THE LOCATING REFERENCES ARE DEFINED BY BASIC DIMENSIONS.

ALL UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES

ARE DEFINED ACCORDING TO THE FOLLOWING

REQUIREMENTS:

DATE: A B M - D C - E

DATUM: A B-M-D C-E

(3) CONTOUR TOLERANCE OF TRIMED SURFACE:	Δ	3.0	A	BM	D	C-E
--	----------	-----	---	----	---	-----


[illegible]

(5) POSITION TOLERANCE OF NON-CIRCULAR HOLES: $\phi .300 \pm .005 \text{ M.D.C.}$

1. I have not stated the name of the person who has been convicted of the crime.

(6) TOLERANCE OF THE HOLE DIAMETER FOR ALL UN

(7) FLATNESS TOLERANCE: $\boxed{0.10}$



INDEX/DRAWING VERSION	DESCRIPTION	DATE
001	TG2 FREEZE	20260610

MODEL TYPE	RQ4F1	CUSTOMER	AMPERE	SUPPLIER	JinRong
COMPLIANCE	EA2&EA3	PROTECTION		IP PROTECTION/STANDARD	SEE DRAWING
RELIABILITY	✓	GENERAL BUSINESS	✓	HYDRAULIC OIL	PP-PET120095m
JOINT SECTION	✓	EXPLOSION PROTECTION	✓	UNIT TYPE	SCALE
DESIGN	✓	PROTECTIVE ENCLOSURE	0.787		1:4
INTERNAL DESIGN	✓	COMPACT	✓	UNIT NUMBER	KIT-RR LH WHL SHIELD KIT-RR RH WHL SHIELD
WHEEL	✓	SHANGHAI Launch Technology Co., Ltd.	767496296R 767496361R	MOULTON PART	001.1/2 A0

NOTE 1 : GENERAL CONDITIONS
R001.1 : FLAMMABILITY OF INTERIOR MATERIAL
R041.2 : EXTERIOR NOISE
R081.3 : WHEEL GUARD MUD GUARD
R091.4 : RECYCLING END OF LIFE
R001.5 : EXTERNAL PROTECTION

NOTE 2 : GENERAL INFORMATION

2.1 : ALL DIMENSIONS THAT ARE NOT IN THE DRAWING HAS TO BE TAKEN FROM THE CAD DATA.

2.2 : THE DIMENSIONS OF THE PARTS MUST BE WITHIN THE DIMENSIONS TRIM TOLERANCE $\pm 0.2\text{MM}$.

2.3 : THE TOLERANCES OF MOUNTING HOLES SIZE $\pm 0.05\text{MM}$.

2.4 : THE UNSPECIFIED POSITIONAL ACCURACY IS SHOWN IN DRAWING.

2.5 : THE SURFACE FINISH OF THE PARTS MUST BE SHOWN IN DRAWING.

2.6 : SUGGESTED CUTTING TOOL SHOULD HAVE NO DEFECTS SUCH AS, SCRATCH, CRACK, SINK MARK WHICH CAN DECREASE THE PARTS PERFORMANCE.



2.7 : ALL THE ILLUSTRATED PARTS ARE THE LEFT PARTS, THE RIGHT PART IS PERFECTLY SYMMETRICAL.

2.8 : OTHER PERFORMANCE REQUIREMENTS CAN BE FOUND IN DWP.

NOTE 3 : BILL OF MATERIAL
3.1 : MATERIAL : PP+PET
3.2 : GENERAL THICKNESS : 3.5MM+0.5/-1MM
3.3 : THICKNESS AT FIXING POINTS AND TRIM AREAS: 2mm +/-0.5mm

NOTE 4 : MARKING.
4.1 : X1325 MARKING REQUIREMENTS (PART IDENTIFICATION INFORMATION : PART NAME, MATERIAL INFORMATION, PART NUMBER, CLOCK (month/year), DATE SHEET INFORMATION, SUBJECT TO THE ACTUAL ENGRAVED INFORMATION ON THE PRODUCT.
4.2 : MARKING TYPE : [MOLDING].

4.1 DEFINITION
4.2
4.3 1. REINULT GROUP LOGO TYPE : THE MINIMUM OPTIMAL SIZE FOR "REINULT GROUP" LOGO TYPE IS 10MM.
4.4 2. REINULT GROUP LOGO TYPE : THE OPTIMAL MINIMUM HEIGHT ALLOWED FOR THE EMBLEM IS 5MM.
4.5 3. REINULT GROUP'S PSEB NUMBER : THE SUPPLIER'S PSEB NUMBER CANNOT APPEAR ON THE PART.
4.6 4. REINULT GROUP'S PSEB NUMBER : THE USE OF ANY INFORMATION THAT CAN EASILY IDENTIFY THE SUPPLIER (E.G. OR CODE) MUST BE AVOIDED.
4.7 5. MARKING AREA : THE MARKING MUST BE PERMANENT AND INDELEIBLE.
4.8 6. MARKING AREA : SEE FIGURING.
4.9 7.

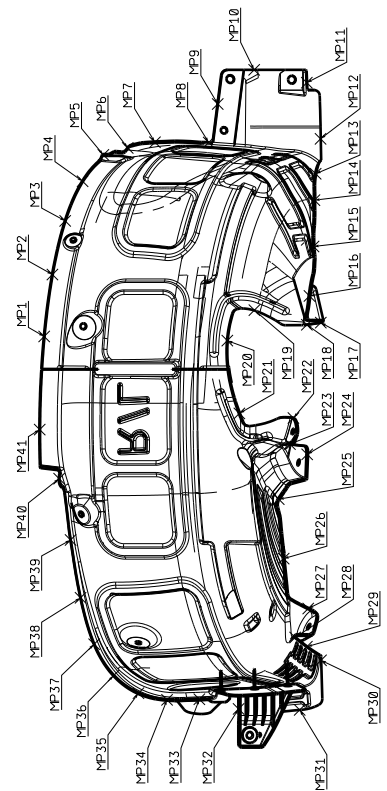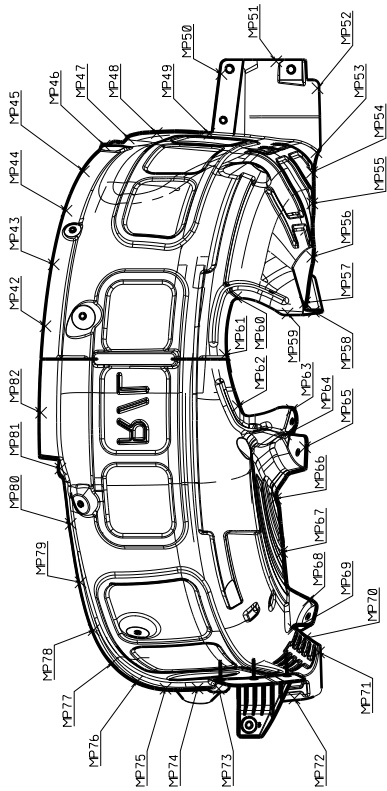

MEASURING POINT	KIT-RR LH WHL SHIELD				COORDINATES				KIT-RR RH WHL SHIELD				COORDINATES				TOLERANCE
	X	Y	Z	TOLERANCE	X	Y	Z	TOLERANCE	X	Y	Z	TOLERANCE	X	Y	Z	TOLERANCE	
MP1	4553.38	-938.29	858.66	MP1	4553.38	-935.01	857.84		4553.38	-935.01	857.84		4553.38	-935.01	857.84		
MP2	4646.78	-934.82	823.76	MP2	4646.78	-932.17	822.03		4646.78	-932.17	822.03		4646.78	-932.17	822.03		
MP3	4727.75	-930.78	765.84	MP3	4727.75	-927.77	763.99		4727.75	-927.77	763.99		4727.75	-927.77	763.99		
MP4	4827.45	-915.59	695.63	MP4	4827.45	-912.56	693.78		4827.45	-912.56	693.78		4827.45	-912.56	693.78		
MP5	4837.75	-901.5	599.02	MP5	4837.75	-898.49	597.17		4837.75	-898.49	597.17		4837.75	-898.49	597.17		
MP6	4846.27	-884.91	512.51	MP6	4846.27	-881.93	510.66		4846.27	-881.93	510.66		4846.27	-881.93	510.66		
MP7	4846.01	-869.14	434.69	MP7	4846.01	-866.16	432.84		4846.01	-866.16	432.84		4846.01	-866.16	432.84		
MP8	4846.01	-852.57	355.91	MP8	4846.01	-849.59	354.06		4846.01	-849.59	354.06		4846.01	-849.59	354.06		
MP9	4904.5	-743.98	326.33	MP9	4904.5	-740.96	324.48		4904.5	-740.96	324.48		4904.5	-740.96	324.48		
MP10	4955.5	-713.98	326.33	MP10	4955.5	-710.96	324.48		4955.5	-710.96	324.48		4955.5	-710.96	324.48		
MP11	4955.5	-695.58	326.33	MP11	4955.5	-692.56	324.48		4955.5	-692.56	324.48		4955.5	-692.56	324.48		
MP12	4951.6	-676.58	326.33	MP12	4951.6	-673.56	324.48		4951.6	-673.56	324.48		4951.6	-673.56	324.48		
MP13	4786.74	-637.7	338.87	MP13	4786.74	-634.69	337.02		4786.74	-634.69	337.02		4786.74	-634.69	337.02		
MP14	4758.92	-615.73	487.78	MP14	4758.92	-612.71	485.93		4758.92	-612.71	485.93		4758.92	-612.71	485.93		
MP15	4689.1	-539.09	555.33	MP15	4689.1	-536.07	553.48		4689.1	-536.07	553.48		4689.1	-536.07	553.48		
MP16	4614.45	-568.5	618.51	MP16	4614.45	-565.48	616.66		4614.45	-565.48	616.66		4614.45	-565.48	616.66		
MP17	4574.45	-554.94	617.85	MP17	4574.45	-551.92	616.00		4574.45	-551.92	616.00		4574.45	-551.92	616.00		
MP18	4574.45	-534.94	617.85	MP18	4574.45	-531.92	616.00		4574.45	-531.92	616.00		4574.45	-531.92	616.00		
MP19	4593.05	-621.76	618.51	MP19	4593.05	-618.74	616.66		4593.05	-618.74	616.66		4593.05	-618.74	616.66		
MP20	4593.05	-601.76	618.51	MP20	4593.05	-598.74	616.66		4593.05	-598.74	616.66		4593.05	-598.74	616.66		
MP21	4531.01	-626.6	741.89	MP21	4531.01	-623.58	740.04		4531.01	-623.58	740.04		4531.01	-623.58	740.04		
MP22	4437.3	-630.19	878.17	MP22	4437.3	-627.17	876.32		4437.3	-627.17	876.32		4437.3	-627.17	876.32		
MP23	4430.3	-554.19	878.97	MP23	4430.3	-551.17	877.12		4430.3	-551.17	877.12		4430.3	-551.17	877.12		
MP24	4396.95	-593.01	766.31	MP24	4396.95	-590.00	764.46		4396.95	-590.00	764.46		4396.95	-590.00	764.46		
MP25	4307.9	-548.59	668.91	MP25	4307.9	-545.58	667.06		4307.9	-545.58	667.06		4307.9	-545.58	667.06		
MP26	4218.2	-634.51	597.22	MP26	4218.2	-631.50	595.37		4218.2	-631.50	595.37		4218.2	-631.50	595.37		
MP27	4142.9	-607.51	584.6	MP27	4142.9	-604.50	582.75		4142.9	-604.50	582.75		4142.9	-604.50	582.75		
MP28	4099.26	-641.55	503.43	MP28	4099.26	-638.54	501.58		4099.26	-638.54	501.58		4099.26	-638.54	501.58		
MP29	4085.37	-649.73	484.79	MP29	4085.37	-646.72	482.94		4085.37	-646.72	482.94		4085.37	-646.72	482.94		
MP30	4064.86	-653.95	314.7	MP30	4064.86	-650.94	312.85		4064.86	-650.94	312.85		4064.86	-650.94	312.85		
MP31	4064.86	-634.95	314.7	MP31	4064.86	-631.94	312.85		4064.86	-631.94	312.85		4064.86	-631.94	312.85		
MP32	3991.5	-780.43	314.83	MP32	3991.5	-777.42	312.98		3991.5	-777.42	312.98		3991.5	-777.42	312.98		
MP33	4006.14	-830.01	358.85	MP33	4006.14	-827.00	356.99		4006.14	-827.00	356.99		4006.14	-827.00	356.99		
MP34	4006.13	-854.35	455.8	MP34	4006.13	-851.34	453.95		4006.13	-851.34	453.95		4006.13	-851.34	453.95		
MP35	4041.78	-872.69	555.83	MP35	4041.78	-869.68	553.98		4041.78	-869.68	553.98		4041.78	-869.68	553.98		
MP36	4041.88	-885.97	658.78	MP36	4041.88	-882.96	656.93		4041.88	-882.96	656.93		4041.88	-882.96	656.93		
MP37	4085.03	-915.59	629.29	MP37	4085.03	-912.56	627.44		4085.03	-912.56	627.44		4085.03	-912.56	627.44		
MP38	4085.03	-895.59	529.29	MP38	4085.03	-892.56	527.44		4085.03	-892.56	527.44		4085.03	-892.56	527.44		
MP39	4246.14	-887.99	895.37	MP39	4246.14	-884.98	893.52		4246.14	-884.98	893.52		4246.14	-884.98	893.52		
MP40	4338.86	-911.92	871.43	MP40	4338.86	-908.91	869.58		4338.86	-908.91	869.58		4338.86	-908.91	869.58		
MP41	4412.89	-941.33	878.13	MP41	4412.89	-938.32	876.28		4412.89	-938.32	876.28		4412.89	-938.32	876.28		