

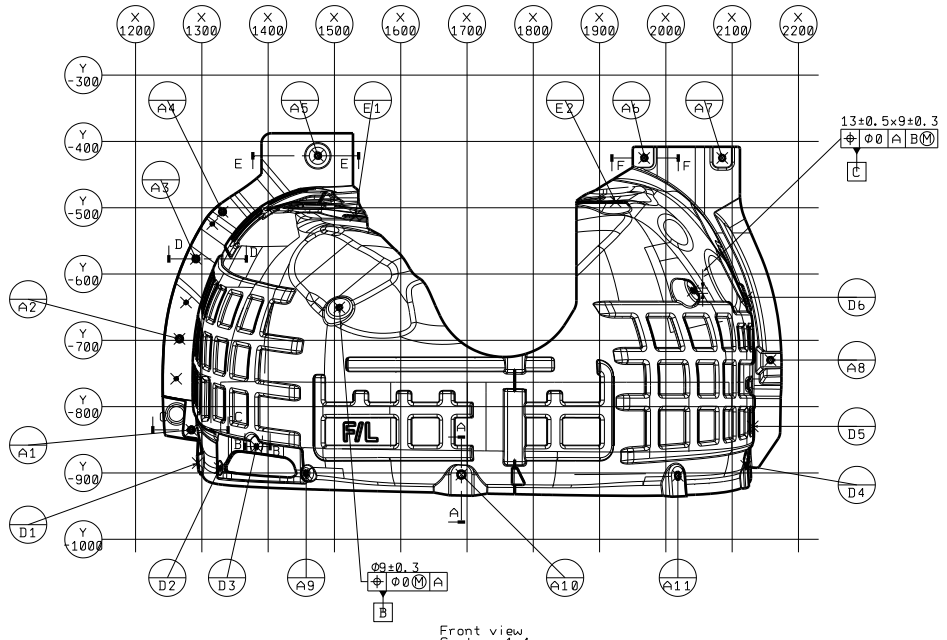



Front view
Scale: 1:4

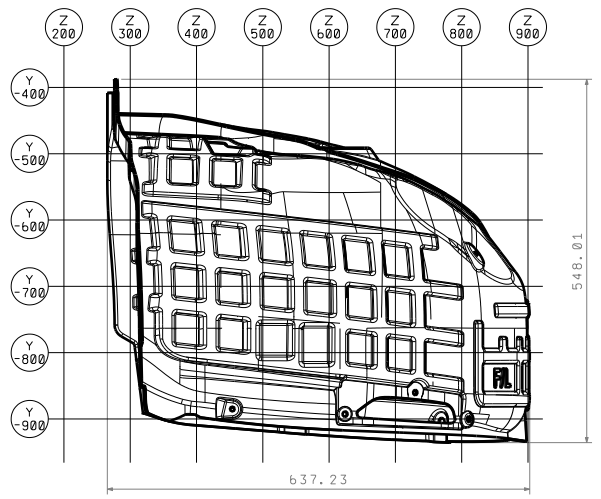


Left view
Scale: 1:4

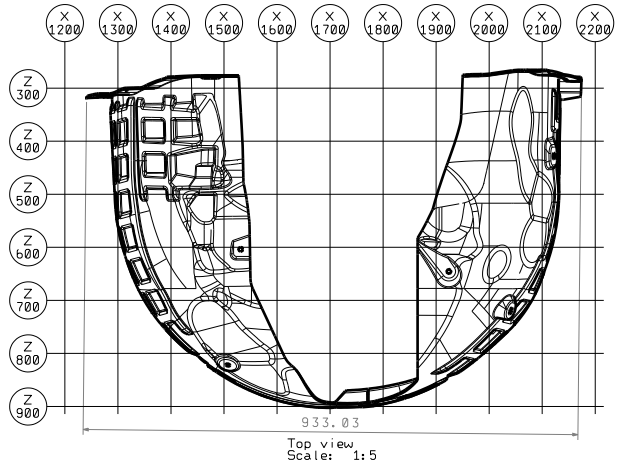


Top view
Scale: 1:5




SECTION CUTA-A
Scale: 1:1




SECTION CUTB-B
Scale: 1:1




SECTION CUTE-E
Scale: 1:1

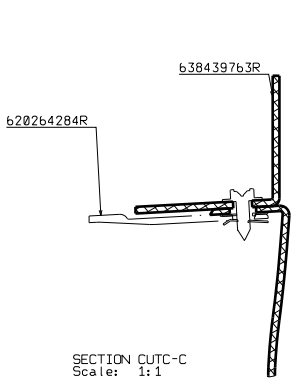

SECTION CUTC-C
Scale: 1:1



SECTION CUTD-D
Scale: 1:1



SECTION CUTF-F
Scale: 1:1

BILL OF MATERIAL

	PART NAME	PART NUMBER	SUPPLIER PART NUMBER	QUANTITY	MATERIAL INFO: MATERIAL	MATERIAL INFO: GRADE	SURFACE FINISH		THICKNESS (mm) R	WEIGHT (kg) R	REMARKS
P	SHIELD-FR LH WHEEL HOUSE(BEV)	b384397b3R	JinRong	1	✓	✓	✓	3	1.1	BEV	
1	MAIN BODY	✓	JinRong	1	PP-PET 1200gsm	✓	✓	Black	2.5±0.11	1.019±0.0b8	✓
2	SPOILER-FR LH WH SHIELD	✓	JinRong	1	TPV	✓	✓	TBD	2.5±0.14	0.078±0.01b	✓
3	RIVET Φ4*11+GASKET Φ12*Φ5*0.8	EXT31021028	JinRong	3	✓	✓	✓	✓	✓	0.001	✓


BILL OF MATERIAL

	PART NAME	PART NUMBER	SUPPLIER PART NUMBER	QUANTITY	MATERIAL INFO: MATERIAL	MATERIAL INFO: GRADE	SURFACE FINISH		THICKNESS (mm) R	WEIGHT (kg) R	REMARKS
P	SHIELD-FR LH WHEEL HOUSE(BEV)	b384397b3R	JinRong	1	✓	✓	✓	3	1.1	BEV	
1	MAIN BODY	✓	JinRong	1	PP-PET 1200gsm	✓	✓	Black	2.5±0.11	1.019±0.0b8	✓
2	SPOILER-FR LH WH SHIELD	✓	JinRong	1	TPV	✓	✓	TBD	2.5±0.14	0.078±0.01b	✓
3	RIVET Φ4*11+GASKET Φ12*Φ5*0.8	EXT31021028	JinRong	3	✓	✓	✓	✓	✓	0.001	✓

1. GD&T EXPLANATION OF UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES:
GD&T BOTH THE GEOMETRIC FEATURES OF THE DESCRIBED COMPONENTS AND THE POSITIONS OF THE LOCATING REFERENCES ARE DEFINED BY BASIC DIMENSIONS.
ALL UNSPECIFIED GEOMETRIC DIMENSION TOLERANCES ARE DEFINED ACCORDING TO THE FOLLOWING REQUIREMENTS:
(1) ALL GEOMETRIC TOLERANCES ARE DEFINED ON THE DATUM: A | BM-D | C-E
(2) SURFACE PROFILE TOLERANCE: ⌓ 3.0 A BM-D C-E
(3) CONTOUR TOLERANCE OF TRIMMED SURFACE: ⌓ 3.0 A BM-D C-E
(4) POSITION TOLERANCE OF CIRCULAR HOLES: ⌖ Φ3.0M A BM-D C-E
(5) POSITION TOLERANCE OF NON-CIRCULAR HOLES: ⌖ 3.0M A BM-D C-E
(6) TOLERANCE OF THE HOLE DIAMETER FOR ALL UN NOTER HOLES/SLOTTED HOLES ±0.5
(7) FLATNESS TOLERANCE: ▱ 1.0

LOCATION		DESIGN SIZE	TOLERANCE	REF	PARTIAL REF	X	Y	Z	X	Y	Z
Protector-WAE	Gap	1.0	+1.0	A	A1			P	1284.12	-835.02	316.76
			-1.0		A2			P	1266.28	-697.84	315.64
	Flush	/	/		A3			S	1291.05	-577.11	312.32
			/		A4			S	1331.11	-506.23	301.43
Rear Door-Protector	Gap	0	+0.7		A5			S	1475.03	-421.7	281.78
			0		A6			S	1967.26	-425	277.11
	Flush	/	/		A7			S	2085	-425	268.9
			/		A8			S	2157.8	-729.75	287.03
					A9			S	1457.35	-902.24	810.89
					A10			S	1691.48	-902.49	896.6
					A11			S	2018.06	-904.21	771.47
				B	B		P		1507.28	-650.32	821.85
					B	P			1507.28	-650.32	821.85
				C	C		P		2040.72	-625.11	719.81
				D	D1	S			1293.74	-885	454
					D2	S			1326.91	-892.67	524.06
					D3	S			1382.29	-860.17	729.95
					D4	S			2121.17	-889.21	549.15
					D5	S			2130.99	-829.71	356.6
					D6	S			2122.88	-635.02	428.86
				E	E1		S		1531.52	-512.37	603.73
					E2		S		1924.1	-490.9	645.55

INDEX/DRAWING VERSION	DESCRIPTION	DATE
001	TG2 FREEZE	2026b10



NOTE 1 : GENERAL CONDITIONSS
COAR1.1 : FLAMMABILITY OF INTERIOR MATERIAL
COA41.2 : EXTERIOR NOISE
COA31.3 : WHEEL GUARD MUD GUARD
COA41.4 : RECYCLING END OF LIFE
COR1.5 : EXTERNAL PROTUSION

NOTE 2 : GENERAL INFORMATIONS
2.1 : ALL DIMENSIONS THAT ARE NOT ON THE DRAWING HAS TO BE TAKEN FROM THE CAD DATA.
2.2 : SEE 3D DIGITAL MODEL FOR UNFILLED DIMENSIONS; TRIM TOLERANCE +/-2MM.
2.3 : TOLERANCES OF MOUNTING HOLE SIZE ±1/0mm.
2.4 : THE UNSPECIFIED POSITIONAL ACCURACY IS SHOWN IN DRAWING.
2.5 : THE UNSPECIFIED CONTOUR DEGREE IS SHOWN IN DRAWING.
2.6 : SURFACE SHOULD BE SMOOTH ANG HAVE NO DEFECTS SUCH AS, SCRATCH, CRACK, SINK SMARK WHICH CAN DECREASE THE PARTS PERFORMANCE.
2.7 : ALL THE ILLUSTRATED PARTS ARE THE LEFT PARTS, THE RIGHT PART IS PERFECTLY SYMMENTRICAL TO IT.
2.8 : OTHER PERFORMANCE REQUIREMENTS CAN BE FOUND IN DVP.


NOTE 3 : BILL OF MATERIAL
3.1 : MATERIAL: PP+PET
3.2 : GENERAL THICKNESS: 3.5MM+0.5/-1MM
⚠ 3.3 : THICKNESS AT FIXING POINTS AND TRIM AREAS: 2mm +/-0.5mm

⚠ NOTE 4 : MARKING
4.1 : X1325_MARKING_REQUIREMENTS(PART IDENTIFICATION INFORMATION : PART NAME , MATERIAL INFORMATION, PART NUMBER, CLOCK(Month/year), DATE SHEET INFORMATION), SUBJECT TO THE ACTUAL ENGRAVED INFORMATION ON THE PRODUCT.
4.2 : MARKING TYPE : (MOLDING).
4.3 : DEFINITION
4.3.1 : RENAULT GROUP LOGOTYPE : THE MINIMUM OPTIMAL SIZE FOR "RENAULT GROUP" LOGOTYPE IS 10MM.
4.3.2 : RENAULT GROUP EMBLEM : THE OPTIMAL MINIMUM HEIGHT ALLOWED FOR THE EMBLEM IS 5MM.
4.3.3 : THE SUPPLIER'S PART NUMBER CANNOT APPEAR ON THE PART.
4.3.4 : THE USE OF ANY INFORMATION THAT CAN EASILY IDENTIFY THE SUPPLIER (E.G.QR CODE) MUST BE AVOIDED.
4.3.5 : THE MARKING MUST BE PERMANENT AND INDELIBLE.
4.3.6 : MARKING AREA: SEE DRAWING.


VEHICLE TYPE: RG4F1	CUSTOMER: AMPERE	SUPPLIER: JINRONG	
CONFIGURATION: EA2&EA3	PROJECTION	GT PRODUCT-DIMENSION STANDARD: SEE DRAWING	
DESIGN RESPONSIBILITY: ✓ ✓	GENERAL TOLERANCES: SEE DRAWING	MATERIAL/BLANK: PP-PET 1200gsm	
FIRST EDITION: ✓ ✓	SURFACE PROTECTION: ✓	PART NAME: SHIELD-FR LH WHEEL HOUSE(BEV)	SCALE: 1:4
CHECKED: ✓ ✓	PRINTING (calculated): 1.1/1.1		
STANDARD CHECKER: ✓ ✓	COMPANY: Shanghai Launch Automotive Technology Co.,Ltd.	PART NUMBER: b384397b3R b384243b6R	VERSION: 001 SHEET: 1/2 SIZE: A0
APPROVED: ✓ ✓			

SYMBOLE/SYMBOL: ES R

0 10 20 30 40 50 60 70 80 90 100mm

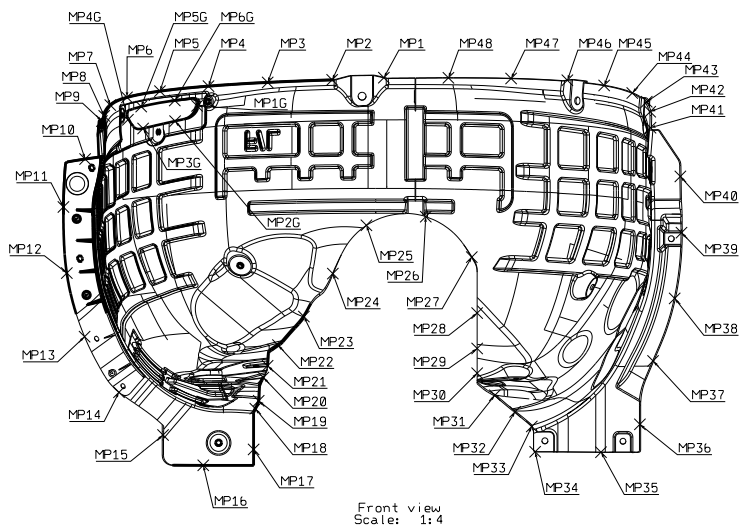


Front view
Scale: 1:4

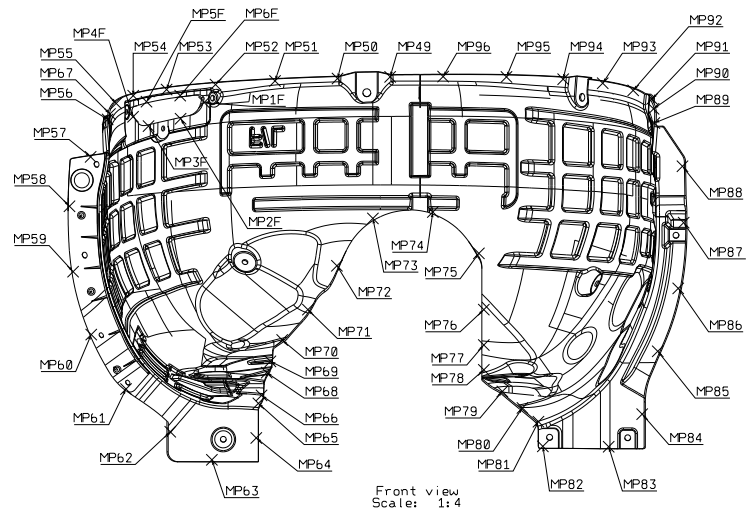

Front view
Scale: 1:4

SHIELD-FR LH WHEEL HOUSE(BEV)					SHIELD-FR LH WHEEL HOUSE(BEV)				
MEASURING POINT	COORDINATES				MEASURING POINT	COORDINATES			
	X	Y	Z	TOLERANCE		X	Y	Z	TOLERANCE
MP1F	1446.21	-895.08	790.01		MP1G	1442.52	-895.37	788.98	
MP2F	1410.57	-872.7	758.57		MP2G	1409.42	-874.38	759.13	
MP3F	1362.26	-866.1	695.28		MP3G	1361.15	-867.77	695.8	
MP4F	1338.83	-883.57	646.33		MP4G	1338.17	-884.24	648.21	
MP5F	1359.13	-903.4	689.88		MP5G	1358.26	-901.27	690.75	
MP6F	1410.03	-907.81	758.08		MP6G	1408.95	-905.61	758.68	
SHIELD-FR LH WHEEL HOUSE(BEV)					SHIELD-FR LH WHEEL HOUSE(BEV)				
MEASURING POINT	COORDINATES				MEASURING POINT	COORDINATES			
	X	Y	Z	TOLERANCE		X	Y	Z	TOLERANCE
MP49	1726.66	-928.09	873.31		MP1	1724.34	-931.79	878.19	
MP50	1647.36	-926.01	866.6		MP2	1646.36	-929.17	867.99	
MP51	1553.02	-923.83	845.35		MP3	1543.11	-926.9	845.61	
MP52	1463.33	-921.33	801.84		MP4	1459.81	-924.37	801.3	
MP53	1389.47	-918.49	735.06		MP5	1386.55	-921.48	733.85	
MP54	1339.12	-915.21	649.16		MP6	1336.85	-918.15	647.57	
MP55	1313.4	-910.38	552.86		MP7	1311.6	-913.18	551.16	
MP56	1300.6	-899.8	357.5		MP8	1302.48	-903.81	452.08	
MP57	1274.87	-846.27	312.93		MP9	1299.01	-902.69	355.76	
MP58	1242.93	-771.56	313.46		MP10	1273.67	-848.22	314.29	
MP59	1248.5	-672.87	310.71		MP11	1240.97	-775.55	317.38	
MP60	1275.86	-578.08	307.32		MP12	1246.04	-675.82	314.68	
MP61	1328.22	-496.51	296.51		MP13	1272.93	-579.87	311.07	
MP62	1394.98	-433.17	278.62		MP14	1324.8	-496.67	300.36	
MP63	1457.78	-390.97	275.33		MP15	1391.26	-433.47	279.88	
MP64	1524.79	-423.96	275.89		MP16	1451.88	-387.84	277.25	
MP65	1527.96	-472.37	331.18		MP17	1527.86	-411.85	277.14	
MP6b	1532.73	-477.45	430.93		MP18	1530.39	-470.41	321.31	
MP6?	1304.06	-901.24	453.79		MP19	1535.48	-475.27	421.05	
MP68	1540.49	-506	515.36		MP20	1542.59	-504.25	509.34	
MP69	1546.11	-516.15	614.19		MP21	1548.99	-515.16	608.05	
MP70	1563.88	-542.05	705.68		MP22	1564.53	-540	700.02	
MP71	1602.62	-582.08	788.47		MP23	1603.64	-577.29	783.9	
MP72	1646.43	-644.05	851.68		MP24	1647.31	-637.67	848.67	
MP73	1700.71	-712.73	892.78		MP25	1698.03	-707.56	893.23	
MP74	1791.09	-722.73	888.33		MP26	1787.46	-720.72	891.89	
MP75	1860.63	-662.54	855.39		MP27	1856.91	-661.96	857.93	
MP76	1868.02	-581.16	801.87		MP28	1865.02	-581.12	804.13	
MP77	1868	-533.79	714.22		MP29	1865.02	-533.68	716.52	
MP78	1867.94	-502.94	619.11		MP30	1865.02	-503.01	621.35	
MP79	1895.91	-476.51	530.49		MP31	1891.7	-475.89	532.5	
MP80	1926.25	-458.07	437.05		MP32	1922.3	-457.28	439.2	
MP81	1950.48	-443.99	341.79		MP33	1947.51	-441.93	344.36	
MP82	1957.05	-411.44	274.65		MP34	1952.52	-408.36	275.91	
MP83	2056.38	-411.44	265.42		MP35	2051.85	-408.3	266.85	
MP84	2106.86	-460.69	265.41		MP36	2110.6	-450.51	266.43	
MP85	2130.43	-555.2	273.28		MP37	2130.44	-545.77	274.15	
MP86	2161.25	-649.87	279.35		MP38	2163.02	-639.92	279.66	
MP87	2169.48	-748.78	284.6		MP39	2173.29	-738.79	286.18	
MP88	2167.65	-832.12	312.16		MP40	2171.54	-822.04	311.95	
MP89	2125.28	-895.45	342.13		MP41	2126.54	-894.42	329.52	
MP90	2124.07	-909.92	440.73		MP42	2126.06	-911.86	427.52	
MP91	2121.85	-918.06	538.73		MP43	2120.82	-919.98	526.49	
MP92	2093.28	-924.47	631.4		MP44	2099.04	-926.73	618.96	
MP93	2047.33	-929.13	719.69		MP45	2056.58	-931.8	708.99	
MP94	1987.69	-930.83	782.17		MP46	2001.12	-934.73	780.29	
MP95	1902.26	-930.7	833.56		MP47	1916.28	-934.01	828.82	
MP9b	1806.7	-929.27	862.25		MP48	1821.77	-932.72	860.77	



VEHICLE TYPE: RG4F1	CUSTOMER: AMPERE	SUPPLIER: JINRONG			
CONFIGURATION: EA2&EA3	PROJECTION	SF PRODUCT/DIMENSION STANDARD: SEE DRAWING			
DESIGN RESPONSIBILITY	GENERAL TOLERANCES: SEE DRAWING	MATERIAL/BLANK: PP-PET 1200gsm			
FIRST EDITION	SURFACE PROTECTION: /	PART NAME: SHIELD-FR LH WHEEL HOUSE(BEV)	SCALE: 1:4		
CHECKED	PROE版本 Version: 1.1/1.1				
STANDARD CHECKER	COMPANY: Shanghai Launch Automotive Technology Co.,Ltd.	PART NUMBER: b3843976JR b3842436bR	VERSION: 001	SHEET: 2/2	SIZE: A0
APPROVED					

SYMBOLE/SYMBOL: ISO