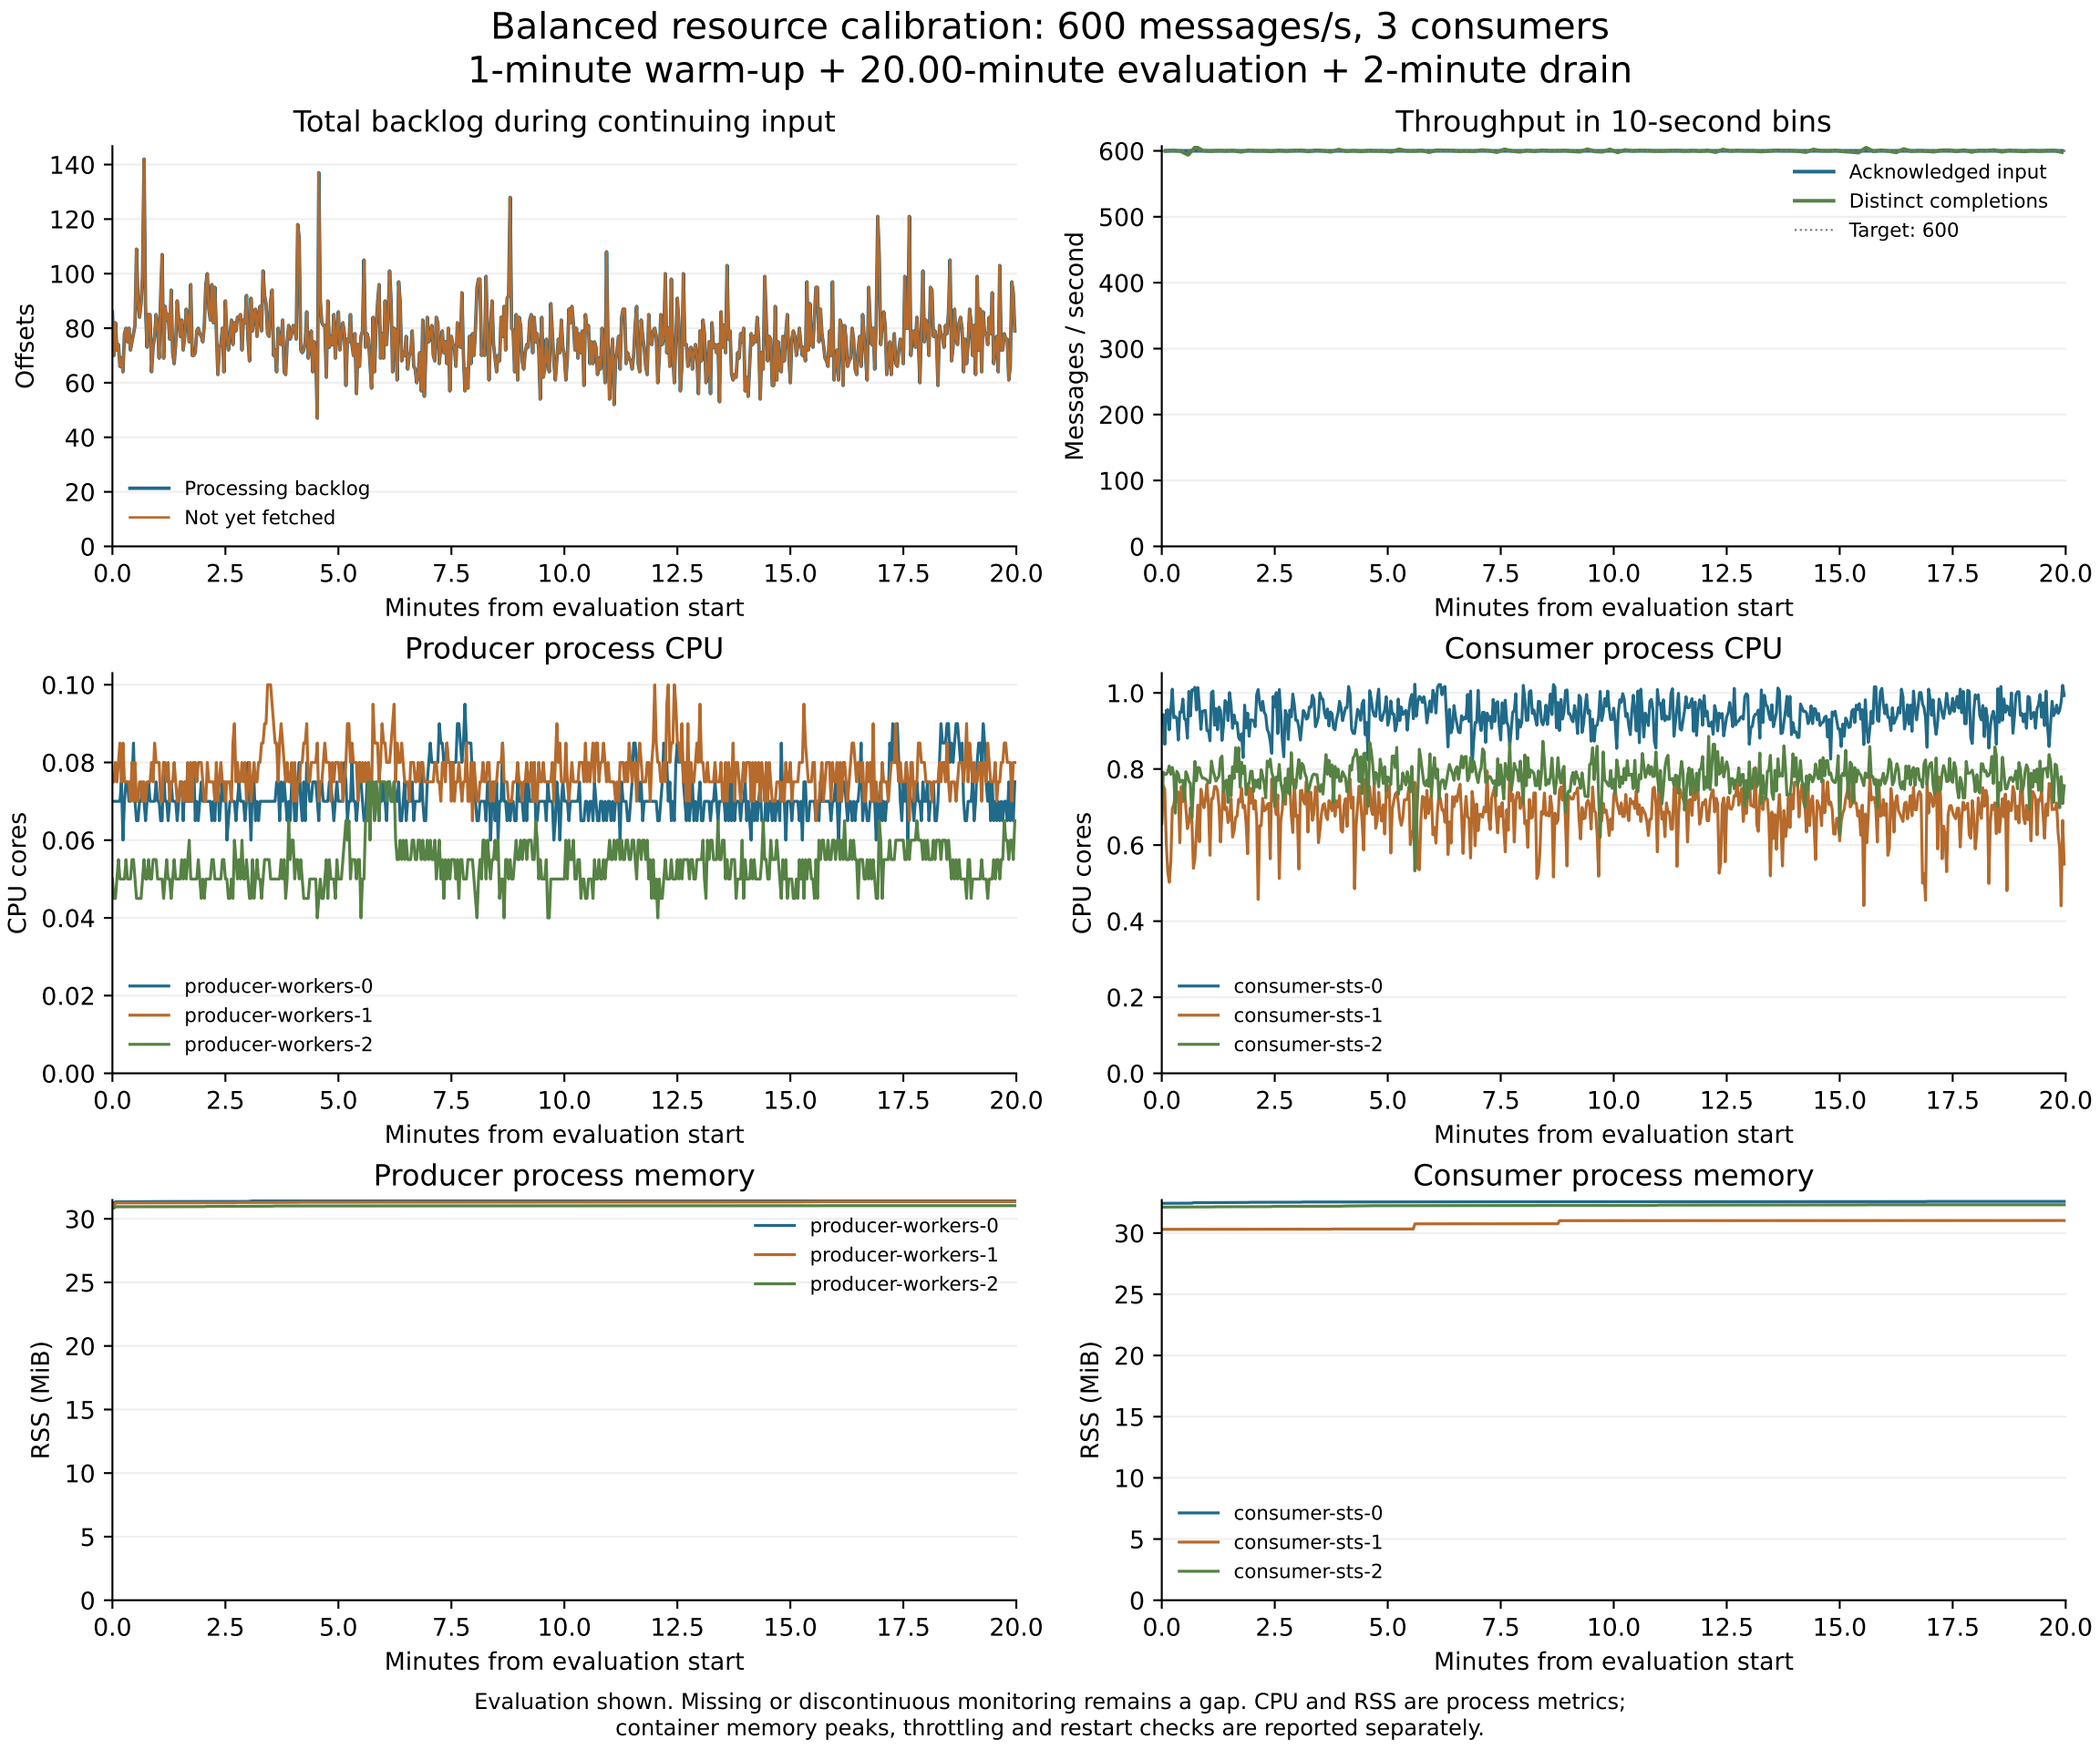
Balanced resource calibration: 600 messages/s, 3 consumers
1-minute warm-up + 20.00-minute evaluation + 2-minute drain
Total backlog during continuing input
Offsets
Processing backlog
Not yet fetched
Minutes from evaluation start
Throughput in 10-second bins
Messages / second
Acknowledged input
Distinct completions
Target: 600
Minutes from evaluation start
Producer process CPU
CPU cores
producer-workers-0
producer-workers-1
producer-workers-2
Minutes from evaluation start
Consumer process CPU
CPU cores
consumer-sts-0
consumer-sts-1
consumer-sts-2
Minutes from evaluation start
Producer process memory
RSS (MiB)
producer-workers-0
producer-workers-1
producer-workers-2
Minutes from evaluation start
Consumer process memory
RSS (MiB)
consumer-sts-0
consumer-sts-1
consumer-sts-2
Minutes from evaluation start
Evaluation shown. Missing or discontinuous monitoring remains a gap. CPU and RSS are process metrics;
container memory peaks, throttling and restart checks are reported separately.