



Round Neck Upside-Down Raglan Pullovers For Everyone

REVISED EDITION

SIMPLE AND EASY DIAGRAM AND WRITTEN INSTRUCTIONS
FOR BEAUTIFUL RAGLAN PULLOVERS FOR ALL THE FAMILY
AND FRIENDS - KNIT FROM THE NECK DOWN.

"They are fast!"

By: Jodie Raymond
P.O. Box 8631
Jacksonville, Fl., 32211
904-642-7148

COPYRIGHT: © September, 1980, by Jodie Raymond. Revised in August, 1985, by Jodie Raymond. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the author.

Library of Congress Catalog No.: TX 570-750

First Printing, September, 1980.
Second Printing, January, 1981.
Third Printing, September, 1981.
Fourth Printing, January, 1982.
Fifth Printing, August, 1982.
Sixth Printing, January, 1983.
Seventh Printing, October, 1983.
Eighth Printing, January, 1984.
Ninth Printing, October, 1984.
Tenth Printing, February, 1985.

Library of Congress Catalog No.: TX 1 754 369

Revised Edition, August, 1985.
Tenth Printing, January, 1992.

ISBN: 0-939669-01-3

The patterns and instructions have been carefully written and are believed to be clear, complete and accurate. Any misunderstandings, or adaptations, are solely the responsibility of the owner of the book.

PREFACE

When this book was first published, it was thought that the entire family had been taken care of with the sizes that were included. Wrong! How could I have forgotten our toddlers and infants? Please excuse me. This revision is to remedy this terrible oversight. While no changes have been made in the original sizes, this book does contain a very small pattern as a practice garment. This knits very quickly and uses just a small amount of yarn. Then we included directions for the infant, six months old, one year old, and two year old toddler sizes - thus making our pattern book a much more complete work. Of course, these smaller patterns can be used to outfit many of the popular dolls. Also, there is the trick of first obtaining the required stitch gauge - 8 sts. x 11 rows = 1" - and then, by changing the tension one or two dots tighter or looser, the same pattern will make a little smaller, or larger sweater. One full tension difference usually makes one complete size change.

Because it is so hard to get the baby's head into a neckband that will fit nicely when on, it is recommended the neckline seam not be seamed. Close the opening by crocheting an edge around the seamline and fastening with either small buttons or velcro. If seaming, please rib very loosely and test the ribbing over the head before completing the sweater.

Since I am revising this, it is time to comply with another wish of many knitters. When this book was written, I didn't know a machine bind-off that I really liked. Thus, the instructions of scrapping off the ends of the garment and kitchenering the ribbing onto the sweater after it was removed from the machine. Soon after printing, Fred and Frances Stafford showed me their bind-off. It was great, and they graciously allowed me to print it in the next book - "The V-Neck Upside-Down Raglan Sweater" Book. It definitely should be included here, and now you have it in both books.

One other change has been made in all patterns. When knitting the small triangles of short rows at the beginning of the front neckline, start on the LEFT side first - complete the short rowing to the center - then turn your row counter back to zero and complete the RIGHT triangle. This will keep your row counter correct. These directions have been altered for your convenience.

By the way, we have new photographs, too. Hopefully, they display the sweaters to better advantage.

Thanks for your many nice comments and interesting letters regarding this, and other books, I have written. Your acceptance and support of them are most gratifying to me. Will be looking forward to seeing, and working with, you at another seminar in the near future.

The best always,

Jodie

FORWARD

In 1980 "THE UPSIDE-DOWN RAGLAN PULLOVER" book was finally completed. Now, in 1985, here is the revised edition of the same book for greater enjoyment. It is called "THE ROUND NECK UPSIDE-DOWN RAGLAN PULLOVERS FOR EVERYONE" - Revised Edition. It is hoped you will like this even more.

In this book I have attempted to share with you the way so many of my sweaters were knitted and assembled. There really isn't a more comfortable and versatile sweater to be found. So, I finally settled down and worked out diagram patterns and written instructions for all the family. Sure didn't want to leave anyone out - they will all want several.

Please allow your imagination to take over with these patterns. In addition to the classic sport pullover we all love, try a dressy look raglan. They are beautiful. Make it lacy, plain, dressy, sporty, short sleeve, long sleeve, crew neck, mock turtleneck, or the regular turtleneck. Also, add a skirt to the bottom of one of these raglans, and you will have one of those ever so popular sweater dresses. The pattern for this skirt is in the "Let's Knit Some Skirts" book of mine. This would be an original you will be so proud to wear and certainly enjoy.

And, for the children in your life, the raglan cannot be outdone. The shaping of the raglan allows the sweater to "grow" with the children's ever changing shapes. The sweater can be worn and enjoyed for a much longer time. Another quality of this super sweater is it's life-saver ability. Often one needs, or wants, to make a gift for someone and has no accurate measurements. With no shoulder seams to worry about, this pattern will mold to fit many garden variety shapes. You can relax a bit and enjoy your knitting.

One might say, "Why do this upside down?" IT'S EASIER! The sweater is knit all in one piece. You are able to knit patterns of fairisle, lace, plaiting, or tuck without the aggravation or hinderance of needles in the Hold (E) position as you shape the raglan armhole.

I hope you have an enjoyable time with this book. I have had a ball putting it together. One thing in closing, CAUTION! These sweaters can be addictive.

Happy knitting,





DEDICATION

Jodie

My family knows I could never do this without their love, help, humor, and support. I love them all for their patience with me. I want to dedicate this book to my mother, Martha Harkins. Never will be able to thank her enough for putting that first knitting needle and crochet hook in my hands. The "handwork" she taught me as a child has been an enjoyment and comfort in my life that money could never buy. This has brought me to this happy time and place. But, Mom, I still can't tat like you.

Thanks a million, Mom.

Jodie

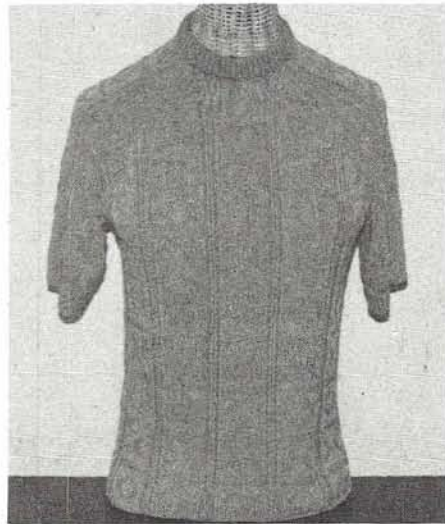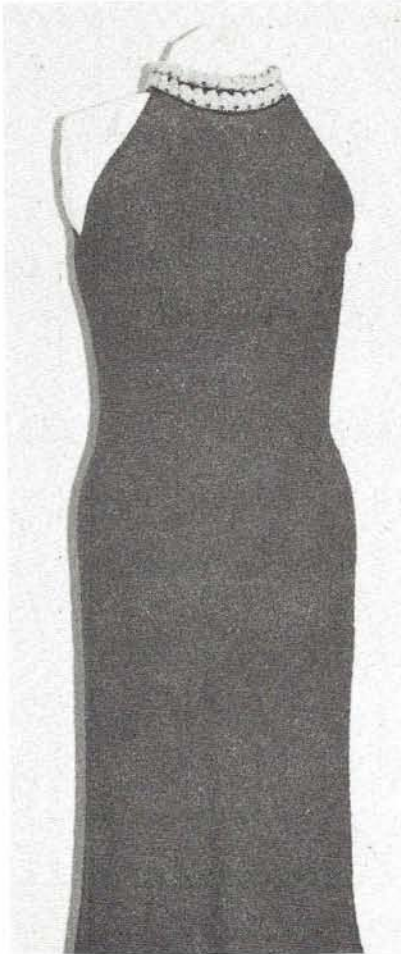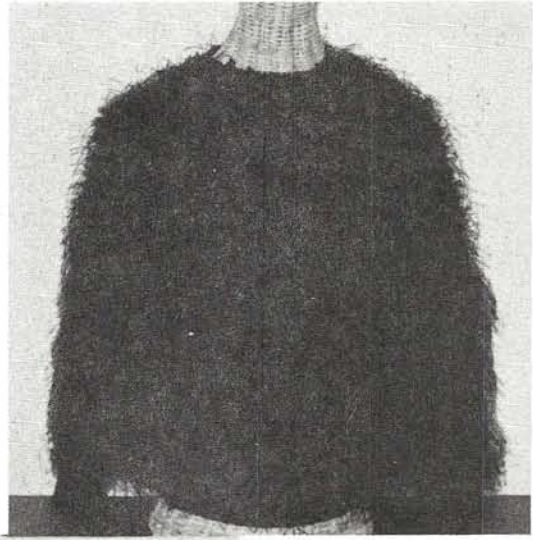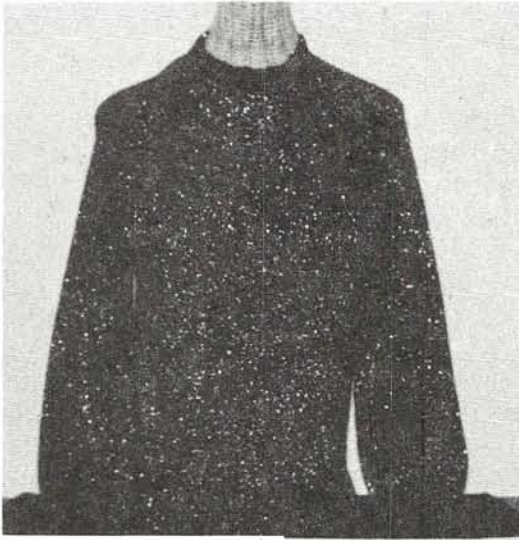

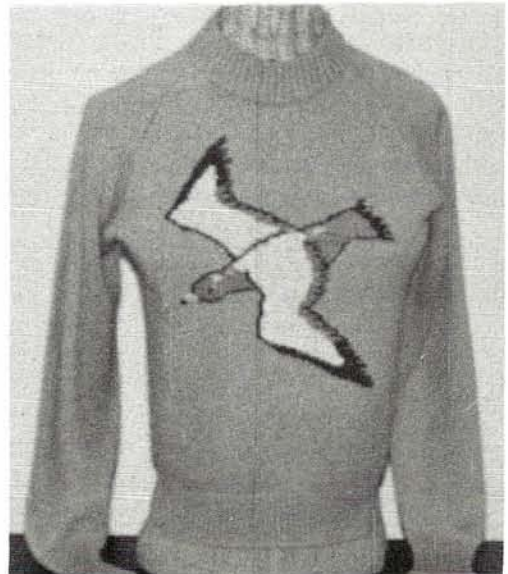
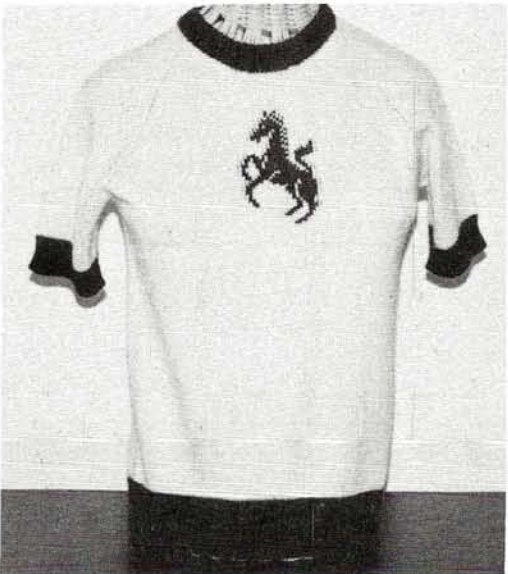
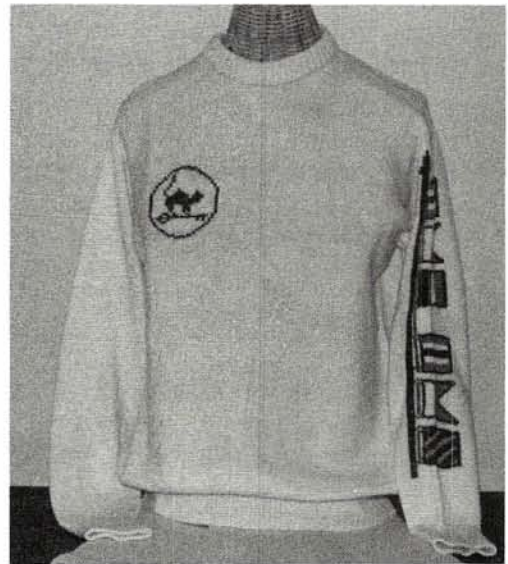
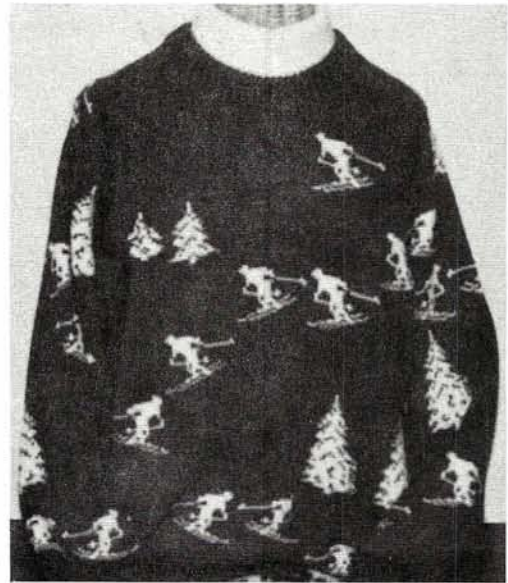


TABLE OF CONTENTS

Title Page	
Copyright	i.
Preface	ii.
Forward	1.
Dedication	1.
Pictures	2.
Table of Contents	4.
Abbreviations and Terminology	5.
Measurement Chart	6.
Random Thoughts and Suggestions	8.
Short Row Refresher	8.
Stitch Gauge	9.
Deciding the Size	9.
Pattern Placement	11.
Necklines	11.
Single Crewneck	11.
Neck Band Scrap Off	12.
Transferring Stitches By Garter Bar	12.
Double Crewneck	13.
Turtleneck - Close Fitting	13.
Mock Rib Neckband	13.
Enlarging Neckband	14.
Turtleneck - Loose Fitting	14.
Blocking and Assembly	15.
Ribbing Finish	16.
Mock Rib Finish	16.
Stafford Ribber Cast-on	17.
Stafford Ribber Bind Off	18.
Upside-Down Round Neck Diagram - Practice and Infant ..	20.
Upside-Down Round Neck Written Instructions for above .	21.
Babies Diagram - Six Months, One Year, Two Years	24.
Babies Written Instructions for above	25.
Children's Diagram - Size 4,(6,8)	28.
Children's Written Instructions - Size 4,(6,8)	29.
Children's Diagram - Size 10,(12,14)	32.
Children's Written Instructions - Size 10,(12,14)	33.
Ladies' Diagram - Size 8,(10,12)	36.
Ladies' Written Instructions - Size 8,(10,12)	37.
Ladies' Diagram - Size 14,(16,18)	40.
Ladies' Written Instructions - Size 14,(16,18)	41.
Men's Diagram - Size 34,(36,38,40)	44.
Men's Written Instructions - Size 34,(36,38,40)	45.
Men's Diagram - Size 42,(44,46)	48.
Men's Written Instructions - Size 42,(44,46)	49.

ABBREVIATIONS AND TERMINOLOGY

oz.	- ounce	ozs.	- ounces
st.	- stitch	sts.	- stitches
ndl.	- needle	ndls.	- needles
dec.	- decrease	inc.	- increase
cont.	- continue	0	- zero
R.	- row number	R.C.	- row counter
C.O.	- cast-on	S/R	- short row
Even	- same number of rows or stitches	Leading	- button on cam nearest to fabric
E.O.N.	- every other needle	E.O.R	- every other row
(A)	- out of work position	(B)	- work position
(C or D)	- needle selector pos.	(E)	- hold or partial knitting position

Armhole Slant - measure of the short rows only.

Armhole Depth - Total length of armhole at raglan slant.

All patterns are written: STITCHES - ROWS - TIMES. Both written and diagram instructions are included in this book.

These patterns can be used on most all makes of machines. The "Empty" buttons of the Toyota are the same as the "Part" buttons of the Brother and Knitking machines, or the "Slip" buttons of the Studio and Singer machines. The "Partial Knitting" buttons are the "Hold" or "I" buttons on the Toyota; the "Hold" or "II" buttons on the Brother and Knitking; or the "Russell Levers" for the Studio and Singer machines. For these, and other brands, just use the terminology that fits your particular brand of knitting machine.

Anytime you see an "0" in your particular size, it tells you that you do not use any of that operation. Move on to the next operation. Example: Dec. 1-2-6,(0,13). This means to decrease one stitch on both sides of your knitting, every other row - six times for the small size, NO times for the middle size, and thirteen times for the large size. When you have completed the above, you would have decreased your knitting by 12 stitches, or no stitches, or 26 stitches, according to the size you were using.

If you see only one set of figures on your diagram, this direction applies to all sizes of the pattern. Example 1-3-1 or 1-1-4.

In the "Random Thoughts and Suggestions" section of this, and my other books, many helpful hints and techniques are discussed to help you along with your knitting.

Other publications of mine that you might enjoy are:

"Jodie's Favorite Demonstrations - Volume One" Book

"A Shirt For All Seasons" Book

"Let's Knit Some Blouses" Book

"Let's Knit Some Skirts" Book

"V-Neck Upside-Down Raglan Sweater" Book

"Signature Hats and Caps" Book

MEASUREMENT CHART

These garments have been charted for the following FINISHED MEASUREMENTS. Raglan measurements are slightly different than usual measurements. The armholes are slanted, thus longer. This will make the underarm seams on both the body and sleeves shorter than usual. Block to dimensions on the diagrams for the particular size you are knitting. Having an accurate swatch with correct stitch gauge and tension is absolutely essential for these sweaters to come out to size stated.

The measurements under "Inc. S/R" figures on the diagrams are the short rowed inches. The sleeve blocking measurements are located on the left of sleeve slant. Length of the body and sleeves on the diagrams to underarms DO NOT INCLUDE RIBBING.

TINY RAGLAN PULLOVERS

<u>SIZE</u>	<u>Practice</u>	<u>Infant</u>	<u>Six Mos.</u>	<u>One Yr.</u>	<u>Two Yr.</u>
Chest	16"	18"	20"	21"	22"
Back of neck	3"	3-1/2"	3-3/4"	4"	4"
Wrist	4"	5-1/4"	5-3/4"	6"	6-1/2"
Sleeve width U/A	6"	7-1/2"	8-1/4"	8-1/2"	9"
Armhole Depth	3-1/2"	4"	4-1/2"	5"	5-1/4"
Length to U/A	3-1/2"	4-1/2"	5"	6"	7"
Sleeve to U/A	3-1/2"	5"	5-1/2"	6-1/2"	7-1/2"

CHILDREN'S RAGLAN PULLOVER

<u>SIZE</u>	<u>4</u>	<u>6</u>	<u>8</u>	<u>10</u>	<u>12</u>	<u>14</u>
Chest	23"	24"	26"	28"	30"	32"
Back of neck	4-1/4"	4-1/4"	4-1/4"	4-1/4"	4-1/2"	4-1/2"
Wrist	7"	7"	7-1/2"	7-1/2"	8"	8"
Sleeve width U/A	9-1/4"	10"	10-3/4"	12"	13-3/4"	14"
Armhole Depth	5"	6"	6-1/2"	6-1/2"	7-1/2"	8"
Length to U/A	8"	8-1/2"	9-1/2"	11"	12"	13"
Sleeve to U/A	8-1/2"	9"	9-1/2"	12"	13"	14"

LADIES' RAGLAN PULLOVER

<u>SIZE</u>	<u>8</u>	<u>10</u>	<u>12</u>	<u>14</u>	<u>16</u>	<u>18</u>
Bust (actual)	30"	32"	34"	36"	38"	40"
	(2" added to patterns for ease).					
Back of neck	4-3/4"	5"	5-1/4"	5-1/2"	5-1/2"	5-1/2"
Wrist	7-1/2"	8"	8-1/2"	8-1/2"	9"	9"
Sleeve width U/A	13-1/2"	14"	15"	15-1/2"	16-1/2"	17-1/2"
Armhole Depth	8"	8-1/2"	9"	9-1/2"	10"	10-3/4"
Length to U/A	12"	13"	14"	15"	16"	17"
Sleeve to U/A	15"	16"	17"	16"	17"	18"

GENTLEMEN'S RAGLAN PULLOVER

<u>SIZE</u>	<u>34</u>	<u>36</u>	<u>38</u>	<u>40</u>
Chest (actual)	34"	36"	38"	40"
	(1" to 2" added to pattern for ease).			
Back of neck	5-1/2"	5-1/2"	6"	6"
Wrist	8-1/2"	9"	9"	9-1/2"
Sleeve width U/A	15-1/4"	16"	16-1/4"	17"
Armhole Depth	9"	9-1/4"	9-1/2"	10"
Length to U/A	15"	16"	17"	18"
Sleeve to U/A	17"	18"	19"	20"

GENTLEMEN'S RAGLAN PULLOVER

<u>SIZE</u>	<u>42</u>	<u>44</u>	<u>46</u>
Chest (actual)	42"	44"	46"
	(1" to 2" added to pattern for ease).		
Back of neck	6"	6"	6"
Wrist	9-1/2"	10"	10"
Sleeve width U/A	18"	18-1/2"	19"
Armhole Depth	10-3/4"	11-1/2"	12-1/2"
Length to U/A	16"	17"	18"
Sleeve to U/A	19"	20"	21"

RANDOM THOUGHTS AND SUGGESTIONS

These sweaters have been knit in yarns of many kinds. The children's size 4 required about 5 ozs. of most of them. The size 8 children's sweater needed approximately 7 ozs. of Trenzado, Batallo, Sparkle 2/10, and Spungee 2/12. If you use two colors or more, it is a great way to use those ends of cones we all have. The ladies' size 34 took about 11 ozs. of the same yarns, while the men's size 40 took approximately 16 ozs. So, I would count on 14 to 20 ozs. for an adult size sweater.

ALL THESE PATTERNS ARE WRITTEN STITCHES - ROWS - TIMES !!!!!

In my patterns this appears as 1-4-6 or 1-2-2,(0,2), etc. The first set of numbers would read: One stitch, every fourth row, six times for all sizes. The second set of numbers would read: one stitch, every-other-row, two times for the first given size - no times for the next given size - and two times for the next given size. In other words, if there is an "0" in the directions of your size, you do not knit any of that; move on to the next set of instructions. This is the best way I have found to get several sizes on one sheet of paper. Most of the time you will be doing the increasing or decreasing on both sides of the fabric on the appropriate rows.

This book contains diagram and written instructions for making all these raglans. If you have not tried knitting from a diagram, you may find after you use it for awhile that it is a tremendous way to follow your pattern. You only need an occasional glance at your diagram to see what will be coming up next. The patterns are read from the bottom to the top of the diagrams, except for the sleeves - which is knitted from the top of the sleeve to the wrist. That is why the patterns in this book are upside-down. Also, I prefer to knit things all in one piece, if possible. Let the machine do as much work for me as it will. To do this, most of my open stitches are held on scrap yarn. I very seldom bind off stitches. Therefore, most all shaping of these sweaters is accomplished with short rowing - decreasing and increasing.

SHORT ROWING REFRESHER

DECREASING: With carriage on right and partial knit buttons on (Hold, I, II, or Russell Levers), pull one less stitch than desired decrease into Hold (E) position on left side. Knit across. Pull 1 stitch next to ones already in (E) position to Hold (E) position also. Pull one less stitch than desired decrease on right hand side out to Hold (E) position. Knit across. Pull 1 stitch next to those already in (E) position on right to Hold (E) position also. Continue in this fashion, working on one side of bed and then the other, until required number of needles are in Hold (E) position.

INCREASING: Using the stitches in Hold (E) position, push 1 more stitch than required to Needle Selector (C or D) position on left. Knit across. Then pull last knitted stitch next to the needles in Hold (E) position back out into Hold (E) position. This forms a wrap stitch as you are knitting back across the row around this last needle pulled out and prevents a hole from forming next to the stitch. Repeat this complete operation on the other side of the bed. Then alternate sides of bed with these directions until all stitches in Hold (E) position have been returned to the Work (B) position.

STITCH GAUGE

THIS IS THE MOST IMPORTANT STEP IN KNITTING. ALL THESE PATTERNS HAVE BEEN WRITTEN IN A STITCH GAUGE OF:

8 stitches x 11 rows = 1".

IF YOU TRY AND KNIT THESE PATTERNS WITH A STITCH GAUGE OTHER THAN THE ABOVE - ALL BETS ARE OFF AS TO THE SIZE YOU WILL HAVE WHEN THE SWEATER IS FINISHED. THE SIZING IS ONLY VALID WHEN YOU HAVE AN ACCURATE STITCH GAUGE AND KNOW EXACTLY WHAT TENSION TO USE ON THE SPECIFIC DYE LOT OF THE YARN YOU HAVE CHOSEN.

I have found that it is best to make my swatch, tube it, steam it, etc., and then let it rest overnight. The next day I check it to see if it is the same as it was before. Saves many headaches to know that one has a secure gauge. I always feel more confident my sweater will fit the size I'm trying to make, when I have an accurate and true stitch gauge. Don't skip making your gauge. And, remember, you must make a stitch gauge for every different dye lot of the same color yarn. Don't ever take for granted that you can always knit a certain brand of yarn at the same tension. The dye colors make the same yarns knit up differently.

If you have several different yarns you know you will be working on soon, take a morning out and make all your stitch gauges at one time. The next opportunity you have to knit, your gauge will be ready. That's nice.

DECIDING THE SIZE TO MAKE

Remember, a raglan armhole is usually 1" to 2" deeper than a normal set-in sleeve armhole. So, please take this into consideration when deciding which size you want to make. It will affect the length of the body of the sweater and the sleeves,

The chest or bust measurements are really your most important guides. In these patterns, 1" to 2" has been added to the chest or bust size for ease. Check the measurements under the stitches of front and back on the diagrams to see how much allowance is in your particular size.

Next is the armhole depth size. To measure the depth,

start a tape at the highest point of the shoulder at the base of the neck - bring the tape over the shoulder point and down the outside of the arm to an imaginary line even with a pencil which is held between the arm and the chest at the armhole. This will give you the length of the armhole depth. Check the measurement chart and decide which size comes nearer the measurements you have taken. Notice on the diagram patterns, there are two different measurements on the armhole depth. The measurement directly under the short rowing operation is the specific inches for the short row work. There are extra stitches "e" casted-on at the end of the short rowing. They add length (or width) to this section. This measurement is shown on the left by itself. This is the blocking measurement to be used. Before removing the pencil from the underarm, measure from pencil down to where you wish the ribbing to begin at the waist and around the elbow to where you wish to start the ribbing for the cuff of the sleeve.

These patterns are knit straight down from the chest or bust measurement. If you want a bust dart, it should be placed approximately 2" to 3" below armhole. Also, you can taper the body of the sweater by decreasing evenly on both sides after the armhole. Be sure when seaming tapered pieces together, to match the decreases and increases. It gives the garment a much more expensive finish. We try for perfection, even though we fall short now and then. It is better than it would have been.

For growing children, the length of time a raglan may be worn can be extended by making longer than usual cuffs. They can be doubled over and then turned down as time goes by. In planning your sweater, take into consideration the wear and tear your garment will have to stand. If you are making this as a gift, or a special item, then take the extra time to make the best possible finished garment you are able to knit. But, if this sweater is for a young child that will shortly out-grow it, (and particularly if there is no one to pass it along down the line), I would be tempted to do the faster Mock Rib, for the cuffs and bottoms. I have found out that I didn't fuss nearly as much when one of my sweaters was ripped in a football game, or an elbow come up missing because of a fall while skating, if I had planned ahead on the possibility of such catastrophies - Heaven forbid!!

Notice on these diagrams there are several different lengths that can be used interchangeably on the body and sleeves of the sweaters. Use them to fit your needs. Be sure to write what you use, or change, on another piece of paper. This serves two purposes. If it is a fantastic fit, then you have special notes for this super pattern. Now you can make several more sweaters for the same person without a worry in the world! That is, providing they don't change shape. If there is something you would like to change the next time you knit this pattern, it will be an easy chore since you know what you didn't like because of the way the first one worked out.

NEVER erase a bad pattern. Write the corrections, or

changes you want to make, on the pattern paper with a different color pen or pencil. In this way, one won't have to tax the brain trying to remember, or figure out, what in the world we did, or didn't do. Your pattern files will grow over the years with some really marvelous fitting patterns that you will use over and over again.

PATTERN PLACEMENT

Some liberties of one or two stitches, or rows, have been taken with these diagrams in order to accommodate automatic pattern cards. These sweaters have been designed to use the 12-wide automatic punch card patterns. On some, the designs will come out with an even number of full repeats. To center this on a Toyota #747 or #858, set your zigzag control on #1. If there is an uneven number of full repeats, set your zigzag control on #7, for centering. Two seaming stitches have been allowed in all patterns.

On some sizes, the dimensions turn out with half of a repeat, plus the two seaming stitches. In this case, you must set your zigzag control on #3 for one side (ex. - back), and then set your zigzag on #9 for the other side to be seamed to it (ex. - front). When these are sewn together, the seam will form another perfect pattern.

Remember, ALWAYS KEEP THE FIRST AND LAST STITCHES ON ALL PIECES MADE WITH TWO COLOR WORK IN MAIN GARMENT COLOR. If the automatic pattern selector moves the end needles out for color work, move them by hand back to the Work (B) position before knitting across that row.

Some sizes work out alright for the 24 wide automatic punch card machines. You must divide the chest, or bust, measurements on your diagram by 24. Don't forget to add the two seaming stitches on each piece. If there is no way of this working out well, try centering a design and using only a few of the repeats. Just push the needles programmed that will not make a complete pattern, back to the work (B) position - by hand - before you knit across. Also, many 24 wide pattern cards are only 12 wide patterns - twice on a card. They will work out just fine. Give it some thought and, it is not really very hard to figure out how to use many of the beautiful patterns available.

NECKLINES

You have decided the size sweater that you are going to make, the yarn you want to use, the pattern card of your choice, and have knit your stitch gauge swatch in the same pattern you want for your sweater. Now it is time to decide on the neckline. There are several options. Naturally, your cuffs and bottom edges usually match.

SINGLE CREWNECK: This is good for little children's sweaters as it has the least bulk under their chins. Also, many people who have short necks look better with this type collar. Then too, it is great for those persons who do not

like the feel of a lot of yarn up around their necks. It is cooler.

Using your ribber manual, cast-on the ribbing of your choice - 1x1; 2x1; 2x2, etc. - over the amount of needles required in your pattern for neckband - (see diagram). Rib for 12 rows, using the tension described in your manual - usually around 2.0 for the yarns mentioned. Transfer your ribber stitches up to the main bed. Knit one row across all these stitches with main garment yarn at main garment tension. Break yarn. Carriage is now on left. Scrap this neckband off in four sections. (See example below).

Example of Neckband Section Scrap Off

16 sts. - shoulder; 34 sts. - front; 16 sts. - shoulder; and 34 sts. - back. (Use the number of sts. in diagram for your particular sweater.) The front must be in middle in order that your seam will be toward the back of your sweater.

Pull all stitches except the first 16 sts. on left into Hold (E) position. Put on partial knit buttons (Hold, I, II, or Russell Levers). With scrap yarn, knit 8 rows over these first 16 sts. Break scrap yarn. Run the empty carriage across these 16 sts. to remove them from the machine. Push these 16 empty needles back to the Out-of-work (A) position. * Carriage is now on the left. Push in the next 34 sts. to Needle Selector (C or D) position. With scrap yarn, knit 8 rows across these sts. Break yarn and remove these 34 sts. from machine. Return these emptied needles to Out-of-work (A) position.* Repeat above directions between the *'s for the next 16 sts. The next and remaining 34 sts. are for the back of the sweater, and can be scrapped off as above and rehung on the center ndls; or transferred to the center of the bed with your garter bar. These sts. will be used first.

TRANSFERRING STITCHES BY GARTER BAR

Place garter bar eyes into the hooks of needles of the stitches to be moved. (These needles should be in the Hold (E) position.) Holding the garter bar firmly in the left hand, pull all 34 sts. onto the garter bar with the right hand tugging at the fabric already knitted. You must keep moving across in the same direction once you have started. If you try to pull from the other side, the stitches will get caught in the hooks of the needles. Push these emptied needles to Out-of-work (A) position. Moving to the center of your bed, pull out the same number of ndls. right and left of zero as in the back of band, to Hold (E) position. Open all latches. Put eyes of the garter bar on these needle hooks. Pull sts. onto selected needles ONLY INTO THE HOOKS OF THE NEEDLES - NOT ALL THE WAY BACK TO THE NEEDLE BED.

Using the straight edge of the garter bar, place it up against the needle butts. Push back and move all needles into Work (B) position at one time. Check to see that you didn't drop any stitches. You are now ready to start the

back of the sweater.

DOUBLE CREWNECK: Using the directions for the "Single Crewneck", rib 20 to 24 rows for children's sizes; 24 to 30 rows for adult sizes. **Transfer all ribber stitches up to the main bed. Drop your ribber bed and remove the ribber comb and weights from the edge of your ribbing. Fold the bottom edge up and hang the ribbing edge on every other corresponding needle. Set the main bed carriage two full tensions looser than garment tension. Knit one row across all stitches to enclose your neckband. This will reduce the doubled stitches from hanging the ribbed edge, down to a single stitch on each needle. We do this loosely so that it will slip over the head. Break yarn. Scrap this piece off into four sections as per the instructions above (Neckband Section Scrap Off).** Don't forget to use the number of stitches for your particular pattern - not always the stitches in the example.

TURTLENECK - CLOSE FITTING: Using the same directions above for "Doubled Crewneck", rib 80 rows - changing tensions on both the ribber carriage and the main carriage:

Tension	3.0	Rows	1	thru	20.
"	2.2	"	21	"	40.
"	2.1	"	41	"	50.
"	2.2	"	51	"	60.
"	3.0	"	61	"	80.

Upon completion, enclose, using directions from "Doubled Crewneck" at **. Pin the neckband together and try it over a head before going on to make sure it will fit. If a bit too snug, open your tension a little on your ribbing for the neckband.


MOCK RIB NECKBAND: Using the necessary stitches for the size you need, cast-on every-other-needle. Set tension two full tensions tighter than garment tension. Knit twice the number of rows that you want in your neckband, plus one more row. This will put your carriage over on the left. Put on your "leading" empty, part, or slip button, and move the carriage in a free pass to the right hand side of your machine. Pull the empty needles in between the working needles into the Hold (E) position. Using the yarn from the left hand side of the bed, "e" cast-on to the right over these empty needles in Hold (E) position. Return this yarn to carriage. Fold up the bottom edge of your mock rib and hang every other "e" wrapped loop onto the corresponding needles. (These will be the needles in Work (B) position.) Turn tension up 6 full tensions and knit one row to enclose the neckband. Scrap this off into four sections as described in the "Neckband Section Scrap Off".

CAUTION: MOCK RIB DOES NOT STRETCH AS RIBBING. Before you continue with your sweater, be sure to pin the neckband

together and try slipping it over the head to make sure it will work. If it is too tight, you will have to add some stitches to the top of the sleeves in this manner:

To Enlarge Neckband

In the top of EACH sleeve section of the neckband, when you are casting-on, or "e" casting-on, add 4, 6, or 8 sts. (or more) - depending on how much extra room you need. Work the band as above. Scrap off these additional stitches with the amount called for originally. (If you needed 20 sts. and added 4 extra sts. to each sleeve, then scrap off 20 sts. in those sections instead of 16 sts.) These MUST be taken out of the sleeve while you are knitting the sleeve into your garment. It is accomplished by inside decreases. (Not really hard.) See drawing:

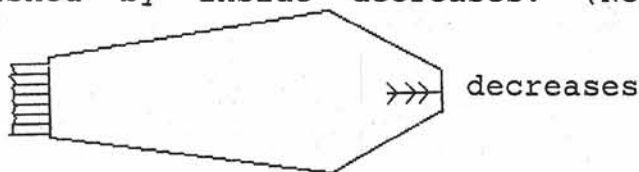

It is best not to hang all the loops from front and back onto the needles when you are making these sleeve decreases. Hang sleeve sts. and a few loops on each side. Begin short rowing sleeves as instructed for four (4) rows. *Keeping the one center stitch always the same, move one stitch on each side of this center stitch over to the adjoining stitch. You have now decreased two stitches and have an empty needle on each side of the center stitch. With tool or garter bar, move each side in towards the center stitch to fill in the space. Short Row increase 4 more rows as before.* Repeat between *'s until you are rid of the extra stitches you put in the top of the sleeve neckband. When all these internal decreases are finished, hang all the remaining loops and stitches on the correct amount of needles. Continue short rowing your sleeve.

TURTLENECK - LOOSE FITTING: The usual turtleneck sweater has a wider neckline than these patterns. In order to adapt the patterns for this neckline, you must add additional stitches to the sleeve neckline as in the above Mock Rib Neckband. They will have to be decreased in the top of the sleeves as above or your sleeves will be much too wide at the underarm. Tension also plays a big part in a pretty Turtleneck. Here is how I do the ones I like. Start the tension of the neckband ribbing very loose - about main garment tension. About (my choice) 100 rows make a nice drape around the neck for this collar. Slowly tighten both your main carriage and ribber carriage tension until one-half of the collar is completed. Then reverse the procedure and loosen your tension on both beds until you are at the beginning tension. These collars can be enclosed as above neckbands (see Turtleneck -Close Fitting)- or they can remain loose to fold back. To explain the changes in tensions on both the ribber and main carriages, just follow the example given ahead.

Loose Fitting Turtleneck Neckline Tension Changes.

Tension	4.0	Rows	1 thru	5.
"	3.2	"	6	" 15.
"	3.1	"	16	" 25.
"	3.0	"	26	" 35.
"	2.2	"	36	" 45.
"	2.1	"	46	" 55.
"	2.2	"	56	" 65.
"	3.0	"	66	" 75.
"	3.1	"	76	" 85.
"	3.2	"	86	" 95.
"	4.0	"	96	" 100.

BLOCKING AND ASSEMBLY

In most of my knitting, I prefer to make the back section first. It usually has the least shaping; therefore, it is the easiest. When it is completed, take it to the blocking board. Using the blocking measurements from your diagram (be sure to get the right measurements from the page for the size you are knitting), pin it out to see if it is working out correctly. If so, then go ahead and steam it. If not, try to see what your problem might be. Check your stitch gauge again or your machine tension. Maybe, you will have to rip it out; but, at least it is only the back and the yarn will still be useable since no steam has been put to it as yet.

Continue to check and block each piece as it comes from the machine. The stitches to be picked up will be easier to find, and the garment will need only a steam touch-up along the seams when you are finished weaving it together.

Blocking is one of the most important steps in turning out a great looking garment. Use enough steam to really set the stitches. I use a sole plate over my iron for steaming. DO NOT BLOCK THE RIBBING. It will lose it's elasticity. Do insert a wooden spoon handle, or dowel, into the doubled bands of Mock Ribbing, or other doubled bands, and gently tug the stitches into place. Also, on the edge of regular ribbing, I take a double-eye needle, run it through the cast-on edge, and pull on these stitches. It takes the curling out of the edge and sets these stitches. Looks a great deal better.

After the sweater is knitted and blocked, weave the neckband together with a bar-to-bar stitch - maintaining the established ribbed pattern. Using the yarn at the top of each sleeve's raglan slant, weave the last loop into the neckband, tie off and hide yarn in collar. Weave the sweater together with the same bar-to-bar stitch, beginning at the bottom edge of body and moving toward the underarm. Then weave the sleeve in the same fashion, starting at cuff and moving toward the underarm. If using a lace or fairisle pattern, be sure to match up your design. At all times one should make the decreases match when sewing a garment together. Secure and tie off. Slip ends into the seams.

Ribbing Finish

I have not come up with a regular ribbing bind-off that I like. So, I scrap off the end of my sweater with about 8 rows of scrap yarn (bottoms and sleeves). With my ribber I make the ribbing for the neck, two bottoms, and two sleeve cuffs all at one time - scrapping each one off with about 8 rows of scrap yarn. Then, before blocking, I kitchener these ribbings to the sweater pieces. It takes a little extra time, but the finished sweater is worth it to me.

Mock Rib Finish

There is a mock rib edge for the end of the bottoms and cuffs that is very nice. And it is fast. After the last row of the bottom and sleeve of the sweater, just transfer every-other-stitch to the adjoining needle, either by a lace carriage or by hand. Place the emptied needles back to the Out-of work (A) position. Turn tension two full tensions tighter than main garment tension. On your first row of this rib, put in a marker row of different colored crochet cotton, or ravel cord, with your garment yarn so you can see where to hang these stitches later. Knit twice the number of rows you want for your ribbing on every other needle. When desired rows are knit, hang stitches on corresponding needles and loosely sew off with a double-eye needle threaded with garment yarn.

Stafford Ribbing Cast-off

As mentioned at the beginning of this Revised Edition, I did find a neat way to Cast-off real ribbing stitches. The Stafford method is the most acceptable way to do this in my opinion. As they have graciously allowed me to share this with you, I hope you will try this and like the results. It is very easy. They also consented to my printing their Ribbing Cast-on. Both of these nice techniques are printed on the following pages.

NOTICE

REMEMBER THIS IS AN "UPSIDE-DOWN" SWEATER. IF YOU ARE USING A PATTERN WITH A DEFINITE TOP AND BOTTOM TO IT, YOU MUST TURN YOUR PATTERN CARD UPSIDE-DOWN ALSO.

DIFFERENT RIBBER CAST-ON AND CAST-OFF

By Fred and Frances Stafford

When you first begin using your new ribber, you may find that you are not completely satisfied with the appearance of the edges of either the cast on row or the bind off row when you follow the instructions in your manual. Here is another cast on and an easy bind off that will give a uniformly neat edge with just the right amount of elasticity for armhole and neckbands, etc.

CAST ON

1. Set main carriage on the right, ribber carriage on left, ribber down in out of work position. Pull out the Hold Position on the main bed any even number of stitches you desire, "e" wrap cast on from left to right. Thread up the carriage, knit one row from right to left, using the proper lever to knit these needles back into work position.
2. Pull ribber into place, join main and ribber carriages. Beginning at the right, leave first 2 needles on main bed. Transfer 3rd and every other needle to ribber bed, ending with the last needle on the main bed. Return all empty needles to A position. The reason for leaving 2 needles on one end of the main bed is to keep the sequence of 1x1 rib when the seam is finished, using the weaving stitch and taking in one whole stitch on each side for the seam.
3. Using a needle pusher, pull out the main bed working needles just far enough for the ends to be even with the ends of the gate post on the ribber bed. Insert the comb from behind the row of knitting so that the teeth of the comb come up between the needles on the main bed, thus preventing the comb from splitting the yarn. Insert the wire in the comb, pull back the needles on the main bed to work position and drop the comb so that it rests on the zigzag yarn stitches between the two beds.
4. Place weights as desired. You are now ready to begin ribbing. To make the first row of ribbing easier, pull all needles on both beds out to Hold position. MAKE SURE THAT ALL LATCHES ARE OPEN. Knit across, letting the machine knit the needles back into work position. (Note: If you use a Brother or Knitking machine, the ribber needles need to be brought out only to C position, not D position, as on a Studio or Singer.)

Please note that there is a right and wrong side to the cast on. So, if you are doing a weaving or purl-side

pattern, when you finish the ribbing and transfer all stitches to the main bed, be sure to turn over the stitches with a garter bar.

The nice thing about this method of casting on is that you may transfer stitches to the ribber in Step #2 in any combination you wish, such as knit 1 purl 1; knit 2 purl 2; knit 3 purl 3.

BIND OFF

This is an easy bind off, finished on the machine, that requires no hand sewing with a tapestry needle to complete. It follows the stitches, that is, knits the knit stitches and purls the purl stitches, thus giving a neat, unobtrusive edge similar to hand knitting that has enough elasticity, but not so much that the edge flares out.

1. Pick up stitches around the armhole, neck, or wherever you wish to place the ribbing. Place all stitches on the main bed and manually knit one row to form a base row that is not so tight that the machine will tear the stitches when the first row is knit.
2. Transfer desired stitches to the ribber bed for 1x1 ribbing, keeping the 2 end stitches on the right end and 1 end stitch on the left end of the main bed to make the seam stitches come out evenly.
3. Insert comb as described in #3, under Cast On. Hang weights. Pull out to Hold Position all needles on both beds for the first row of ribbing. Be sure all latches are open. Do the desired number of rows of ribbing.
4. After the last row of ribbing is completed, knit one row at 4 full tensions higher than the ribbing tension on both beds. Now transfer all ribber stitches to the main bed, ready to do a slip stitch bind off. Remove all weights and comb.
5. Using the 1x1 needle pusher, pull out to C position all stitches that are knit as you face them (these are all the stitches brought up from the ribber bed.) Using the pusher to set the needles as described is very helpful to get the needles in the proper position, thus preventing mistakes which could otherwise easily be made. And by pushing all the knit sts. slightly forward of B position, it is easy to tell whether the next stitch is a knit or a purl.
6. Placing the left hand on the knitting so that the thumb presses against the garment underneath the needles and the forefinger touches the butts of the needles, push the first needle out far enough to allow the stitch to slip behind the latch. Hook the latch tool in the hook of this stitch, letting the finger push the butt of the needle

back out of work as the stitch slides off the needle onto the hook of the latch tool. Slip it behind the latch of the tool ready for the next stitch. Repeat with the 2nd stitch (also a purl st.). When the stitch has come off the needle, pull it through the stitch behind the latch of the tool, completing the stitch. This is the technique used in the regular slip stitch bind off. Do all purl stitches (main bed sts.) in this manner.

7. Using the latch tool, from behind the first knit stitch (from the ribber), lift that stitch off the hook of the needle onto the latch tool. Slip the stitch through the other stitch on the latch tool. Let this stitch slide behind the latch of the tool, ready for the next stitch. Push empty needle out of work.
8. The next stitch being a purl, slip it off the needle onto the latch tool as in Step #6. Pull this stitch through the stitch already on the latch tool.
9. Continue in this manner, doing the regular slip stitch bind off, but picking off the knit stitches from back to front, and slipping the purl stitches from the needle from the front, until all stitches are bound off.

A little practice with this and you will never want to go back to the slower and more tedious ways of binding off.

UPSIDE-DOWN

RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: Practice and Infant

Material: 2 to 4 ounces.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".
Pattern Repeats - 12 wide.

Practice: 5 repeats - dec. 1 st. each
end (62 sts.)

Infant: 6 repeats - add 1 st. each
end (74 sts.)




Yarns Used in Samples:

Newton's Serenaide, 2/12 Spungee

Millor's Trenzado, Gloria

Tamm's Diamante

Many other beautiful yarns can be
used, as well as twisting your own
choice for the above stitch gauge.

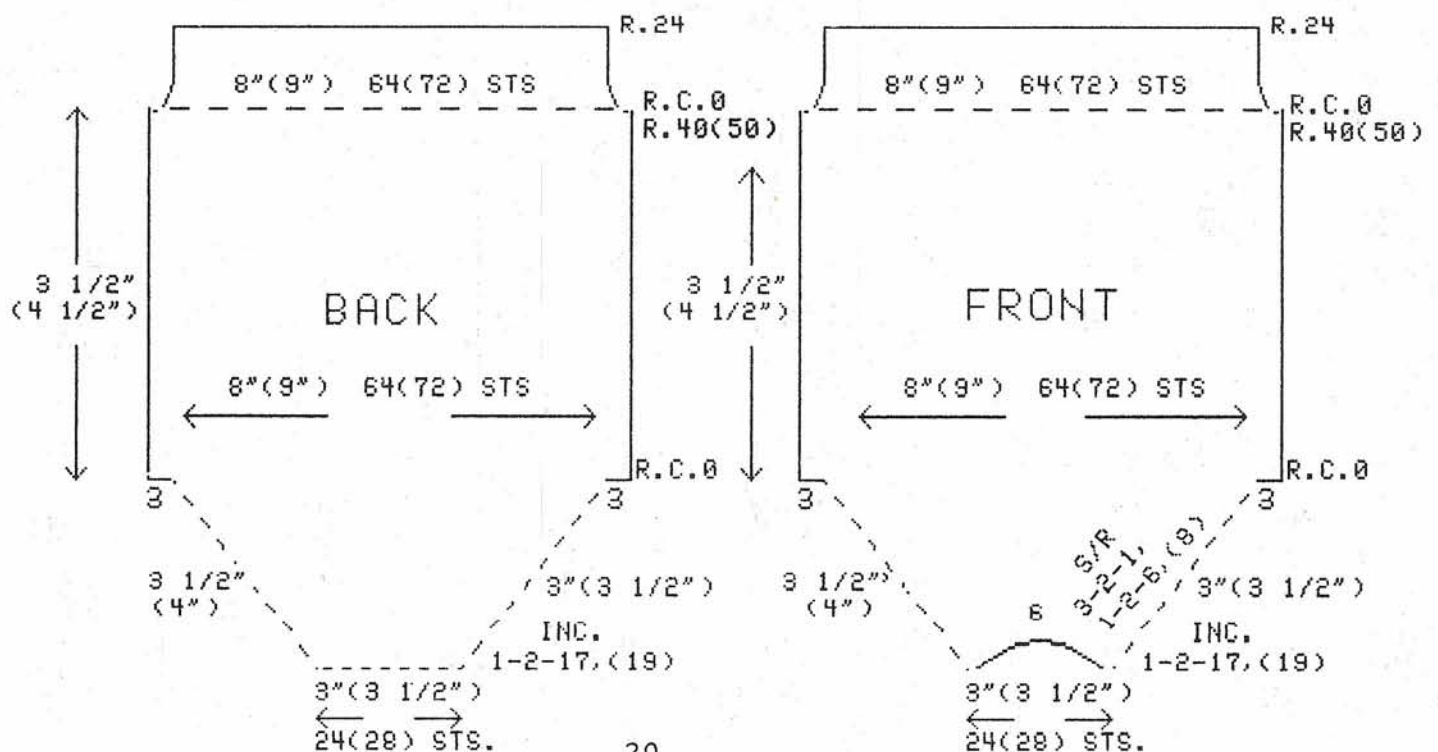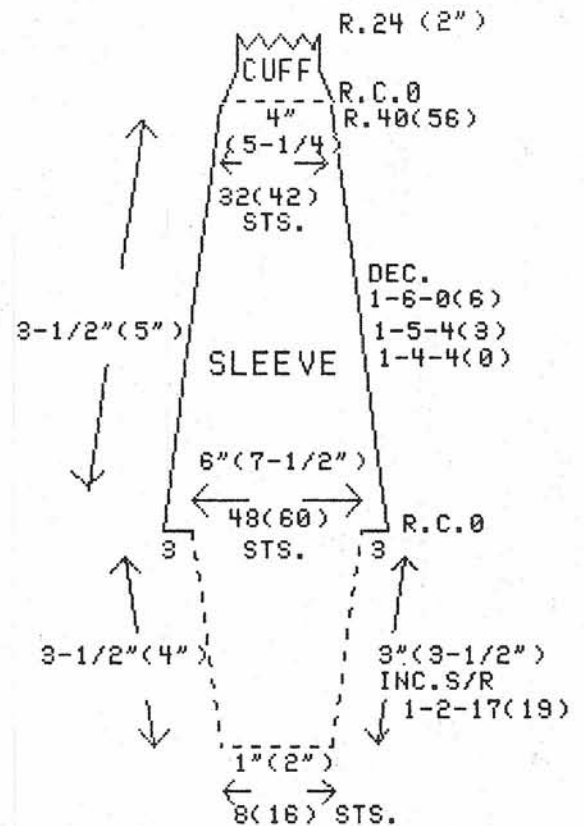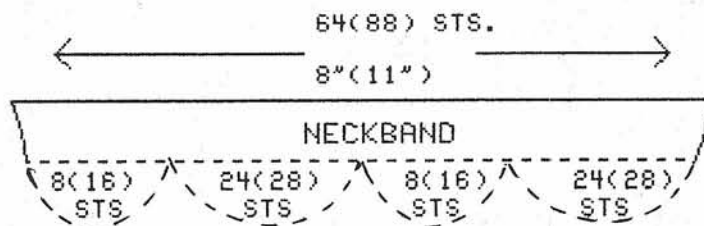

RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: PRACTICE AND INFANT

Neckband of 64,(88) stitches has been completed and sectioned. Hang the back 24,(28) stitches on the center needles of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 34,(38). The carriage should now be on the right and 58 (66) ndls. should be in work.

Pull 3 ndls. out in Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 3 ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 64,(72) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R.40,(50). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 24,(28) sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 4,(6) more times. 12,(16) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 4 ndls. from the Hold (E) position, - all at one time - to Needle

SIZE: PRACTICE AND INFANT

FRONT: cont.

Selector (C or D) position AND continue to bring up the 1 new ndl. on the left hand side of working ndls. from Out-of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 3 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband.**

R.C. 13,(17). Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 14,(18). Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position (39,(47) sts. in total now.) Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 58,(66) sts. are in work. Carriage is now on the right. Pull out 3 new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to the left. Pull out 3 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(16) sts. from the scrap of one of the sleeves in the neckband, onto the center 8,(16) ndls. of your machine. Pick up and hang 17,(19) loops and 3 sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 17,(19) loops and 3 sts. from the back raglan armhole - on the other side of the 8,(16) sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 48,(60) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(16) sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D)

SIZE: PRACTICE AND INFANT

SLEEVE: cont.

position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 3 sts. on each side. Then make a multiple increase by pushing 3 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 3 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 38,(42).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, with 3 prong tool decs. 1-4-4,(0); 1-5-4,(3); and 1-6-0,(6). Knit even to R. 40,(56). You should end with 32,(42) sts. Complete the cuff of the sweater as you finished the body of the sweater. Scrap off with 8 rows of scrap yarn if using "Ribbing Finish", or finish in Mock Ribbing as on bottom of "Back" using about 24 rows. You can also do real ribbing and finish it with the Stafford method.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

UPSIDE-DOWN

BABIES RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: SIX MONTHS, ONE YEAR, AND TWO YEARS

Material: 3 to 6 ounces.

Any yarn that can
obtain the gauge.

Gauge: 8 sts. x 11 rows = 1".

Pattern Repeats - 12 wide.

Six Mo: 6-1/2 repeats + 2 sts.

One yr: 7 repeats - add 1 st. on
each side (86 sts.)

Two yr: 7 repeats - dec. 1 st. on
each side (86 sts.)


Yarns Used in Samples:

Newton's Serenaide, 2/12 Spungee

Millor's Trenzado, Gloria

Tamm's Diamante

Many other beautiful yarns can
be used, as well as twisting
your own choice for the above
stitch gauge.

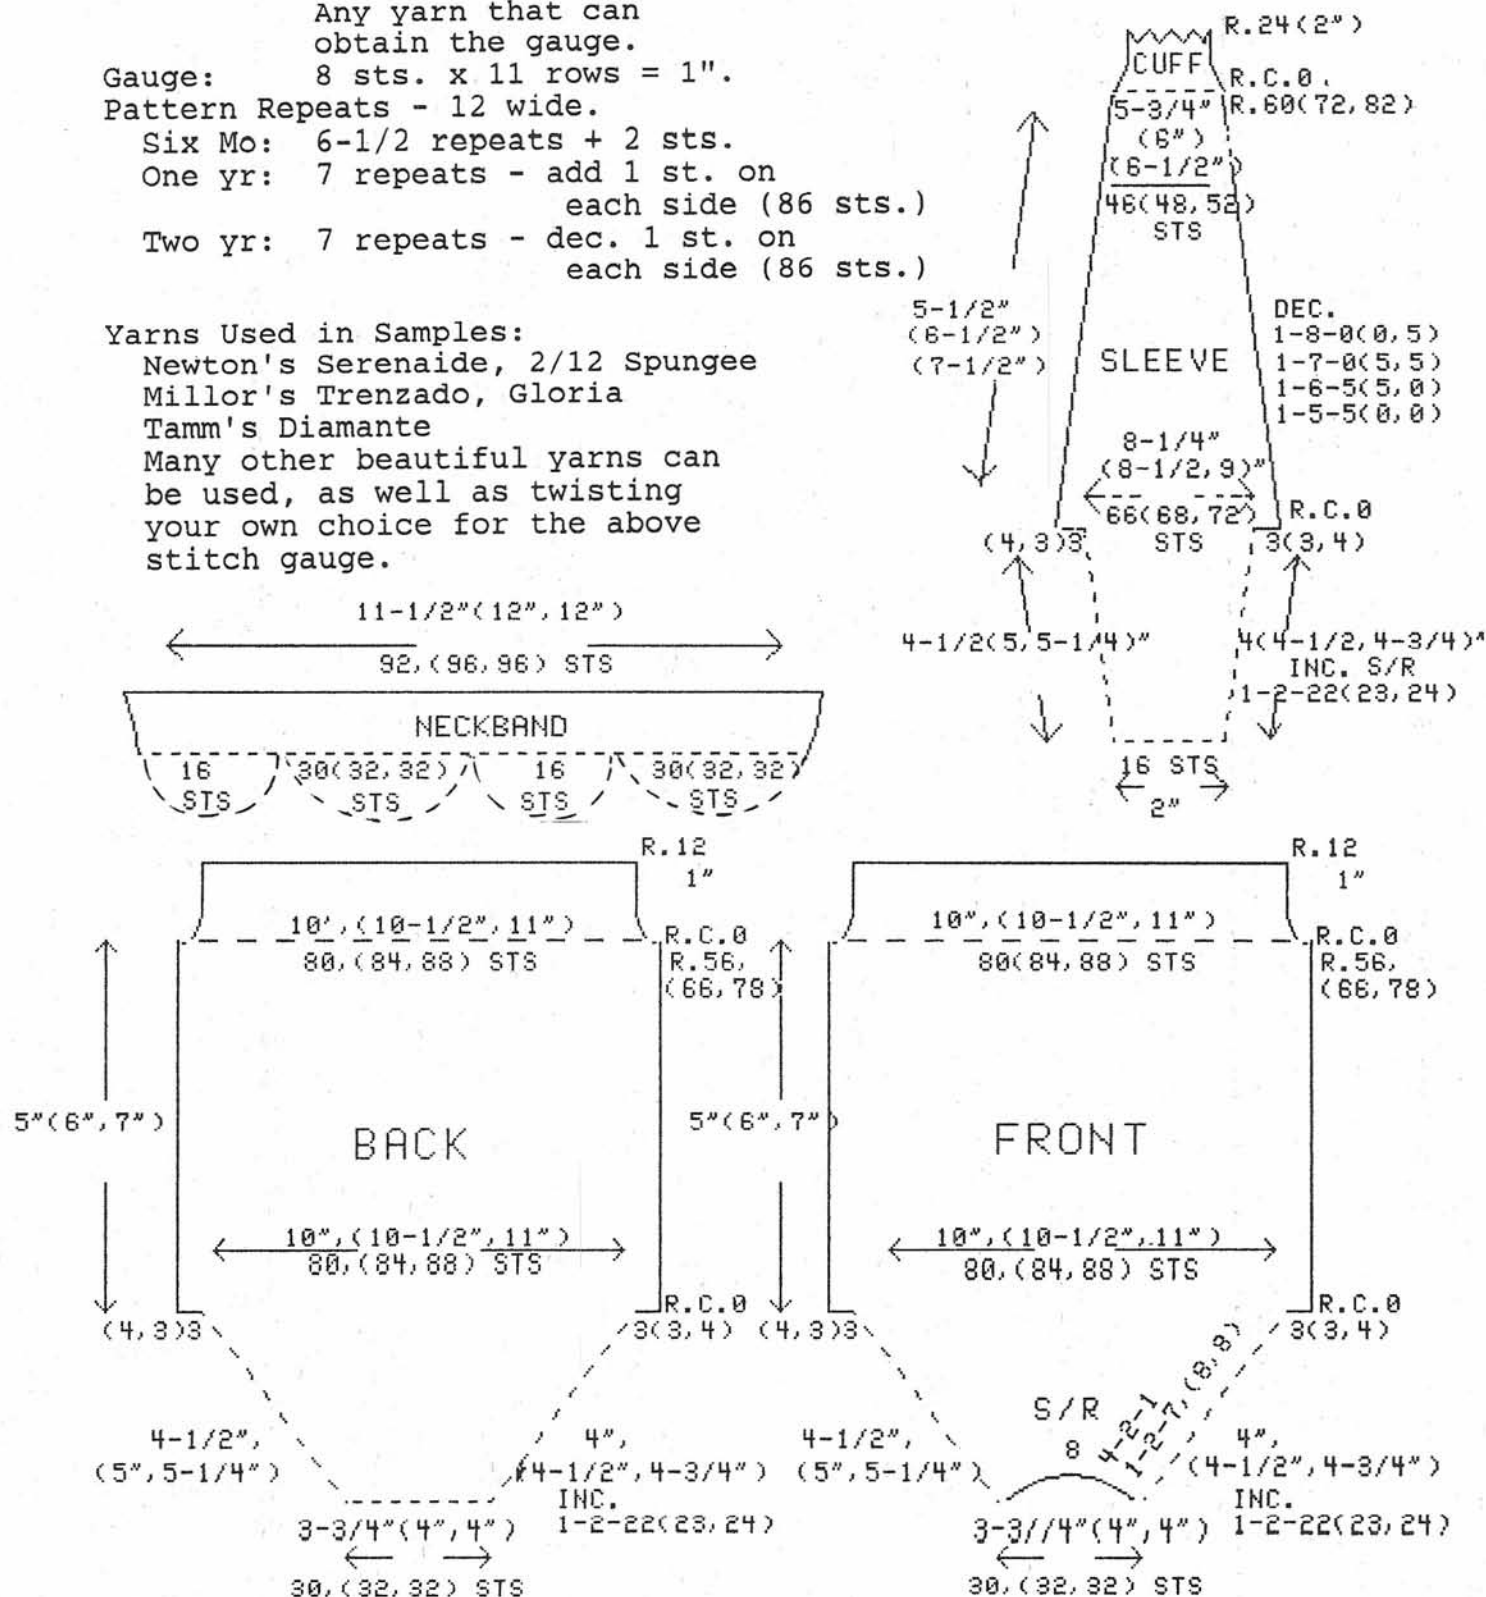

BABIES' RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: SIX MONTHS, ONE YEAR, AND TWO YEAR

Neckband of 92,(96,96) stitches has been completed and sectioned. Hang the back 30,(32,32) stitches on the center needles of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 44,(46,48). The carriage should now be on the right and 74,(78,80) ndls. should be in work.

Pull 3,(3,4) ndls. out in Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 3,(3,4) ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 80,(84,88) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 56,(66,78). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 30,(32,32) sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 5,(6,6) more times. 14,(16,16) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 5 ndls. from the Hold (E) position, - all at one time - to Needle

SIZE: BABIES' - Six Months, One Year, and Two Years

FRONT: cont.

Selector (C or D) position AND continue to bring up the 1 new ndl. on the left hand side of working ndls. from Out-of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 4 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband.**

R.C. 15,(17,17). Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 16,(18,18). Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position (49,(51,51) sts. in total now.) Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 74,(78,80) sts. are in work. Carriage is now on the right. Pull out 3,(3,4) new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to the left. Pull out 3,(3,4) ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 16 sts. from the scrap of one of the sleeves in the neckband, onto the center 16 ndls. of your machine. Pick up and hang 22,(23,24) loops and 3,(3,4) sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 22,(23,24) loops and 3,(3,4) sts. from the back raglan armhole - on the other side of the 16 sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 66,(68,72) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 16 sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in

SIZE: BABIES' - Six Months, One Year, and Two Years

SLEEVE: cont.

Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 3,(3,4) sts. on each side. Then make a multiple increase by pushing 3,(3,4) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 3,(3,4) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 46,(48,50).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, with 3 prong tool decs. 1-5-5,(0,0); 1-6-5,(5,0); 1-7-0,(5-5); and 1-8-0,(0,5). Knit even to R. 60,(72,82). You should end with 46,(48,52) sts. Complete the cuff of the sweater as you finished the body of the sweater. Scrap off with 8 rows of scrap yarn if using "Ribbing Finish", or finish in Mock Ribbing as on Bottom of "Back" - using about 36 rows. You can also do real ribbing and finish it with the Stafford method.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

UPSIDE-DOWN

CHILDREN'S RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: 4, (6, 8)

Material: 6 to 10 ounces.

Any yarn that can
obtain the gauge.

Gauge: 8 sts. x 11 rows = 1".




Pattern Repeats - 12 wide.

Size: 4: 7-1/2 repeats + 2 sts.

6: 8 repeats + 2 sts.

8: 8-1/2 repeats + 2 sts.

Newton's Serenaide, 2/12 Spungee
Millor's Trenzado, Gloria
Tamm's Diamante
Many other beautiful yarns can
be used, as well as twisting
your own choice for the above
stitch gauge.

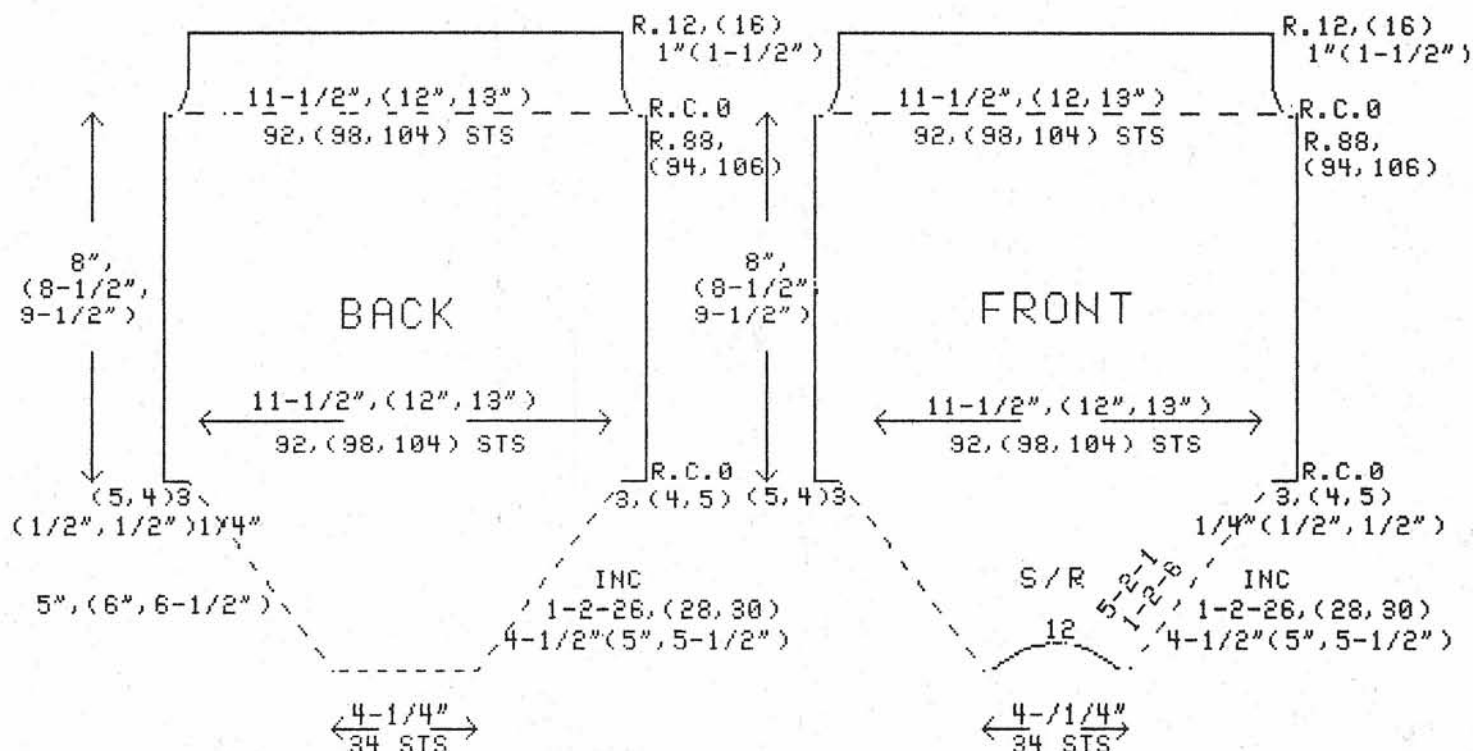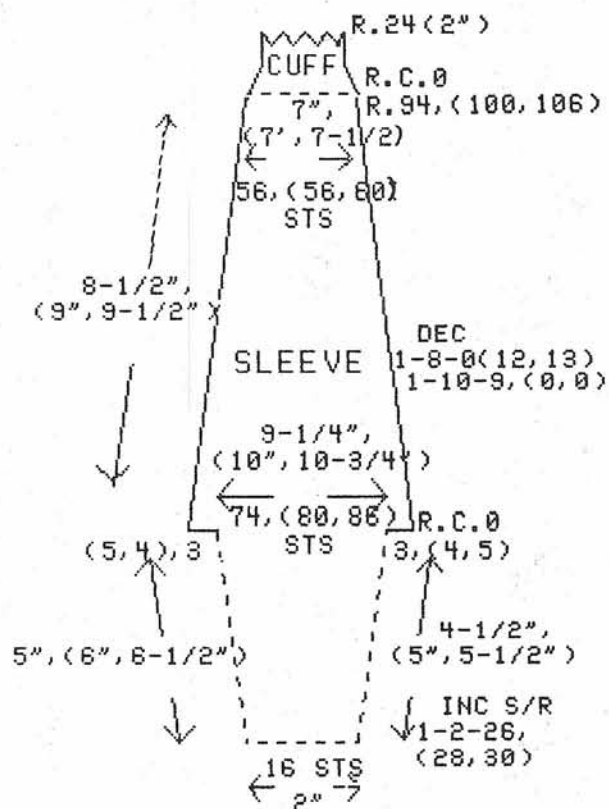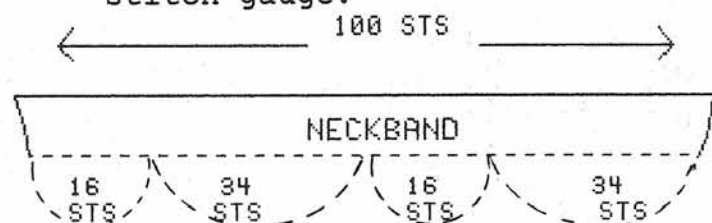

CHILDREN'S RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: 4,(6,8)

Neckband of 100 stitches has been completed and sectioned. Hang the back 34 stitches on the center needles of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 52,(56,60). The carriage should now be on the right and 86,(90,94) ndls. should be in work.

Pull 3,(4,5) ndls. out in Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 3,(4,5) ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 92,(98,104) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 88,(94,106). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 34 sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s four (4) more times. Twelve (12) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 6 ndls. from the Hold (E) position, - all at one time - to Needle

SIZE: CHILDREN'S 4,(6,8)

FRONT: cont.

Selector (C or D) position AND continue to bring up the 1 new ndl. on the left hand side of working ndls. from Out-of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 6 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband.**

R.C. 13. Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 14. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position (49 sts. in total now). Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 86,(90,94) sts. are in work. Carriage is now on the right. Pull out 3,(4,5) new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to the left. Pull out 3,(4,5) ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 16 sts. from the scrap of one of the sleeves in the neckband, onto the center 16 ndls. of your machine. Pick up and hang 26,(28,30) loops and 3,(4,5) sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 26,(28,30) loops and 3,(4,5) sts. from the back raglan armhole - on the other side of the 16 sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 74,(80,86) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 16 sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your

SIZE: CHILDREN'S 4,(6,8)

SLEEVE: cont.

yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 3,(4,5) sts. on each side. Then make a multiple increase by pushing 3,(4,5) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 3,(4,5) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 56,(60,64).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, with 3. prong tool decs. 1-10-9,(0-0); and 1-8-0,(12,13). Knit even to R. 94,(100,106). You should end with 56,(56,60) sts. Complete the cuff of the sweater as you finished the body of the sweater. Scrap off with 8 rows of scrap yarn if using "Ribbing Finish", or finish in Mock Ribbing as on bottom of "Back" - using about 48 rows. You can also do real ribbing and finish it with the Stafford method.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

CHILDREN'S RAGLAN ROUND NECK PULLOVER DIAGRAM

CHILDREN'S RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: 10,(12,14)

Neckband of 108,(112,112) stitches has been completed and sectioned. Hang the back 34,(36,36) stitches on the center needles of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 70,(80,84). The carriage should now be on the right and 104,(116,120) ndls. should be in work.

Pull 3,(3,4) ndls. out in Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 3,(3,4) ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 110, (122,128) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 120,(132,142). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 34, (36,36) sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers). ** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 5,(6,6) more times. 14,(16,16) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 5 ndls. from the Hold (E) position, - all at one time - to Needle

SIZE: CHILDREN'S 10,(12,14)

FRONT: cont.

Selector (C or D) position AND continue to bring up the 1 new ndl. on the left hand side of working ndls. from Out-of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 6 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband.**

R.C. 15,(17,17). Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 16,(18,18). Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position (51,(55,55) sts. in total now). Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 104, (116,120) sts. are in work. Carriage is now on the right. Pull out 3,(3,4) new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to the left. Pull out 3,(3,4) ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 20 sts. from the scrap of one of the sleeves in the neckband, onto the center 20 ndls. of your machine. Pick up and hang 35,(40,42) loops and 3,(3,4) sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 35,(40,42) loops and 3,(3,4) sts. from the back raglan armhole - on the other side of the 20 sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 96,(106,112) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 20 sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in

SIZE: CHILDREN's 10,(12,14)

SLEEVE: cont.

Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 3,(3,4) sts. on each side. Then make a multiple increase by pushing 3,(3,4) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 3,(3,4) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 74,(84,88).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, with 3 prong tool decs. 1-7-18,(12,10) and 1-6-0,(9,14). Knit even to R. 132 (144,154). You should end with 60,(64,64) sts. Complete the cuff of the sweater as you finished the body of the sweater. Scrap off with 8 rows of scrap yarn if using "Ribbing Finish", or finish in Mock Ribbing as on bottom of "Back" - using about 48 rows. You can also do real ribbing and finish it with the Stafford method.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

UPSIDE-DOWN

LADIES' RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: 8, (10, 12)

Material: 12 to 16 ounces.

Any yarn that you can
obtain the gauge.

Gauge: 8 sts x 11 rows = 1".

Pattern Repeats - 12 wide

Size: 8: 10-1/2 repeats + 2 sts.

10: 11 repeats + 2 sts.

12: 12 repeats + 2 sts.




Yarns Used in Samples:

Newton's Serenade, 2/12 Spungee

Millor's Trenzado, Gloria

Tamm's Diamante

Many other beautiful yarns can
be used, as well as twisting
your own choice for the above
stitch gauge.

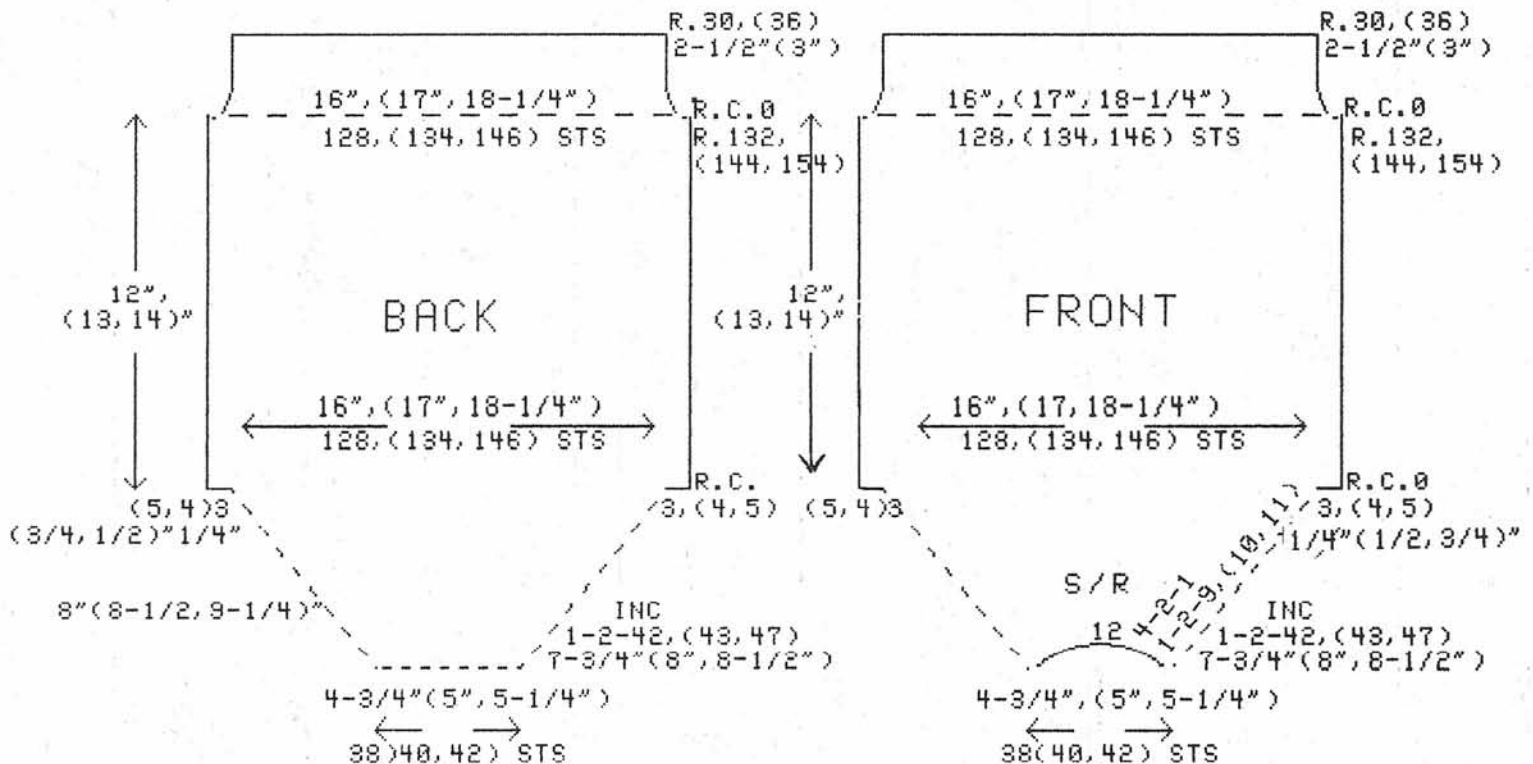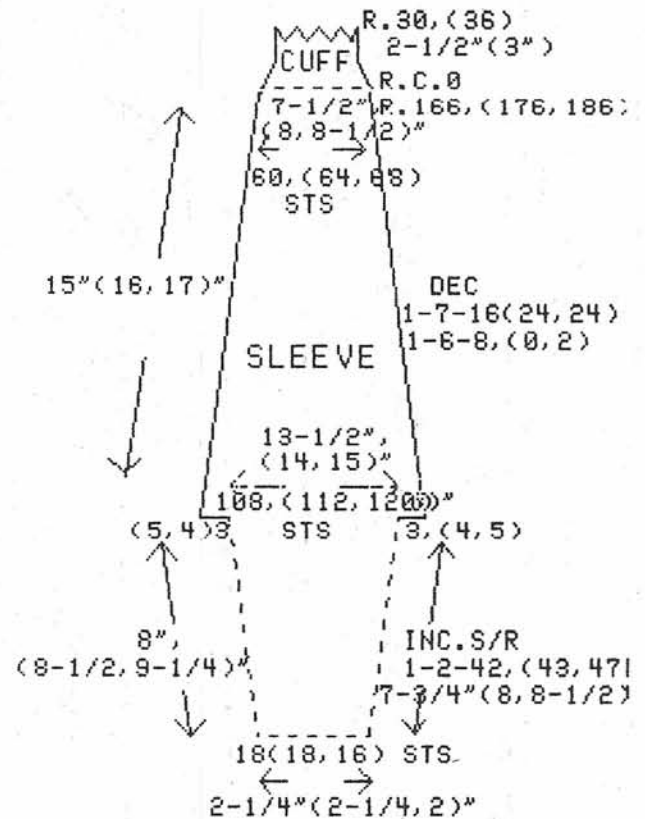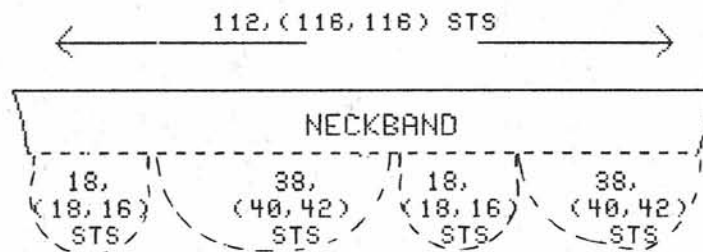

LADIES' RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: 8,(10,12)

Neckband of 112,(116,116) sts. has been completed and sectioned. Hang the back 38,(40,42) sts. on the center ndls. of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 84,(86,94). The carriage should now be on the right and 122,(126,136) ndls. should be in work.

Pull 3,(4,5) ndls. out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 3,(4,5) ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 128,(134,146) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 132,(144,154). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock Ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 38,(40,42) sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers). ** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 7,(8,9) more times. 18,(20,22) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 5 ndls. from Hold (E) position - all at one time - to Needle

SIZE: LADIES' 8,(10,12)

FRONT: cont.

Selector (C or D) position AND continue to bring up the 1 new ndl. on the left hand side of working ndls. from Out -of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 6 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband. R.C. 19, (21,23). Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 20,(22,24). Carriage is on the right. Take off partial knit buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position (59,(63,67) sts. in total now). Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 122, (126,136) sts. are in work. Carriage is now on the right. Pull out 3,(4,5) new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 3,(4,5) new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "BACK" directions.

SLEEVE:

Pick up and hang 18,(18,16)sts. from the scrap of one of the sleeves in the neckband, onto the center 18,(18,16) ndls. of your machine. Pick up and hang 42,(43,47) loops and 3, (4,5) sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 42,(43,47) loops and 3,(4,5) sts. from the back raglan armhole - on the other side of the 18,(18,16) sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 108,(112,120) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 18,(18,16) sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D position. This will prevent your

SIZE: LADIES' 8,(10,12)

SLEEVE: cont.

yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side, to Needle Selection (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 3,(4,5) sts. on each side. Then make a multiple increase by pushing 3,(4,5) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 3,(4,5) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 88,(90,98).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, with 3 prong tool decs. 1-6-8,(0,2), and 1-7-16,(24,24). Knit even to R. 166,(176,186). You should end with 60,(64,68) sts. Complete the cuff of the sweater as you finished the body of the sweater.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

UPSIDE-DOWN

LADIES' RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: 14, (16, 18)

Material: 16 to 20 ounces.

Any yarn that you can
obtain the gauge.

Gauge: 8 sts x 11 rows = 1".

Pattern repeats - 12 wide.

Size 14: 12-1/2 repeats + 2 sts.

16: 13 repeats + 2 sts.

18: 14 repeats + 2 sts.




Yarns Used in Samples:

Newton's Serenaide, 2/12 Spungee

Millor's Trenzado, Gloria

Tamm's Diamante

Many other beautiful yarns can
be used, as well as twisting your
own choice for the above stitch gauge.

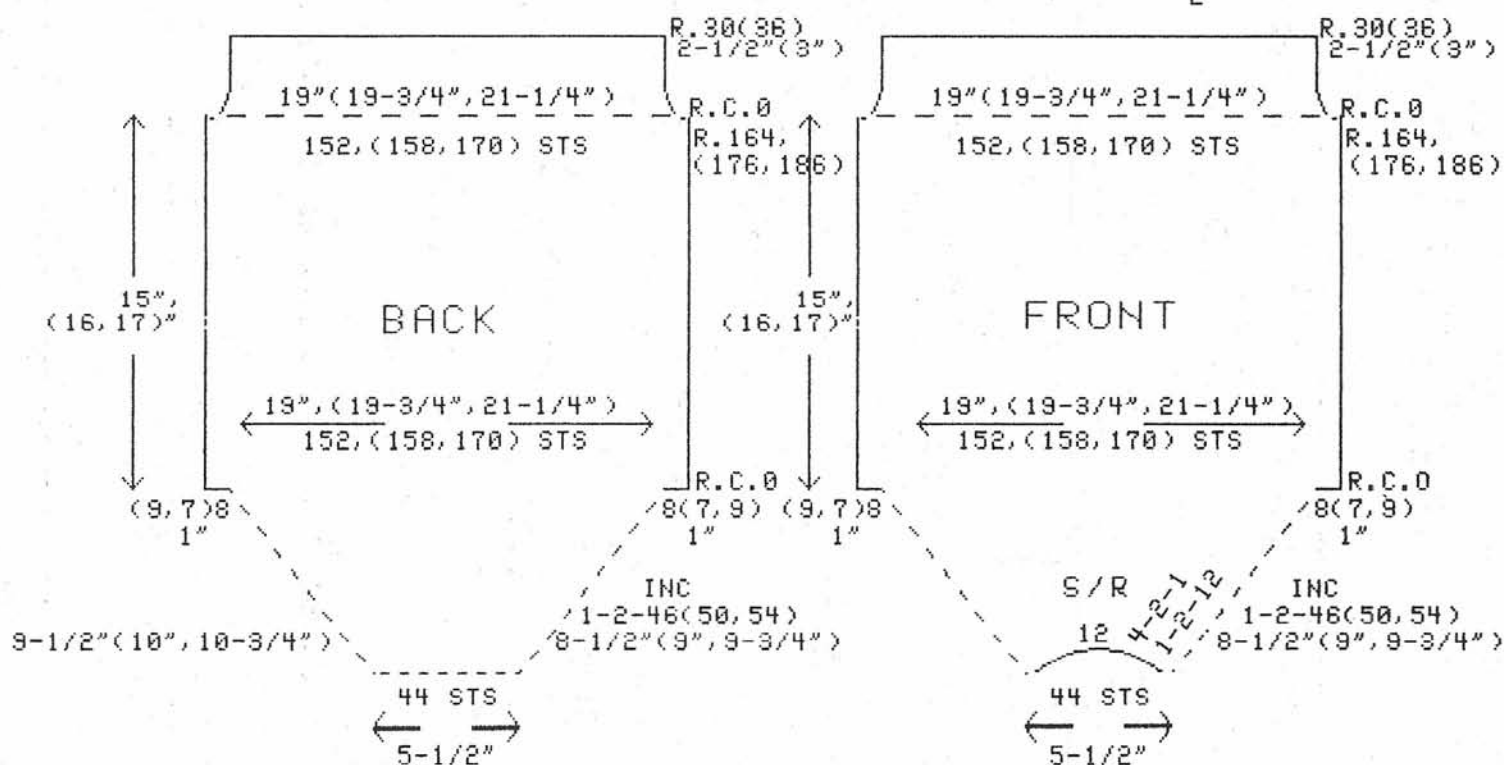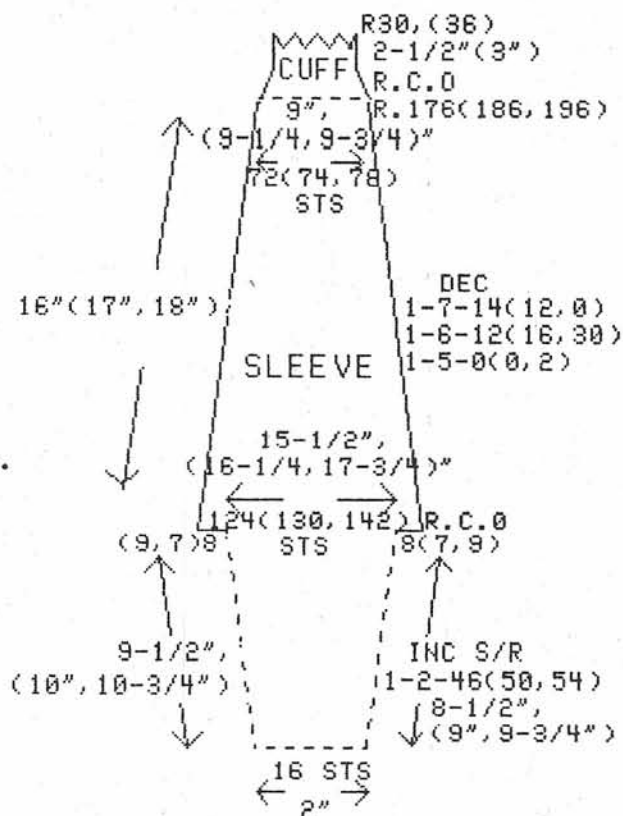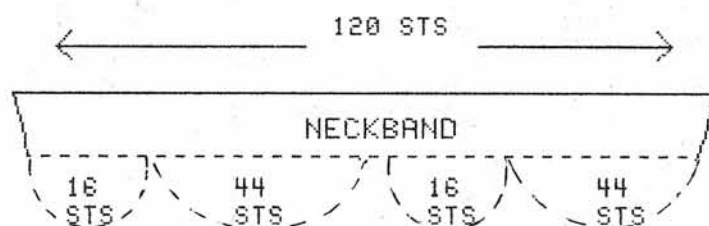

LADIES' RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: 14,(16,18)

Neckband of 120 sts. has been completed and sectioned. Hang the back 44 sts. on the center ndls. of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 92,(100,108)). The carriage should now be on the right and 136,(144,152) ndls. should be in work.

Pull 8,(7,9) ndls. out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 8,(7,9) ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 152,(158,170) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 164,(176,186). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock Ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 44 sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers). ** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 10 more times. Twenty four (24) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 5 ndls. from Hold (E) position - all at one time - to Needle Selector (C or D) position AND continue to bring up the 1

SIZE: LADIES' 14,(16,18)

FRONT: cont.

new ndl. on the left hand side of working ndls. from Out -of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 6 center ndls. (1/2 center increase) should now be in work on the left hand side of the neckband.

R.C. 25. Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 26. Carriage is on the right. Take off partial knit buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position - 71 sts. in total now). Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 136, (144,152) sts. are in work. Carriage is now on the right. Pull out 8,(7,9) new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 8,(7,9) new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "BACK" directions.

SLEEVE:

Pick up and hang 16 sts. from the scrap of one of the sleeves in the neckband, onto the center 16 ndls. of your machine. Pick up and hang 46,(50,54) loops and 8, (7,9) sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 46,(50,54) loops and 8,(7,9) sts. from the back raglan armhole - on the other side of the 16 sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 124, (130,142) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 16 sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

SIZE: LADIES' 14,(16,18)

SLEEVE: cont.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side, to Needle Selection (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 8,(7,9) sts. on each side. Then make a multiple increase by pushing 8,(7,9) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 8,(7,9) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 96,(104,112).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, doing 3 prong tool decreases 1-7-14,(12,0); 1-6-12,(16,30); and 1-5-0,(0-2). Knit even to R. 176,(186,196). You should end with 72,(74,78) sts. Complete the cuff of the sweater as you finished the body of the sweater.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

UPSIDE-DOWN

MEN'S RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: 34, (36, 38, 40)

Material: 16 to 20 ounces.

Any yarn that you can
obtain the gauge.

Gauge: 8 sts x 11 rows = 1".

Pattern Repeats - 12 wide

Size 34: 12 repeats + 2 sts.

36: 12-1/2 repeats + 2 sts.

38: 13 repeats + 2 sts.

40: 13-1/2 repeats + 2 sts.

Yarns Used in Samples:




Newton's Serenaide, 2/12 Spungee

Millor's Trenzado, Gloria

Tamm's Diamante

Many yarns can be twisted into
size for the above stitch gauge.

128, (128, 136, 136) STS

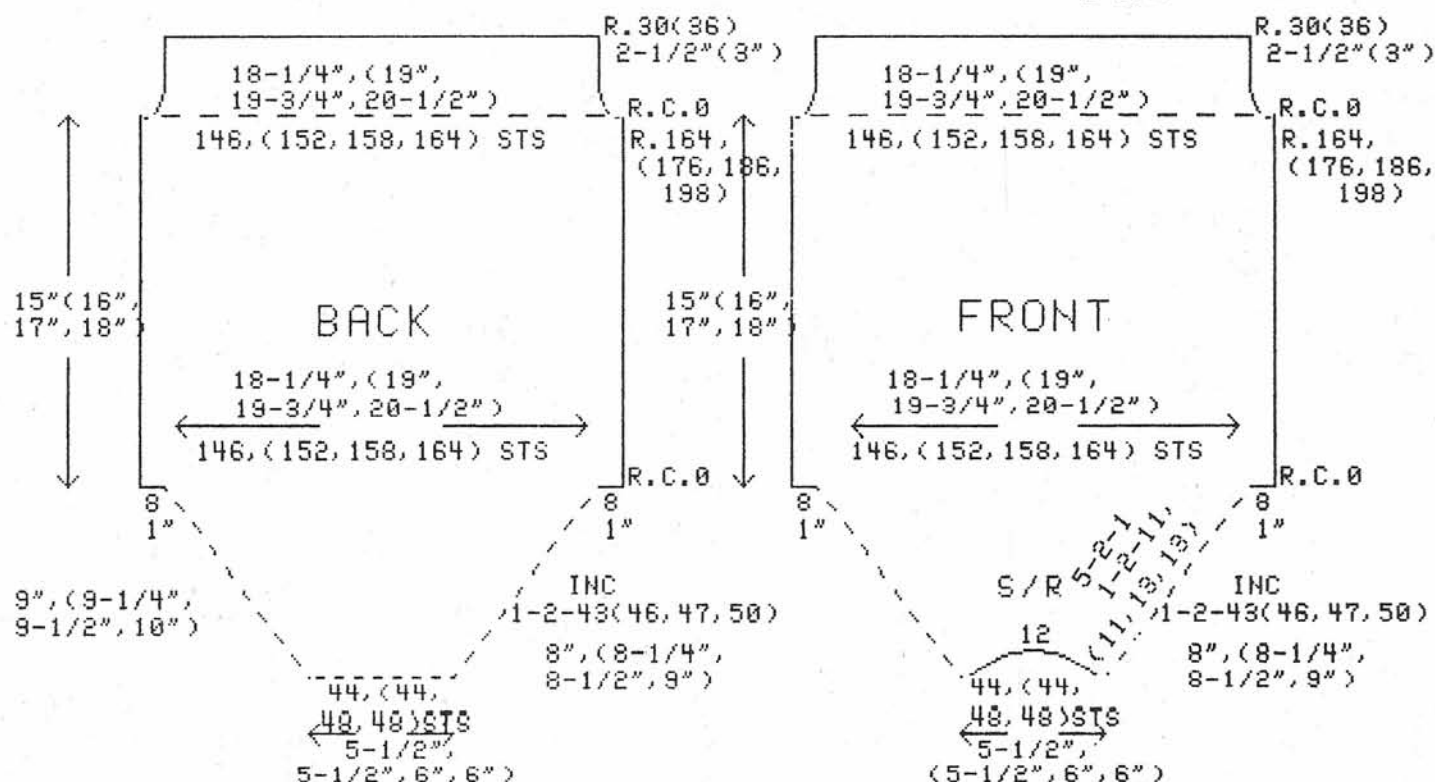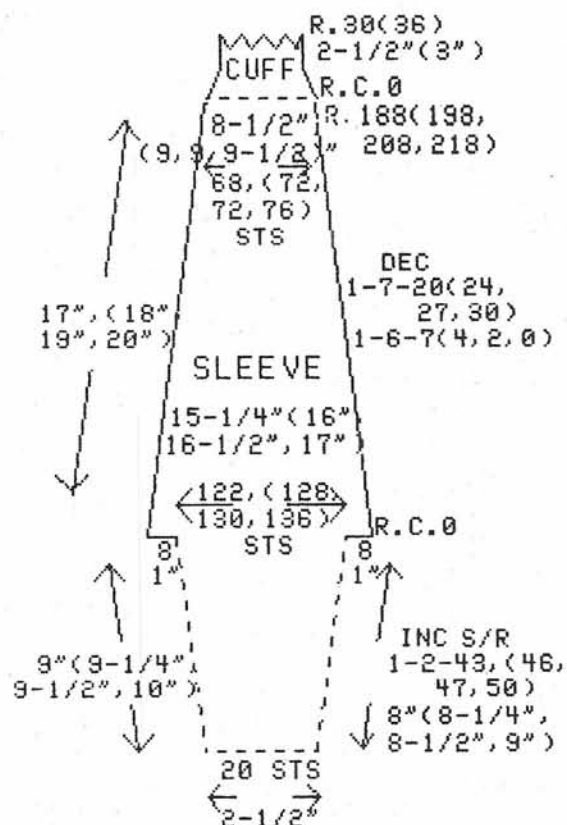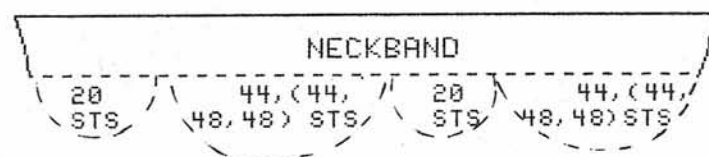

MEN'S RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: 34, (36, 38, 40)

Neckband of 128, (128, 136, 136) sts. has been completed and sectioned. Hang the back 44, (44, 48, 48) sts. on the center ndls. of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 86, (92, 94, 100). The carriage should now be on the right and 130, (136, 142, 148) ndls. should be in work.

Pull 8 ndls. out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 8 ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 146, (152, 158, 164) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 164, (176, 186, 198). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock Ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 44, (44, 48, 48) sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers). ** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 9, (9, 11, 11) more times. 22, (22, 26, 26) stitches should now be in work on left

SIZE: MEN'S 34, (36, 38, 40)

FRONT: cont.

hand side of ndls. in Hold (E) position. Now, push in the next 6 ndls. from Hold (E) position - all at one time - to Needle Selector (C or D) position AND continue to bring up the 1 new ndl. on the left hand side of working ndls. from Out-of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 6 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband.

R.C. 23, (23, 27, 27). Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 24, (24, 28, 28). Carriage is on the right. Take off partial knit buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position - 69, (69, 77, 77) sts. in total now). Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 130, (136, 142, 148) sts. are in work. Carriage is now on the right. Pull out 8 new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 8 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "BACK" directions.

SLEEVE:

Pick up and hang 20 sts. from the scrap of one of the sleeves in the neckband, onto the center 20 ndls. of your machine. Pick up and hang 43, (46, 47, 50) loops and 8 sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 43, (46, 47, 50) loops and 8 sts. from the back raglan armhole - on the other side of the 20 sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 122, (128, 130, 136) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 20 sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top

SIZE: MEN'S 34,(36,38,40)

SLEEVE: cont.

of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side, to Needle Selection (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 8 sts. on each side. Then make a multiple increase by pushing 8 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 8 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 90,(96,98,104).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, doing 3 prong tool decreases 1-7-20,(24,27,30) and 1-6-7,(4,2,0). Knit even to R. 188,(198,208,218). You should end with 68,(72,72,76) sts. Complete the cuff of the sweater as you finished the body of the sweater.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.

UPSIDE-DOWN

MEN'S RAGLAN ROUND NECK PULLOVER DIAGRAM

SIZE: 42, (44, 46)

Material: 18 to 24 ounces.

Any yarn that you can
obtain the gauge.

Gauge: 8 sts x 11 rows = 1".

Pattern Repeats - 12 wide

Size 42: 14-1/2 repeats + 2 sts.

44: 15 repeats + 2 sts.

46: 16 repeats + 2 sts.




Yarns Used in Samples:

Newton's Serenaide, 2/12 Spungee

Millor's Trenzado, Gloria

Tamm's Diamante

Many yarns can be twisted into
size for the above stitch gauge.

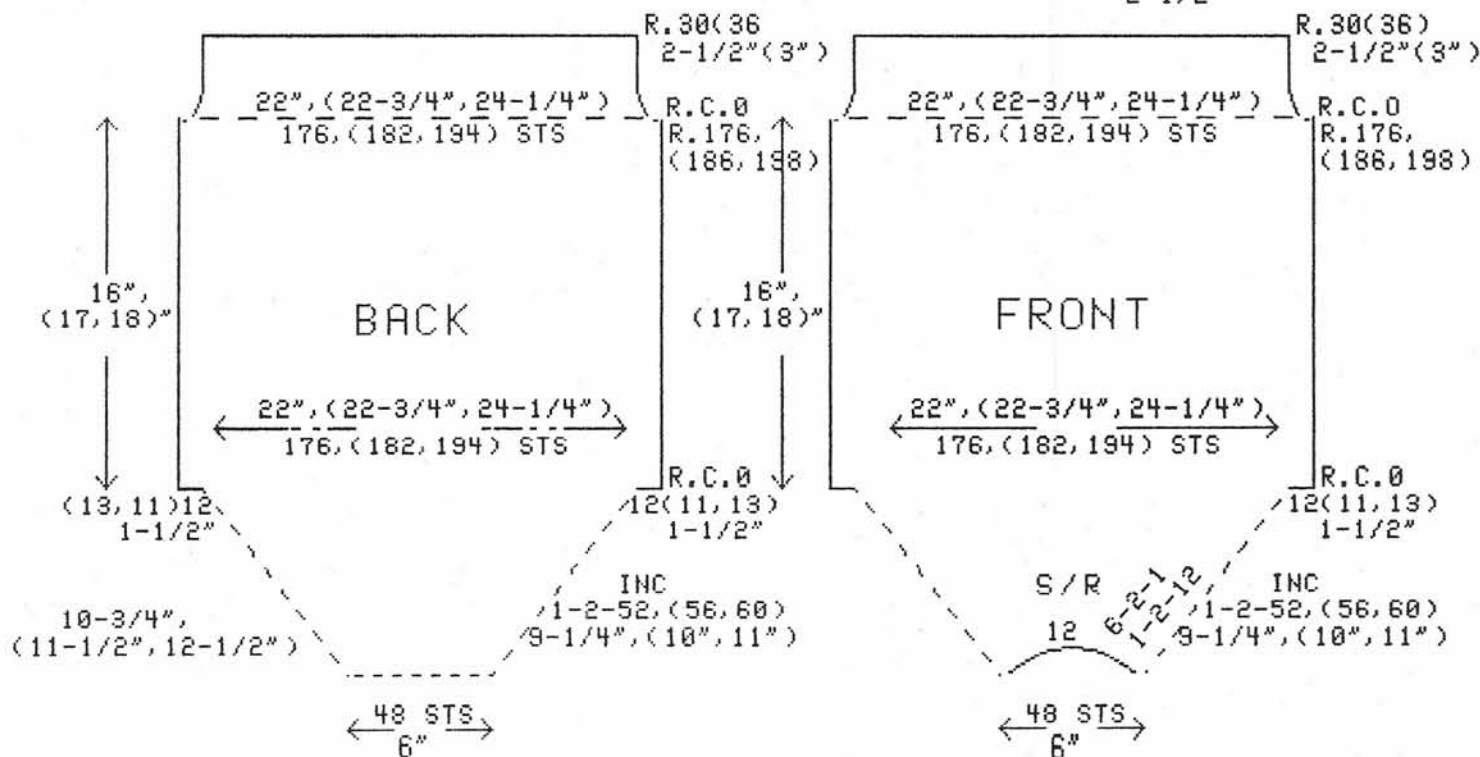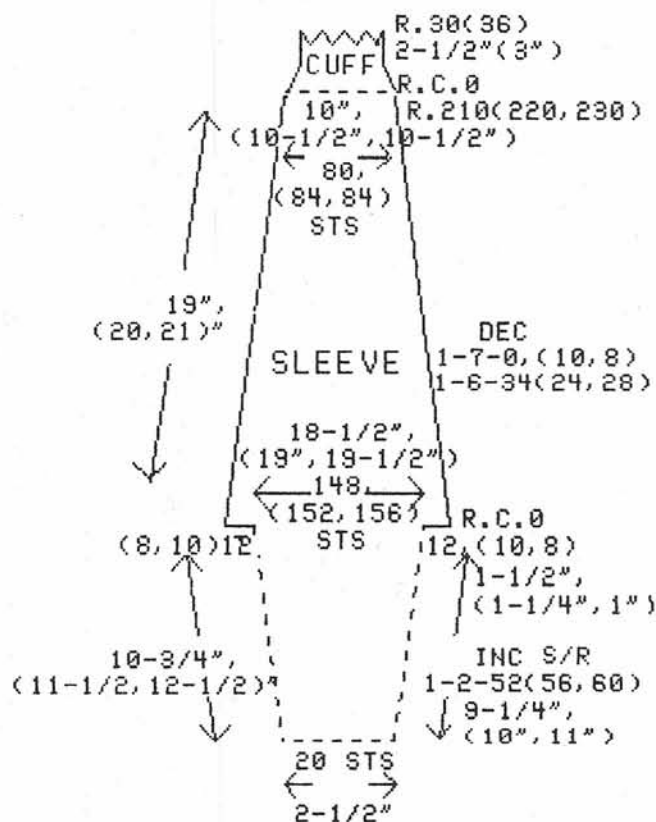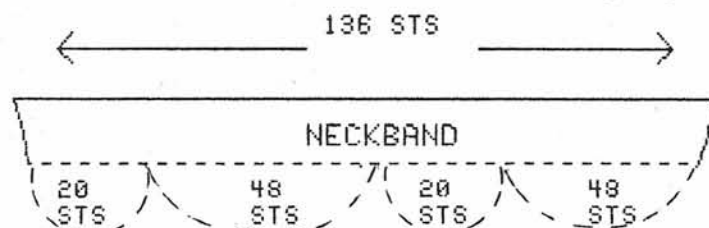

MEN'S RAGLAN ROUND NECK PULLOVER WRITTEN INSTRUCTIONS

SIZE: 42,(44,46)

Neckband of 136 sts. has been completed and sectioned. Hang the back 48 sts. on the center ndls. of your machine.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW ndl. to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 104,(112,120). The carriage should now be on the right and 152,(160,168) ndls. should be in work.

Pull 12, (11,13) ndls. out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these ndls. Knit 1 row to left. Pull out 12, (11,13) ndls. on left to Hold (E) position, and "e" cast-on over these ndls. with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 176,(182,194) ndls. working and your carriage on the right hand side.

** R.C. 0. Knit even to R. 176,(186,198). If you are going to kitchener ribbing on later, follow "Ribbing Finish" paragraph. If you are using Mock Ribbing, follow "Mock Rib Finish". You can also continue with regular ribbing and bind it off with the Stafford method now in this book.

FRONT:

R.C. 0. Carriage is on the LEFT, garment tension, and main color yarn threaded through carriage. Rehang the front 48 sts. from neckband scrap, onto the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers). ** Push the first 2 sts. next to the carriage into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of work (A) position to Work (B) position beside the 2 ndls. just pushed in. Knit across to right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to (E) position again. (Now 2 sts. remain working.) Knit back to left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you have formed a wrap st.). Knit back to left.* Repeat between *'s 10 more times. Twenty four (24) stitches should now be in work on left hand side of ndls. in Hold (E) position. Now, push in the next 7 ndls. in Hold (E) position - all at one time - to Needle Selector (C or D) position AND continue to bring up the 1

SIZE: MEN'S 42,(44,46)

FRONT: cont.

new ndl. on the left hand side of working ndls. from Out-of-work (A) position to the Work (B) position. Knit across. Pull last knitted st. next to ndls. in Hold (E) position back out to the Hold (E) position, forming another wrap st. All ndls. but the 6 center ndls. (1/2 of center increase) should now be in work on the left hand side of the neckband.

R.C. 25. Continue carriage on over to right of machine. One side of the neck triangle of the front is completed. Break yarn and leave it at the center part of the neckline. It will be tied off and tucked into the neckband later.

R.C. 0. Pull ALL ndls. back into Hold (E) position. Carriage is on the right. Repeat "Front" between **'s over the ndls. right of "0", reversing all sides and directions.

R.C. 26. Carriage is on the right. Take off partial knit buttons (Hold, I, II, or Russell Levers). Pull 1 new st. from Out-of-work (A) position to Work (B) position on right hand side. Knit across ALL sts., putting them all into Work (B) position - 75 sts. in total now). Continue pulling up 1 new st. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until 152,(160,168) sts. are in work. Carriage is now on the right. Pull out 12, (11,13) new ndls. next to carriage to Hold (E) position; and, with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 12,(11,13) new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "BACK" directions.

SLEEVE:

Pick up and hang 20 sts. from the scrap of one of the sleeves in the neckband, onto the center 20 ndls. of your machine. Pick up and hang 52,(56,60) loops and 12,(10,8) sts. from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. I KNOW YOU "e" CASTED-ON 12, (11,13) SO YOU MUST DOUBLE UP SOME STITCHES OR YOUR SLEEVE WILL BE VERY LARGE. JUST HANG TWO STITCHES ON ONE NEEDLE UNTIL YOU HAVE THE CORRECT AMOUNT. Pick up and hang 52,(56,60) loops and 12,(10,8) sts. from the back raglan armhole - on the other side of the 20 sts. of the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increases of the raglan slant. Be careful to keep both purl sides facing you. After you have them all hung, you should have 148, (152, 156) sts. on your machine. Pull all these ndls. into Hold (E) position. Push in the center 20 sts. PLUS 1 more st. on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between

SIZE: MEN'S 42,(44,46)

SLEEVE: cont.

the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side, to Needle Selection (C or D) position. Knit across right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 12,(10,8) sts. on each side. Then make a multiple increase by pushing 12, (10,8) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 12, (10,8) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. reads 108,(116,124).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit in the remainder of the sleeve, doing 3 prong tool decreases 1-7-0,(10,8,) and 1-6-34,(24,28). Knit even to R.210,(220,230). You should end with 80,(84,84) sts. Complete the cuff of the sweater as you finished the body of the sweater. Scrap off with 8 rows of scrap yarn if using "Ribbing Finish" or continue on in Mock Ribbing as on bottom of "Back" - using 60 to 72 rows. You may also decide to continue on with real Ribbing. Bind that off with the Stafford method in this book.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions to complete your sweater.