



*Bulky
V-Neck Raglan
Upside-Down Sweaters
For Youngsters*

THREE STITCH GAUGES FOR EACH PATTERN

By Jodie Raymond



*Bulky
V-Neck Raglan
Upside-Down Sweaters
For Youngsters*

Here are the smaller versions of the classic V-Neck Upside-down Raglan sweaters for the heavier yarns and large needle machines. Written and diagram instructions.

"Another wonderful way to show your love."

By: Jodie Raymond
P.O. Box 8631
Jacksonville, FL 32211
(904) 642-7148

COPYRIGHT: © July, 1988, by Jodie Raymond. All rights reserved. Printed in the United States of America. No part of this book may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the author.

ISBN: 0-939669-11-0

First Printing, July, 1988.

The patterns and instructions have been carefully written and are believed to be clear, complete and accurate. Any misunderstandings or adaptations are solely the responsibility of the owner of the book.

FORWARD

Having finished the "Bulky V-Neck Raglan Upside-Down Sweaters for Adults", it is time to complete the series with the same sweaters for our babies and youngsters. These have been fun to knit. With not too heavy yarn, they have turned out super for even the little ones.

The larger gauge knitting machines produce sweaters that are more comparable to hand knitting. Most all hand knitting yarns are quite adaptable to them, as well as all the beautiful cone yarns made especially for your knitter. So, this allows even more creativeness for our craft. As you can see in the photographs, the pictured sweaters are very basic renditions of different types of yarn. It is hoped you will let your imagination wander through all sorts of designs - fairisle, cables, lace, tuck, weaving, etc.

With so many different sizes of yarns that can be used on these machines, one stitch gauge just wouldn't do. So, all the patterns are written in three different stitch gauges in order to accommodate most of the yarns one might enjoy using.

I must mention these sweaters have been designed with a looser fit than the Bulky Round Necks, as they most certainly will be worn over a shirt, etc. As you will see in the chart of sizes, the patterns run from a very small soft-sculptured doll size-infant (practice) size to a youngster's size 12. The next larger size appears in the "Bulky V-Neck Raglan Upside-down Sweaters For Adults", as it worked out the same as a Lady's Small. These patterns have no gender. Any pattern that matches the size you need will work.

To state again my reasons for knitting these sweaters upside-down, they are one of the easiest and quickest sweaters to knit on these machines. The upside-down method allows the neckbands to be knitted all in one piece with a minimum of effort. Several different neckbands are given and all have only one seam at the mitered "V" point. Knitting this way, you can keep the needles in working position throughout the sweater, if you wish. With the needles not in the way, it's easy to use many knitting techniques for lovely finished products. The sweater is quickly sewn together as it is knitted in one piece, leaving only the underarm seams to finish.

Well, I have had fun working on these patterns. It is hoped that the book will add many happy hours of knitting for you, and result in a lot of hugs and kisses from all those "little darlings" of ours.

Best always,



Jodie

DEDICATION

I think by now I have thanked just about everyone possible, but with one exception - the dedicated instructors I have had the pleasure of working along side. Without fail, whenever asked, all share their expertise and viewpoints unselfishly. Thanks to all of you for your friendship, wit, and good times.

As ever,

Jodie

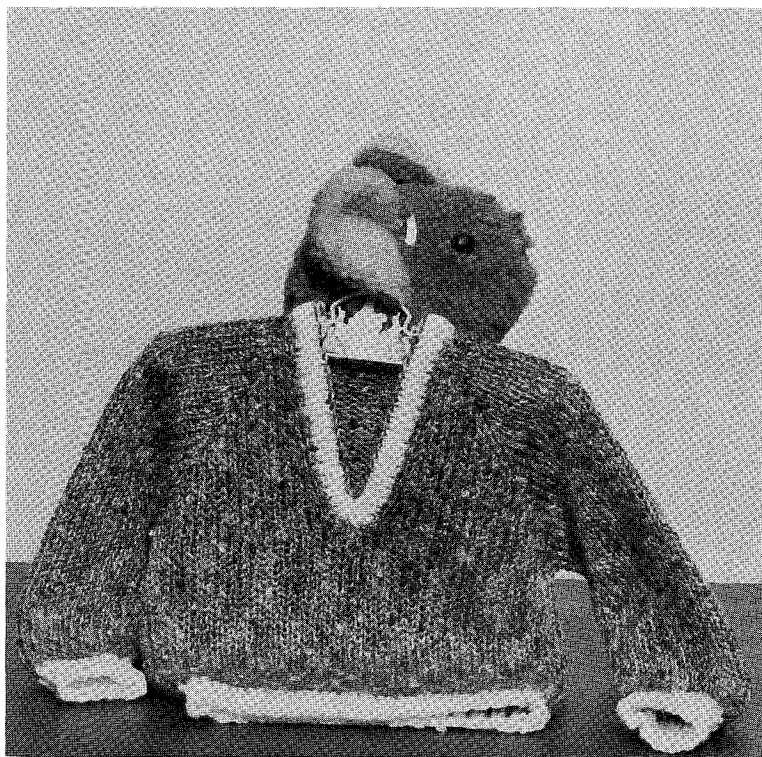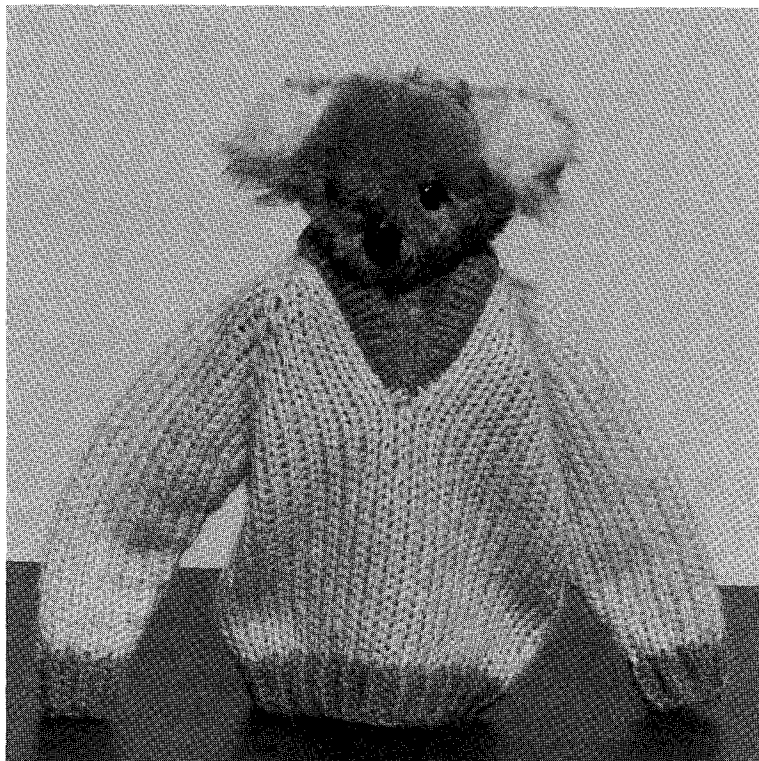

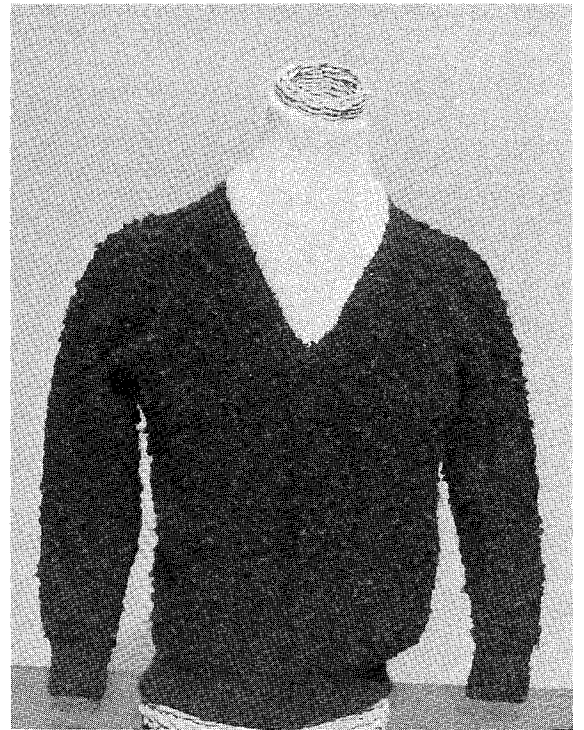
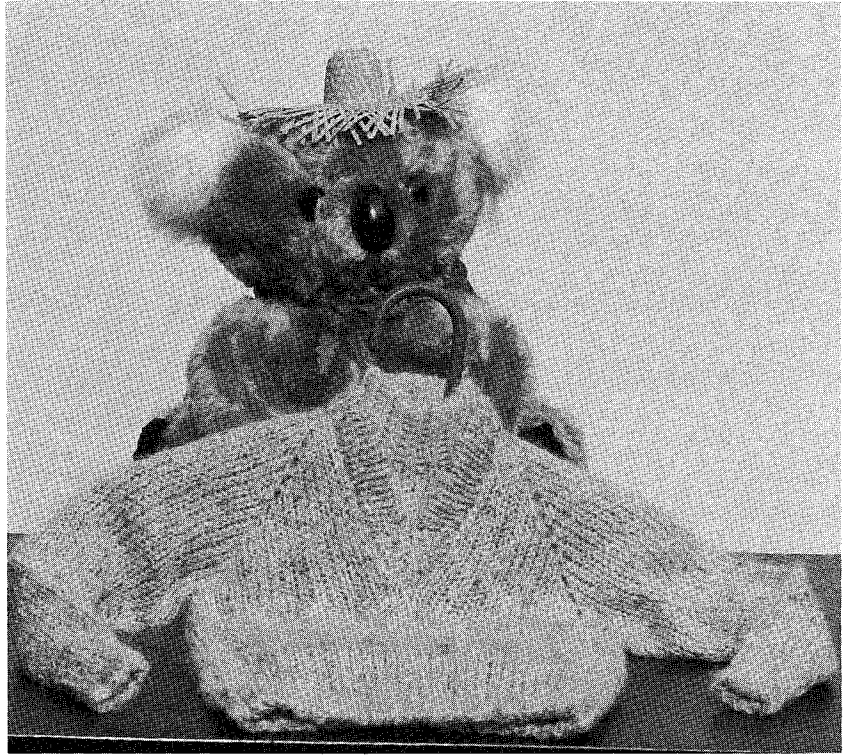
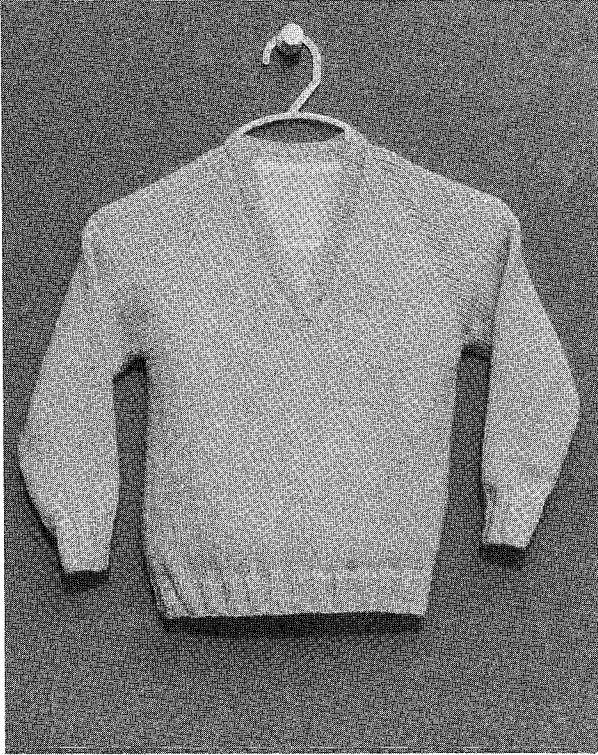


TABLE OF CONTENTS

Title Page	
Copyright	i.
Forward	1.
Dedication	1.
Photographs	2.
Table of Contents	4.
Abbreviations and Terminology	5.
Measurement Chart	7.
Random Thoughts and Suggestions	8.
Taking Needed Measurements	8.
Bulky Swatches	9.
Easy Stitch Gauges	9.
Three Stitch Gauges for Each Sweater	11.
Marker Cord versus Ravel Cord Rows	11.
This is An Upside-Down Sweater	12.
Garter Bar Turn Row	12.
Making Raglan Slants	13.
Knitting Sleeves In with Needles in "B" Position	13.
Short Row Refresher	14.
Bulky Ribbing	15.
Stafford Cast-On and Cast-Off	17.
Neckbands	20.
Blocking and Assembly	21.
Practice Size - Diagram	22.
Practice Size - Written Instructions	23.
One Year Old Size - Diagram	26.
One Year Old Size - Written Instructions	27.
Two Year Old Size - Diagram	30.
Two Year Old Size - Written Instructions	31.
Four Year Old Size - Diagram	34.
Four Year Old Size - Written Instructions	35.
Six Year Old Size - Diagram	38.
Six Year Old Size - Written Instructions	39.
Eight Year Old Size - Diagram	42.
Eight Year Old Size - Written Instructions	43.
Ten Year Old Size - Diagram	46.
Ten Year Old Size - Written Instructions	47.
Twelve Year Old Size - Diagram	50.
Twelve Year Old Size - Written Instructions	51.

ABBREVIATIONS AND TERMINOLOGY

oz.	- ounce	ozs.	- ounces
st.	- stitch	sts.	- stitches
ndl.	- needle	ndls.	- needles
dec.	- decrease	inc.	- increase
cont.	- continue	O	- zero
R.	- row number	R.C.	- row counter
C.O.	- cast-on	S/R	- short row
Even	- same number of rows or stitches	Leading	- button on cam nearest to fabric
E.O.N.	- every other needle	E.O.R.	- every other row
U/A	- underarm		

NEEDLE POSITIONS

Please check your manual for your needle selections.

(A)	- Out of Work	(B)	- Work
(C or D)	- Needle Selector	(D or E)	- Hold, or Partial Knitting

Armhole Slant - measure of the short rows only.

Armhole Depth - total length of armhole at raglan slant.

All patterns are written : STITCHES - ROWS - TIMES. Both written and diagram instructions are included for all patterns of this book.

These instructions can be used on all makes of Bulky, Chunky, or Husky machines. Even you can use them on the standard machines if you use every OTHER needle - and can achieve the stitch gauge required. This allows one to knit many types of thicker yarns than normally used on the standard machines.

The "Part" buttons on the Brother and Knitking machines, are the same as the "Slip" buttons of the Studio, Singer, and Toyota machines. The "Partial Knitting" buttons are the "Hold" button on the Brother and Knitking, or the "Russell Levers" on the Studio, Singer, and Toyota. For these and other brands of machines, just use the terminology that fits your particular knitting machine.

Anytime you see an "0" in your particular directions, it tells you NOT to use any of that operation. Move on to the next operation. Example: Dec. 1-2-6,(0,13) would mean to decrease one stitch, on both sides of your garment usually, every other row - six times for the first stitch gauge, NO TIMES for the second stitch gauge, and thirteen times for the largest stitch gauge. When you have completed the above directions (if you were decreasing on both sides of your garment), you would have decreased your knitting by 12 stitches, or NO STITCHES, or 26 stitches, according to the gauge sizing you were using,

If you see only one set of figures on your diagram, (that is, an instruction without any numbers in parentheses) this direction applies to all stitch gauges of these patterns. Example: Dec. 1-4-1 would mean decrease one stitch, every fourth row, one time. In this example, you would be losing one stitch on one side in four rows - or

two stitches in four rows, if you were decreasing on both sides of your sweater.

These patterns all have been charted in the stitch gauges of 3 x 5 = 1"; 4 x 6 = 1"; and 5 x 7 = 1". While the 3 x 5 = 1" gauge is usually thought of for use with larger yarns, it has been included into the small patterns so a loose, lacy sweater could be knit for the babies. Try a not too heavy yarn at a looser tension and you will be able to have a lovely fabric using this gauge. In the "Random Thoughts and Suggestions" section of this, and my other books, many helpful hints and techniques are discussed for your knitting pleasure.

While it seems to be a waste of time and effort to place some of the same information in this book as found in another of my books, one must remember that this might be the first, or only, one of my books the knitter purchases. Some hints and suggestions to knit these patterns must be repeated here to make this a complete entity. Have fun, and welcome, to my knitting world again - knitting upside-down.

Other publications of mine that you might enjoy are:

"BULKY V-NECK RAGLAN UPSIDE-DOWN SWEATERS FOR ADULTS"

"BULKY ROUND NECK UPSIDE-DOWN RAGLANS FOR GROWNUPS"

"BULKY ROUND NECK UPSIDE-DOWN RAGLANS
FOR BABIES AND CHILDREN"

"JODIE'S FAVORITE DEMONSTRATIONS - VOLUME ONE"

"A SHIRT FOR ALL SEASONS"

"LET'S KNIT SOME BLOUSES"

"LET'S KNIT SOME SKIRTS"

"V-NECK UPSIDE-DOWN RAGLAN SWEATERS - Revised"

"ROUND NECK UPSIDE-DOWN RAGLAN PULLOVERS - Revised"

"SIGNATURE HATS AND CAPS - Revised"

MEASUREMENT CHART

These bulky V-Neck sweaters have been designed with ease knit into them, so one may wear them comfortably over a shirt or blouse. Please look over this chart carefully after you have taken the body measurements. Choose the pattern that matches your desired finished size. Another method to arrive at the size to knit is to pull out a favorite sweater, measure it, and then use my pattern that comes closest to these measurements. Remember, having an accurate swatch with a correct stitch gauge and tension is absolutely essential for the larger yarns used in the bulky sweaters. Being "off" just a bit makes a big difference.

The comfort of the raglan armhole is brought about by the sleeve seam slanting to the neckline. They are longer than normal armhole seams. This also makes for shorter underarm seams in the body of the sweater and sleeve.

The length of the body and sleeve underarm seams in these patterns DO NOT INCLUDE CUFFS AND BANDS. Your ribbing will add extra length at both places. The measurements by "Inc." on the right side of the diagrams are the short rowed inches only.

ALL PATTERNS HAVE APPROXIMATELY 1" EASE ADDED TO CHEST SIZE

PRACTICE, BABY, AND TODDLER BULKY V-NECK RAGLAN SWEATERS

<u>SIZE</u>	<u>PRACTICE</u>	<u>ONE YR.</u>	<u>TWO YR.</u>	<u>FOUR YR.</u>
Chest, actual	17"	20"	22"	24"
Chest, ease	18"	21"	23"	25"
Back of neck	2"	2"	2"	2"
Wrist	5½"	6½"	6½"	7"
Sleeve width	7½"	9"	10"	11"
Raglan slant	4"	5"	6"	6½"
Armhole depth	5"	6"	7"	7½"
Length to U/A	4½"	6"	7"	8"
Sleeve to U/A	5"	7"	8"	9"

YOUNGSTER'S BULKY V-NECK RAGLAN SWEATERS

<u>SIZE</u>	<u>SIX YR.</u>	<u>EIGHT YR.</u>	<u>TEN YR.</u>	<u>TWELVE YR.</u>
Chest, actual	26"	28"	30"	32"
Chest, ease	27"	29"	31"	33"
Back of neck	2½"	3"	3"	3"
Wrist	7½"	7½"	8"	8"
Sleeve width	12"	12-3/4"	13½"	14½"
Raglan slant	6-3/4"	7½"	8"	8½"
Armhole depth	7-3/4"	8½"	9"	10"
Length to U/A	9"	10½"	12"	13"
Sleeve to U/A	10"	11½"	12½"	14"

RANDOM THOUGHTS AND SUGGESTIONS

A good beginning makes for a much happier ending. This definitely applies in all of our work. To help you have fun with your knitting and achieve the results you want, I have included in my books some hints and techniques that might help you along the way. Although some of these are repeated in other books, they are valid for this book too. And, this just might be the first book of mine you have purchased. So, here are some interesting points relating to the Bulky V-Neck Raglan Sweaters. Remember, have an enjoyable time knitting these garments. And, most of all, be proud of your accomplishments.

TAKING THE NEEDED MEASUREMENTS

Raglan sweaters are so comfortable because there are no shoulder seams. Not having to worry with this is quite a bonus if you are making a sweater for someone not available for measuring. Basically, you need only a few measurements with these sweaters to decide which pattern you should follow. The first one is the chest measurement. This should be taken around the fullest part of this area of the body. Remember, there is ease charted into the sweaters, so check your pattern carefully after you have taken the measurement.

Next, hold a pencil under the armpit at the point you want the underarm seams to meet. Take into consideration the type of sweater you are knitting. If the garment is to be worn under a jacket, the pencil should be raised very high under the arm, to shorten the raglan slant. On the other hand, if it is an outdoor sweater - or will be worn for vigorous athletic play - the pencil should be dropped lower to allow more room. Place the tape measure at the base of the neck on top (highest point) of the shoulder. Bring the tape over the shoulder point, and down the outside of the arm to an imaginary line even with the pencil. This is the length of the armhole depth and appears on the left hand side of the diagram. It includes the underarm break. The measurement under the short rowing operation (on the right hand side) is the specific inches for the short row work only.

While still holding the pencil in position, measure from the pencil down to where you want the ribbing, or cuff, of the body of the sweater to commence. Only one more measurement is needed and that is for the length of the sleeve. Bend the elbow slightly. Measure from the pencil still being held under your arm, down around the elbow (outside of arm) toward the wrist to the place you wish the ribbing, or cuff, to start. This gives you the information needed. Match up your numbers to the ones on the chart. Don't forget to write down the particular numbers you use, as you may want to knit at least a dozen more.

Of course, there is another neat way to determine which pattern to use. Grab one of the old favorite sweaters and measure it. With these dimensions it is easy to find the right size to knit. Now, all you have to worry about is getting an accurate stitch gauge with your chosen yarn.

One other point about your measurements. If you wish a looser fitting sleeve, as for the teddy sizes or a kimono sleeve; just don't decrease as often as the pattern says. Then make multiple decreases two rows before the cuff to reduce the number of stitches to size.

BULKY SWATCHES

No one dislikes making swatches any more than I, but it is a MOST NECESSARY evil. The quickest, most accurate way to knit one is a goal of all knitters. With these larger yarns it is imperative to get it right, as a slight mistake will slip you right into another, usually unwanted, size. Some points to remember while knitting any swatch are:

1. Must be knitted at the speed you usually knit. Fast passes of the carriage will tighten up the stitch. Lazy movement of carriage loosens the stitch.
2. Must knit the swatch in exact pattern you plan to follow - lace, tuck, cable, fairisle, stockinette, slip, ribbing patterns, etc.
3. Must make a new swatch for all colors of yarns. CHANGE OF EVEN THE DYE LOT OF SAME YARN REQUIRE A NEW SWATCH TO BE KNITTED. I'm sorry, but it's true.
4. If using a combination of patterns, make a swatch for each - your tensions will probably change.
5. Lace patterns tend to knit larger, so a smaller tension on your carriage dial usually works.
6. Fairisle patterns usually knit tighter, loosen your carriage dial a dot or two.
7. After knitting your swatch, tube it before checking the measurements. If it looks like it's correct, then treat it just as you plan to use the sweater.
8. Never pin out your swatches while blocking them. This distorts what the yarn wants to do. Just steam them out. Let them "rest" for a day or so, to make sure they remain steady.
9. Be sure to measure your swatch correctly. Many knitters who are having trouble with gauges have knitted them just fine, but didn't measure from the right points of reference.
10. The dial on your carriage adjusts the width of the stitch, while the dial on the tension mast changes the height, or length, of a stitch.

Knitting a swatch on the larger needle machines is the same as for the standard ones. If you are happy with your method, just transfer it to your big needles - using half the stitches and rows.

EASY STITCH GAUGES

After years of trying many methods of making a fast accurate stitch gauge, this is the best I have come up with thus far. Give it a try and see if you like it too.

"E" wrap with main color yarn, needles #10 right, thru needles #10 left. Knit over these needles until ten rows are completed. Remember to pull the needles out to "Hold" position for about 4 rows to keep the stitches from falling off the needles. Remove the main color yarn from the carriage and insert a contrasting yarn of approximately the same size, into the main feeder. Knit two rows with this contrasting color. Remove contrast yarn and replace with the

main color yarn. Knit as many rows as you wish to equal ONE INCH. (If you want 6 rows to equal one inch, then knit six rows.) Now, stop and mark off the STITCHES of your gauge by finding the needles on the OUTSIDE of what you wish to be two inches across on the swatch. For instance, if you were trying to reach a swatch of 4 stitches to an inch, you would want to mark needles #5 right, and #5 left. This would be done by hand knitting a contrast yarn through these two needles.

After marking the needles on this one row, knit once more as many rows as you wish to equal one inch. This would be six rows if you were trying for 6 rows = one inch. Remove main color yarn, replace it with a contrasting yarn, and knit two rows. Return once again the main color yarn into the feeder. Knit about four more rows.

With the one prong tool, make eyelet holes to help you remember the tension your carriage was set. For instance, if one makes five eyelet holes, leaves a space, and then another eyelet hole, it would SHOW the swatch had been knitted at tension 5.1. The eyelets would look like this on the swatch:

0 0 0 0 0 0

You are half done with the swatch. With contrast yarn, knit six to eight rows, increasing the number of the tension dial on your carriage by TWO DOTS looser (higher increments).

Put in main color yarn and repeat the entire swatch again at this new tension. Mark it in the same way by putting in contrast yarns, and eyelets, as before.

After you have completed the eyelet holes for this new swatch, knit about six more rows with main garment yarn. Latch tool bind off the entire knitted swatch. Tube the swatch when you first remove it from the needles (stretch it in a vertical manner to set stitches as they should be).

Next, block it, measure it, and then let it dry and rest. If you have any doubts of the yarn, launder this knitted piece as you would the garment.

It is very important when measuring the swatch, to watch and see that the contrast lines of yarn are straight across when blocked. If the swatch is distorted while blocking (and this is easily done), at one side you could get one reading and on the other side you could get another. Keeping contrast rows horizontally straight prevents this.

The lengthwise measurement for your ROW GAUGE is taken from the point on one "V" of a stitch to the point of the contrast yarn "V" - in other words, you must have the entire group of rows counted to be accurate with this swatch. And, when measuring across the swatch for your STITCH GAUGE, lay your ruler on the top of the knit side of the swatch and count from the inside of the marked stitches of contrast yarn. You should end up with two inches both in length and width in between the contrast color markings.

If your gauge happens to have something other than 4 stitches and 6 rows to an inch, check to see if you can use the patterns for 3 sts. x 5 rows = 1", or 5 sts x 7 rows = 1". The patterns are included.

Hope this helps with this nasty, necessary task. Another thing to remember is that swatches have many uses after the yarn is all knitted up. For instance, even if the yarn has been steamed, it is

great for crocheting trims. I rip them out as I am crocheting. They are a great big advantage when you need two strands of yarn. Another use for old swatches is to hold open stitches. Place the edge of the swatch on the needles where you wish to start new stitches. Knit one row of ravel cord across these needles. And then knit your garment yarn across the ravel cord - open stitches result for you, to be used in a band or armholes. No, don't ever throw those swatches away. You never know when you will need to practice making a band, technique, buttonhole, or something. These are just the thing to practice all kinds of ideas.

THREE STITCH GAUGES FOR EACH SWEATER

As in the previous Bulky Upside-down sweater books, there is one size per pattern, but given in three different stitch gauges. In working with the heavier yarns, gauges of 3 sts. x 5 rows = 1", 4 sts. x 6 rows = 1", and 5 sts x 7 rows = 1" were most common. These have been used in these youngsters designs.

If you have any doubts which tension to use in your particular swatch, choose the one that will make the larger sweater. The children are always growing bigger. If a loose, easy fitting sweater is desired, make one or two sizes larger than measurements. Also, in working with these patterns, some liberties had to be taken with a few numbers. As a rule, when a choice had to be made, the larger number was used to make the pattern work out.

The ribbing gauge is usually set at about one-half of the main garment tension on both the main and ribber carriages. With some yarns, especially cotton, you might wish to knit an elastic yarn with the main yarn, when ribbing - to help it maintain a better shape. Practice doing this before starting your garment.

As some of these yarns do tend to bias, sometimes plaiting with the same color of ordinary sewing thread will stabilize the yarn. You must make your swatch in plaiting also, to get it correct.

If you try to knit these with a stitch gauge other than the ones above - only heaven knows what size sweater you will complete. So, taking a little time, and care, with the the swatch will pay large dividends in satisfaction.

MARKER CORD ROWS VERSUS RAVEL CORD ROWS

The above terms are often used interchangeably. They have very different uses and meanings. This often needs to be explained as we definitely need to use these techniques in our daily knitting. First, "Ravel Cord" is the name for the white, silky cord that came in the utility box of a knitting machine. One can even purchase these cords in pastel shades so they will be more obvious when used with different shades of yarns. Course, if you want to be practical (because one uses a lot of marker and ravel cords), try using different colors of crochet cotton yarn in place of the silk cord. This can be discarded after the task is finished.

While knitting, the term "ravel cord" takes on another meaning. When a pattern states "knit one row with ravel cord", it means to take your garment yarn out of the carriage and knit across with only the

ravel cord. When this ravel cord is pulled out, the knitted fabric will separate into two pieces - a very handy, useful technique.

However, the same cord is also termed "Marker Cord". In this use one puts THE CORD IN WITH THE GARMENT YARN. It is used to mark a row to hang something else into - to sew off, etc. Leaving the garment yarn in with the marker cord allows one to pull out the cord after using it, and the fabric will still be connected. After a little practice, you will readily see the help these two techniques can be.

THIS IS AN UPSIDE-DOWN SWEATER

If you have decided to use a pattern with these sweaters, turn your pattern card upside down, or turn on your upside-down key if you have an electronic machine.

Knitting in a monogram or initials are easy too. As these patterns are relatively small, just be sure to watch how many needles you will be able to use for the initials. Remember that the fabric is upside-down and the wrong side is facing you. Most all monograms are placed on the left side of the outside of your sweater. To do this on this garment, draw the graph and turn it upside down. Number your graph along the bottom of the letters as you will be working there first. The initials should be knitted in what I call the "RIGHT TRIANGLE". Count the lines needed for the entire graph and subtract this number from the end row of the triangle. This will give you the row to start pulling the needles. After a few rows have been completed, it is a good idea to check underneath your fabric to see how it is working out on the front side.

As for using your graph to pull the needles for your two color work, try this. Read your graph from the left hand side - to the right hand side (just like reading a book) BUT pull the needle numbers starting on the RIGHT side of the main bed moving to the left side. This automatically reverses your graph and makes it come out okay on the front side of the garment. Have some fun with this and save time redrawing your graphs up at the light of your window.

GARTER BAR TURNING ROW

It is necessary to turn one part of this sweater over to the other side. This can be done by either scrapping off the stitches and turning them over when rehanging OR use the garter bar (Yes, you can use your standard Garter Bar on the bulky machines. Just use every other prong of the Garter Bar.) The following is an easy way:

Pull all stitches to Hold (E) position with the fabric up tight against the bed of your machine. Pick up the garter bar with the "Bump" side facing you. When you hold it in your hand, your thumb will be on the top and on the "bump". Place the windows of the garter bar onto the hooks of the needles where fabric is to be turned. Start from one side pulling all the stitches onto the garter bar, back as far as they will go - back to bottom of this part of the bar. Lift the bar, with it's stitches now safe, off the needles. Leave the needles out in the Hold (E) position.

Make sure all the latches are open. Turn the garter bar over in your hand and lay it back down on the hooks so the eye of the garter bar is even with the TOP of the OPEN FLAP OF THE LATCH. The tip of

the latch will be visible in the window (hole) of the garter bar. Push down on the bar and pull the bar toward you. You will feel the yarn catch in the hooks of the needles. Then tilt the bar back a little to see if all the stitches have been caught.

Once the stitches have been put back on the hooks of the needles, turn the garter bar vertically to the machine and push the entire set of stitches into the machine bed. After the needles are back in Work (B) position, then pull the garter bar out by reaching up under the work and tugging down on just the bar. A run of your fingers across the needle butts places all your stitches in the proper line. If a stitch slipped off, pick it up with your tool, and rehang.

The most important thing to remember when working with the garter bar is that your stitches are always in jeopardy as long as they are in some other place than Work (B) position. So, get them back to "B" as soon as possible.

MAKING THE RAGLAN SLANTS OF THIS SWEATER

Rapid increasing instructions have been use to form the slants of the armhole. This method creates a small eyelet when connecting the sleeves to the body. It is a quick way to join the sweater together and is a very fast technique. To do this, pull a new needle from the Out-of work (A) position into Work (B) position (or even clear out to Hold (E) position on slippery yarns) on the side NEXT TO THE CARRIAGE EVERY ROW before knitting across.

An alternative to this is to "E" wrap each new needle brought up with the yarn next to it before knitting across. Doing this will avoid the eyelet look.

Even if you have knit the front and back of the sweater using the Rapid Increase method (the first way given that forms loops), one may still knit in the sleeves without the eyelets. Holding the front and back slants, wrong side facing you - just reach below the loops and hang the piece of yarn that shows in each stitch. Just be sure you pick up the same part of every stitch on each needle. This will allow the loops to form a long stitch on the front side of the garment. If you don't like this, then reach in front of the loop and hang the part of the stitch you see below the loop. This puts the loops to the back of the garment and will not be seen on the outside of the sweater. All ways look very nice.

KNITTING SLEEVES IN WITH NEEDLES IN "B" POSITION

As said before, one of the neatest things about knitting upside-down sweaters is that we can keep all the needles back in Work (B) position while knitting in sleeves. This permits a lot of freedom using different techniques. It also saves having to make the sleeves separately and later seaming them in - thus shortening the finishing time. If at all possible on any garment, I like to knit the sleeves in. By using the upside-down sweaters, your yarn and patterns will be knitted the same way throughout.

Hang the stitches of the top of one sleeve that were previously scrapped off on the neckband, onto the center of the machine. Thread your carriage and set up your machine and pattern for your particular type of knitting. Pick up ONE (1) loop (or knot) from the front or

back side of the armhole slant AWAY from the carriage and put it on a new needle brought up from Out-of-work (A) position. Knit across. Pick up a loop (or knot) from the raglan slant of the other side of the garment and hang it on a new Out-of-work (A) position needle which you have pulled up into Work (B) position on the other side of the sleeve. Knit across. Continue picking up one new stitch on the side AWAY from the carriage and knitting one row across until all stitches for the sleeve except for the "E" wrapped stitches at the underarms are in Work (B) position. Pick up all the "e" wrapped stitches from the underarm away from the carriage. Knit over all stitches. Pick up all the "E" wrapped stitches from the underarm on the other side and knit back across. Now you should have ALL sleeve stitches in Work (B) position. Whenever it might be inconvenient to use a technique with needles out in the Hold (E) position, this method can be easily implemented throughout the sleeve cap. One try will convince you, I'm sure. And the finished product is so rewarding.

SHORT ROW REFRESHER

If you choose to knit in the sleeve cap by hanging all the sleeve stitches on at one time, you will need to understand about short row increasing. This is a valuable technique, so let's review two methods of increasing and decreasing with short rows.

AUTOMATIC SHORT ROW INCREASING (Inc. S/R):

Put on your Partial Knit Button, or Buttons (Hold, I, II, or Russell Levers). Using the stitches in Hold (E) position, PUSH ONE (1) MORE STITCH THAN REQUIRED in your pattern into the Needle Selector (C or D) position, beginning on the side AWAY FROM THE CARRIAGE. (Studio and Singer machines should only barely push in these needles. If you push them in too far, the stitches will drop off the needles.)

Knit one row across. Now, pull the LAST KNITTED STITCH next to the needles in Hold (E) position, back into the Hold (E) position. This will form a wrap stitch around this last needle brought forward, when you knit the carriage to the other side - preventing a hole being formed when you turn around and knit the other way in the middle of a row (that's what is meant by "short rows").

AUTOMATIC SHORT ROW DECREASING (Dec. S/R):

Put on your Partial Knit Button, or Buttons, (Hold, I, II, or Russell Levers). On the side away from the carriage, PULL ONE LESS STITCH than desired decrease into Hold (E) position. Knit across to other side. Pull the last knitted stitch, next to the needles in Hold (E) position on the side where your carriage is now, back into Hold (E) position. This needle will be wrapped by your yarn when the carriage is knitted to the other side, stopping a hole from forming.

When knitting in the sleeves, you will be working on both sides of one sleeve on the same row - pushing needles in on one side and wrapping a needle on the other side.

HAND WRAPPING:

In short row work, the technique of Hand Wrapping the needle at your "turn-around" point is a much neater way. The last stitch is not knitted and then wrapped; so one extra strand of yarn is omitted from

the wrapped needle. Here's how we do it:

Push in (or pull out) EXACTLY the number of stitches you wish to place in Hold (E) position. Knit across the row. With your fingers, or two prong tool, take the yarn at the end of this row and place it in between the last two needles in Hold (E) position. Knit back across. When you knit this return row, the yarn wraps around the last Hold (E) position needle - preventing the hole. In cotton, or hard twisted yarns, the turn-around point will not be as obvious with this method. Practicing this technique will make it become a very quick and easy maneuver.

BULKY RIBBING

There are several methods of creating ribbed cuffs and bands for your V-Neck Bulky Sweaters. A lot depends on the yarn one plans to use and the style you wish to create.

If you are fortunate enough to have the ribber attachment, please refer to your specific manual for your instructions. Many variations are given. According to your ideas, I'm sure you will find a most appropriate method to enhance your design.

Until you do manage to get a ribber for your large gauge machine, there are several successful ways to achieve good ribbing anyway.

MACHINE RIBBING:

Please refer to your manual for your specific machine. There are several types given - suit your desires.

HAND KNITTING THE RIBBING WITH HAND KNITTING NEEDLES:

It is possible to remove the stitches from the machine needles and place them on regular hand knitting needles when ready to make the ribbing. Do a normal ribbing from hand knitting manuals. Be sure to bind off in ribbing pattern.

HAND RIBBING ON THE MACHINE:

To do this type of ribbing coming down from the body or sleeve of a garment, such as in this upside-down V-Neck, place a marker cord in with your yarn at the row you wish to START THE RIBBING. Knit one row. Remove marker cord but leave garment yarn in carriage. Knit as many rows as you wish at two full tension tighter than garment tension. Knit the last row about FIVE FULL TENSION LOOSER as this will be your bind-off row.

When this is finished - BEFORE BINDING OFF - release the first stitch that needs to be changed into a knit stitch. Let it run down to the place the marker cord is found. Then latch tool the stitch back up through each yarn strand, and hang it back on the needle. Repeat this across the row on every stitch that needs to be converted into the knit stitch. When all this is completed, use the latch tool to remove the stitches from the needles, keeping the stitches in the knit, or purl formation, by the Stafford instructions in this book.

MOCK RIBBING:

For mock ribbing on the cuffs and bottoms of the sweater, try this method. After the last row of the sweater, or sleeve, is knitted - transfer every other stitch to the adjoining needle by hand. Place

the emptied needles back to the Out-of-work (A) position. Turn the tension two full tensions tighter than main garment tension. On the first row of this rib, put in a marker row of different colored crochet cotton, or ravel cord, with your garment yarn so you can see where to hang these stitches later.

Knit TWICE the number of rows you need for ribbing. When correct number of rows are knitted, hang stitches on corresponding needles and LOOSELY sew them off together with a double-eye needle, threaded with garment yarn.

ADDING ELASTIC TO RIBBING FOR STABILITY:

Using an elastic thread in the ribbing is helpful, and even necessary with some yarns, to keep the ribbing firm - allow it to stretch - and return to it's original shape. This is true with cotton yarns in particular. Many brands of fine elastic thread can be purchased from your dealer. Thread elastic through tension mast as a contrasting yarn, but place it in with your garment yarn in the carriage.

"AFTERWHILE" RIBBING FINISH:

Sometimes, when in a hurry or I just don't feel like putting up the ribber, I will come down to the end of the body, or sleeves, of the sweater and just scrap them off with about six rows of contrasting waste yarn. Later when the mood strikes me, I knit my choice of ribbing in a normal cast-on manner over the same number of stitches of each piece scrapped. After the ribbing is completed, transfer with a double-eye needle the ribber bed stitches up to the main bed. Scrap off this ribbing with six rows of waste yarn.

Kitchener weave with a tapestry needle these sets of stitches onto the body and sleeves of the sweater. This gives a beautiful finish and you will have the ribbing cast-on that is so pleasing. Another big plus with this method is one can do the handwork while getting your hair done, waiting for the children, watching T.V., or riding in the car. It works best if you attach the ribbing before doing the seaming.

STAFFORD RIBBING CAST-OFF:

After trying many machine ribber bind offs, it is felt by me that the Stafford method gives one of the best ribber edges. It maintains the integrity of the stitches as either a knit or purl stitch; it has a lot of elasticity for the stretch that is needed; and it has a nice finished edge to it. Plus, it is very easy to do. The late Fred and Frances Stafford graciously allowed me to print it, to share with you. Hope you will like it as much as I do.

DIFFERENT RIBBER CAST-ON AND CAST-OFF

By Fred and Frances Stafford

When you first begin using your new ribber, you may find that you are not completely satisfied with the appearance of the edges of either the cast-on row, or the bind-off row when you follow the instructions in your manual. Here is another cast-on and an easy bind-off that will give a uniformly neat edge with just the right amount of elasticity for armhole and neckbands, etc.

CAST-ON

1. Set main carriage on the right, ribber carriage on left, ribber down in Out-of-work position. Pull out to Hold position on the main bed any even number of stitches you desire. "e" wrap cast-on from left to right. Thread up the carriage, knit one row from right to left, using the proper lever to knit these needles back into Work (B) position.
2. Pull ribber into place, join main and ribber carriages. Beginning at the right, leave first 2 needles on main bed. Transfer 3rd and every other needle to ribber bed, ending with the last needle on the main bed. Return all empty needles to "A" position. The reason for leaving 2 needles on one end of the main bed is to keep the sequence of 1x1 rib when the seam is finished, using the weaving stitch and taking in one whole stitch on each side for the seam.
3. Using a needle pusher, pull out the main bed working needles just far enough for the ends to be even with the ends of the gate posts on the ribber bed. Insert the comb from behind the row of knitting so that the teeth of the comb come up between the needles on the main bed, thus preventing the comb from splitting the yarn. Insert the wire in the comb, pull back the needles on the main bed to work position and drop the comb so that it rests on the zigzag yarn stitches between the two beds.
4. Place weights as desired. You are now ready to begin ribbing. To make the first row of ribbing easier, pull all needles on both beds out to Hold position. MAKE SURE THAT ALL LATCHES ARE OPEN. Knit across, letting the machine knit the needles back into Work position. (Note: If you use a Brother or Knitking machine, the ribber needles need to be brought out only to (C) position, not "D" position, as a Studio or Singer.)

Please note that there is a right and wrong side to the cast on. So, if you are doing a weaving or purl-side pattern, when you finish the ribbing and transfer all stitches to the main bed, be sure to turn over the stitches with a garter bar.

The nice thing about this method of casting on is that you may transfer stitches to the ribber in Step #2 in any combination you wish, such as knit 1, purl 1; knit 2, purl 2: or knit 3, purl 3, etc.

BIND-OFF

This is an easy bind off, finished on the machine, that requires no hand sewing with a tapestry needle to complete. It follows the stitches; that is, knits the knit stitches and purls the purl stitches, thus giving a neat, unobtrusive edge similar to hand knitting that has enough elasticity, but not so much that the edge flares out.

1. Pick up stitches around the armhole, neck, or wherever you wish to place the ribbing. Place all stitches on the main bed and manually knit one row to form a base row that is not so tight that the machine will tear the stitches when the first row is knit.
2. Transfer desired stitches to the ribber bed for 1x1 ribbing, keeping the 2 end stitches on the right end and 1 end stitch on the left end of the main bed to make the seam stitches come out evenly.
3. Insert comb as described in #3, under cast-on. Hang weights. Pull out to Hold Position all needles on both beds for the first row of ribbing. Be sure all latches are open. Do the desired number of rows of ribbing.
4. After the last row of ribbing is completed, knit one row at least 4 full tensions higher than the ribbing tension on both beds. Now transfer all ribber stitches to the main bed, ready to do a slip stitch bind off. Remove all weights and comb.
5. Using the 1x1 needle pusher, pull out to C position all stitches that are knit as you face them (these are all the stitches brought up from the ribber bed.) Using the pusher to set the needles as described is very helpful to get the needles in the proper position, thus preventing mistakes which could otherwise easily be made. And by pushing all the knit stitches slightly forward of B position, it is easy to tell whether the next stitch is a knit or a purl stitch.
6. Placing the left hand on the knitting so that the thumb presses against the garment underneath the needles and the forefinger touches the butts of the needles, push the first needle out far enough to allow the stitch to slip behind the latch. Hook the latch tool in the hook of this stitch, letting the finger push the butt of the needle back out of work as the stitch slides off the needle onto the hook of the latch tool. Slip it behind the latch of the tool ready for the next stitch. Repeat with the 2nd stitch (also a purl st.). When the stitch has come off the needle, pull it through the stitch behind the latch of the tool, completing the stitch. This is the technique used in the regular slip stitch bind off. Do all purl stitches (main bed sts.) in this manner.
7. Using the latch tool, from behind the first knit stitch (from the ribber), lift that stitch off the hook of the needle onto the latch tool. Slip the stitch through the other stitch on the latch tool. Let this stitch slide behind the latch of the tool, ready for the

7. cont.
next stitch. Push empty needle out of work.
8. The next stitch being a purl, slip it off the needle onto the latch tool as in Step #6. Pull this stitch through the stitch already on the latch tool.
9. Continue in this manner, doing the regular slip stitch bind off, but picking off the knit stitches from back to front, and slipping the purl stitches from the needle from the front, until all stitches are bound off.

A little practice with this and you will never want to go back to the slower and more tedious ways of binding off.

* * * * *

NECKBANDS

In the written pattern directions are specific instructions for knitting a double welted stockinette "V" neckband. There are several other nice bands you might want to try. Of course, one can forego putting on one of these bands and use some crochet edges, lace trims, etc. Take a chance and try some of your own ideas.

LOOSE TURN ROW:

This is used on the above band as a fast edge on the double welt. Knit the band as directed. When you reach the turning row, put your tension up FOUR (4) FULL TENSIONS LOOSER and knit one row. Change your tension back down to two (2) dots tighter than main garment tension and complete the back side of the band.

GARTER BAR TURN EDGE;

The standard size garter bar works on any 9 mm. gauge large needle machine. This edge is the most tailored and sharp turn row for these bands. When you reach the turn row on the double welted band, use the garter bar and turn the band over - knit one row - and then turn the band back to purl side. Turn your garment tension down two (2) dots and continue with directions listed.

PICOT TURN EDGE:

Upon reaching the turning row, transfer every other stitch to the adjoining needle with your prong tool. Leave emptied needles up at work (B) position. Knit one (1) row. You will have a loop of yarn over the emptied needles and the doubled stitches have knitted down to one. Continue on the written directions, remembering to turn tension down.

MOCK RIBBED BAND:

Hang your neckband as instructed, then transfer every other stitch to it's adjoining needle. Push emptied needles back to the out-of-work (A) position. Turn tension TWO (2) FULL TENSIONS tighter than garment tension. (Knit the first row with a marker cord in with your garment yarn.) Knit the entire band (front and back). Pick up the stitches from the marker cord and hang them on corresponding needles. Sew off loosely with a double-eye needle.

RIBBED BAND:

Hang the neckband as instructed. Put your ribber bed up and transfer your stitches in the pattern you wish. Rib about 4 to 8 rows. Use the Stafford method to bind off.

Remember the neckbands, cuffs, and bands of a sweater should either match completely, or be compatible. Some other ideas you might like to try can be found in the "Hems and More Hems" section of my "Let's Knit Some Skirts" book.

EASIER WAY TO INCREASE NECKBAND BACK OUT

After the decreases have been made on the neckband at the mitered point and the turn row has been knit, try this way to increase. It is

not very ethical knitting, but sure is much easier - and the finishing looks fine.

Instead of using a tool increase as written in the patterns, bring up a new stitch from the "A" position to the "B" position on BOTH ends of the neckband. Knit one row. Continue bringing up new needles on both sides of the band each row, until you have the same number of needles working as when you first started decreasing. On the last row, I usually "e" wrap the last needle next to the carriage.

This easier way will not pull the yarn as tightly as the other way written in the patterns. Upon seeing the loose edges, don't panic. Just bar-to-bar weave the front side of the band, keep on weaving around to the back and pick up a part of these stitches and weave them in.

BLOCKING AND ASSEMBLY

On this particular sweater, I want you to put something like a hand knitting needle into the doubled neckband and "tube it" as soon as it is off the machine. This sets the stitches in the band. Next, bar-to-bar sew the mitered "V" together with a tapestry needle. Start at the front bottom of the "V", and working up and over the turn row - clear around to the bottom of the back. This is unethical also, but gives a much neater mitered edge if done before blocking. Okay, this having been done, on with the usual sequences of finishing.

Blocking is one of the most important steps in turning out a terrific item. As soon as the knitting is completed and the garment is off the knitting machine, give each section a tug vertically to set the stitches. (All knits are stretched horizontally on the machine.) After this, head for the blocking board and some steam.

Using the diagram in the book, lay the sweater out on the board for the size knitted. Using "T" pins, secure the sweater into shape. I pin about an inch apart. Be sure to keep the rows of stitches in line. No one wants slanted stitches in their sweaters.

After the sweater is pinned, use enough steam to really set the stitches. I use a teflon sole plate over my iron. And, yes, I really do set my iron right down on the yarn. However, I do not use an ironing motion. Place the iron down, press steam, pick up iron, and move. The iron just sort of glides over the bed of steam. At all times, be most careful not to distort the stitches by the movement of the iron. Move the iron up to your pins, steam, remove the pins, then steam the edges of the garment. One needs a flat edge for good seaming. **DO NOT BLOCK THE RIBBING.** It will lose it's elasticity.

When the sweater has been blocked, sew the sleeve and body seams together with the bar-to-bar method, catching every row. Be sure to keep your ribbing pattern intact, even if you have to go in an extra stitch. If you have used a pattern in your knitting, make sure it is matched. At all times one should make any increases, or decreases, (such as underarm sleeve seams) match when seaming.

Securely knot all the extra sewing pieces of yarn. Weave them into a nearby seam and cut off.

Give the completed sweater another trip to the blocking board for the final steaming, especially the seamed edges. Looks great, doesn't it. Hope you had fun.






BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

PRACTICE SIZE - DIAGRAM

Material: 1 to 3 ozs. depending on yardage of yarns, that give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

NECK BAND

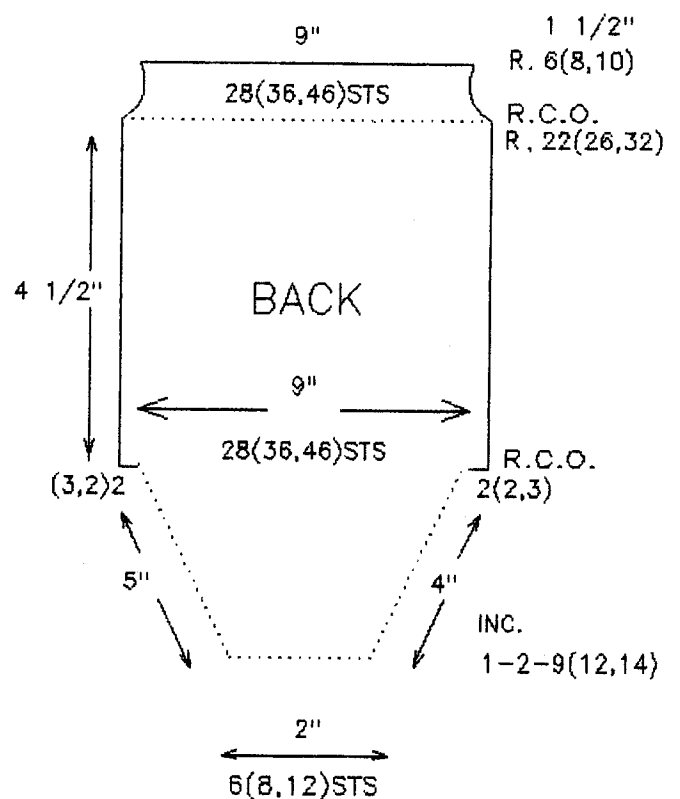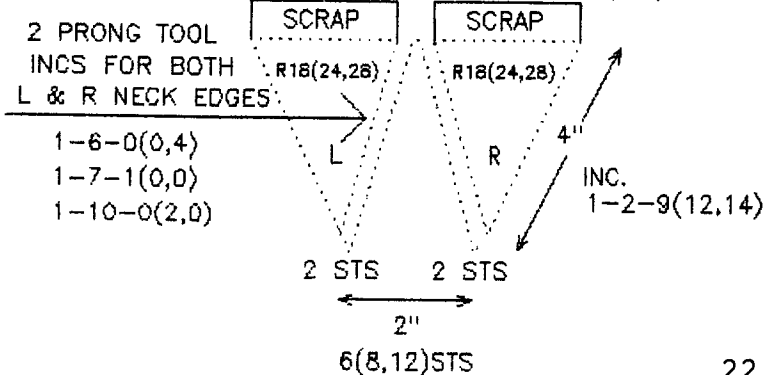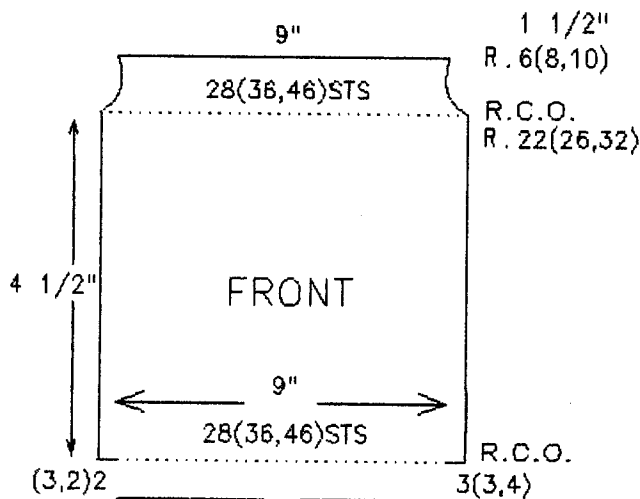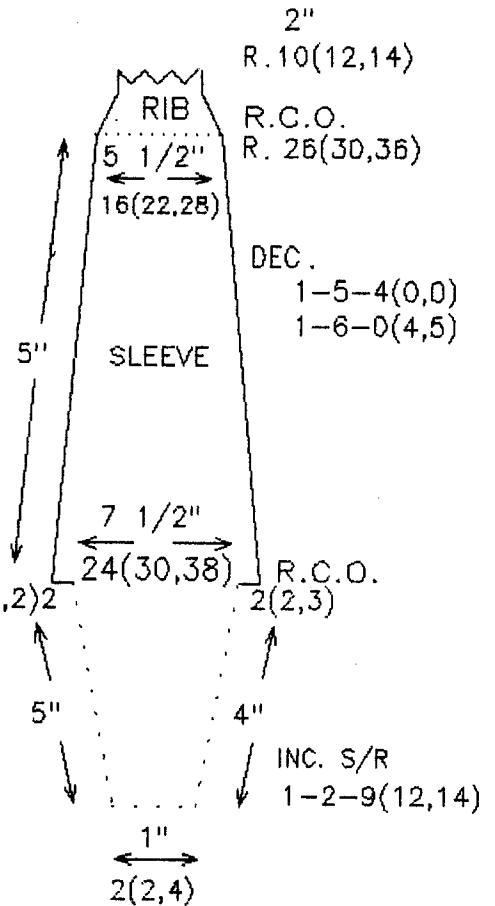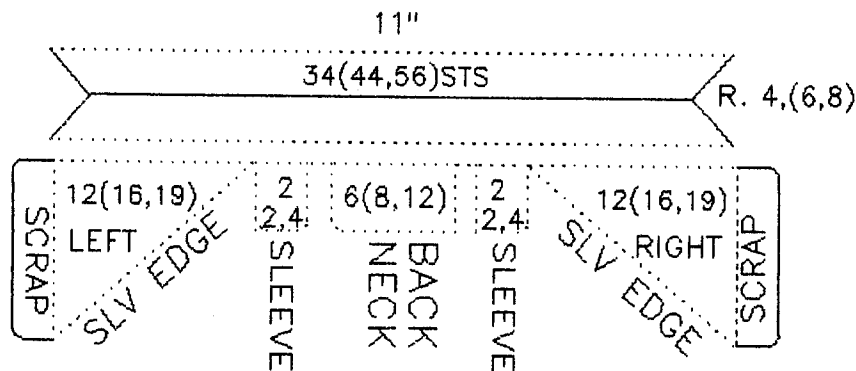

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

PRACTICE SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 7,(10,6), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-10-0,(2,0); 1-7-1,(0,0); and 1-6-0,(0,4).

Knit on, still increasing on left armhole side, till your row counter reads 18,(24,28). You should have 3,(4,6) stitches to the right of "0", and 9,(12,14) working needles left of "0". Knit one row to the left. *Pull out 2,(2,3) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 14,(18,23) ndls. in work and be at R.C. 20,(26,30). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,4) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 15,(19,24) ndls. in work with R.C. at 20,(26,30). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #17,(22,28), right, thru needles #6,(7,11), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 10,(12,20) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(2,4) stitches for one sleeve;

6,(8,12) stitches for the back of the neck; and 2,(2,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #6,(7,11), left, thru #17,(22,28), left. You have 34,(44,56) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 4,(6,8) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 34,(44,56) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(2,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(2,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 18,(24,28). The carriage should now be on the right and 24,(32,40) ndls. should be in work.

Pull out 2,(2,3) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,3) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 28,(36,46) needles working and your carriage on the right

BACK: cont.

PRACTICE SIZE

hand side. Row counter now reads 20,(26,30).

R.C. 0. Knit even to R. 22,(26,32). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #14,(18,23) left, thru #1 left; and right triangle - needle #1, left, thru needles #14,(18,23), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 28,(36,46) sts. to R. 22,(26,32). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(2,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(2,4) needles of the machine. Pick up and hang 11,(14,17) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 11,(14,17) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(2,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 24,(30,38) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(2,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(2,3) stitches on each side. Then make a multiple increase by pushing 2,(2,3) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(2,3) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-6-0,(4,5) and 1-5-4,(0,0). Knit even to R. 26,(30,36). You should end with 16,(22,28) stitches. Complete cuff as desired.

Hang, and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.





BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

ONE YEAR OLD SIZE - DIAGRAM

Material: 3 to 5 ozs., depending on yardage of yarns, that give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

NECK BAND

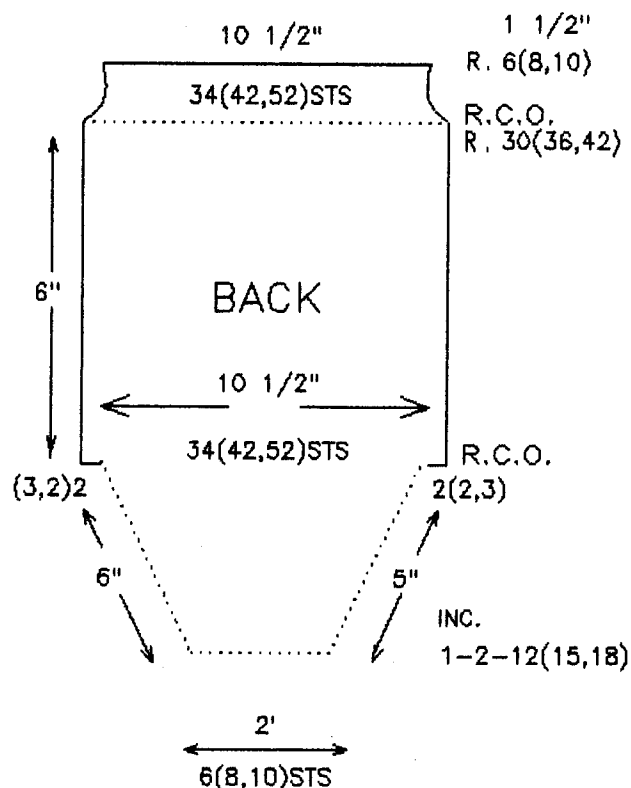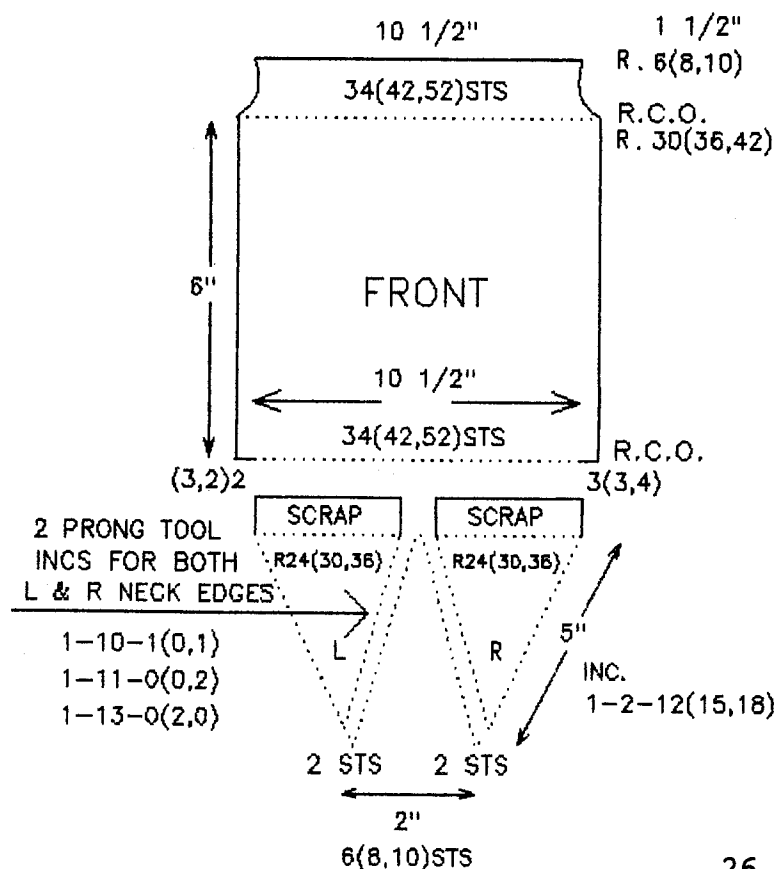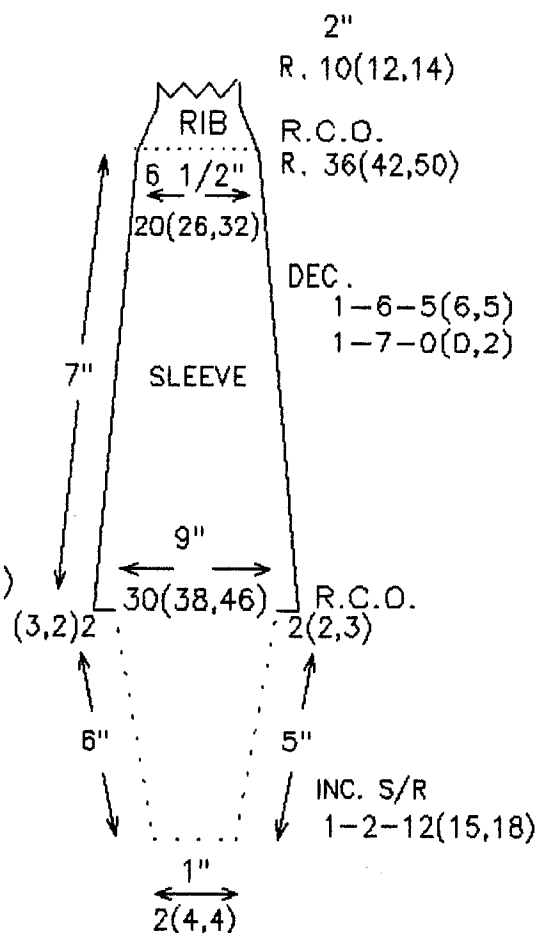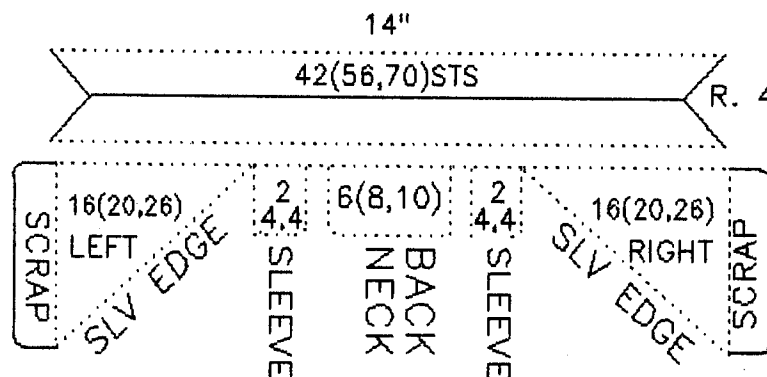

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

ONE YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 10,(13,11), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-13-0,(2,0); 1-11-0,(0,2); and 1-10-1,(0,1).

Knit on, still increasing on left armhole side, till your row counter reads 24,(30,36). You should have 3,(4,5) stitches to the right of "0", and 12,(15,18) working needles left of "0". Knit one row to the left. *Pull out 2,(2,3) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 17,(21,26) ndls. in work and be at R.C. 26,(32,38). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,4) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 18,(22,27) ndls. in work with R.C. at 26,(32,38). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #21,(28,35), right, thru needles #6,(9,10), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 10,(16,18) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(4,4) stitches for one sleeve;

NECKBAND: cont.

ONE YEAR OLD SIZE

6,(8,10) stitches for the back of the neck; and 2,(4,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #6,(9,10), left, thru #21,(28,35), left. You have 42,(56,70) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 4,(6,8) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 42,(56,70) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(4,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(4,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 24,(30,36). The carriage should now be on the right and 30,(38,46) ndls. should be in work.

Pull out 2,(2,3) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,3) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 34,(42,52) needles working and your carriage on the right

BACK: cont.

ONE YEAR OLD SIZE

hand side. Row counter now reads 26,(32,38).

R.C. 0. Knit even to R. 30,(36,42). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #17,(21,26) left, thru #1 left; and right triangle - needle #1, left, thru needles #17,(21,26), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 34,(42,52) sts. to R. 30,(36,42). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(4,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(4,4) needles of the machine. Pick up and hang 14,(17,21) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 14,(17,21) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(4,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 30,(38,46) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(4,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(2,3) stitches on each side. Then make a multiple increase by pushing 2,(2,3) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(2,3) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-7-0,(0,2) and 1-6-5,(6,5). Knit even to R.36,(42,50). You should end with 20,(26,32) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.





BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

TWO YEAR OLD SIZE - DIAGRAM

Material: 4 to 6 ozs., depending on yardage of yarn that will give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

NECK BAND

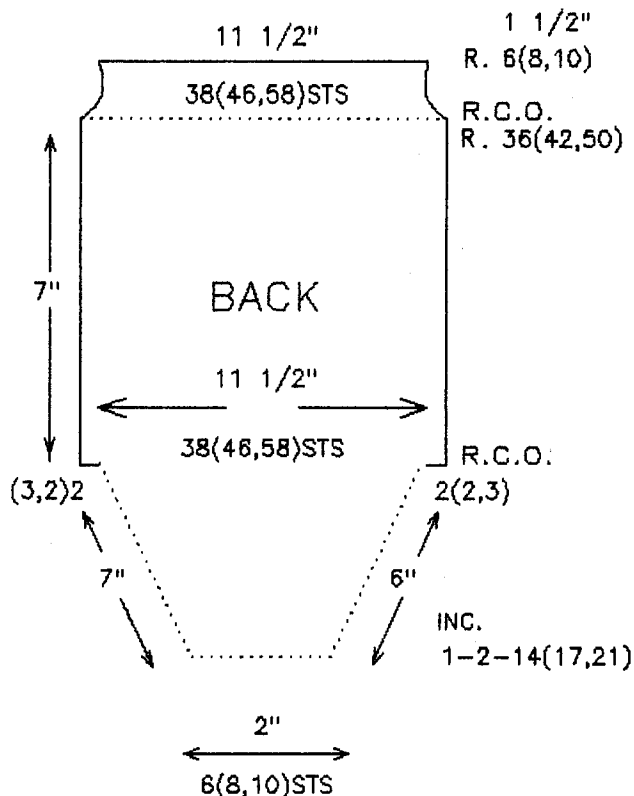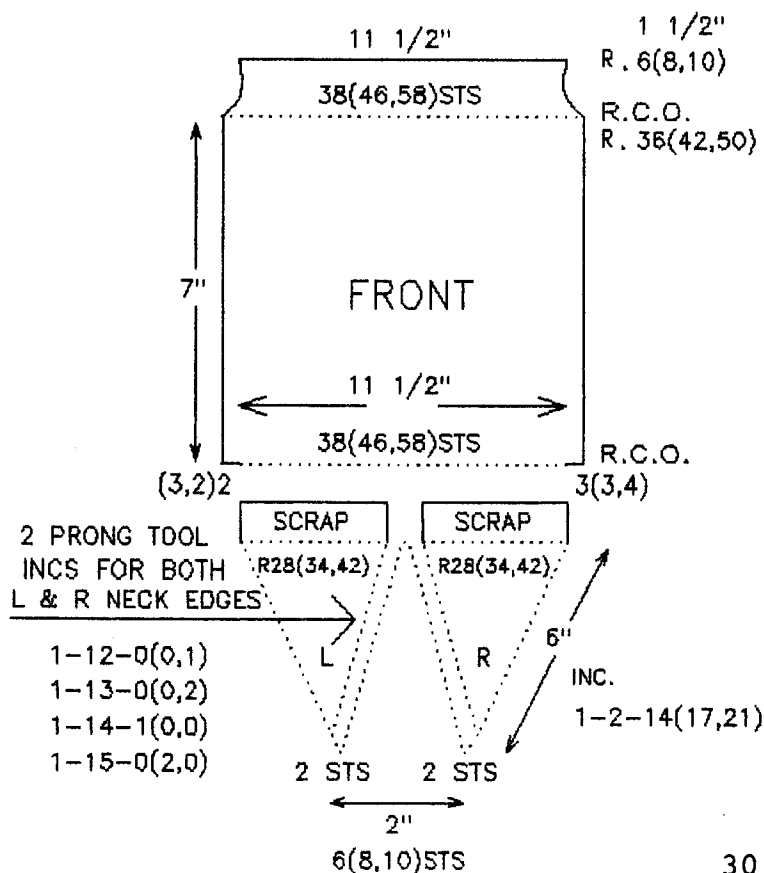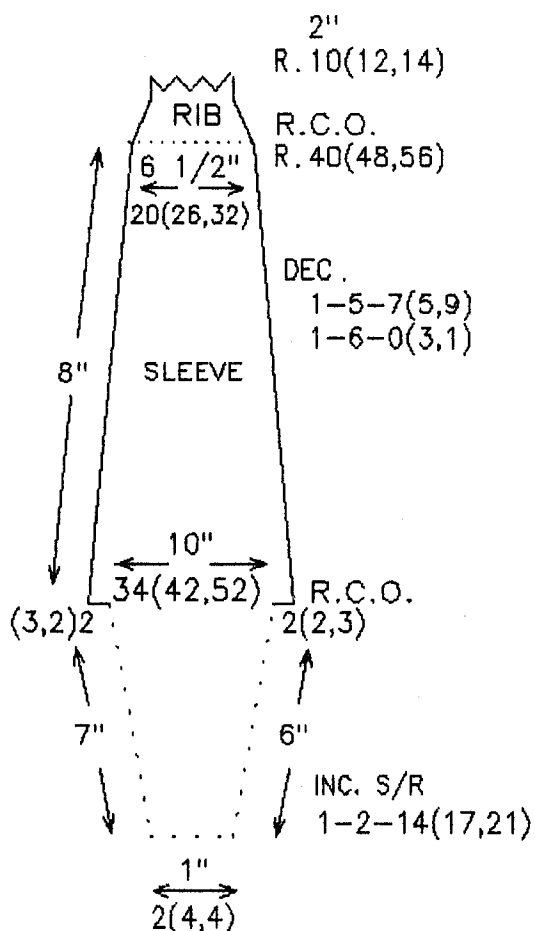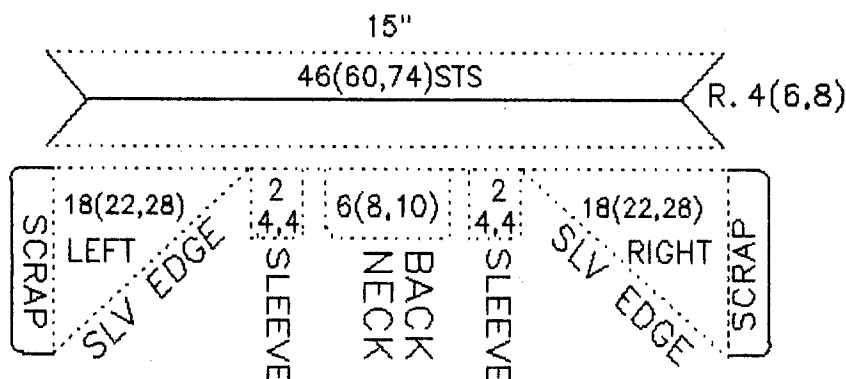

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

TWO YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 14,(15,13), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-15-0,(2,0); 1-14-1,(0,0); 1-13-0,(0,2); and 1-12-0,(0,1).

Knit on, still increasing on left armhole side, till your row counter reads 28,(34,42). You should have 3,(4,5) stitches to the right of "0", and 14,(17,21) working needles left of "0". Knit one row to the left. *Pull out 2,(2,3) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 19,(23,29) ndls. in work and be at R.C. 30,(36,44). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,4) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 20,(24,30) ndls. in work with R.C. at 30,(36,44). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #23,(30,37), right, thru needles #6,(9,10), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 10,(16,18) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(4,4) stitches for one sleeve;

6,(8,10) stitches for the back of the neck; and 2,(4,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #6,(9,10), left, thru #23,(30,37), left. You have 46,(60,74) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 4,(6,8) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 46,(60,74) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(4,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(4,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 28,(34,42). The carriage should now be on the right and 34,(42,52) ndls. should be in work.

Pull out 2,(2,3) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,3) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 38,(46,58) needles working and your carriage on the right

BACK: cont.

TWO YEAR OLD SIZE

hand side. Row counter now reads 30,(36,44).

R.C. 0. Knit even to R. 36,(42,50). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #19,(23,29) left, thru #1 left; and right triangle - needle #1, left, thru needles #19,(23,29), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 38,(46,58) sts. to R. 36,(42,50). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(4,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(4,4) needles of the machine. Pick up and hang 16,(19,24) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 16,(19,24) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(4,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 34,(42,52) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(4,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(2,3) stitches on each side. Then make a multiple increase by pushing 2,(2,3) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(2,3) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-6-0,(3,1) and 1-5-7,(5,9). Knit even to R.40,(48,56). You should end with 20,(26,32) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER





FOUR YEAR OLD SIZE - DIAGRAM

Material: 4 to 6 ozs., depending on yardage of yarn that will give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

NECK BAND

16"

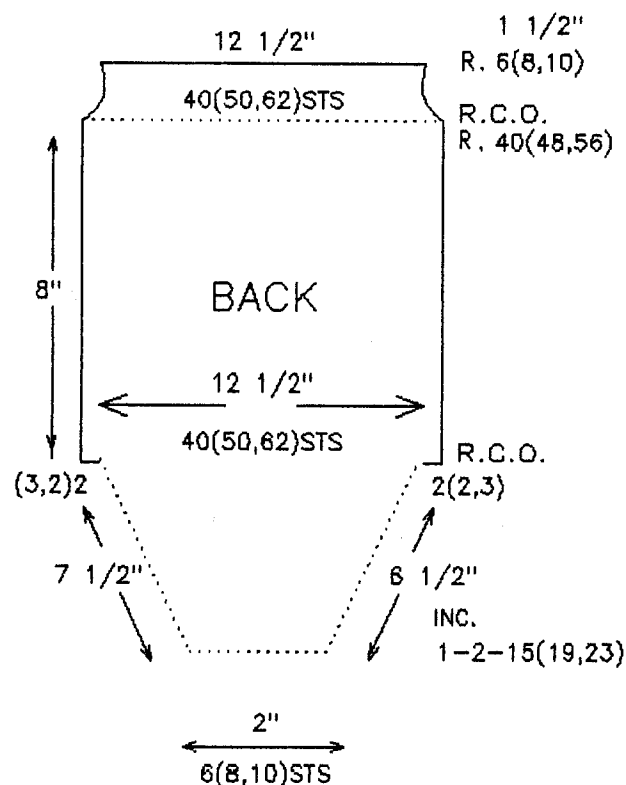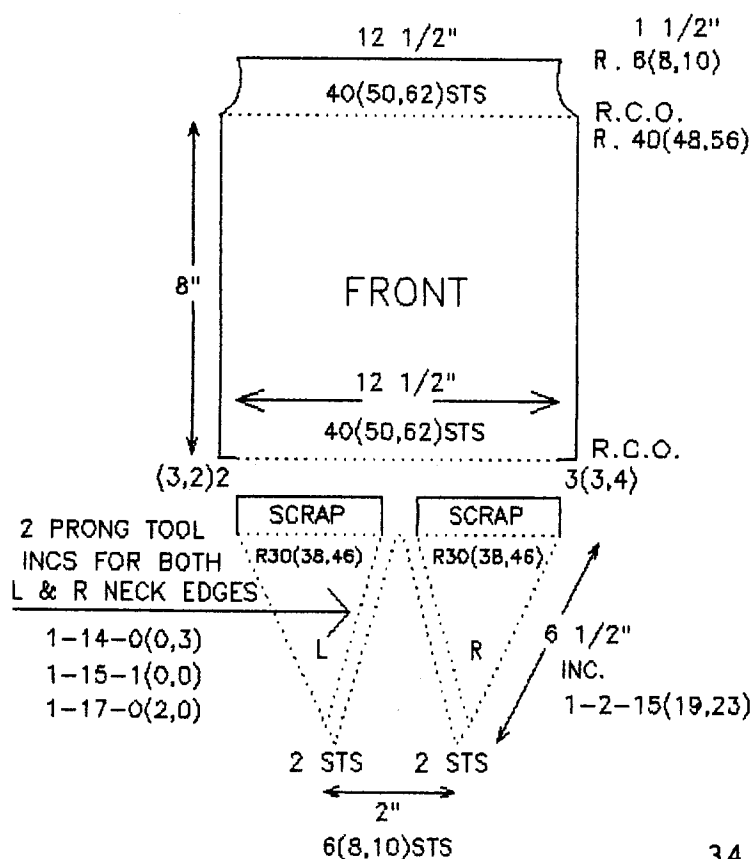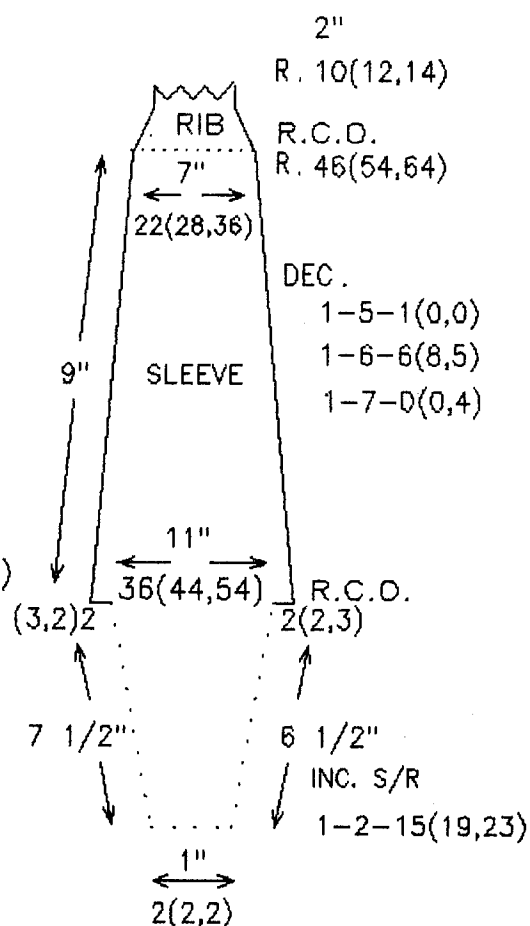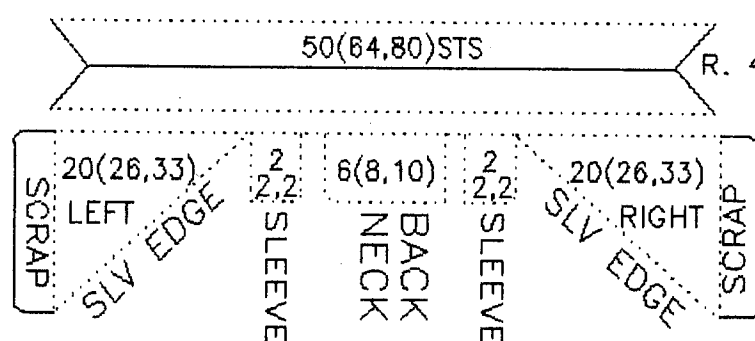

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

FOUR YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 15,(17,14), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-17-0,(2,0); 1-15-1,(0,0); and 1-14-0,(0,3).

Knit on, still increasing on left armhole side, till your row counter reads 30,(38,46). You should have 3,(4,5) stitches to the right of "0", and 15,(19,23) working needles left of "0". Knit one row to the left. *Pull out 2,(2,3) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 20,(25,31) ndls. in work and be at R.C. 32,(40,48). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,4) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 21,(26,32) ndls. in work with R.C. at 32,(40,48). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #25,(32,40), right, thru needles #6,(7,8), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 10,(12,14) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(2,2) stitches for one sleeve;

6,(8,10) stitches for the back of the neck; and 2,(2,2) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #6,(7,8), left, thru #25,(32,40), left. You have 50,(64,80) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 4,(6,8) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 50,(64,80) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(2,2) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(2,2) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 30,(38,46). The carriage should now be on the right and 36,(46,56) ndls. should be in work.

Pull out 2,(2,3) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,3) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 40,(50,62) needles working and your carriage on the right

BACK: cont.

FOUR YEAR OLD SIZE

hand side. Row counter now reads 32,(40,48).

R.C. 0. Knit even to R. 40,(48,56). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #20,(25,31) left, thru #1 left; and right triangle - needle #1, left, thru needles #20,(25,31), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 40,(50,62) sts. to R. 40,(48,56). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(2,2) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(2,2) needles of the machine. Pick up and hang 17,(21,26) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 17,(21,26) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(2,2) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 36,(44,54) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(2,2) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(2,3) stitches on each side. Then make a multiple increase by pushing 2,(2,3) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(2,3) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-7-0,(0,4); 1-6-6,(8,5) and 1-5-1,(0,0). Knit even to R.46,(54,64). You should end with 22,(28,36) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.





BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

SIX YEAR OLD SIZE - DIAGRAM

Material: 6 to 8 ozs., depending on yardage of yarn that will give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

NECK BAND

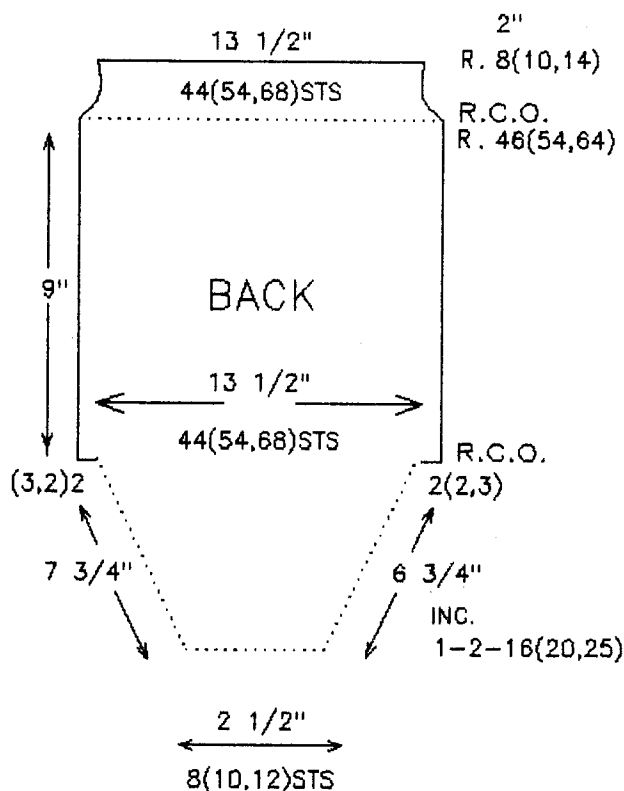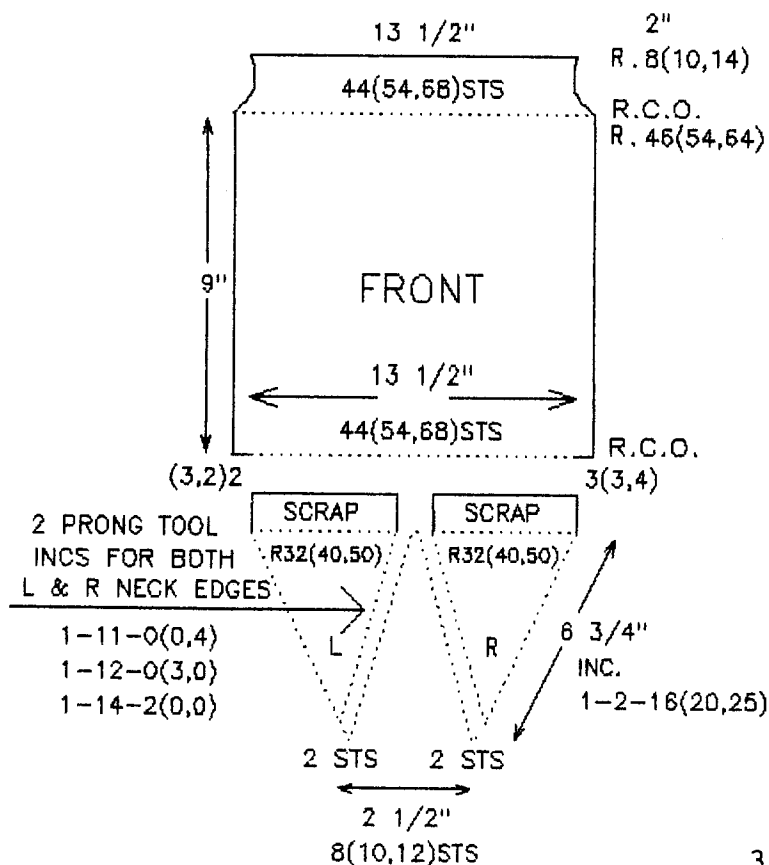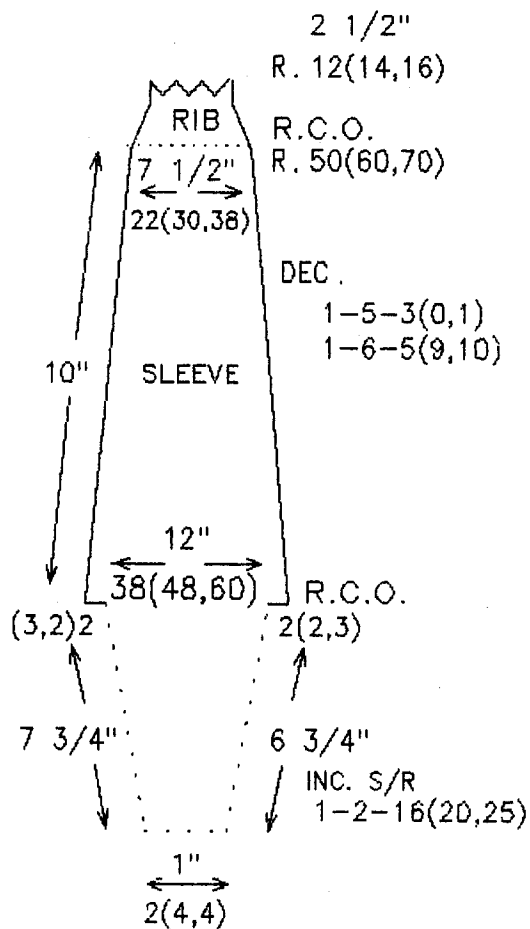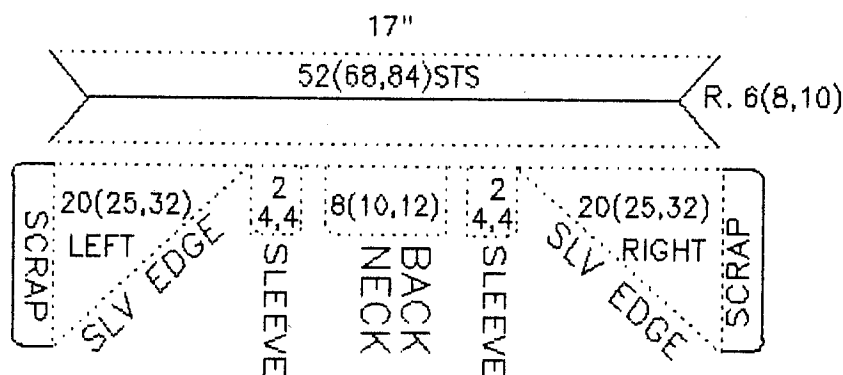

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

SIX YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 14,(12,11), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-14-2,(0,0); 1-12-0,(3,0); and 1-11-0,(0,4).

Knit on, still increasing on left armhole side, till your row counter reads 32,(40,50). You should have 4,(5,6) stitches to the right of "0", and 16,(20,25) working needles left of "0". Knit one row to the left. *Pull out 2,(2,3) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 22,(27,34) ndls. in work and be at R.C. 34,(42,52). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,4) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 23,(28,35) ndls. in work with R.C. at 34,(42,52). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #26,(34,42), right, thru needles #7,(10,11), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 12,(18,20) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(4,4) stitches for one sleeve;

NECKBAND: cont.

SIX YEAR OLD SIZE

8,(10,12) stitches for the back of the neck; and 2,(4,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #7,(10,11), left, thru #26,(34,42), left. You have 52,(68,84) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 6,(8,10) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 52,(68,84) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(4,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(4,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 32,(40,50). The carriage should now be on the right and 40,(50,62) ndls. should be in work.

Pull out 2,(2,3) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,3) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 44,(54,68) needles working and your carriage on the right

BACK: cont.

SIX YEAR OLD SIZE

hand side. Row counter now reads 34,(42,52).

R.C. 0. Knit even to R. 46,(54,64). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #22,(27,34) left, thru #1 left; and right triangle - needle #1, left, thru needles #22,(27,34), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 44,(54,68) sts. to R. 46,(54,64). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(4,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(4,4) needles of the machine. Pick up and hang 18,(22,28) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 18,(22,28) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(4,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 38,(48,60) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(4,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(4,4) stitches on each side. Then make a multiple increase by pushing 2,(4,4) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(4,4) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-6-5,(9,10) and 1-5-3,(0,1). Knit even to R.50,(60,70). You should end with 22,(30,38) stitches. Complete cuff as desired.





Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

EIGHT YEAR OLD SIZE - DIAGRAM

Material: 8 to 10 ozs., depending on yardage of yarn that will give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

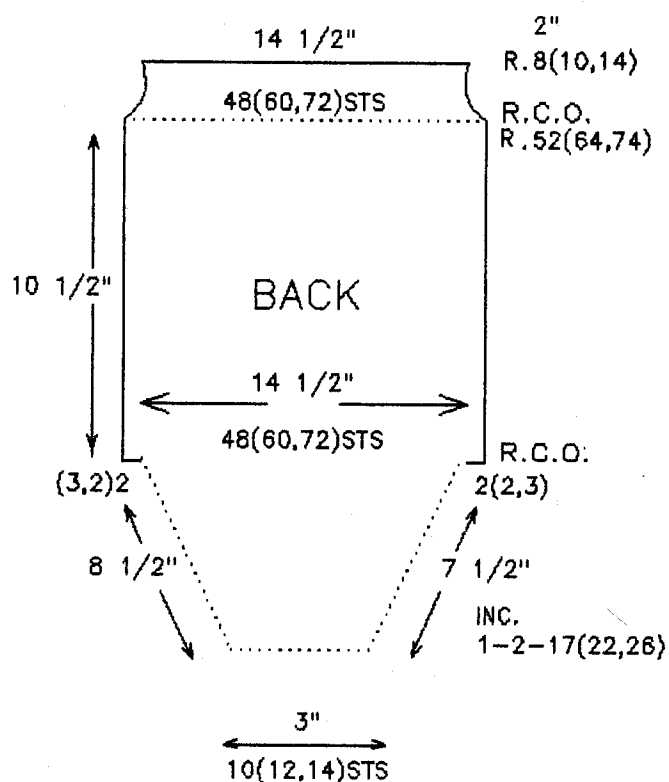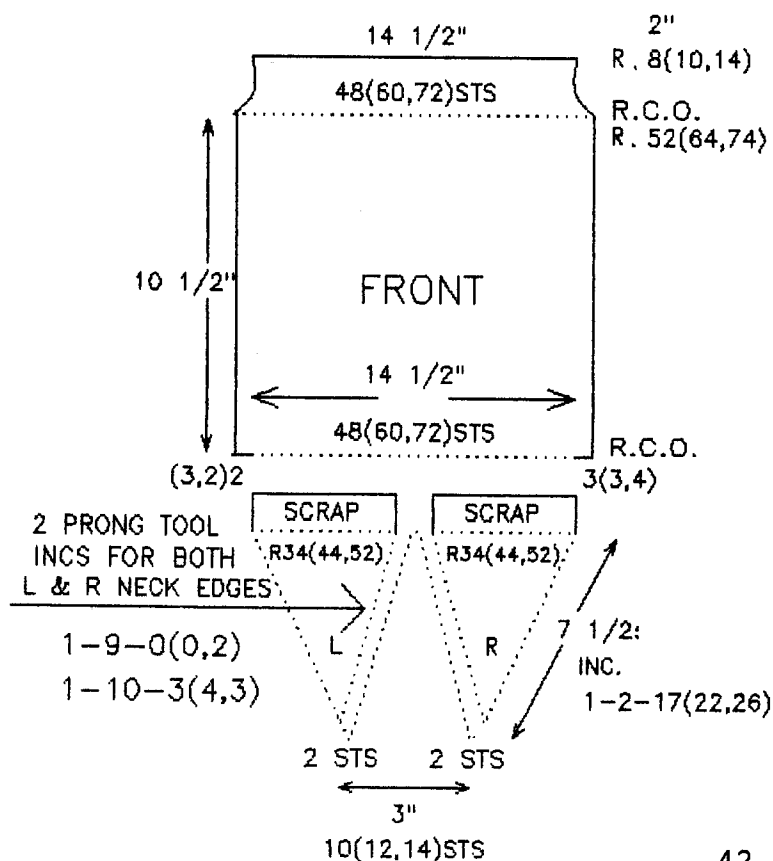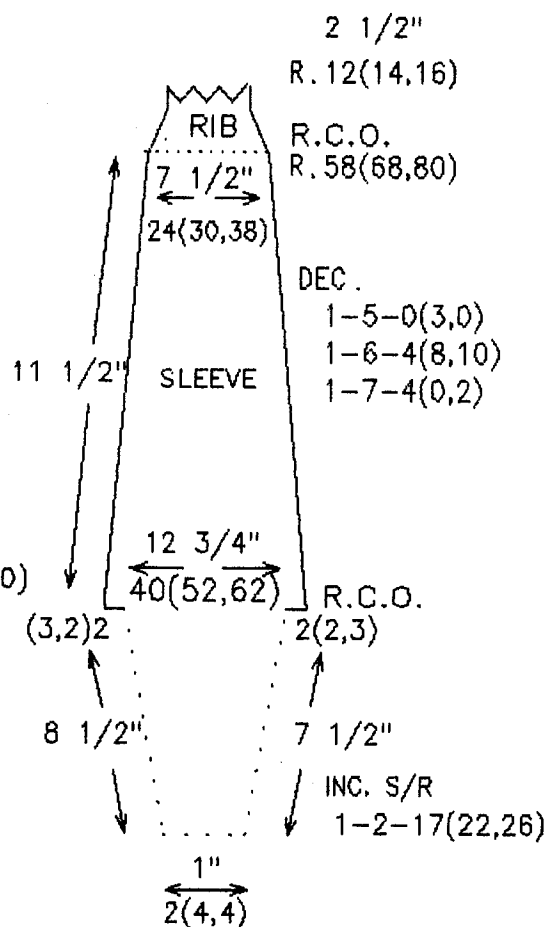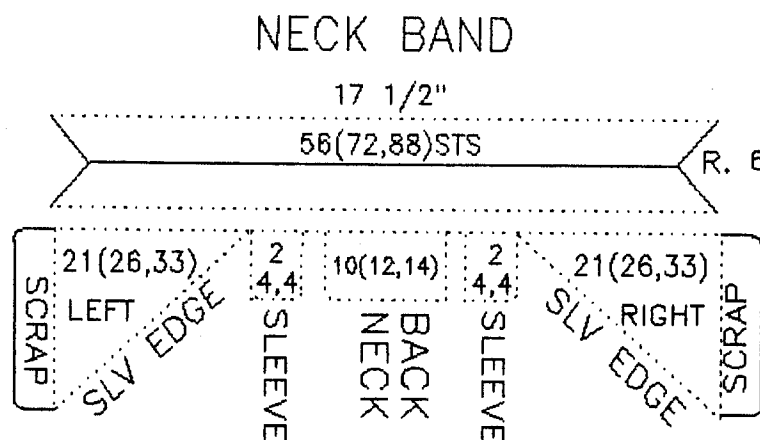

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

EIGHT YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 10,(11,10), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-11-0,(2,0); 1-10-3,(2,3) and 1-9-0,(0,2).

Knit on, still increasing on left armhole side, till your row counter reads 34,(44,52). You should have 5,(6,7) stitches to the right of "0", and 17,(22,26) working needles left of "0". Knit one row to the left. *Pull out 2,(2,3) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 24,(30,36) ndls. in work and be at R.C. 36,(46,54). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,4) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 25,(31,37) ndls. in work with R.C. at 36,(46,54). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #28,(36,44), right, thru needles #8,(11,12), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 14,(20,22) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(4,4) stitches for one sleeve;

NECKBAND: cont.

EIGHT YEAR OLD SIZE

10,(12,14) stitches for the back of the neck; and 2,(4,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #8,(11,12), left, thru #28,(36,44), left. You have 56,(72,88) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 6,(8,10) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 56,(72,88) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(4,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(4,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from "'s to R. 34,(44,52). The carriage should now be on the right and 44,(56,66) ndls. should be in work.

Pull out 2,(2,3) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,3) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 48,(60,72) needles working and your carriage on the right

BACK: cont.

EIGHT YEAR OLD SIZE

hand side. Row counter now reads 36,(46,54).

R.C. 0. Knit even to R. 52,(64,74). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #24,(30,36) left, thru #1 left; and right triangle - needle #1, left, thru needles #24,(30,36), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 48,(60,72) sts. to R. 52,(64,74). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(4,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(4,4) needles of the machine. Pick up and hang 19,(24,29) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 19,(24,29) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(4,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 40,(52,62) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(4,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.





R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(2,3) stitches on each side. Then make a multiple increase by pushing 2,(2,3) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(2,3) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-7-4,(0,2); 1-6-4,(8,10); and 1-5-0,(3,0). Knit even to R.58,(68,80). You should end with 24,(30,38) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.

TEN YEAR OLD SIZE - DIAGRAM

Gauge: 3 sts. x 5 rows = 1".
 4 sts. x 6 rows = 1".
 5 sts. x 7 rows = 1".

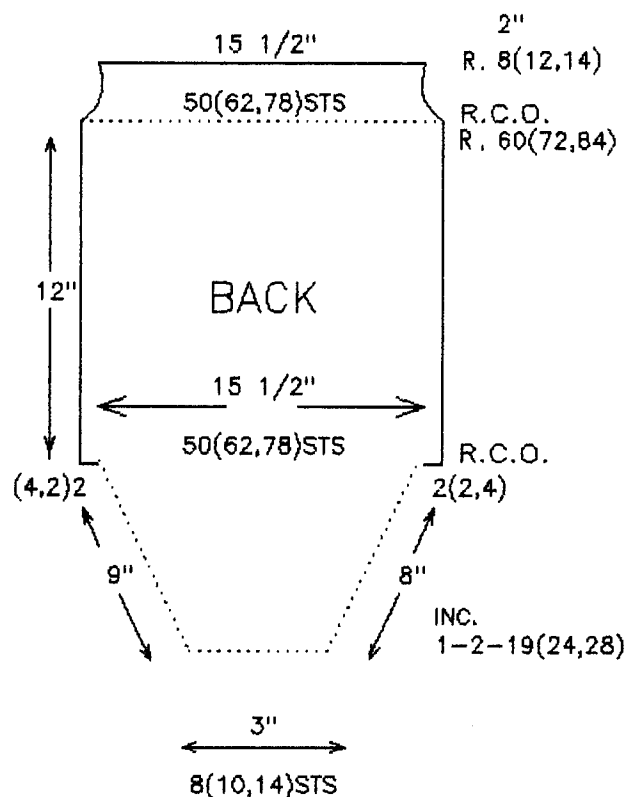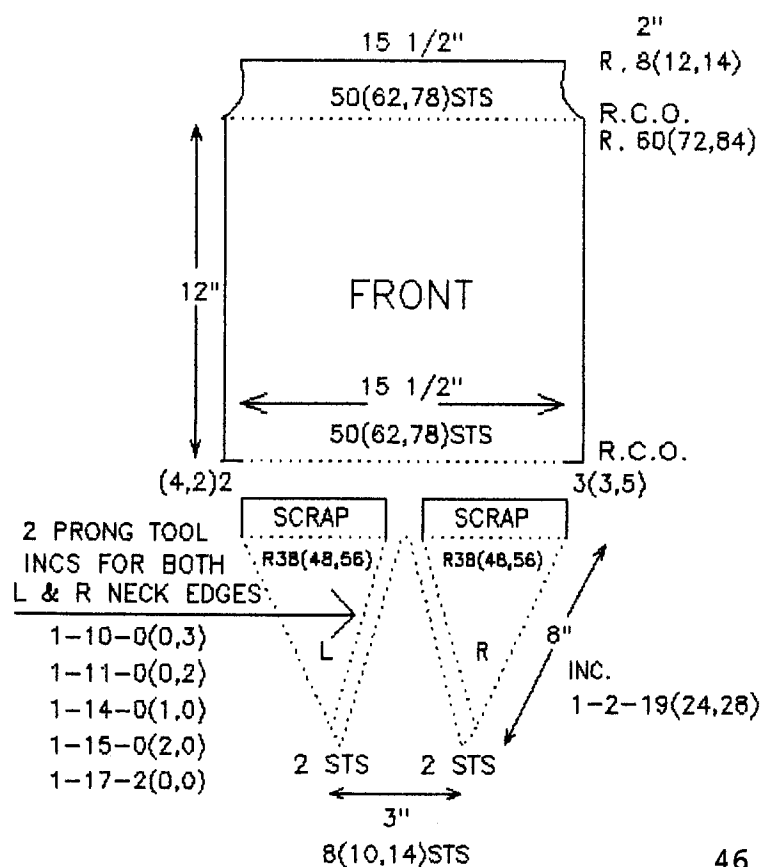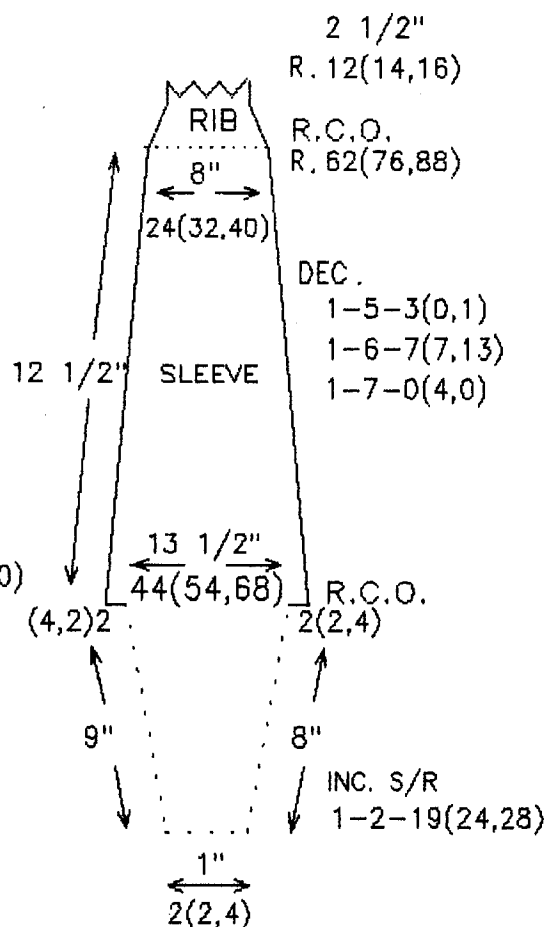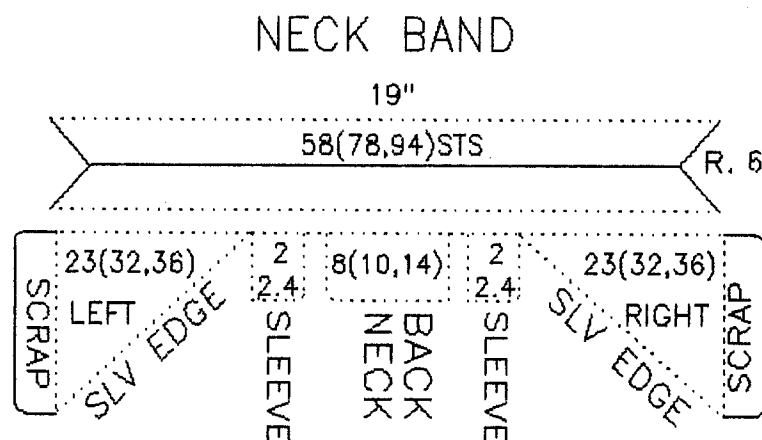

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

TEN YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 17,(15,11), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-17-2,(0,0); 1-15-0,(2,0); 1-14-0,(1,0); 1-11-0,(0,2); and 1-10-0,(0,3).

Knit on, still increasing on left armhole side, till your row counter reads 38,(48,56). You should have 4,(5,7) stitches to the right of "0", and 19,(24,28) working needles left of "0". Knit one row to the left. *Pull out 2,(2,4) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 25,(31,39) ndls. in work and be at R.C. 40,(50,58). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 3,(3,5) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 26,(32,40) ndls. in work with R.C. at 40,(50,58). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #29,(39,47), right, thru needles #7,(8,12), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 12,(14,22) sts. Take yarn from carriage and "e" cast-on over

these new needles, which are 2,(2,4) stitches for one sleeve; 8,(10,14) stitches for the back of the neck; and 2,(2,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #7,(8,12), left, thru #29,(39,47), left. You have 58,(78,94) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 6,(8,10) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 58,(78,94) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(2,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(2,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 38,(48,56). The carriage should now be on the right and 46,(58,70) ndls. should be in work.

Pull out 2,(2,4) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2,(2,4) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have

BACK: cont.

TEN YEAR OLD SIZE

a total of 50,(62,78) needles working and your carriage on the right hand side. Row counter now reads 40,(50,58).

R.C. 0. Knit even to R. 60,(72,84). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #25,(31,39) left, thru #1 left; and right triangle - needle #1, left, thru needles #25,(31,39), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 50,(62,78) sts. to R. 60,(72,84). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(2,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(2,4) needles of the machine. Pick up and hang 21,(26,32) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 21,(26,32) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(2,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 44,(54,68) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(2,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 2,(2,4) stitches on each side. Then make a multiple increase by pushing 2,(2,4) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 2,(2,4) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-7-0,(4,0); 1-6-7,(7,13); and 1-5-3,(0,1). Knit even to R.62,(76,88). You should end with 24,(32,40) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.





BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

TWELVE YEAR OLD SIZE - DIAGRAM

Material: 12 to 15 ozs., depending on yardage of yarn that will give one of the stitch gauges below.

Gauge: 3 sts. x 5 rows = 1".
4 sts. x 6 rows = 1".
5 sts. x 7 rows = 1".

NECK BAND

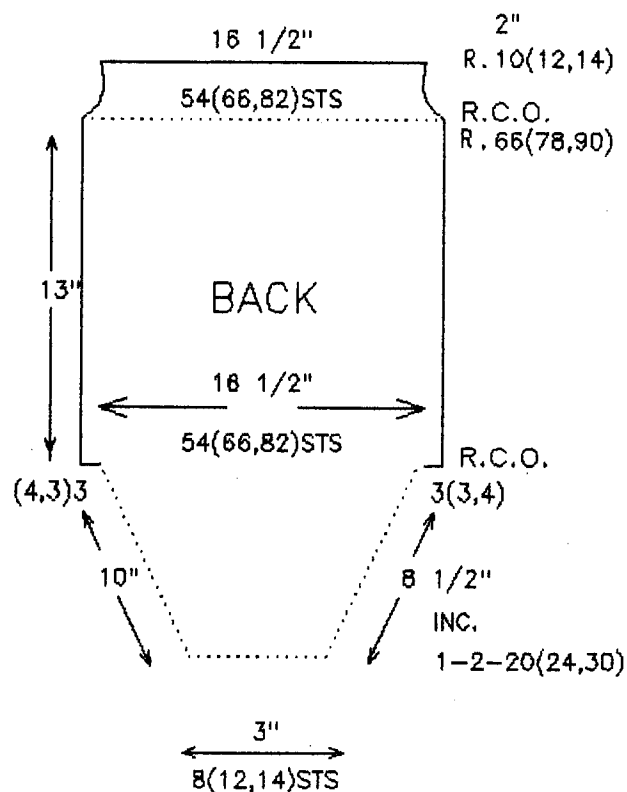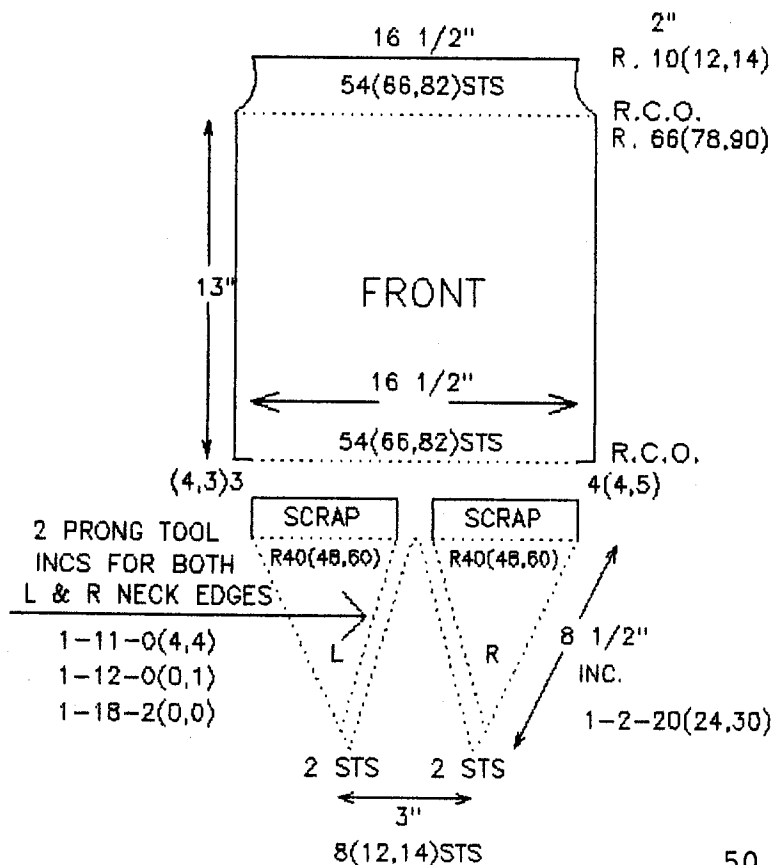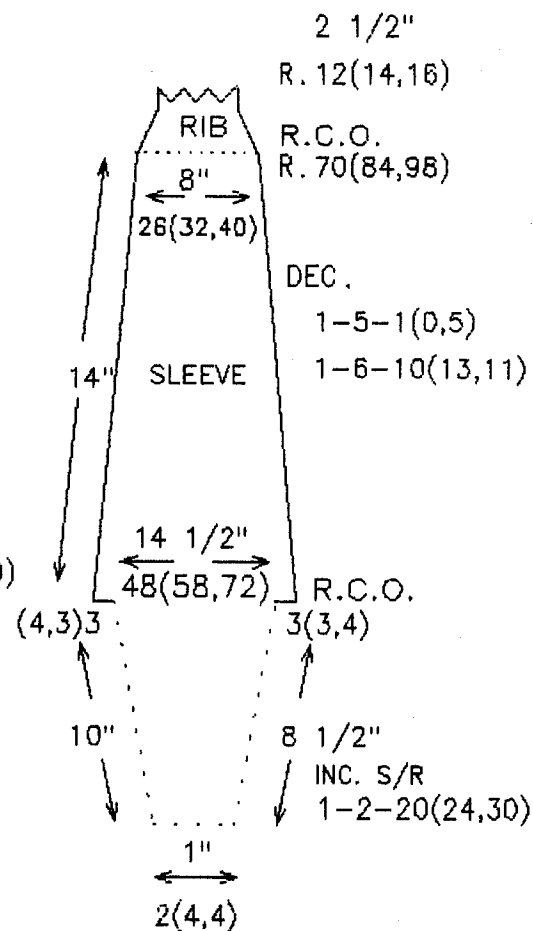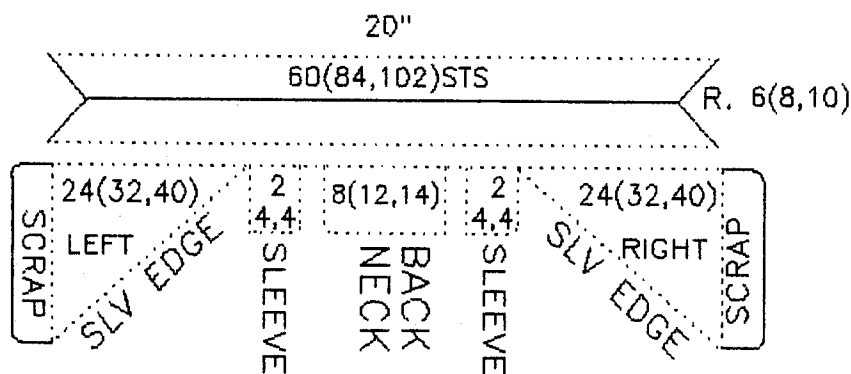

BULKY V-NECK UPSIDE-DOWN RAGLAN SWEATER

TWELVE YEAR OLD SIZE

WRITTEN INSTRUCTIONS

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on needles. #1 & #2 on RIGHT SIDE OF "0". Knit 5 rows of scrap. Knit 1 row of ravel cord.

R. C. 0. Carriage is on the right. Put in main color yarn. With carriage set at main garment tension, knit one row. With the carriage now on the left, pull the ndl. next to the 2 ndls. just knit, from the Out-of-work (A) position to Work (B) position. This is ndl. #1 on the LEFT of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an Out-of-work (A) position ndl. on the left side every-other-row, until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 18,(11,12), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase. Pick up the bar from under the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. These neckline increases are: 1-18-2,(0,0); 1-12-0,(0,1); and 1-11-0,(4,4).

Knit on, still increasing on left armhole side, till your row counter reads 40,(48,60). You should have 4,(6,7) stitches to the right of "0", and 20,(24,30) working needles left of "0". Knit one row to the left. *Pull out 3,(3,4) needles, on left, from Out-of-work (A) position into Hold (E) position - next to the carriage. With yarn from the carriage, "e" cast-on over these new ndls. Rethread carriage and knit back across to the right. You should now have 27,(33,41) ndls. in work and be at R.C. 42,(50,62). Scrap off this piece for 6 rows in waste yarn, remove from machine and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions until you reach the "*". Now pull out 4,(4,5) needles from Out-of-work (A) position to Hold (E) position - next to the carriage. Again, "e" cast-on over these new ndls, rethread carriage and knit back to the left. You will have 28,(34,42) ndls. in work with R.C. at 42,(50,62). Scrap off this piece also and remove from machine.

This is the side a monogram is usually placed (upside-down).

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle, purl side facing you, and hang the neckline slant on needles #30,(42,51), right, thru needles #7,(11,12), right of "0". Pickup the inside half of the outside stitch along this edge. Do not pick up every stitch. Just get the ones in front of the needles to be used.

With main garment tension and a marker cord in with your yarn, knit 1 row across to left. Now pull all these just knit needles into Hold (E) Position. Put on your partial knitting buttons (Hold, I, II, or Russell Levers) and return carriage to the right. Pull out the next 12,(20,22) sts. Take yarn from carriage and "e" cast-on over these new needles, which are 2,(4,4) stitches for one sleeve;

NECKBAND: cont.

TWELVE YEAR OLD SIZE

8,(12,14) stitches for the back of the neck; and 2,(4,4) stitches for the other sleeve.

Now hang the LEFT triangle, purl side facing you, on needles #7,(11,12), left, thru #30,(42,51), left. You have 60,(84,102) stitches in work for the entire neckband. Put in garment yarn, plus marker cord, and knit 1 row, only across this triangle to complete the starting row. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; or a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end stitch - then moving the two sts. back in.* Remember to pull out the new back neck and sleeve stitches in the middle of your band for about four rows, so they don't fall off. Repeat directions between "'s", until 6,(8,10) decs. on each side of the neckband have been completed. Turn row counter off and make the turn row of your choice (see page 20). Don't count this turn row.

R.C. 0. Tension set 2 dots tighter for the back side of band. **Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.** Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight. Repeat between the "'s", until you have 60,(84,102) stitches back on your needles.

Pick up the stitches of the triangle where the marker cord shows and place these marked stitches on the corresponding needles. Using a double-eye needle, sew off ALL OF BOTH triangle stitches ONLY.

Pick up the remaining "e" cast-on stitches and hang them on their corresponding needles. THESE MUST BE TURNED OVER ONCE AFTER YOU HAVE HUNG THEM - EITHER WITH THE GARTER BAR OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM - BEFORE KNITTING THEM TOGETHER.

After this has been turn over, knit 1 row at garment tension across all the doubled stitches to enclose them. Scrap off 2,(4,4) stitches on the right side of this piece and drop them from machine. Then scrap off 2,(4,4) stitches on the left side and drop them from machine too. This leaves only the back neck stitches on the machine.

DON'T WORRY ABOUT THE FRONT. WE WILL COMPLETE THE BACK FIRST.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through the carriage. *On the side next to the carriage, pull 1 NEW ndl. from Out-of-work (A) position up to the Work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to Work (B) position, then knit across back to the right side.* Repeat from 's to R. 40,(48,60). The carriage should now be on the right and 48,(60,74) ndls. should be in work.

Pull out 3,(3,4) needles into Hold (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 3,(3,4) needles on the left to Hold (E) position, and "e" cast-on over them with yarn from carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position before knitting across for a couple of rows, so they won't fall off. At this time you should have a total of 54,(66,82) needles working and your carriage on the right

BACK: cont.

TWELVE YEAR OLD SIZE

hand side. Row counter now reads 42,(50,62).

R.C. 0. Knit even to R. 66,(78,90). Complete your bottom band with ribbing, or as you desire.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #27,(33,41) left, thru #1 left; and right triangle - needle #1, left, thru needles #27,(33,41), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 0. Knit even on 54,(66,82) sts. to R. 66,(78,90). Complete the bottom band the same as the back.

SLEEVE:

Pick up and hang 2,(4,4) stitches from the scrap of one of the sleeves in the neckband, onto the center 2,(4,4) needles of the machine. Pick up and hang 23,(27,34) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 23,(27,34) loops and "e" wraps from the back raglan armhole - on the other side of the 2,(4,4) stitches of the same sleeve top. Be careful to keep purl sides facing you. After you have them all hung, you should have 48,(58,72) stitches on the machine. Pull all needles into Hold (E) position. Push in center 2,(4,4) stitches, PLUS 1 more stitch on the left hand side to Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling the yarn up on the shelf of the fabric presser and over the top of the needles on the right hand side in Hold (E) position. Hold yarn down with your fingers between the last needle in Hold (E) position and the first needle in Needle Selector (C or D) position. This prevents tangling of yarn in carriage brushes. Set tension for main garment tension.

R. C. 0. Knit across to the left. Pull last knitted stitch on the left, back to Hold (E) position for a wrap st. Push 2 stitches next to the working needles that are in Hold (E) position on right hand side to the (C or D) position. Knit across right. Pull last knitted stitch back to Hold (E) position for another wrap stitch. Continue increasing stitches into Work (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in Work (B) position, EXCEPT 3,(3,4) stitches on each side. Then make a multiple increase by pushing 3,(3,4) stitches to (C or D) position all at one time on the right hand side. Knit across. Then push 3,(3,4) stitches on the left hand side into (C or D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases each side: 1-6-10,(13,11) and 1-5-1,(0,5). Knit even to R.70,(84,98). You should end with 26,(32,40) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions. Follow blocking and assembly instructions to complete.

ISBN: 0-939669-11-0