



"V" Neck Raglan Upside-Down Sweaters For All

REVISED EDITION

**QUICK AND SIMPLE TO KNIT.
CHILDREN, LADIES, AND GENTLEMEN.**

EASY TO FOLLOW DIAGRAM AND WRITTEN INSTRUCTIONS FOR
THE CLASSIC "V" NECK RAGLAN SWEATERS, KNITTED FROM
THE NECK DOWN IN SIZES FOR THE ENTIRE FAMILY.

"Beauty with ease!"

By: Jodie Raymond
P.O. Box 8631
Jacksonville, Fl., 32225

COPYRIGHT: © February, 1981, by Jodie Raymond. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the author.

Library of Congress Catalog No.: TX 697-649

ISBN 0-939669-02-1

First Printing, February, 1981.
Second Printing, November, 1981.
Third Printing, April, 1982.
Fourth Printing, January, 1983.
Fifth Printing, August, 1983.
Sixth Printing, February, 1984.
Seventh Printing, November, 1984.
Eighth Printing, April, 1985.
Ninth Printing, January, 1986.
Tenth Printing, September, 1986.

ISBN 0-939669-09-9

Revised Edition, April, 1987.
Thirteenth Printing, March, 1993.

The patterns and instructions have been carefully written and are believed to be clear, complete and accurate. Any misunderstandings or adaptations are solely the responsibility of the owner of the book.

PREFACE

After the revision of the "Round Neck Upside-down Raglan Pullover" book became available in which the smaller sizes were added, there was an expressed desire for the V-Neck to be upgraded also. In keeping with your requests, this popular "V-Neck Raglan Upside-down Sweater For All" book now has been revised.

All the pattern sizes have been retained - plus five additional ones have been added. These include all the little sizes that were not printed in the original edition. And, to help make your knitting more enjoyable and the book easier to follow, the diagrams have been drawn with the computer. This makes for much clearer drawings and figures. Also, the entire typing format has been changed, making this revised edition much more fun to read and understand.

The pictures have been replaced and you can see some of the family. Our daughter Debbie, her husband, and their son - Rich, are the only ones near enough to make the photography session - regretfully. Our son, Rob, and his family, live in Orlando; and son Steve, and his wife, have moved to Texas. When we all get together again, hopefully we can get some new pictures of everyone. But, at least you can see some samples of what the patterns produce.

It is hoped that you will enjoy working with this book. And I want you to know that all the thoughtful, complimentary notes and letters received are appreciated. Just remember, knitting is suppose to be fun. So relax, enjoy, and have a great time while you are making some truly outstanding sweaters.

The best to all of you,

Jodie

FORWARD

Well, hello again. Here I am back at the knitting machine and typewriter again to bring you another book.

First, I want to express my thanks to so many of you who took the time from your busy lives to drop me a note telling of the fun you have had with my "Signature Hats and Caps" book and "The Upside-Down Raglan Pullover" book. It is such a great delight to hear your comments. Keep those cards and letters coming.

And now, here is the latest venture - "The "V" Neck Raglan Upside-Down Sweater" book. It is a fun sweater, too. The fuss and tears of making a mitered "V" neckband are eliminated. There are no large groups of stitches to be transferred in and back out again. Isn't that good news? The neckband has a true point, plus there is only one seam in the band to be woven together. The beauty of the raglan shaping is easily and quickly done - all in one piece - using the method of knitting from the neck down, as in the pullover sweaters.

Lace, fairisle, cable work, knit-in signatures or monograms, are very little trouble as there are no needles out in the hold position in the body sections. There are several variations in the bands to try also. Remember, your choice, and color, of yarns will change the entire appearance and character of these sweaters. That gives one a lot of options.

There are some random thoughts and suggestions included in this book. Many have come from questions asked at seminars. Some have been repeated from my previous books, as they are used in making these sweaters. One new and important suggestion is a "Quick and Easy Ribber Cast-on and Cast-off" written by Fred and Frances Stafford. They have graciously allowed me to print this and share it with all. Thank you, Fred and Frances, for your encouragement and friendship. You must try this, it's a "goody" technique.


So, this is my attempt to give you a "V" neck raglan pattern for the whole family. Try a short sleeve version also. They are grand for the warmer weather. As the old saying goes, "Your imagination is your only limitation". Start those knitting machines humming and enjoy the smiles and "Kudos" for whom you knit your heart away.

Enjoy! *Jodie*

DEDICATION

This book is dedicated to the one who keeps me safe and happy, my husband, Bob. And does he ever have a full time occupation doing just that. He is my best friend, too. For all your patience, understanding, and confidence, thank you!

Love ya, *Jodie*

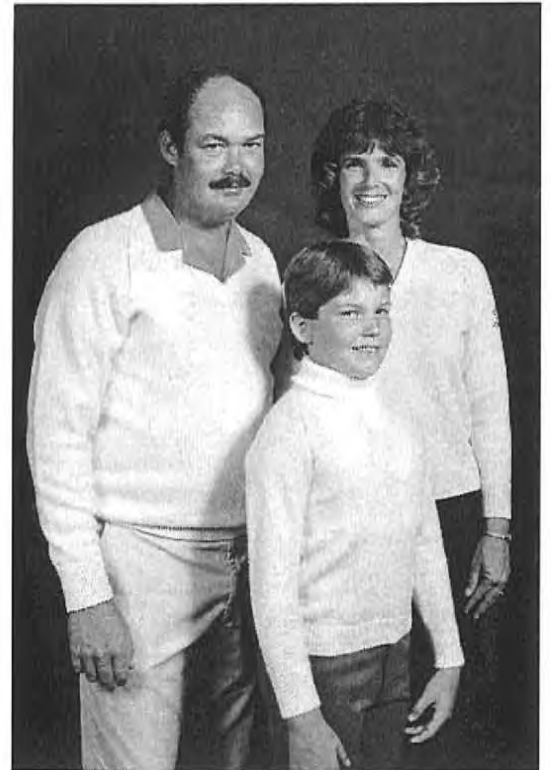

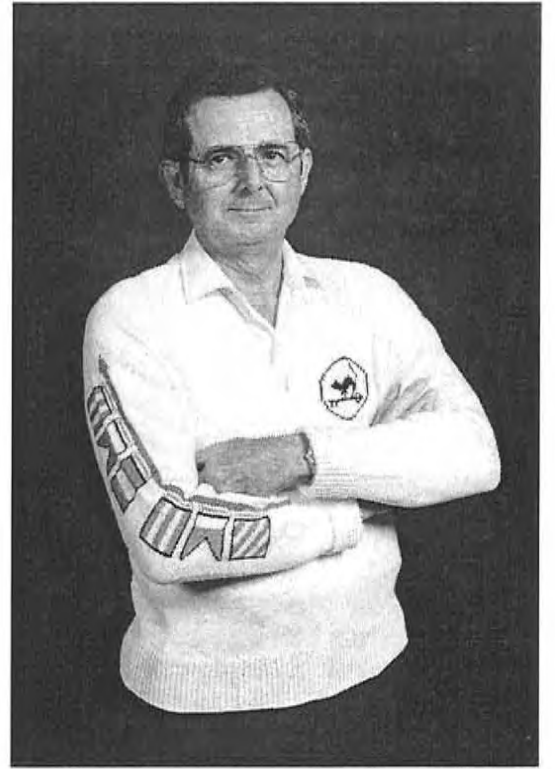


TABLE OF CONTENTS

Title Page	
Copyright	i.
Preface	ii.
Forward	1.
Dedication	1.
Photographs	2.
Table of Contents	4.
Abbreviations and Terminology	5.
Measurement Chart	6.
Random Thoughts and Suggestions	8.
Stitch Gauge Suggestions	9.
Short Row Refresher	10.
Size to Knit	11.
Marker and Ravel Cord	11.
Pattern and Initial Placement	12.
Garter Bar Hints	13.
Ribber Cast-on	14.
Ribber Bind-off	15.
Mock Rib Finish	16.
Afterwhile Finish	16.
Neckbands	16.
Blocking & Assembly	18.
Tiny Diagram, Size Practice & Infant	19.
Tiny Written Instructions, Size Practice & Infant	20.
Tiny Diagram, Size 6 Mos.(1 Yr., & 2 Yr.)	23.
Tiny Written Instructions, Size 6 Mos.(1 Yr. & 2 Yr.)	24.
Children's Diagram, Size 4,(6,8)	27.
Children's Written Instructions, Size 4,(6,8)	28.
Children's Diagram, Size 10,(12,14)	31.
Children's Written Instructions, Size 10,(12,14)	32.
Ladies' Diagram, Size 8,(10,12)	35.
Ladies' Written Instructions, Size 8,(10,12)	36.
Ladies' Diagram, Size 14,(16,18)	39.
Ladies' Written Instructions, Size 14,(16,18)	40.
Men's Diagram, Size 34,(36,38,40)	43.
Men's Written Instructions, Size 34,(36,38,40)	44.
Men's Diagram, Size 42,(44,46)	47.
Men's Written Instructions, Size 42,(44,46)	48.

ABBREVIATIONS AND TERMINOLOGY

oz.	- ounce	ozs.	- ounces
st.	- stitch	sts.	- stitches
ndl.	- needle	ndls.	- needles
dec.	- decrease	inc.	- increase
cont.	- continue	0	- zero
R.	- row number	R.C.	- row counter
C.O.	- cast-on	S/R	- short row
Even	- same number of rows or stitches	Leading	- button on cam nearest to fabric
E.O.N.	- every other needle	E.O.R.	- every other row
(A)	- out of work position	(B)	- work position
(C or D)	- needle selector pos.	(E)	- hold position
Armhole Slant - measure of short row only.			
Armhole Depth - Total length of armhole at raglan slant.			

All patterns are written: STITCHES - ROWS - TIMES.

Both written and diagram instructions are included in this book. These patterns can be used on most all makes of machines. The "Empty" buttons on the Toyota are the same as the "Part" buttons of the Brother and Knitking machines, or the "Slip" buttons of the Studio and Singer machines. The "Partial Knitting" buttons are the "Hold" or "I" buttons on the Toyota; the "Hold" or "II" buttons on the Brother and Knitking; or the "Russell Levers" for the Studio and Singer machines. For these, or other brands of machines, just use the terminology that fits your particular brand of knitting machine.

Anytime you see an "0" in your particular size, it tells you that you do not use any of that operation. Move on to the next operation. Example: Dec. 1-2-6,(0,13). This means to decrease one stitch on both sides of your knitting, every other row - six times for the small size, NO times for the middle size, and thirteen times for the large size. When you have completed the above, you would have decreased your knitting by 12 stitches, or no stitches, or 26 stitches, according to the size you were using.

If you see only one set of figures on your diagram, this direction applies to all sizes of the pattern (1-3-1 or 1-1-4).

In "Random Thoughts and Suggestions" section of this, and my other books, many helpful hints and techniques are discussed to help you along with your knitting.

Other publications of mine that you might enjoy are:

- "Jodie's Favorite Demonstrations - Volume One" Book
- "A Shirt For All Seasons" Book
- "Let's Knit Some Blouses" Book
- "Let's Knit Some Skirts" Book
- "Upside-Down Round Neck Raglan Pullover" - Revised Book
- "Signature Hats and Caps" Book

MEASUREMENT CHART

Keeping in mind that a "V" Neck sweater USUALLY is worn over a shirt or blouse, these patterns have ease designed in them. Check both your body's measurements and the chart carefully before deciding which size to knit.

These charts are for "Finished Measurements". Raglan armholes are slanted to the neck, so they will be longer than normal. This, in turn, makes the underarm seams of the body and the sleeve a bit shorter. See "Random Thoughts" for tips in measuring for these sweaters. The length of the body and sleeve to the underarm DOES NOT INCLUDE CUFFS AND BANDS.

TINY RAGLAN V-NECK SWEATERS

<u>SIZE</u>	<u>Practice</u>	<u>Infant</u>	<u>Six Mos.</u>	<u>One Yr.</u>	<u>Two Yr.</u>
Chest, actual	15"	17"	19"	20"	21"
Chest, ease	16"	18"	20"	21"	22"
Back of neck	2"	2"	2"	2 $\frac{1}{4}$ "	2 $\frac{1}{2}$ "
Wrist	5"	5 $\frac{1}{2}$ "	6"	6 $\frac{1}{2}$ "	7"
Sleeve Width	6"	7 $\frac{1}{4}$ "	8 $\frac{1}{2}$ "	9"	9 $\frac{1}{2}$ "
Raglan Slant	4"	4-3/4"	5 $\frac{1}{4}$ "	5 $\frac{1}{2}$ "	6"
Armhole Depth	4 $\frac{1}{4}$ "	5"	5 $\frac{1}{2}$ "	6"	6 $\frac{1}{2}$ "
Length to U/A	4"	4 $\frac{1}{2}$ "	5"	6"	7"
Sleeve to U/A	4"	5"	5 $\frac{1}{2}$ "	6 $\frac{1}{2}$ "	7 $\frac{1}{2}$ "

CHILDREN'S "V" NECK RAGLAN SWEATERS

<u>Size</u>	<u>4</u>	<u>6</u>	<u>8</u>	<u>10</u>	<u>12</u>	<u>14</u>
Chest, actual	23"	24 $\frac{1}{2}$ "	26"	28"	30"	32"
Chest, ease	24 $\frac{1}{2}$ "	25 $\frac{1}{2}$ "	27"	29"	31"	33 $\frac{1}{2}$ "
Back of Neck	2"	2 $\frac{1}{2}$ "	2-3/4"	3 $\frac{1}{4}$ "	3 $\frac{1}{2}$ "	3 $\frac{3}{4}$ "
Wrist	7"	7-3/4"	7-3/4"	8"	8 $\frac{1}{4}$ "	8 $\frac{1}{2}$ "
Sleeve width	10"	11"	11 $\frac{1}{2}$ "	12"	13 $\frac{1}{4}$ "	14 $\frac{1}{2}$ "
Raglan Slant	6"	6-3/4"	7"	7 $\frac{1}{4}$ "	7-3/4"	8"
Armhole depth	7 $\frac{1}{2}$ "	7-3/4"	8"	8 $\frac{1}{4}$ "	9"	9-3/4"
Length to U/A	8"	8 $\frac{1}{2}$ "	9 $\frac{1}{2}$ "	11"	12"	13"
Sleeve to U/A	8-3/4"	9"	10"	12"	13"	14 $\frac{1}{2}$ "

LADIES' "V" NECK RAGLAN SWEATERS

<u>Size</u>	<u>8</u>	<u>10</u>	<u>12</u>	<u>14</u>	<u>16</u>	<u>18</u>
Bust, actual	30"	32"	34"	36"	38"	40"
Bust, ease	32"	34"	36½"	38"	40"	42"
Back of Neck	3½"	3½"	3-¾"	3-¾"	4¼"	4¼"
Wrist	8"	8½"	9"	9"	9½"	9½"
Sleeve width	13½"	14¼"	15½"	16¼"	16½"	17½"
Raglan Slant	8¼"	9"	9¼"	9½"	10"	11"
Armhole depth	9½"	10"	10-¾"	11"	11½"	12½"
Length to U/A	12"	13"	14"	15"	16"	17"
Sleeve to U/A	15"	16"	17"	16"	17"	18"

MEN'S "V" NECK RAGLAN SWEATERS

<u>Size</u>	<u>34</u>	<u>36</u>	<u>38</u>	<u>40</u>
Chest, actual	34"	36"	38"	40"
Chest, ease	36½"	38"	39½"	42"
Back of Neck	3-¾"	4"	4"	4¼"
Wrist	9"	9"	9½"	9½"
Sleeve width	15½"	16"	16-¾"	17-¾"
Raglan Slant	9½"	10"	10½"	11"
Armhole depth	10-¾"	11¼"	11-¾"	12½"
Length to U/A	15"	16"	17"	18"
Sleeve to U/A	17"	18"	19"	20"

MEN'S "V" NECK RAGLAN SWEATERS

<u>Size</u>	<u>42</u>	<u>44</u>	<u>46</u>
Chest, actual	42"	44"	46"
Chest, ease	44"	46"	48"
Back of Neck	4½"	4-¾"	4-¾"
Wrist	10"	10"	10"
Sleeve width	18½"	19"	19½"
Raglan Slant	11¼"	11¼"	11½"
Armhole depth	12-¾"	13"	13½"
Length to U/A	16"	17"	18"
Sleeve to U/A	19"	20"	21"

RANDOM THOUGHTS AND SUGGESTIONS

If this is your first attempt at one of my upside-down sweaters, you're in for a treat! They are simple, easy, and fast. For those of you who have not used diagrams before, they are not as difficult as they might look. Always knit from the bottom of the graph up to the top. The written instructions follow along the diagram from beginning to the end. Once you master this way of knitting, you will probably never want to use another method. One glance at your pattern and you have a wealth of information.

Checking my patterns you will notice several sizes included on one page. This is the simplest way to incorporate various lengths and widths on one sheet of paper. The first number will always be the smallest size; the middle number, (in parentheses) will be the in-between size; and the last number (in parentheses) will be the largest size in that particular pattern. Many people take the time to trace the pattern to be used and put in just the particular numbers that pertain to the size they want. This can then be filed and used over and over again - a truly great fitting pattern is a treasure to be saved.

While on this subject - when you complete a garment and decide it could have been a little bit shorter or longer, etc., DON'T ERASE your pattern. You will probably remember you wanted to do something different with that garment; but chances are you won't remember IF you changed the numbers or not. So, use a different colored pen - usually red - and make notations on the pattern as to what really pleased you or what you want to change the next time. Make all changing notes in the different color ink and it will show you at a glance what was done before and what you intend to do now. Some of my patterns have ended up looking like a rainbow from so many changes - but I know a lot of ways that I didn't like. However, once the pattern is right, it is worth it's weight in gold.

For my family, there is a pattern file for each. The pattern of everything that is knitted is saved. Here is a copy of one pattern's information retained.

Name:	Steve	Date:	February, 1981
Garment:	"V" Neck Raglan	Gauge:	8 sts. x 11 rows = 1".
Material:	Trenzado 1436	Tension:	4.2 and rib 2.1
Dye Lot:	2004	Machine:	Toyota - Tan #787
Amount used:	13 ozs.	Pattern:	Monogram

In checking the headings, I can readily see which yarn and dye lot was used in case I need to mend a hole in this. (Hopefully I will still have a little bit of that yarn remaining.) Also, when I want to repeat this sweater, I will know ahead of time how much yarn was needed.

You will be surprised how fast your files will grow once you start making permanent records of your knitting. It sure is fun to sit down and start knitting from a tried, and true, pattern.

In order to achieve success every time from a good pattern, your stitch gauge swatch is of utmost importance. Being "off" with the gauge by only a half of a stitch, or row, will compound into inches


too wide or narrow - too long or short - by the time you have completed your garment.

The stitch gauge must be knitted exactly as you plan to knit your garment. If you are planning lace, fairisle, tuck, or cable, you must knit your stitch gauge with the pattern and yarn to be used. If you are using stockinette - plus one of the above, you will need two separate gauges. Usually the change in texture of knitting will change gauges. So, determine what approximate gauges you might need, then start aiming for the exact gauge. If the yarn is new to you, ask the dealer for tensions to be used to get the desired stitch gauge. She will be glad to share her knowledge with you. Or, write to the yarn distributor, or manufacturer, for their suggestions. Brochures are usually available. However, this is still only a starting point.

You MUST make a new stitch gauge for the same yarn when even the dye lot changes. THE DYE LOT ALONE CAN VARY YOUR TENSIONS. Also, lace patterns tend to knit looser, so your tensions will need to be tighter than stockinette tension. Fairisle patterns almost always should be at least 2 dots higher tension than stockinette. The extra plys of yarn with the two colors will tend to draw in the knitted fabric - thus distorting the gauge.

And don't let anyone kid you, stitch gauges are no snap. Remember, all stitch gauges should be knitted and blocked. On some particularly hard-to-get-a-swatch yarns, it is necessary to even launder the swatch as you plan to treat your knitted garment. Then allow the completed swatch to "sit and rest" for an evening, or so, before being trusted. Some have been known to do strange things over a period of relaxation. So, if you are having some difficulty with stitch gauges - try this way. It might be one answer for you.

Diagram - 8 sts. x 11 rows = 1" Stitch Gauge.

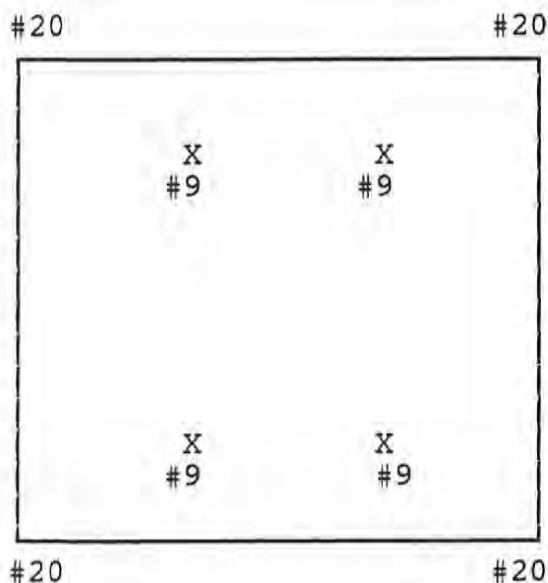

- R.100 Latch tool bind-off.
- R. 94 Picot holes for tension.
- R. 90 Main color yarn.
- R. 88 Contrast color yarn.
- R. 77 Mark ndls. #9 right & left.
- R. 66 Main color yarn.
- R. 64 Contrast color yarn.
- R. 54 Turn tension 2 dots looser.
- R. 46 Main color yarn.
- R. 44 Contrast color yarn.
- R. 40 Picot holes for tension.
- R. 36 Main color yarn.
- R. 34 Contrast color yarn.
- R. 23 Mark ndls. #9 right & left.
- R. 12 Garment yarn.
- R. 10 Contrast color yarn.
- R. 0 "e" cast-on 40 sts. with garment yarn.

After the swatch is knitted, "tube" your swatch by pulling on it lengthwise to reset the stitches. Then head for the blocking board and steam. Do not pin the swatch on the board. Gently flatten the swatch out with steam and your fingers. The contrast stripes should be perfectly straight. If they are "wavy", you probably wiggled the steam iron and distorted the stripe. Use more steam and straighten these guide lines.

Using a ruler, the distance between the two marked ndls. should be two inches. The distance between the point of the "V" of a row st. and the 2 humps of the "V" top should measure two inches. If your swatch is steamed correctly, you should never be too long one way and too short the other way. Both horizontally and vertically should be either both too large, both too small, or both on target. If you are out of balance, tube it some more and put more steam to it. It will come on and behave.

By making a swatch with two different tensions, two dots apart, you have the option of five different gauges. For instance:

Knit 3.2 and 4.1 swatches. If either of these are correct - fine. If not, look where you are. If 3.2 is a bit too large - 3.1 should do fine. If 4.1 is a smidgeon too small, 4.2 will likely work. And then 4.0 will be fine if 3.2 is a hair short and 4.1 is a bit large. So, in one operation - 5 gauges are seen.

Sometimes I knit up a stack of gauges for yarns I know I'm going to be knitting. I get this all out of my way and replace them in the package of yarn that matches. Then, when I really want to knit, I can pull out my swatch and my trusty pattern and just enjoy a fun time.

SHORT ROW REFRESHER

I prefer to let my knitting machine do as much work for me as it can. As a result, most of my garments are knit all in one piece with a minimum of weaving seams together. In order to accomplish this, most of my open stitches are held in scrap yarn. I do very little binding off of stitches. The shaping of these sweaters is accomplished by short-rowing, both decreasing and increasing.

DECREASING:

With carriage on right and partial knit buttons on, pull one less stitch than desired decrease into hold (E) position on left side. Knit across. Pull 1 stitch next to ones already in (E) position to hold (E) position also. Pull one less stitch than desired decrease on right hand side out to hold (E) position. Knit across. Pull 1 stitch next to those already in (E) position on right to hold (E) position also. Continue in this fashion, working on one side of the bed and then the other until required number of needles are in hold (E) position.

INCREASING:

Using the stitches in hold (E) position, push one (1) more stitch than required to (D) position on left. Carriage is on the right. Knit across. Then pull last knitted stitch next to the needles in hold, back out into hold (E) position. This will form a wrap stitch around this last needle pulled out, and will prevent a hole from forming next to the stitch. Repeat this operation on the other side of the bed. Then alternate sides of bed with these directions until all stitches in hold (E) position have been returned to the work (B) position.

DETERMINING THE SIZE TO KNIT

Learning how to take accurate measurements is one of the basic requirements of nicely fitting garments. The dimensions of raglan patterns are real challengers as the slant of the armhole seam must allow for the shoulder point. These patterns also have extra width across the underarm at the seam in order to shorten the raglan slant.

On the measurement chart there are both actual chest, or bust, measurements and the ease allowance figures charted in these patterns. Use a tape measurement around the fullest part of the chest, or bust, and record this. Next is the armhole depth measurement. Start a tape at the highest point of the shoulder at the base of the neck, bring the tape over the shoulder point and down the outside of the arm to an imaginary line even with a pencil which is held between the arm and chest at a point comfortable for your underarm seam. This will give you the length of the armhole depth. This figure appears on the left hand side of the diagram pattern and includes the underarm break. The measurement directly under the short rowing operation (on the right hand side) is the specific inches for the short row work. There are extra stitches "e" casted-on at the end of the short rowing and they add length (or width) to this section of your sweater (armhole depth). Be careful not to stretch this too much when blocking as the lattice-work joining of the sleeve to the body will give a little bit.

These patterns are knit straight down from the chest or bust measurement. If you want a bust dart, it should be placed approximately 2" below armhole. Also, you can taper the body of the sweater by decreasing evenly on both sides after the armhole. Be sure when seaming tapered pieces together, to match the decreases and increases. It really gives a professional finish to your garment.

On all these patterns several lengths of body and sleeves have been given. These can be used interchangeably. Also, for a loose fitting sleeve, you might want to use fewer decreases along the sleeve and then do a multiple decrease two rows before the end. It makes a great golf sweater that way.

MARKER CORD - RAVEL CORD ROWS

To end the confusion so many have about these two terms, here is how I remember which is which. If I am only going to mark a row to hang something else into it to sew off, etc.; I know one must leave

the garment yarn in and put the marker cord in, also. I usually use the silk marker cord that is available at your dealers, or heavy crochet cotton. If I want the knit piece to separate - and drop off, then you use the ravel cord all alone, and when it is pulled out - the two pieces will come apart. THAT'S A RAVEL CORD ROW.

PATTERN PLACEMENT

Some liberties have been taken with these patterns to accommodate automatic pattern cards. There are two stitches always counted for seaming stitches. To see if your pattern will work out, divide your stitches in the body by 12 or 24. Again, you will need the seaming stitches to be added to make your patterns come out even. If you have extra stitches, just push them back to the work (B) position before knitting across, using only the full pattern stitches in contrast color. Remember, ALWAYS KEEP THE FIRST AND LAST STITCHES ON ALL PIECES MADE WITH TWO COLOR WORK IN MAIN GARMENT COLOR. WHEN LACING, ALWAYS KEEP THE FIRST TWO AND LAST TWO STITCHES IN WORK POSITION IN ORDER TO HAVE GOOD SEAMING PLACES.

If there is no way of this working out well, try centering a design and using only a few repeats. Just push the needles programmed, that will not make a complete pattern, back to the work (B) position, by hand, before you knit across. Also, many 24 wide pattern cards are only 12 wide patterns - twice on a card. They will work out just fine. I'm sure once you start to think about what you want on your sweater, you will be able to come up with some beautiful ideas.

REMEMBER, THIS IS AN "UPSIDE-DOWN SWEATER"

If you are using a pattern with a definite top and bottom to it, you MUST turn your pattern upside-down also.

To knit in a monogram or initials, follow these directions. You will be knitting upside-down and wrong side facing you. Most all initials are placed on the left side of the outside of your sweaters. So this is how we arrive there. Draw a graph you want and turn it upside down. (You might want to use the Script Alphabet Graph from my other books like I used on mine.) Number your graph along the bottom of the letters as you will be working upside down, and from the wrong side of your garment. The initials should be knitted in what I call the RIGHT TRIANGLE of the sweater. I count the lines needed for my graph and subtract that number from the end of the neckline - thus that is the row to start pulling the needles. When you do the first few rows, check to see how it is working out before you go too far. I read my graph from the left hand side to the right hand side (like reading a book) BUT I pull the needle numbers starting on the RIGHT side of the bed moving to the left side. This will reverse your knitting and make it come out correctly on the front side of your sweater. It is very easy, once you get the hang of it.

GARTER BAR HINTS

TRANSFERRING STITCHES:

Place garter bar eyes into the hooks of needles of the stitches to be moved. (These needles should be in the hold (E) position). Holding the garter bar firmly in the left hand, pull all stitches onto the garter bar with the right hand, tugging at the fabric already knitted. You must keep moving across in the same direction. Once you have started, if you try to pull from the other side, the stitches usually will get caught in the hooks of the needles.

Push these emptied needles, or the needles needed to be changed, out of your way. Pull out to hold (E) position the needles you want to use. Open all latches. Put eyes of the garter bar on these needle hooks. Pull stitches onto these selected needles **ONLY INTO THE HOOKS OF THE NEEDLES - NOT ALL THE WAY BACK TO THE MACHINE BED.**

Using the straight edge of the garter bar, place it up against the needle butts just filled. Push back and move all needles into work (B) position at one time. Check to see that you didn't drop any stitches. You are now ready to start anew.

TURNING KNIT FABRIC OVER:

Pull all stitches to hold (E) position with knitting up tight against the bed of your machine. Pick up your garter bar with the "hump" side facing you. (Your thumb will feel the "hump" when you pick it up.) Place it on the hooks of the needles and start from one side pulling all the stitches onto the garter bar as far as they will go. (This will be clear back to the back edge of the garter bar.) Lift the bar, with it's stitches, up off the needles. Leave needles out in the hold (E) position.

Turn the garter bar with stitches on it - over in your hands and lay the bar back down on the hooks. This is the most important step. You must lay the bar on the hooks so that the eye of the garter bar is even with the TOP of the OPEN FLAP OF THE LATCH. You can see the tip of the latch in the hole of the bar. Now, with some downward pressure from the thumb on the bar, pull the bar towards you. Tilt the bar up a little to see if the hooks have caught your stitches. If not, try again. With a little practice this will become more easy.

Once the stitches have been caught by the hooks of your needles, turn the garter bar vertically and push the entire set of stitches into the machine bed all at one time. Then reach from underneath and pull out the garter bar. Your fabric is turned over and is safely back on the needles.

With your fingertip, run along the needle butts to place all your stitches in the correct (B) position. If one happens to have slipped off, you will easily see this when you make the trip down the needle butts. Use your tool and pick it up and rehang.

Remember, your stitches are always in jeopardy as long as they are out of the work (B) position.

DIFFERENT RIBBER CAST-ON AND CAST OFF

By Fred and Frances Stafford

When you first begin using your new ribber, you may find that you are not completely satisfied with the appearance of the edges of either the cast-on row or the bind-off row when you follow the instructions in your manual. Here is another cast on and an easy bind off that will give a uniformly neat edge with just the right amount of elasticity for armhole and neck bands, etc.

CAST-ON:

1. Set main carriage on the right, ribber carriage on left, ribber down in out-of-work position. Pull out to Hold Position on the main bed any even number of stitches you desire, "e" wrap cast on from left to right. Thread up the carriage, knit one row from right to left, using the proper lever to knit these needles back into work position.
2. Pull the ribber into place, join main and ribber carriages. Beginning at the right, leave first 2 needles on main bed. Transfer 3rd and every other needle to ribber bed, ending with the last needle on the main bed. Return all empty needles to (A) position. The reason for leaving 2 needles on one end of the main bed is to keep the sequence of 1x1 rib when the seam is finished, using the weaving stitch and taking in one whole stitch on each side for the seam.
3. Using a needle pusher, pull out the main bed working needles just far enough for the ends to be even with the ends of the gate posts on the ribber bed. Insert the comb from behind the row of knitting so that the teeth of the comb come up between the needles on the main bed, thus preventing the comb from splitting the yarn. Insert the wire in the comb, pull back the needles on the main bed to work position and drop the comb so that it rests on the zigzag yarn stitches between the two beds.
4. Place weights as desired. You are now ready to begin ribbing. To make the first row of ribbing easier, pull all needles on both beds out to hold position. MAKE SURE THAT ALL LATCHES ARE OPEN. Knit across, letting the machine knit the needles back into work position. (NOTE: If you use a Brother machine, the ribber needles need to be brought out only to C position, not D position as on a Studio.)

Please note that there is a right and wrong side to the cast on. So, if you are doing a weaving or purl-side pattern, when you finish the ribbing and transfer all stitches to the main bed, be sure to turn over the stitches with a garter bar.

The nice thing about this method of casting on is that you may transfer stitches to the ribber in Step #2 in any combination you wish, such as knit 1 purl 1; knit 2 purl 2; knit 3 purl 3.

BIND OFF

This is an easy bind off, finished on the machine, that requires no hand sewing with a tapestry needle to complete. It follows the stitches; that is, knits the knit stitches and purls the purl stitches, thus giving a neat, unobtrusive edge similar to hand knitting that has enough elasticity, but not so much that the edge flares out.

1. Pick up stitches around the armhole, neck, or wherever you wish to place the ribbing. Place all stitches on the main bed and manually knit one row to form a base row that is not so tight that the machine will tear the stitches when the first row is knit.
2. Transfer desired stitches to the ribber bed for 1x1 ribbing, keeping the 2 end stitches on the right end and 1 end stitch on the left end of the main bed to make the seam stitches come out even.
3. Insert comb as described in #3 under Cast On. Hang weights. Pull out to Hold Position all needles on both beds for the first row of ribbing. Be sure all latches are open. Do the desired number of rows of ribbing.
4. After the last row of ribbing is completed, knit one row at 6 full tensions higher than the ribbing tension on both beds. Now transfer all ribber stitches to the main bed, ready to do a slip stitch bind off. Remove all weights and comb.
5. Using the 1x1 needle pusher, pull out to C position all stitches that are knit as you face them (these are all the stitches brought up from the ribber bed.) Using the pusher to set the needles as described is very helpful to get the needles in the proper position, thus preventing mistakes which could otherwise easily be made. And by pushing all the knit sts. slightly forward of B position, it is easy to tell whether the next stitch is a knit or a purl.
6. Placing the left hand on the knitting so that the thumb presses against the garment underneath the needles and the forefinger touches the butts of the needles, push the first needle out far enough to allow the stitch to slip behind the latch. Hook the latch tool in the hook of this stitch, letting the finger push the butt of the needle back out of work as the stitch slides off the needle onto the hook of the latch tool. Slip it behind the latch of the tool ready for the next stitch. Repeat with the 2nd stitch (also a purl st.). When the stitch has come off the needle, pull it through the stitch behind the latch of the tool, completing the stitch. This is the technique used in the regular slip stitch bind off. Do all purl stitches (main bed sts.) in this manner.
7. Using the latch tool from behind the first knit stitch (from the ribber), lift that stitch off the hook of the needle onto the latch tool. Slip the stitch through the other stitch on the latch tool. Let this stitch slide behind the latch of the tool, ready for the next stitch. Push empty needle out of work.

BIND OFF: cont.

8. The next stitch being a purl, slip it off the needle onto the latch tool as in Step #6. Pull this stitch through the stitch already on the latch tool.
9. Continue in this manner, doing the regular slip stitch bind off, but picking off the knit stitches from back to front, and slipping the purl stitches from the needle from the front, until all stitches are bound off.

A little practice with this and you will never want to go back to the slower and more tedious ways of binding off.

* * * * *

MOCK RIB FINISH

There is a mock rib edge for the end of the bottoms and cuffs that is very nice. It is fast, and does not require a ribber bed. After the last row of the bottom and sleeve of the sweater, just transfer every other stitch to the adjoining stitch, either by lace carriage or by hand. Turn tension two full tensions tighter than main garment tension. On the first row of this rib, put in a MARKER ROW of different colored crochet cotton with your garment yarn. Then you will be able to see where to hang these stitches later.

Knit TWICE the number of rows you want for your ribbing on every other needle. (Remember to put emptied needles out-of-work (A) position before you start to knit the rib.) When desired rows are knit, hang stitches from marker cord row on corresponding needles and LOOSELY sew them off together with a double eye needle.

RIBBING FINISH FOR "AFTERWHILE"

Sometimes I scrap off the end of my sweaters and sleeves. Then I make ribbing, transfer it up on the main bed and scrap it off. One then is able to kitchener the ribbing onto the ends of the sweater while watching T.V., getting your hair done, or taking a trip in the car. This gives a beautiful finish also.

NECKBANDS

In the written pattern directions are specific instructions for hanging and knitting your "V" neckbands. I would like to comment on alternate neckbands that are very attractive on these sweaters.

Loose Turn Row:

For a very easy method of a nice neckband, hang and knit as directed, up to the turn row. When you reach the turning row, put your tension up 4 full tensions looser and knit one row. Be careful and remember to change your tension back down to a tension tighter than garment tension for the back side of this neckband.

Garter Bar Turn Edge:

This is a very crisp, sharp, tailored edge. When you reach your turn row, use the garter bar and turn the band over, knit one row, turn band back to purl side and continue on. For the procedure of turning with the garter bar, see garter bar hints.

Picot Turn Edge:

Charming edge for ladies' and children's garments. When you reach the turn row, transfer every other stitch to the adjoining needle - either by lace carriage or by hand. Leave emptied needles up in work position so they will come back into work. Knit 1 row. Then continue on with the band instructions.

Mock Rib Band:

After you have hung your neckband as instructed, transfer every other stitch by lace carriage or by hand to the adjoining stitch. Push emptied needles back to the out-of-work (A) position. Turn tension 2 full tensions tighter than garment tension. Knit both front and back of band. Hang and sew off. This mock rib can be changed by emptying every 3rd stitch; 4th stitch, etc. You can make up some very interesting patterns with this. Your own design!

Ribbed Band:

Hang your neckband as instructed. Put your ribber bed up and transfer your stitches to the pattern you desire. Rib about 12 rows and then use the "Stafford" method to bind the stitches off.

Easier Way to Increase the Neckbands Back Out After Decreases:

After you have decreased the stitches down and have made your turn row, - instead of using a tool increase as written in the patterns, just bring up a new stitch from the "A" position to the "B" position on the side next to the carriage and knit across one row. Continue increasing in this manner, bringing up a new stitch on both sides of the neckband until you have the same number of stitches working as when you first started the decreases. The last stitch on the right hand side is usually just an "e" wrap stitch, to make the same number of rows as was used for the neckband decreases. (This increase is the same as the increase used for the side increases of the raglan slant of the sleeves.) This easier method will not pull your yarn as tightly as the other way. Before the stitches really were pulled a little too much in increasing so fast. Try the way written in the patterns, and this way - they both work. This just seems a better way to accomplish the same task with a lot less trouble. Sorry I didn't figure this out before the first printing. But, better late than never.

Remember that the neckbands, cuffs, and bands of your sweater should either match completely, or be compatible. Try some of the tricks in the "Hems and More Hems" section of my "Let's Knit Some Skirts" book for some basic instructions for hems and edges that can be used on these sweaters. It will add to the many varieties of good looking sweaters, blouses, etc. that can be made from these patterns.

NECKBANDS: cont.

If you would like a neckband that crosses over at the front "V", decrease your outside neckband stitches every other row. Of course, you would only need to do half as many decreases as written because you are doing this only every-other-row. The increasing on the back side of the neckband would be only half as many as written, too. When it is slip-stitched together with the neckline, it is very attractive, especially in the ribbing, loose turn row, or the garter bar turn row variation. Couldn't leave this one out.

BLOCKING AND ASSEMBLY

When knitting is finished, "tube" your sweater to reset your stitches. If you have any doubled bands, insert a wooden spoon or dowel into them, and gently tug. This will reshape these stitches also.

Before blocking, it is best to weave the point of the "V" together. It will fall into place much better doing this step first. This is one of a few exceptions of sewing before blocking. Tie off, and hide, all the bits of yarn in the neckband after you have closed up the raglan slant seams.

Using the measurements on the diagram, block to your size. Do not pull the back of the neck up straight across. Pin the points of the raglan slant and let the back neckline form it's own small curve. The neckbands seem to fit the back of the neck better this way.

I hand weave my seams together with matching yarn. In fact, I try to leave (or start) with long "tails" of yarn so the sewing yarn is attached and ready to start. It saves a lot of tying threads and hiding knots.

Blocking is one of the most important steps in turning out a great looking garment. Use enough steam to really set the stitches. I use a teflon sole plate over my iron for steaming. The iron, with the sole plate attached, sits right down on the fabric and I squirt extra steam from the iron. Lift the iron to another spot (don't move it across the knit fabric like you would when you are ironing regular fabrics) and repeat. DO NOT BLOCK RIBBING. It will lose it's elasticity.

If you are using regular ribbing that was casted on, you might like to run a double-eye needle down the first cast-on row and pull a little. It will take the curling out of the edge and will set the end stitches. Looks a lot better.

Weave your blocked garment together with as much care as you knitted it. A nicely knit garment can be really messed up with a bad job of assembly. On the other hand, a not-so-good knit can be made respectable with a lot of care in putting it together. Match all patterns, increased stitches, or decreased stitches. Sew from the bottom of the sweater up to the underarm. Sew from the cuff of the sleeve up to the underarm. Then fasten down all your strings and weave them back down your seam for a small way. Touch up with iron.

Now sit back and admire your handiwork. Brings out a smile, I'm sure. Let the raves come, but be prepared for more orders.



TINY RAGLAN "V" NECK SWEATERS

SIZE: Practice and Infant


Material: 2 to 5 ozs.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".

NECK BAND

84,(92) STS.

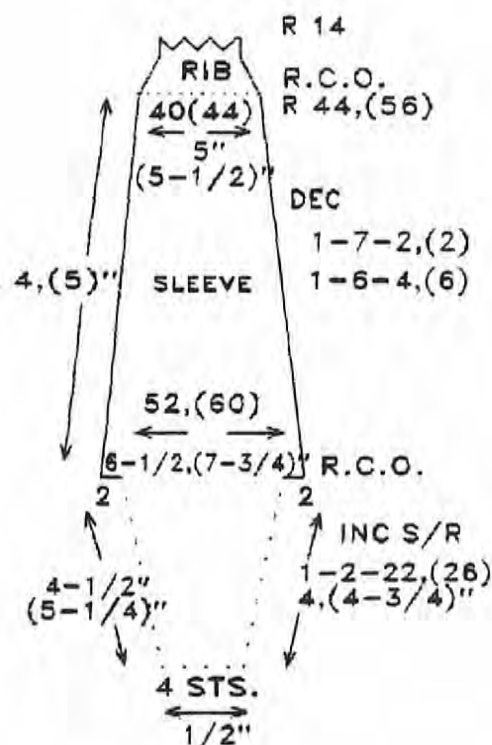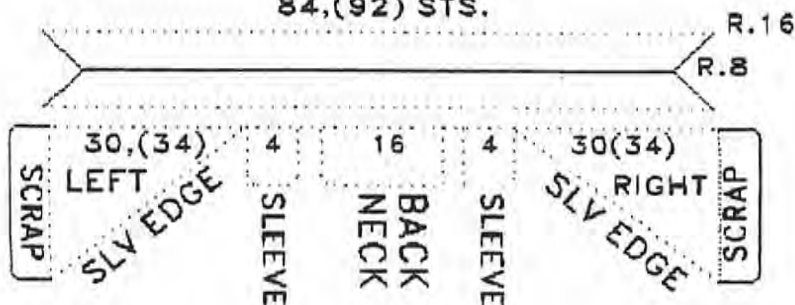


64,(72) STS

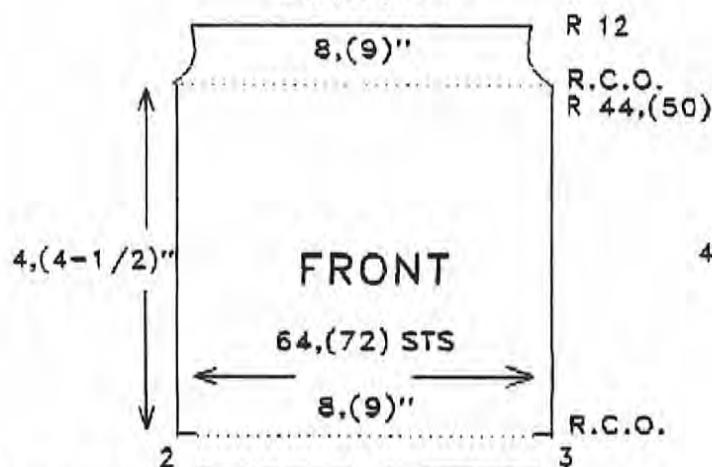


2 PRONG TOOL
INCS FOR BOTH
L & R NECK EDGES

1-4-2
1-11-0(4)
1-9-4(0)

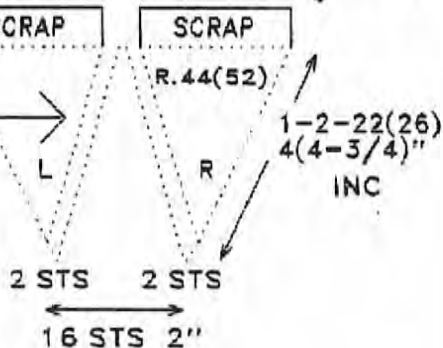

64,(72) STS

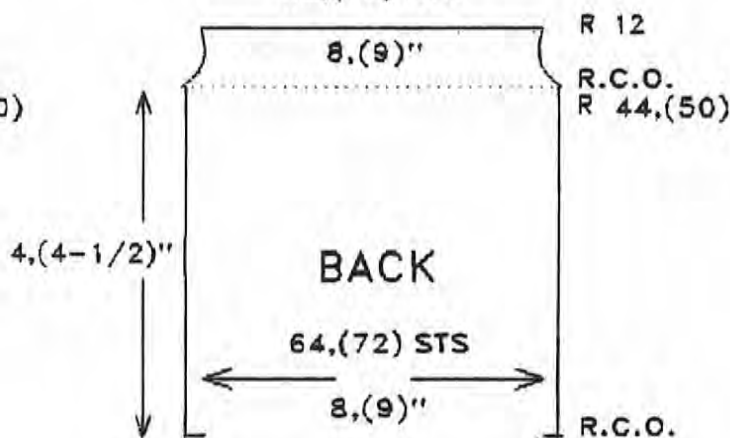

4-1/2,(5-1/4)"

1-2-22,(26)
4,(4-3/4)"
INC

16 STS

2"

TINY RAGLAN "V" NECK SWEATERS WRITTEN INSTRUCTIONS

SIZE: Practice and Infant

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 stitches on needles #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the needle next to the 2 needles in work, from the out-of-work position (A) to the work position (B). This is needle #1 on the left of "0". Knit 2 rows. Pull needle #2, left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work needle on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 9,(11) - you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. I pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline incs. are: 1-9-4,(0), 1-11-0,(4) and 1-4-2.

At this point your row counter should read R.44,(52). You should also have 8 stitches to the right of "0". There are 22,(26) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on needles #42,(46), right, thru needle #13, right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many sts. - only when necessary. This saves breaking the sts. when the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons, and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 24 needles. This is the 4 stitches for a sleeve; 16 stitches for the back of the neck; and the 4 stitches for the other sleeve. Pull all the stitches on the machine now, out into hold (E) position. Take off your empty, part, or slip buttons, and put on your partial knit buttons.

Hang the LEFT triangle now on needle #13 left, thru needles #42,(46), left. You now have 84,(92) needles in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

SIZE: Practice and Infant

NECKBAND: cont.

R.C. 0. *Knit 1 row. Decrease 1 stitch at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end st. - then moving the two sts. back in.* Repeat until 8 decreases on each side of the band have been completed. Row counter now reads 8. Turn row counter off. Make your turn row as desired, (see page 16.) Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.* Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight for you. Repeat this until you have 84,(92) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on it's corresponding needle. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13), OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 4 stitches on the right side and 4 stitches on the left side for the sleeves. This leaves you with the 16 back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW needle from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW needle to (B) position and then knit across back to the right side.* Repeat from *'s to R. 44,(52). The carriage should now be on the right and 60,(68) needles should be in work.

Pull out 2 needles into Hold (E) Position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 2 needles on the left to Hold (E) Position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) Position for a couple of rows, so they won't fall off. At this time you should have a total of 64,(72) needles working, and your carriage on the right hand side. Row counter reads 46,(54).

R.C. 0. Knit even to R.44,(50). Complete your bottom band as desired.

SIZE: Practice and Infant.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLES FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #30,(34), left, thru #1 left; and right triangle - needles #1, left, thru needles #29,(33), right. This places the first center stitch of each triangle on the same ndl. #1, left of "0", and prevents a hole at the center front.

R. C. 44,(52). Carriage on the right. Garment tension. Knit across to the left. With yarn from carriage, pull out 2 needles on left and "e" cast-on over them. Rethread carriage and knit back across to right. Pull 3 needles out to hold (E) position and "e" cast-on over them. Rethread carriage. (This makes up for the doubled stitch at the center front). Row counter now reads 46,(54) and you have 64,(72) needles in work.

R.C. Knit even to R. 44,(50). Complete bottom band as back.

SLEEVE:


Pick up and hang 4 stitches from the scrap of one of your sleeves in the neckband, onto the center 4 needles of your machine. Pick up and hang 24,(28) loops and "e" wraps from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 24,(28) loops and "e" wraps from the back raglan armhole - on the other side of the 4 sts. of the same sleeve. Be careful, to keep both purl sides facing you. After you have them all hung, you should have 52,(60) sts. on your machine. Pull all these ndls. into (E) position. Push in the center 4 sts. PLUS 1 more st. on left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over top of the ndls. in (E) position on the right side. Hold yarn down with your fingers between the last ndl. in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.

R.C. 0. Knit across to left. Pull last knitted stitch on the left back to (E) position for a wrap st. Push 2 stitches next to working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap stitch. Continue increasing stitches into (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in (B) position, EXCEPT 2 stitches on each side. Then make a multiple increase by pushing 2 sts. to (D) position, all at one time, on right hand side. Knit across. Then push 2 sts. on the left hand side into (D) position, and knit across. Knit back to right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of sleeve, doing 3 prong tool decreases: 1-7-2,(2) and 1-6-4,(6). You should end with 40,(44) stitches. Complete cuff as desired. Hang and knit the second sleeve by repeating all above directions.

SIZE: 6 Months, (One Year, Two Year Old)

Material: 4 to 8 ozs.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".

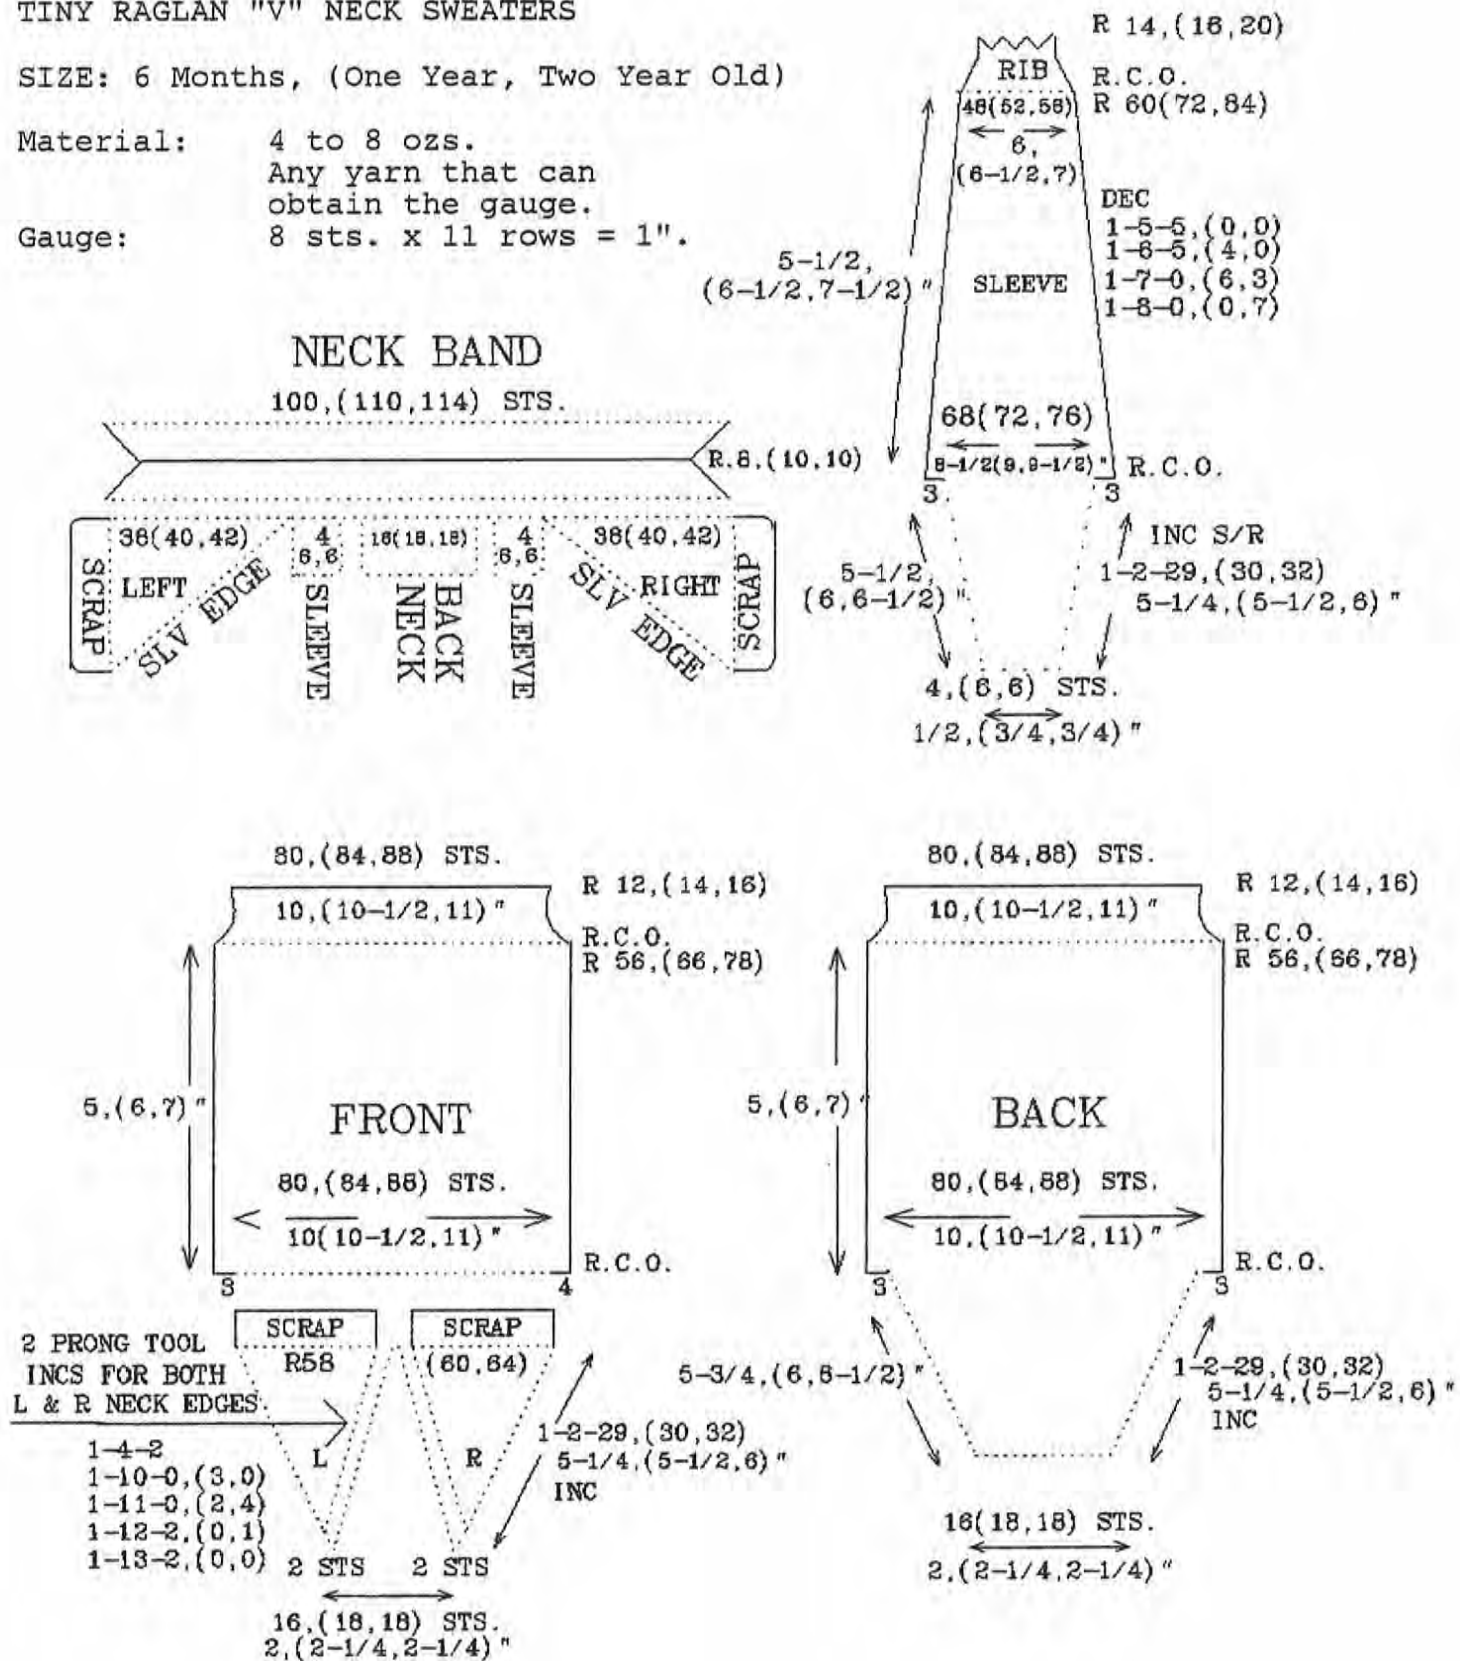

TINY RAGLAN "V" NECK SWEATERS WRITTEN INSTRUCTIONS

SIZE: 6 Months, (One Year, Two Year Old)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 stitches on needles #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the needle next to the 2 needles in work, from the out-of-work position (A) to the work position (B). This is needle #1 on the left of "0". Knit 2 rows. Pull needle #2, left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work needle on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 13,(11,12), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. I pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline increases are: 1-13-2,(0,0); 1-12-2,(0,1); 1-11-0,(2,4); 1-10-0,(3,0); and 1-4-2 for each.

At this point your row counter should read R.58,(60,64). You should also have 8,(9,9) stitches to the right of "0". There are 29,(30,32) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and directions. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on needles #50,(55,57), right, thru needles #13,(16,16) right of "0". Hang it from the point down as this is the way it was knitted. Do not double many sts. - only when necessary. This saves breaking the sts. when the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 24,(30,30) needles. These are the 4,(6,6) stitches for a sleeve; 16,(18,18) stitches for the back of the neck; and the 4,(6,6) stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off your empty, part, or slip buttons and put on your partial knit buttons.

Hang the LEFT triangle now on needles #13,(16,16) left, thru ndls. #50,(55,57), left. You now have 100,(110,114) needles in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

SIZE: 6 Months, (One Year, Two Year Old)

NECKBAND: cont.

R.C. 0. *Knit 1 row. Decrease 1 stitch at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd stitch from the end - moving it out to the end stitch - then moving the two stitches back in.* Repeat until 8,(10,10) decreases on each side of the band have been completed. Row counter now reads 8,(10,10). Turn row counter off. Make your turn row as desired, (see page 16.) Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.* Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight for you. Repeat this until you have 100, (110,114) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 4,(6,6) stitches on the right side and 4,(6,6) stitches on the left side for the sleeves. This leaves you with the 16,(18,18) back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW needle from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW needle to (B) position and then knit across back to the right side.* Repeat from *'s to R. 58,(60,64). The carriage should now be on the right and 74,(78,82) needles should be in work.

Pull out 3 needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 3 needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 80,(84,88) needles working and your carriage on the right hand side. Row counter reads 60,(62,66).

R.C. 0. Knit even to R.56,(66,78). Complete your bottom band as desired.

SIZE: Six Month, (One Year, Two Year Old)

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLES FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #37,(39,41), left, thru #1 left; and right triangle - needle #1, left, thru needles #36,(38,40) right. This places the first center stitches of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R. C. 58,(60,64). Carriage on the right. Garment tension. Knit across to the left. With yarn from carriage, pull out 3 needles on left and "e" cast-on over them. Rethread carriage and knit back across to right. Pull 4 needles out to hold (E) position and "e" cast-on over them. Rethread carriage. (This makes up for the doubled stitch at the center front). Row counter now reads 60,(62,66) and you have 80,(84,88) needles in work.

R.C. Knit even to R. 56,(66,78). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 4,(6,6) sts. from the scrap of one of your sleeves in the neckband, on to the center 4,(6,6) needles of your machine. Pick up and hang 32,(33,35) loops and "e" wraps from one side of the front raglan armhole - on to the ndls. next to the ndls. of the top of the sleeve. Pick up and hang 32,(33,35) loops and "e" wraps from the back raglan armhole - on the other side of the 4,(6,6) sts. of the same sleeve. Be careful, to keep both purl sides facing you. After you have them all hung, you should have 68,(72,76) sts. on your machine. Pull all these needles into (E) position. Push in the center 4,(6,6) stitches, PLUS 1 more stitch on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the needles in (E) position on the right side. Hold yarn down with your fingers between the last needle in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.

R.C. 0. Knit across to the left. Pull last knitted stitch on the left back to (E) position for a wrap stitch. Push 2 sts. next to the working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap stitch. Continue increasing sts. into (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in (B) position, EXCEPT 3 sts. on each side. Then make a multiple increase by pushing 3 stitches to (D) position all at one time on the right hand side. Knit across. Then push 3 stitches on the left hand side into (D) position and knit across. Knit back to the right, across all stitches in work.




R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases: 1-8-0,(0,7); 1-7-0,(6,3); 1-6-5,(4,0); and 1-5-5,(0,0). You should end with 48,(52,56) stitches. Complete cuff as desired. Hang and knit second sleeve by repeating all above directions.

CHILDREN'S "V" NECK RAGLAN SWEATER

SIZE: 4, (6, 8)

Material: 6 to 10 ozs.
Any yarn that can
obtain the gauge.

Gauge: 8 sts. x 11 rows = 1".

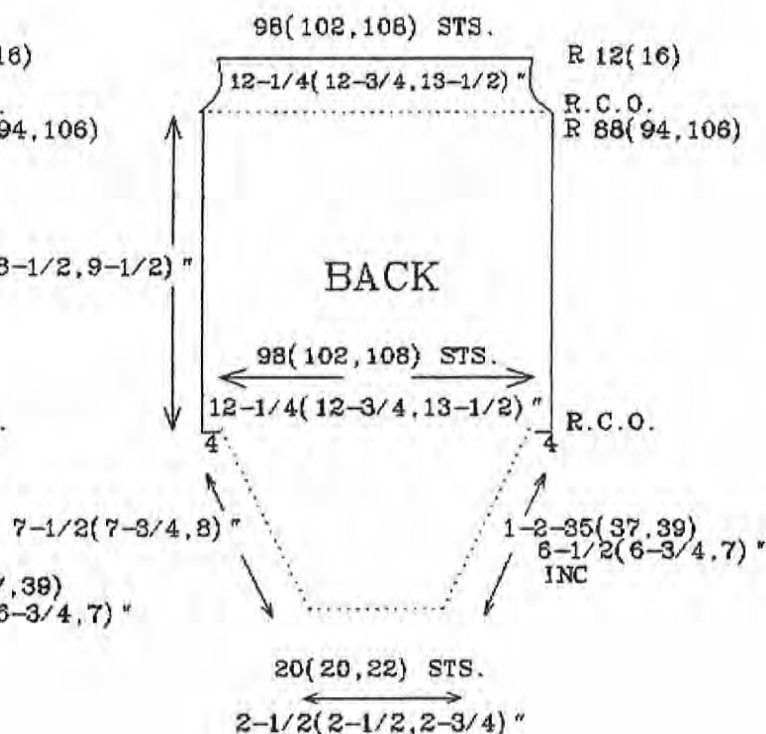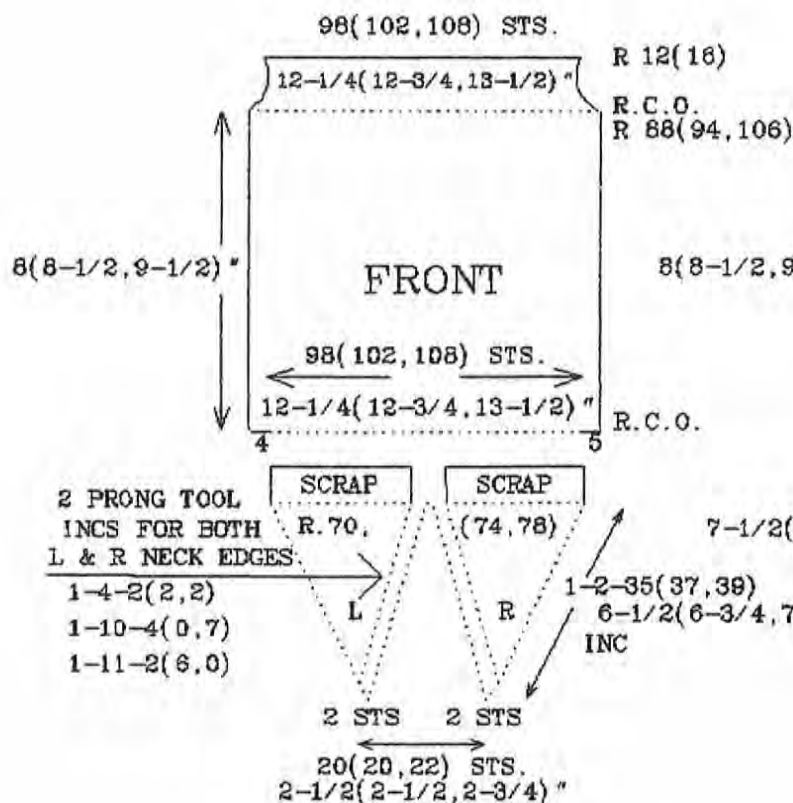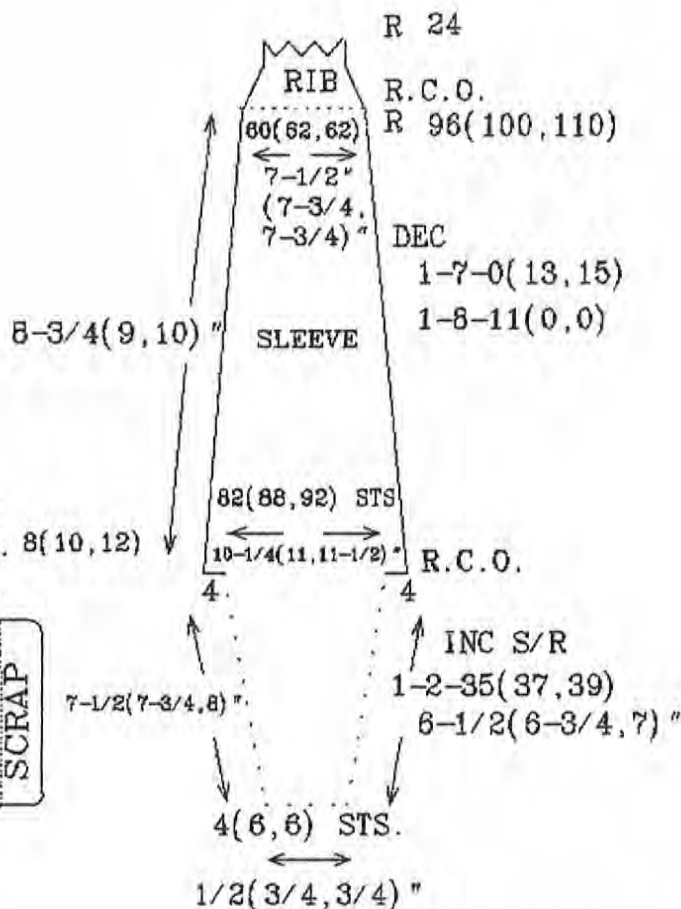

CHILDREN'S "V" NECK RAGLAN WRITTEN INSTRUCTIONS

SIZE: 4,(6,8)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 stitches on needles #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the needle next to the 2 needles in work, from the out-of-work position (A) to the work position (B). This is needle #1 on the left of "0". Knit 2 rows. Pull needle #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work needle on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 11,(11,10), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. I pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline increases are: 1-11-2,(6,0); 1-10-4,(0,7); and 1-4-2,(2,2).

At this point your row counter should read 70,(74,78). You should also have 10,(10,11) stitches increased to the right of "0". There are 35,(37,39) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and direction. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on needles #62,(66,69), right, thru needles #15,(17,18), right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many stitches - only when necessary. This saves breaking the stitches when the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 28,(32,34) needles. These are the 4,(6,6) stitches for a sleeve; 20,(20,22) stitches for the back of the neck; and the 4,(6,6) stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off your empty, part, or slip buttons and put on your partial knit buttons.

Hang the LEFT triangle now on needles #15,(17,18), left, thru needles #62,(66,69), left. You now have 124,(132,138) ndls. in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

SIZE: 4,(6,8).

NECKBAND: cont.

R.C. 0. *Knit 1 row. Decrease 1 stitch at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd stitch from the end - moving it out to the end stitch - then moving the two stitches back in.* Repeat until 8,(10,12) decreases on each side of the band have been completed. Row counter now reads 8,(10,12). Turn row counter off. Make your turn row as desired, (see page 16). Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool. * Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight for you. Repeat this until you have 124,(132,138) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 4,(6,6) stitches on the right side and 4,(6,6) stitches on the left side for the sleeves. This leaves you with the back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW needle from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW needle to (B) position and then knit across back to the right side.* Repeat from *'s to R. 70,(74,78). The carriage should now be on the right and 90,(94,100) needles should be in work.

Pull out 4 needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 4 needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 98,(102,108) needles working, and your carriage on the right hand side. Row counter reads 72,(76,80).

R.C. 0. Knit even to R. 88,(94,106). Complete your bottom band as desired.

SIZE: 4,(6,8)

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #45,(47,50), left, thru #1 left; and right triangle - needle #1, left, thru needles #44,(46,49), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

R.C. 70,(74,78). Carriage on the right. Garment tension. Knit across to the left. With yarn from carriage, pull out 4 needles on left and "e" cast-on over them. Rethread carriage and knit back across to right. Pull 5 needles out to hold (E) position and "e" cast-on over them. Rethread carriage. (This makes up for the doubled stitch at the center front.) Row counter now reads 72,(76,80) and you have 98,(102,108) needles in work.

R.C. 0. Knit even to R. 88,(94,106). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 4,(6,6) stitches from the scrap of one of your sleeves in the neckband, onto the center 4,(6,6) needles of your machine. Pick up and hang 39,(41,43) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 39,(41,43) loops and "e" wraps from the back raglan armhole - on the other side of the 4,(6,6) stitches of the same sleeve. Be careful, to keep purl sides facing you. After you have them all hung, you should have 82,(88,92) stitches on your machine. Pull all these needles into (E) position. Push in the center 4,(6,6) stitches, PLUS 1 more st., on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the needles in (E) position on the right side. Hold yarn down with your fingers between the last needle in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.

R.C. 0. Knit across to the left. Pull last knitted stitch on the left back to (E) position for a wrap stitch. Push 2 stitches next to the working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap stitch. Continue increasing stitches into (B) position - alternating the pushing and pulling of stitches from side to side, until all stitches are in (B) position, EXCEPT 4 sts. on each side. Then make a multiple increase by pushing 4 sts. to (D) position all at one time on the right hand side. Knit across. Then push 4 sts. on the left hand side into (D) position and knit across. Knit back to the right, across all stitches in work.



R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases; 1-8-11,(0,0); and 1-7-0,(13,15). Knit even to R. 96,(100,110). You should end with 60,(62,62) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating above directions.

CHILDREN'S "V" NECK RAGLAN SWEATERS

SIZE: 10, (12, 14)

Material: 10 to 16 ozs.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".

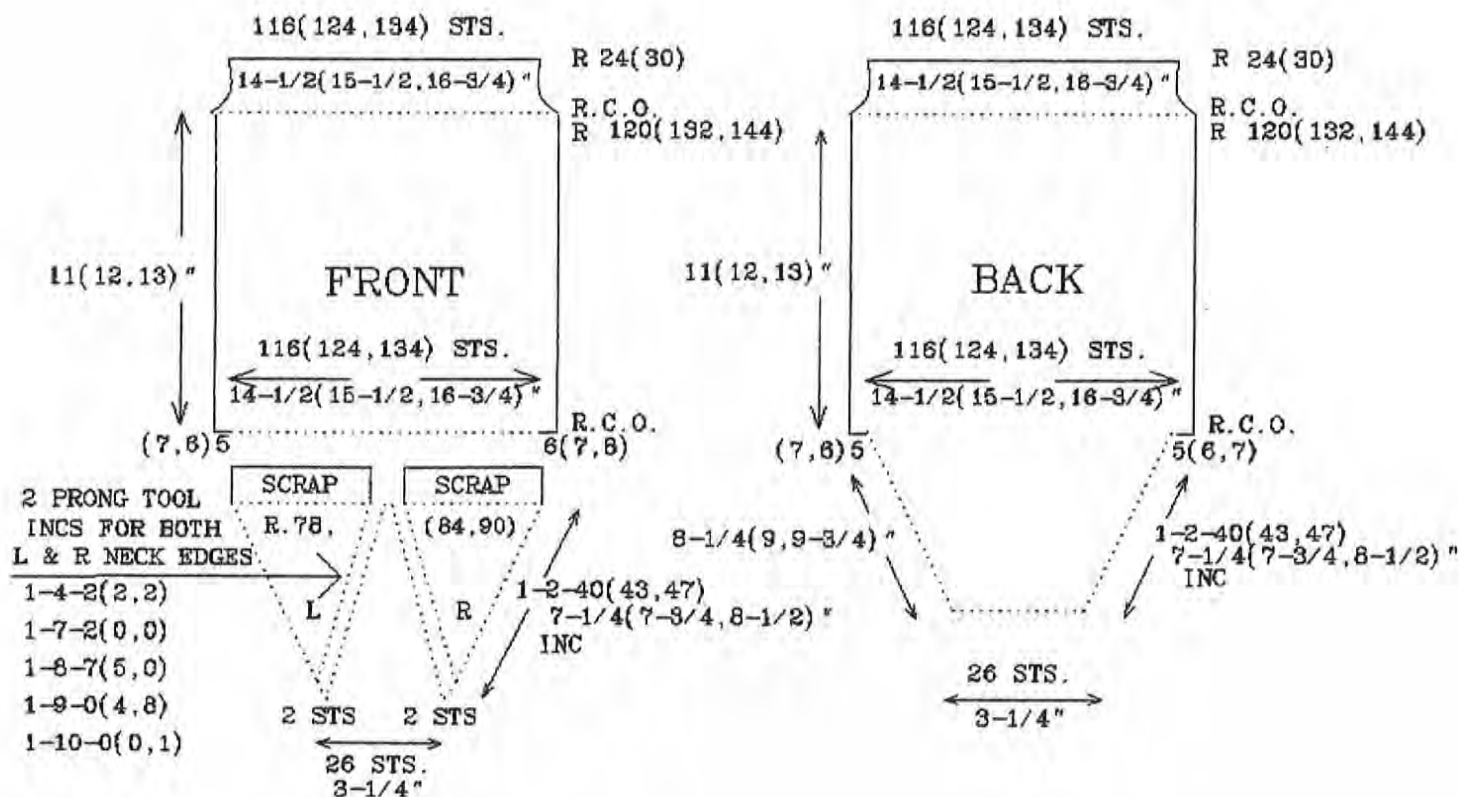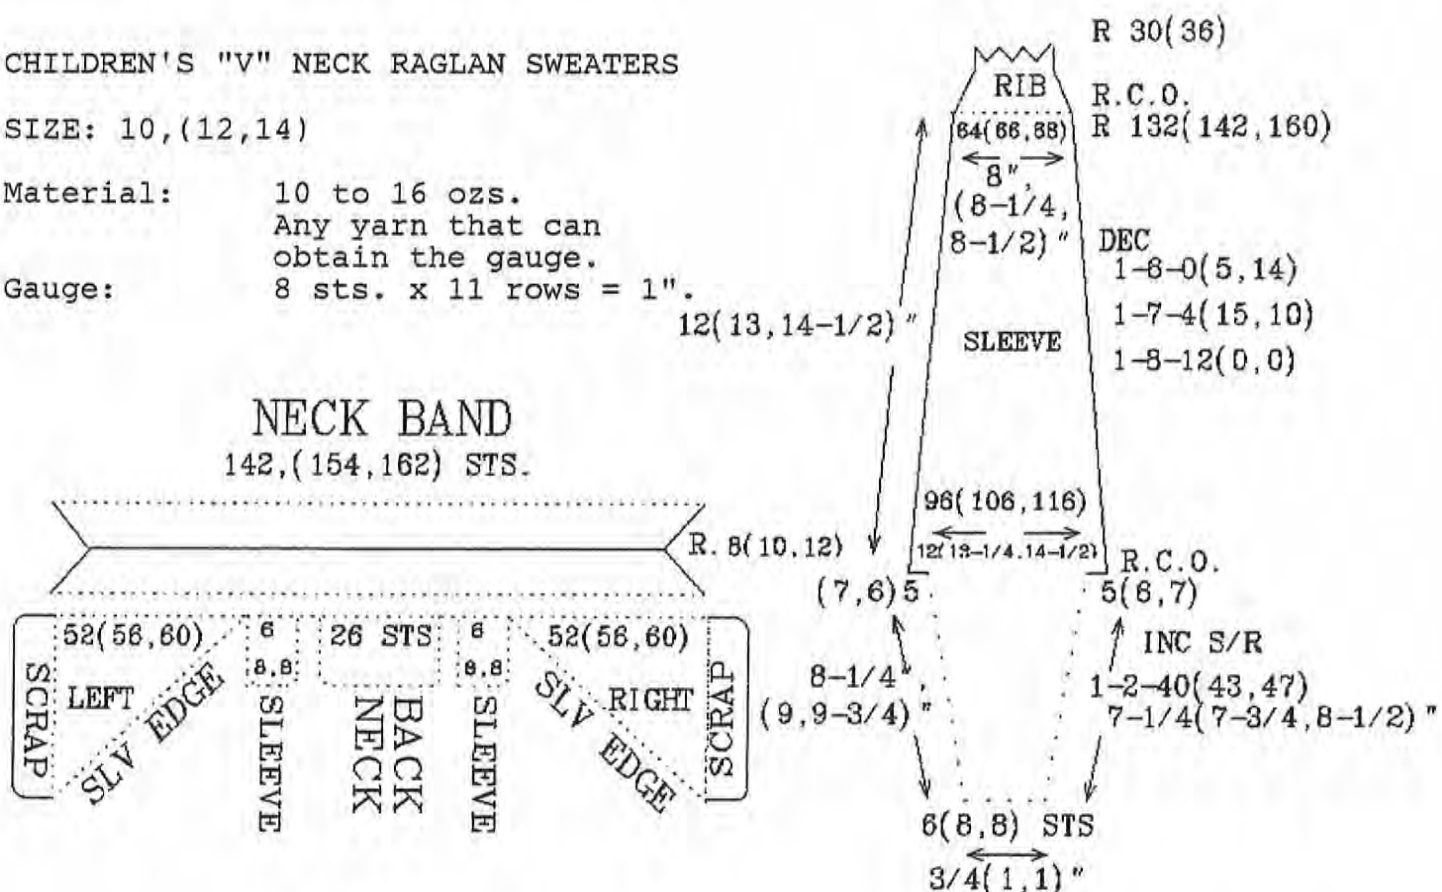

CHILDREN'S "V" NECK RAGLAN WRITTEN INSTRUCTIONS

SIZE: 10,(12,14)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on ndls. #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the ndl. next to the 2 ndls. in work, from the out-of-work position (A) to the work position (B). This is ndl. #1 on the left of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work ndl. on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 8,(9,10), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. I pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline increases are: 1-10-0,(0,1); 1-9-0,(4,8); 1-8-7,(5,0); 1-7-2,(0,0); and 1-4-2,(2,2).

At this point your row counter should read 78,(84,90). You should also have 13,(13,13) stitches increased to the right of "0". There are 39,(42,45) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and direction. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on needles #71,(77,81), right, thru needles #20,(22,22), right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many stitches - only when necessary. This saves breaking the stitches when the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 38,(42,42) needles. These are the 6,(8,8) stitches. for a sleeve; 26 stitches for the back of the neck; and the 6,(8,8) stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off your empty, part, or slip buttons and put on your partial knit buttons.

Hang the LEFT triangle now on ndls. #20,(22,22), left, thru ndls. #71,(77,81), left. You now have 142,(154,162) ndls. in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end st. - then moving the two sts. back in.* Repeat until

SIZE: CHILDREN'S 10,(12,14)

NECKBAND: cont.

8,(10,12) decreases on each side of the band have been completed. Row counter now reads 8,(10,12). Turn row counter off. Make your turn row as desired, (see page 16). Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool. * Pick up the bar from first inside stitch and then the outside stitch, so it won't get too tight for you. Repeat this until you have 142,(154,162) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on sts. and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 6,(8,8) stitches on the right side and 6,(8,8) stitches on the left side for the sleeves. This leaves you with the back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW needle from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW needle to (B) position and then knit across back to the right side.* Repeat from *'s to R. 80,(86,94). The carriage should end on the right and 106,(112,120) needles should be in work.

Pull out 5,(6,7) needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 5,(6,7) needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 116,(124,134) needles working and your carriage on the right hand side. Row counter reads 82,(88,96).

R.C. 0. Knit even to R. 120,(132,144). Complete your bottom band as desired.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #52,(55,58), left, thru #1 left; and right triangle - needle #1, left, thru needles #51,(54,57), right. This places the first center stitch of each triangle on the same needle #1, left of "0",

SIZE: CHILDREN'S 10,(12,14)

FRONT: cont.

and prevents a hole from forming at the center front.

R.C. 78,(84,90). Carriage on the right. Continue to add sleeve edge stitches next to the carriage as before until you have a total of 53,(56,60) stitches on the left side and 52,(55,59) needles on the right side. R.C. reads 80,(86,94). Knit 1 row to the left. Pull out 5,(6,7) needles on left from the out-of-work (A) position to hold (E) position. With yarn from carriage, "e" cast on over these needles. Re-thread carriage and knit back across to right. Pull 6,(7,8) needles out to hold (E) position on right side and "e" cast-on over them. Rethread carriage. (This makes up for the doubled stitches at the center front.) Row counter now reads 82,(88,96) and you have 116,(124,134) stitches in work.

R.C. 0. Knit even to R. 120,(132,144). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 6,(8,8) stitches from the scrap of one of your sleeves in the neckband, onto the center 6,(8,8) needles of your machine. Pick up and hang 45,(49,54) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 45,(49,54) loops and "e" wraps from the back raglan armhole - on the other side of the 6,(8,8) stitches of the same sleeve. Be careful to keep purl sides facing you. After you have them all hung, you should have 96,(106,116) stitches on your machine. Pull all these needles into (E) position. Push in the center 6,(8,8) stitches, PLUS 1 more stitch on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in (E) position on the right side. Hold yarn down with your fingers between the last ndl. in (E) position and the first ndl. in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.





R.C. 0. Knit across to the left. Pull last knitted stitch on the left back to (E) position for a wrap stitch. Push 2 stitches next to the working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap st. Continue increasing stitches into (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in (B) position, EXCEPT 5,(6,7) stitches on each side. Then make a multiple increase by pushing 5,(6,7) stitches to (D) position all at one time on the right hand side. Knit across. Then push 5,(6,7) stitches on the left hand side into (D) position and knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases; 1-8-12,(0,0); and 1-7-4,(15,10); and 1-6-0,(5,14). Knit even to R. 132,(142,160). You should end with 64,(66,68) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions.

SIZE: 8, (10, 12)

Material: 12 to 16 ozs.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".

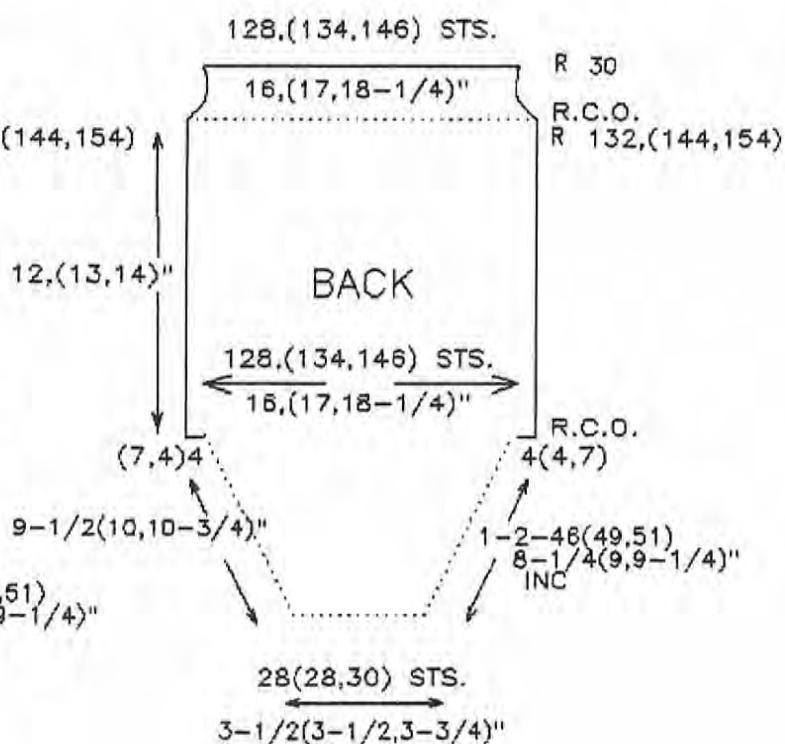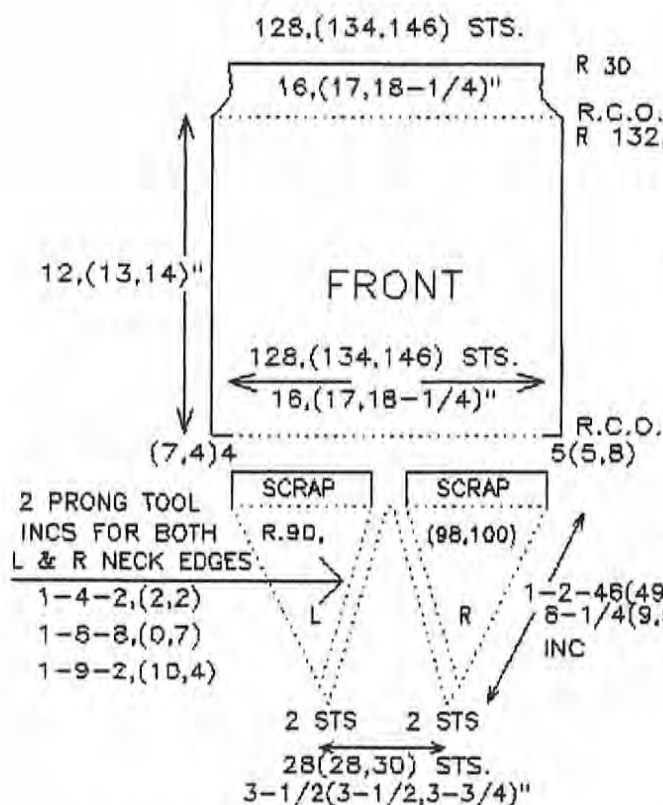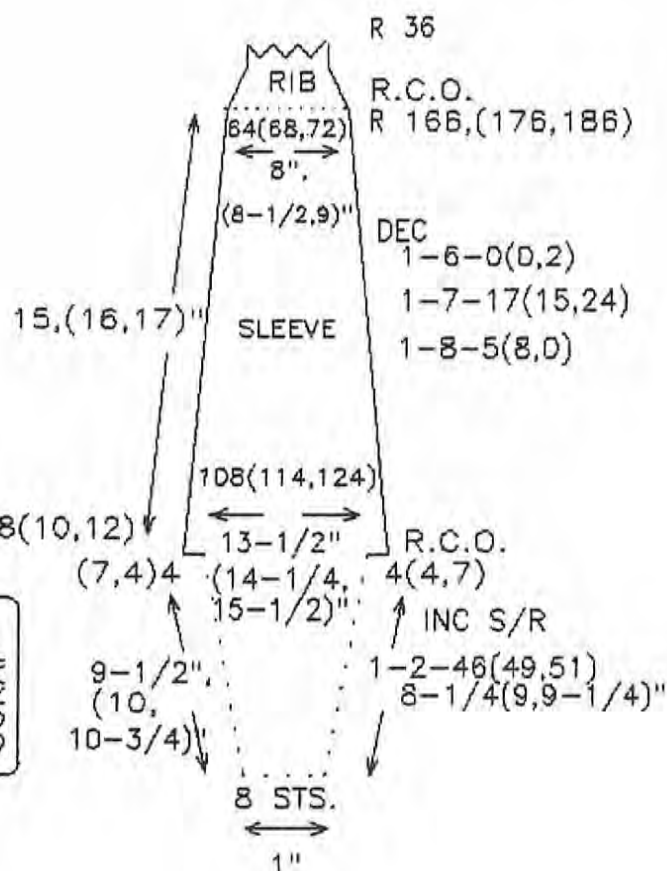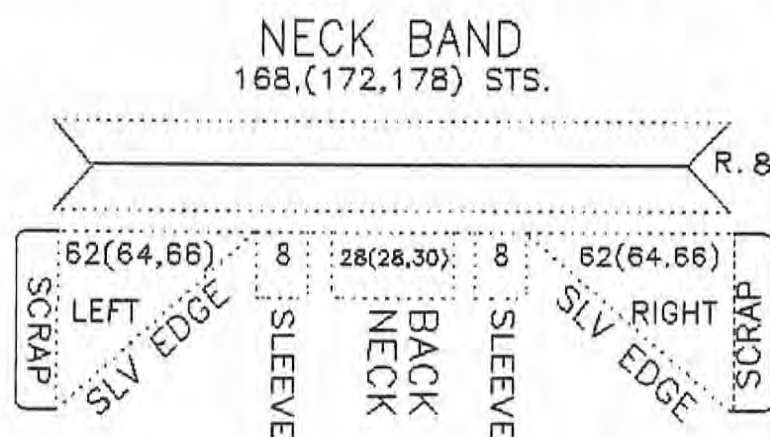

LADIES' "V" NECK RAGLAN WRITTEN INSTRUCTIONS

SIZE: 8,(10,12)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on ndls. #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the ndl. next to the 2 ndls. in work, from the out-of-work position (A) to the work position (B). This is ndl. #1 on the left of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work needle on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 9 you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. I pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline increases are: 1-9-2,(10,4); 1-8-8,(0,7); and 1-4-2,(2,2).

At this point your row counter should read 90,(98,100). You should also have 14,(14,15) stitches increased to the right of "0". There are 45,(49,50) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and direction. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on ndls. #84,(86,89), right, thru needles #23,(23,24), right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many sts. - only when necessary. This saves breaking the sts. as the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 44,(44,46) needles. These are the 8 stitches for a sleeve; 28,(28,30) stitches for the back of the neck; and the 8 stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off your empty, part, or slip buttons and put on your partial knit buttons.

Hang the LEFT triangle now on needles #23,(23,24), left, thru needles #84,(86,89), left. You now have 168,(172,178) sts. in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end st. - then moving the two sts. back in.* Repeat until 8,(10,12) decreases on each side of the band have been completed.

SIZE: LADIES' 8,(10,12)

NECKBAND: cont.

Row counter now reads 8,(10,12). Turn row counter off. Make your turn row as desired, (see page 16). Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool. * Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight for you. Repeat this until you have 168,(172,178) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 8 stitches on the right side and 8 stitches on the left side for the sleeves. This leaves you with the back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to (B) position and then knit across back to the right side.* Repeat from *'s to R. 92,(98,102). The carriage should now be on the right and 120,(126,132) ndls. should be in work.

Pull out 4,(4,7) needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 4,(4,7) needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 128,(134,146) needles working and your carriage on the right hand side. Row counter reads 94,(100,104).

R.C. 0. Knit even to R. 132,(144,154). Complete your bottom band as desired.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #59,(63,65), left, thru #1 left; and right triangle - needle #1, left, thru needles #58,(62,64), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

SIZE: LADIES' 8,(10,12)

FRONT: cont.

R.C. 90,(98,100). Carriage on the right. Continue to add sleeve edge stitches, if necessary, until you have 60,(63,66) stitches on the left side and 59,(62,65) stitches on the right side. Knit 1 row to the left. Pull out 4,(4,7) needles on left from the out-of-work (A) position to hold (E) position. With yarn from carriage, "e" cast on over these needles. Rethread carriage and knit back across to right. Pull 5,(5,8) needles out to hold (E) position on right side and "e" cast-on over them. Rethread carriage. (This makes up for the doubled stitch at the center front.) Row counter now reads 94,(100,104) and you have 128,(134,146) stitches in work.

R.C. 0. Knit even to R. 132,(144,154). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 8 stitches from the scrap of one of your sleeves in the neckband, onto the center 8 needles of your machine. Pick up and hang 50,(53,58) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 50,(53,58) loops and "e" wraps from the back raglan armhole - on the other side of the 8 stitches of the same sleeve. Be careful to keep purl sides facing you. After you have them all hung, you should have 108,(114,124) stitches on your machine. Pull all these needles into (E) position. Push in the center 8 stitches, PLUS 1 more stitch on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the needles in (E) position on the right side. Hold yarn down with your fingers between the last needle in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.





R.C. 0. Knit across to the left. Pull last knitted stitch on the left, back to (E) position for a wrap st. Push 2 stitches next to the working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap st. Continue increasing stitches into (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in (B) position, EXCEPT 4,(4,7) stitches on each side. Then make a multiple increase by pushing 4,(4,7) stitches to (D) position all at one time on the right hand side. Knit across. Then push 4,(4,7) stitches on the left hand side into (D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases; 1-8-5,(8,0); 1-7-17,(15,24); and 1-6-0,(0,2). Knit even to R. 166,(176,186). You should end with 64,(68,72) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions.

SIZE: 14, (16, 18)

Material: 16 to 20 ozs.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".

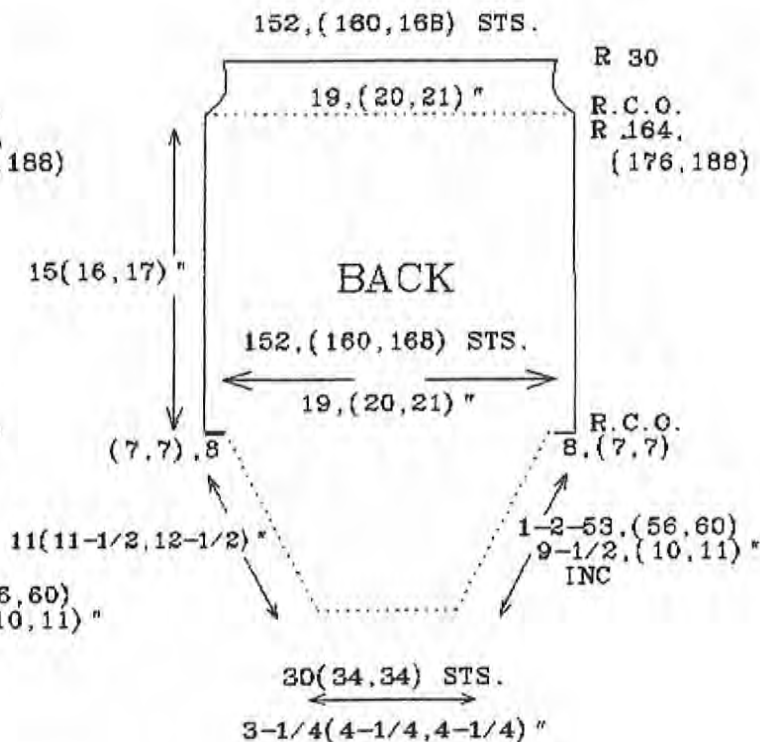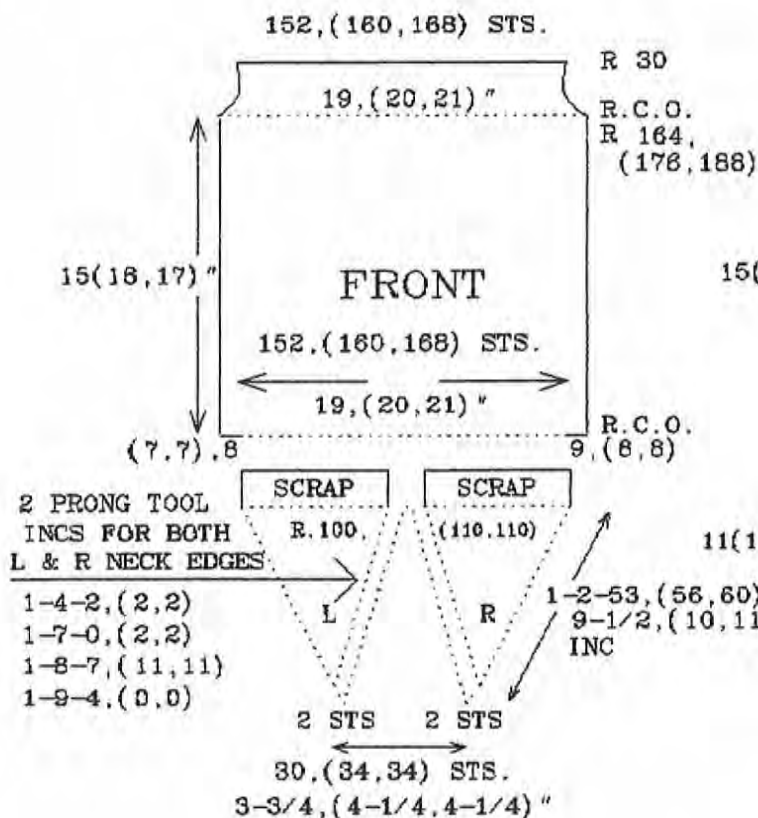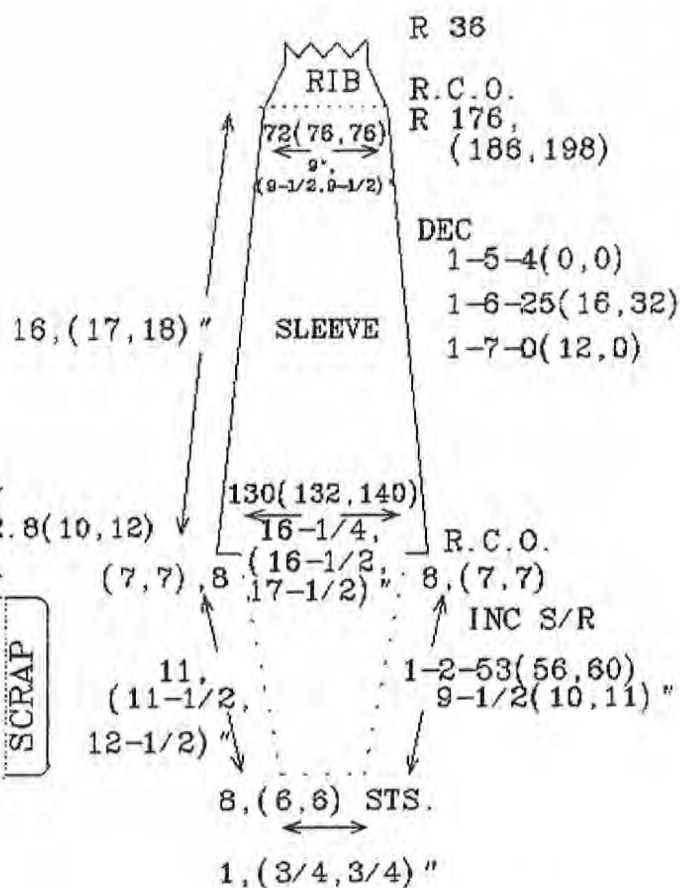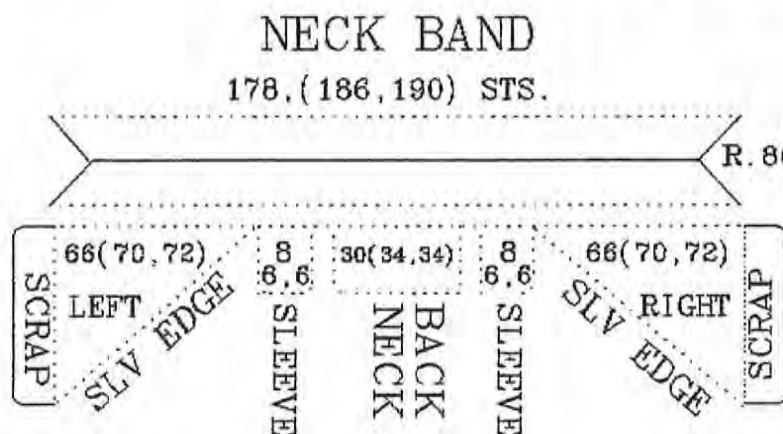

LADIES' "V" NECK RAGLAN WRITTEN INSTRUCTIONS

SIZE: 14,(16,18)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C.0. With scrap yarn "e" cast-on 2 sts. on ndls. #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the ndl. next to the 2 ndls. in work, from the out-of-work position (A) to the work position (B). This is ndl. #1 on the left of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work ndl. on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 9,(8,8), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. Pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline increases are: 1-9-4,(0,0); 1-8-7,(11,11); 1-7-0,(2,2); and 1-4-2,(2,2).

At this point your row counter should read 100,(110,110). You should also have 15,(17,17) stitches increased to the right of "0". There are 50,(55,55) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and direction. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on needles #89,(93,95), right, thru needles #24,(24,24), right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many stitches - only when necessary. This saves breaking the stitches on first knitted row.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 46 needles. These are the 8,(6,6) stitches for a sleeve; 30,(34,34) stitches for the back of the neck; and the 8,(6,6) stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off your empty, part, or slip buttons and put on your partial knit buttons.

Hang the LEFT triangle now on needles #24,(24,24), left, thru ndls. #89,(93,95), left. You now have 178,(186,190) stitches in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it

SIZE: LADIES' 14,(16,18)

NECKBAND: cont.

out to the end stitch - then moving the two sts. back in.* Repeat until 8,(10,12) decs. on each side of the band have been completed. Row counter now reads 8,(10,12). Turn row counter off. Make your turn row as desired, (see page 16). Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool.* Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight for you. Repeat this until you have 178,(186,190) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 8,(6,6) stitches on the right side and 8,(6,6) stitches on the left side for the sleeves. This leaves you with the back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW ndl. from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to (B) position and then knit across back to the right side.* Repeat from *'s to R. 106,(112,120). The carriage should now be on the right and 136,(146,154) ndls. should be in work.

Pull out 8,(7,7) needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 8,(7,7) needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 152,(160,168) needles working and your carriage on the right hand side. Row counter reads 108,(114,122).

R.C. 0. Knit even to R. 164,(176,188). Complete your bottom band as desired.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #65,(72,72), left, thru #1 left; and right triangle - needle #1, left, thru needles #64,(71,71), right. This places the first center stitch of each triangle of the same needle #1, left of "0"

SIZE: LADIES' 14,(16,18)

FRONT: cont.

and prevents a hole at the center front.

R.C. 100,(110,110). Carriage on the right. Continue to add sleeve edge sts., if necessary, until you have 68,(73,77) stitches on the left side and 67,(72,76) stitches on the right side. R.C. reads 106,(112,120). Knit 1 row to the left. Pull out 8,(7,7) needles on left from the out-of-work (A) position to hold (E) position. With yarn from carriage, "e" cast-on over these ndls. Rethread carriage and knit back across to right. Pull 9,(8,8) needles out to hold (E) position on right side and "e" cast-on over them. Rethread carriage. (This makes up for the doubled st. at the center front.) R.C. now reads 108,(114,122) and you have 152,(160,168) stitches in work.

R.C. 0. Knit even to R. 164,(176,188). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 8,(6,6) stitches from the scrap of one of your sleeves in the neckband, onto the center 8,(6,6) needles of your machine. Pick up and hang 61,(63,67) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 61,(63,67) loops and "e" wraps from the back raglan armhole - on the other side of the 8,(6,6) stitches of the same sleeve. Be careful to keep purl sides facing you. After you have them all hung, you should have 130,(132,140) stitches on your machine. Pull all these needles into (E) position. Push in the center 8,(6,6) stitches, PLUS 1 more st. on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the needles in (E) position on the right side. Hold yarn down with your fingers between the last needle in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.

R.C. 0. Knit across to the left. Pull last knitted stitch on the left back to (E) position for a wrap stitch. Push 2 stitches next to the working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap st. Continue increasing stitches into (B) position - alternating the pushing and pulling of stitches from side to side until all stitches are in (B) position, EXCEPT 8,(7,7) stitches on each side. Then make a multiple increase by pushing 8,(7,7) stitches to (D) position all at one time on the right hand side. Knit across. Then push 8,(7,7) stitches on the left hand side into (D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases; 1-7-0,(12,0); 1-6-25,(16,32); and 1-5-4,(0,0). Knit even to R. 176,(186,198). You should end with 72,(76,76) stitches. Complete cuff as desired.



Hang and knit second sleeve by repeating all above directions.

MEN'S "V" NECK RAGLAN SWEATERS

SIZE: 34, (36, 38, 40)

Material: 16 to 20 ozs.
Any yarn that can
obtain the gauge.

Gauge: 8 sts. x 11 rows = 1".

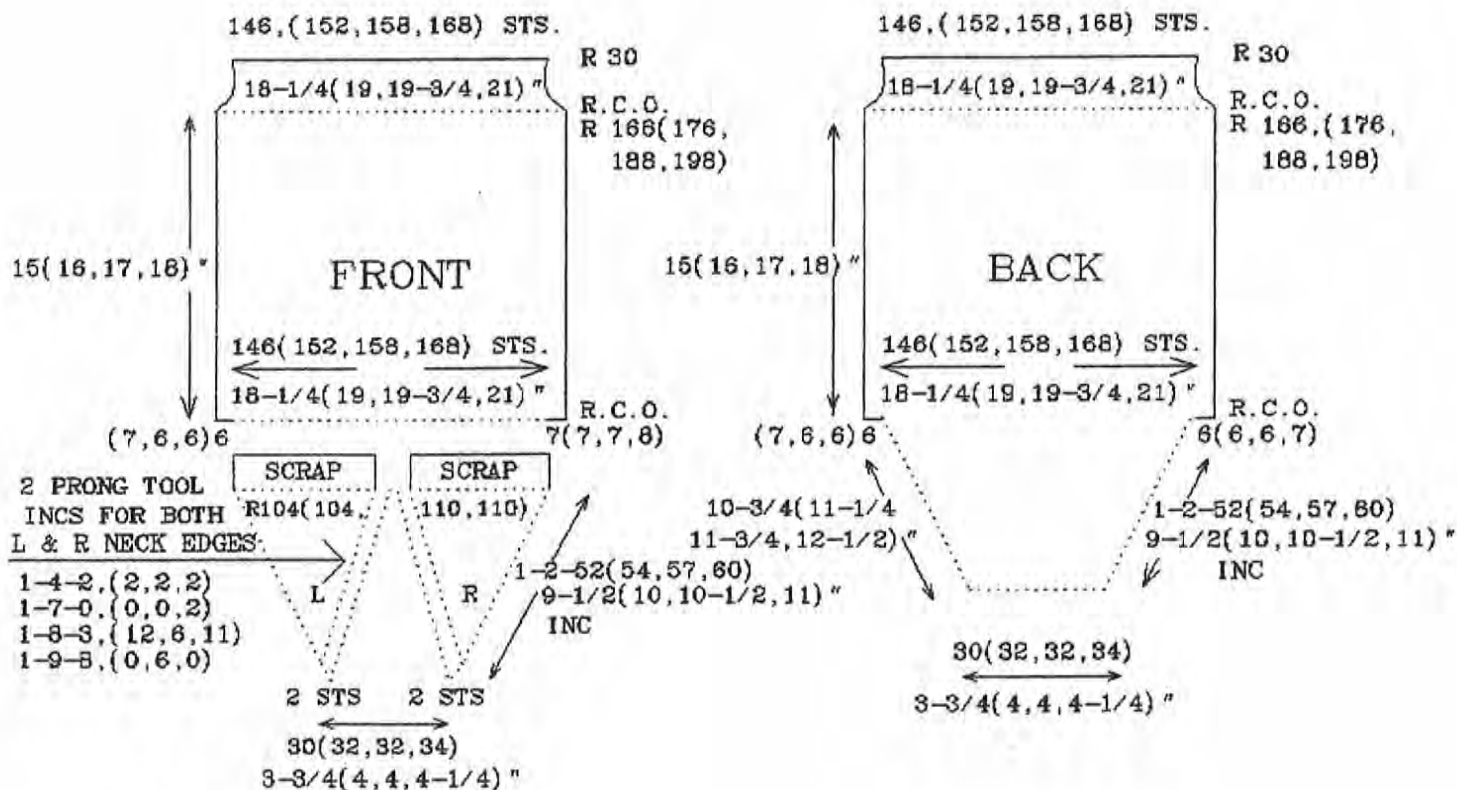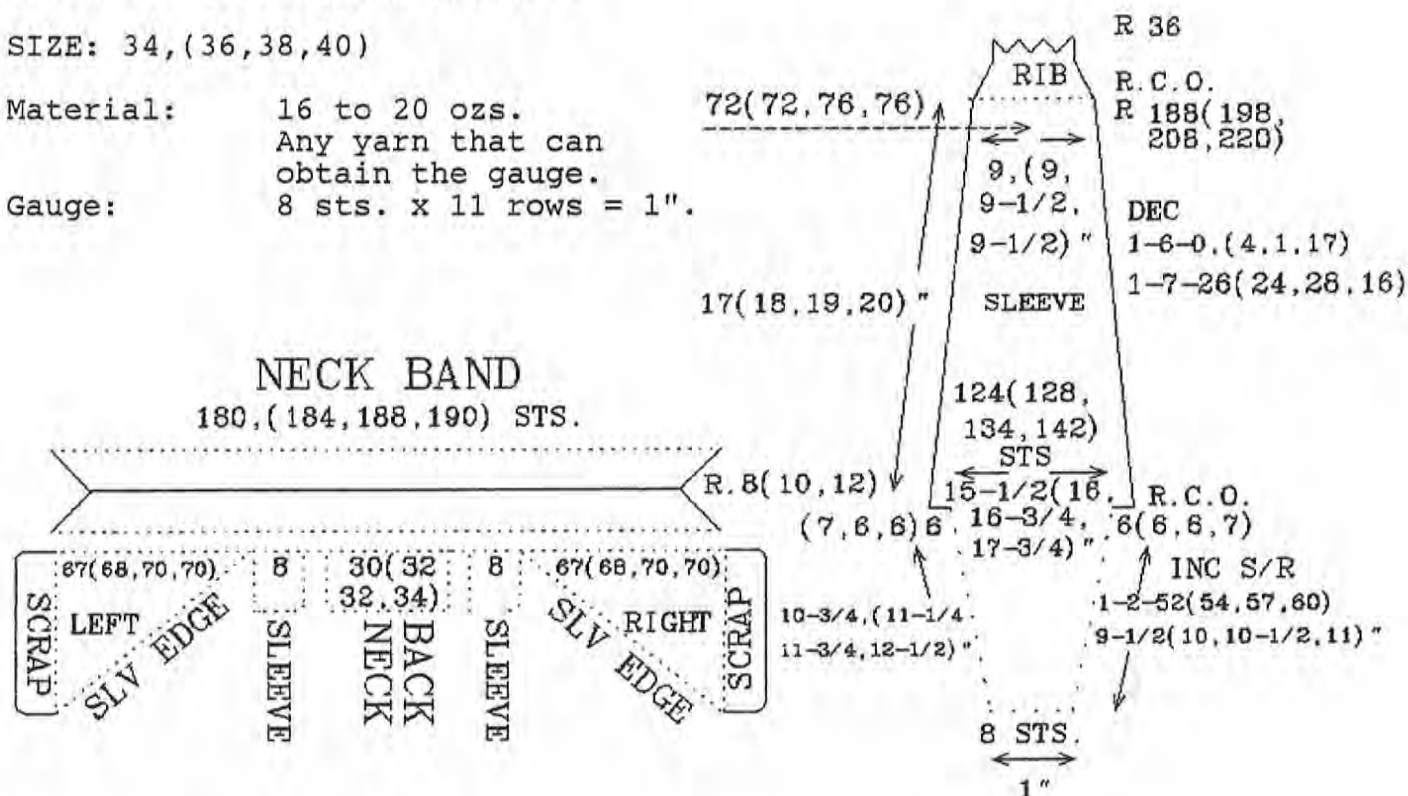

MEN'S "V" NECK RAGLAN WRITTEN INSTRUCTIONS

SIZE: 34,(36,38,40)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on ndls. #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the ndl. next to the 2 ndls. in work, from the out-of-work position (A) to the work position (B). This is ndl. #1 on the left of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work needle on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 9,(8,9,8), you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. Pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It usually looks better. These neckline increases are: 1-9-8,(0,6,0); 1-8-3,(12,6,11); 1-7-0,(0,0,2); and 1-4-2,(2,2,2).

At this point your row counter should read 104,(104,110,110). You should also have 15,(16,16,17) stitches increased to the right of "0". There are 52,(52,55,55) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and direction. Scrap off. This is the side initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on needles #90,(92,94,95), right, thru ndls. #24,(25,25,26), right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many sts. - only when necessary. This saves breaking sts. as the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 46,(48,48,50) needles. These are the 8 stitches for a sleeve; 30,(32,32,34) stitches for the back of the neck; and the 8 stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off your empty, part, or slip buttons and put on your partial knit buttons.

Hang the LEFT triangle now on ndls. #24,(25,25,26), left, thru ndls. #90,(92,94,95), left. You now have 180,(184,188,190) sts. in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end st. - then moving the two sts. back in.* Repeat until

SIZE: MEN'S 34,(36,38,40)

NECKBAND: cont.

8,(10,12) decreases on each side of the band have been completed. Row counter now reads 8,(10,12). Turn row counter off. Make your turn row as desired, (see page 16). Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool. * Pick up the bar from first inside stitch, and then the outside stitch so it won't get too tight for you. Repeat this until you have 180(184,188,190) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 8 sts. on the right side and 8 sts. on the left side for the sleeves. This leaves back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW needle from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW needle to (B) position and then knit across back to the right side.* Repeat from *'s to R. 104,(108,114,120). The carriage should now be on the right and 134,(140,146,154) needles should be in work.

Pull out 6,(6,6,7) needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 6,(6,6,7) needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 146,(152,158,168) needles working and your carriage on the right hand side. Row counter reads 106,(110,116,122).

R.C. 0. Knit even to R.166,(176,188,198). Complete your bottom band as desired.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #67,(68,71,72), left, thru #1 left; and right triangle - needles #1, left, thru needles #66,(67,70,71), right. This places the first center stitch of each triangle on the same needle #1,

SIZE: MEN'S 34,(36,38,40)

FRONT: cont.

left of "0" and prevents a hole at the center front.

R.C. 104,(104,110,110). Carriage on the right. Continue to add sleeve edge sts., if necessary, until you have 67,(70,73,77) sts. on the left side and 66,(69,72,76) sts. on the right side. R.C. reads 104,(108,114,120). Knit 1 row to the left. Pull out 6,(6,6,7) ndls. on left from the out-of-work (A) position to hold (E) position. With yarn from carriage, "e" over these ndls. Rethread carriage and knit back across to right. Pull 7,(7,7,8) ndls. out to hold (E) position on right side and "e" cast-on over them. Rethread carriage. (This makes up for the doubled st. at the center front.) R.C. now reads 106,(110,116,122) and you have 146,(152,158,168) stitches in work.

R.C. 0. Knit even to R. 166,(176,188,198). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 8 stitches from the scrap of one of your sleeves in the neckband, onto the center 8 stitches of your machine. Pick up and hang 58,(60,63,67) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 58,(60,63,67) loops and "e" wraps from the back raglan armhole - on the other side of the 8 stitches of the same sleeve. Be careful to keep purl sides facing you. After you have them all hung, you should have 124,(128,134,142) stitches on your machine. Pull all these needles into (E) position. Push in the center 8 stitches, PLUS 1 more stitch, on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser and over the top of the ndls. in (E) position on the right side. Hold yarn down with your fingers between the last needle in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.

R.C. 0. Knit across to the left. Pull last knitted st. on the left back to (E) position for a wrap st. Push 2 sts. next to the working ndls. that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted st. back to (E) position for another wrap st. Continue increasing sts. into (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in (B) position, EXCEPT 6,(6,6,7) sts. on each side. Then make a multiple increase by pushing 6,(6,6,7) sts. to (D) position all at one time on the right hand side. Knit across. Then push 6,(6,6,7) sts. on the left hand side into (D) position and knit across. Knit back to the right, across all stitches in work.





R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases: 1-7-26,(24,28,16) and 1-6-0,(4,1,17). Knit even to R. 188,(198,208,220). You should end with 72,(72,76,76) stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions.

MEN'S "V" NECK RAGLAN SWEATERS

SIZE: 42, (44, 46)

Material: 18 to 24 ozs.
Any yarn that can
obtain the gauge.
Gauge: 8 sts. x 11 rows = 1".

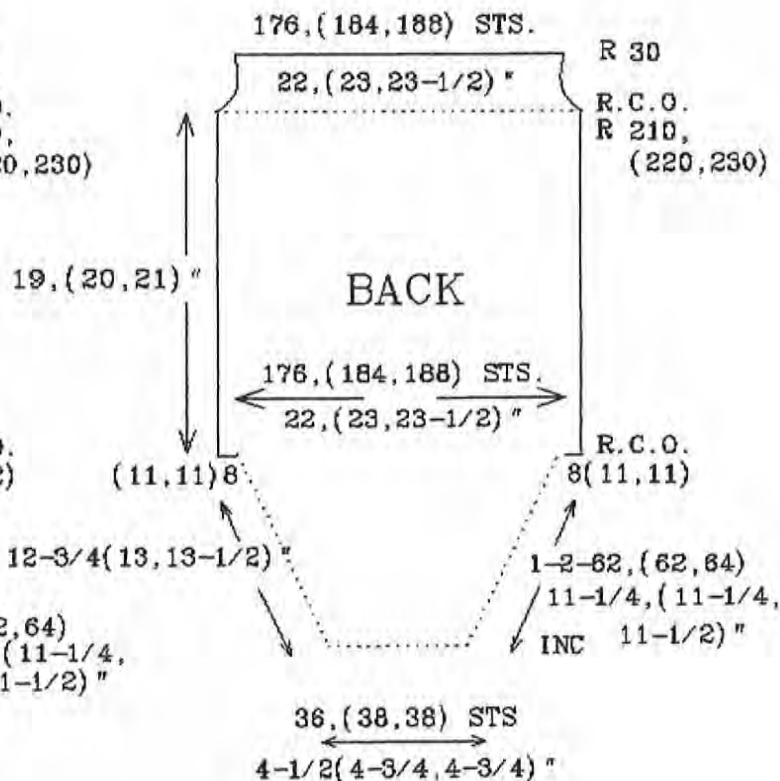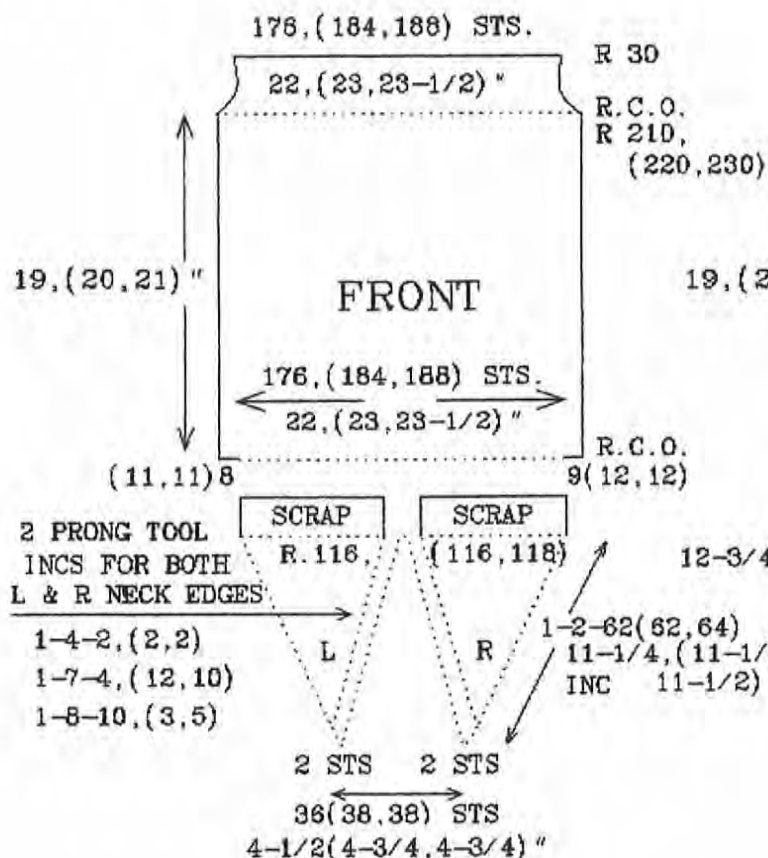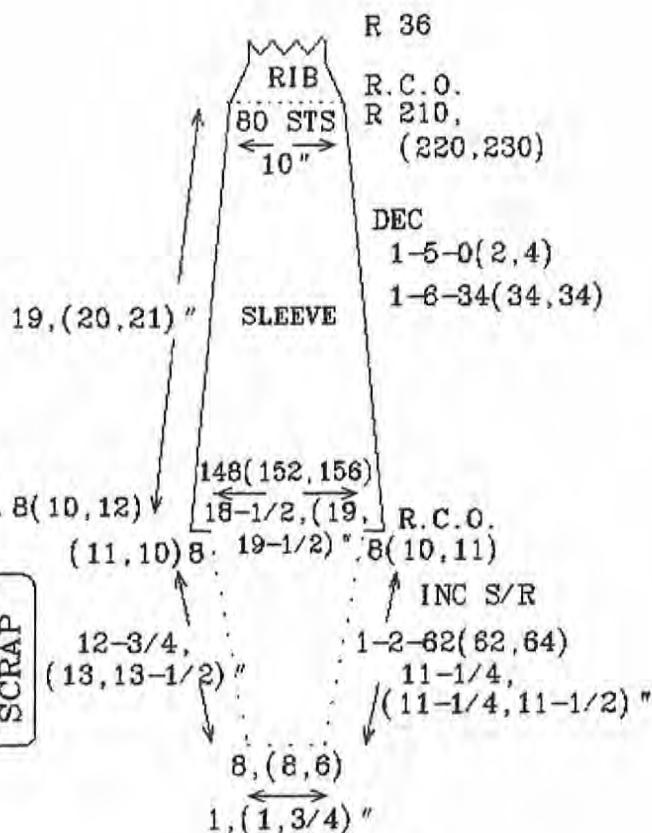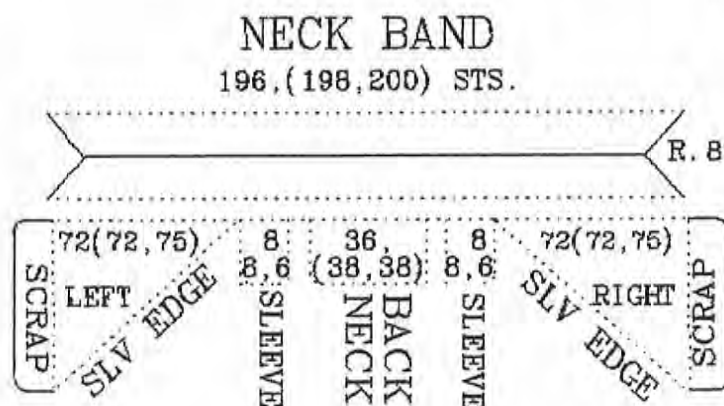

MEN'S "V" NECK RAGLAN WRITTEN INSTRUCTIONS

SIZE: 42, (44, 46)

FRONT TRIANGLES:

Left Triangle:

Carriage on the right. Main garment tension. R.C. 0. With scrap yarn "e" cast-on 2 sts. on ndls. #1 & #2 on RIGHT side of "0". Knit 7 rows of scrap. Knit 1 row of ravel cord. R.C. 0. Carriage on right. Put in main color yarn, garment tension, and knit 1 row. With your carriage now on the left, pull the ndl. next to the 2 ndls. in work, from the out-of-work position (A) to the work position (B). This is ndl. #1 on the left of "0". Knit 2 rows. Pull ndl. #2 left, up from the (A) position to the (B) position. Knit 2 rows. Continue to pull up an out-of-work needle on the left side every-other-row until you have completed all your armhole side increases.

AT THE SAME TIME WHEN YOU REACH ROW 8, you must begin to increase for the neck edge. This is done by the usual 2 prong tool increase method. Pick up the bar from the 3rd stitch, instead of the 2nd "moved" stitch that was transferred. It looks a lot better. The neckline incs are: 1-8-10, (3, 5); 1-7-4, (12, 10); and 1-4-2, (2, 2).

At this point your row counter should read 116, (116, 118). You should also have 18, (19, 19) stitches increased to the right of "0". There are 58, (58, 59) working needles on the left of "0". Scrap off this entire piece, and lay it aside.

Right Triangle:

Make an identical triangle, reversing all sides and direction. Scrap off. This is where initials, or monograms, usually appear.

NECKBAND:

Carriage on the right. R.C. off. Take the RIGHT triangle and hang the neckline slant on ndls. #98, (99, 100), right thru ndls. #27, (28, 26), right of "0". Hang it from the point down as this is the way it was knitted. Do not double up many sts. - only when necessary. This saves breaking the sts. as the first row is knitted.

With tension set 1 dot tighter than garment tension, and with a marker cord in with yarn, knit 1 row across. Put on your empty, part, or slip buttons and move your carriage back to the right side of knitting. Take yarn out of carriage and "e" cast-on over the next 52, (54, 50) needles. These are the 8, (8, 6) stitches for a sleeve; 36, (38, 38) stitches for the back of the neck; and the 8, (8, 6) stitches for the other sleeve. Pull all the stitches on the machine now out into hold (E) position. Take off the empty, part, or slip buttons and put on partial knit buttons.

Hang the LEFT triangle now on needles #27, (28, 26), left, thru needles #98, (99, 100), left. You now have 196, (198, 200) sts. in work for your complete neckband. Put in garment yarn, plus marker cord, and knit 1 row across this triangle. Carriage is now on the left.

R.C. 0. *Knit 1 row. Decrease 1 st. at each side of the band, using a 2 prong tool decrease; a 2 prong on one side and a 3 prong on the other side; or by picking up the 2nd st. from the end - moving it out to the end st. - then moving the two sts. back in.* Repeat until 8, (10, 12) decs. on each side of the band have been completed.

SIZE: MEN'S 42,(44,46)

NECKBAND: cont.

Row counter now reads 8,(10,12). Turn row counter off. Make your turn row as desired, (see page 16). Do not count this row.

R.C. 0. Tension set 2 dots still tighter for the back side. *Knit 1 row. Increase 1 stitch at each end of the band, using the 2 prong tool. * Pick up the bar from first inside stitch and then the outside stitch so it won't get too tight for you. Repeat this until you have 196,(198,200) stitches back on your needles.

Pick up the bottom of the knitted triangles (where the marker cord shows) and hang each stitch on the corresponding needles. Using a double eye needle, sew off these two triangles only.

Pick up the remaining "e" cast-on stitches and hang them on the corresponding needles. THESE MUST BE TURNED OVER AFTER YOU HAVE HUNG THEM EITHER WITH THE GARTER BAR (see page 13) OR BY SCRAPPING THEM OFF AND THEN REHANGING THEM.

After they have been turned over, knit 1 row at garment tension across the doubled stitches to enclose them. Then scrap off 8,(8,6) stitches on the right side and 8,(8,6) stitches on the left side for the sleeves. This leaves you with the back neck stitches on the machine ready to complete.

DON'T WORRY ABOUT THE FRONT. WE WILL RETURN TO IT IN A MINUTE.

BACK:

R.C. 0. Carriage is on the right, garment tension, and main color yarn threaded through carriage. *On the side next to the carriage, pull 1 NEW needle from out-of-work (A) position up to the work (B) position. Knit 1 row. Repeat operation on the left side - bringing up one NEW ndl. to (B) position and then knit across back to the right side.* Repeat from *'s to R. 124,(124,128). The carriage should now be on the right and 160,(162,166) ndls. should be in work.

Pull out 8,(11,11) needles into (E) position on the right hand side. Using yarn threaded in the carriage, "e" cast-on over these needles. Knit 1 row to the left. Pull out 8,(11,11) needles on the left to (E) position, and "e" cast-on over these needles with yarn from the carriage. Knit back 1 row to the right. You should pull the "e" cast-on stitches into (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 176,(184,188) needles working and your carriage on the right hand side. Row counter reads 126,(126,130).

R.C. 0. Knit even to R. 210,(220,230). Complete your bottom band as desired.

FRONT:

Keeping your neckline straight and not twisted, PURL SIDE OF KNITTED TRIANGLE FACING YOU, rehang the stitches held in the scrap yarn on the bottom of the triangles like this: left triangle - needles #76,(77,78), left, thru #1 left; and right triangle - needle #1, left, thru needles #75,(76,77), right. This places the first center stitch of each triangle on the same needle #1, left of "0", and prevents a hole at the center front.

SIZE: MEN'S 42,(44,46)

FRONT: cont.

R.C. 116,(116,118). Carriage on the right. Continue to add sleeve edge stitches, if necessary, until you have 80,(81,83) sts. on the left side and 79,(80,82) stitches on the right side. R.C. reads 124,(124,128). Knit 1 row to the left. Pull out 8,(11,11) needles on left from the out-of-work (A) position to hold (E) position. With yarn from carriage, "e" over these needles. Rethread carriage and knit back across to right. Pull 9,(12,12) needles out to hold (E) position on right side and "e" cast-on over them. Rethread carriage. (This makes up for the doubled st. at the center front.) R.C. now reads 126,(126,130) and you have 176,(184,188) stitches in work.

R.C. 0. Knit even to R. 210,(220,230). Complete your bottom band the same as the back.

SLEEVE:

Pick up and hang 8,(8,6) stitches from the scrap of one of your sleeves in the neckband, onto the center 8,(8,6) stitches of your machine. Pick up and hang 70,(72,75) loops and "e" wraps from one side of the front raglan armhole - on to the needles next to the needles of the top of the sleeve. Pick up and hang 70,(72,75) loops and "e" wraps from the back raglan armhole - on the other side of the 8,(8,6) stitches of the same sleeve. Be careful to keep purl sides facing you. After you have them all hung, you should have 148,(152,156) stitches on your machine. Pull all these needles into (E) position. Push in the center 8,(8,6) stitches, PLUS 1 more stitch on the left hand side to (D) position. Carriage is on the right. Put on partial knitting buttons. Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser and over the top of the needles in (E) position on the right side. Hold yarn down with your fingers between the last needle in (E) position and the first needle in (D) position. This will prevent your yarn from tangling in the carriage brushes. Set tension for garment tension.

R.C. 0. Knit across to the left. Pull last knitted stitch on the left back to (E) position for a wrap stitch. Push 2 stitches next to the working needles that are in (E) position on right hand side to (D) position. Knit across right. Pull last knitted stitch back to (E) position for another wrap st. Continue increasing stitches into (B) position - alternating the pushing and pulling of stitches from side to side, until all stitches are in (B) position, EXCEPT 8,(10,11) stitches on each side. Then make a multiple increase by pushing 8,(10,11) stitches to (D) position all at one time on the right hand side. Knit across. Then push 8,(10,11) stitches on the left hand side into (D) position and knit across. Knit back to the right, across all stitches in work.

R.C. 0. Take off partial knit buttons. Knit in the remainder of the sleeve, doing 3 prong tool decreases: 1-6-34, (34,34) and 1-5-0,(2,4). Knit even to R. 210,(220,230). You should end with 80 stitches. Complete cuff as desired.

Hang and knit second sleeve by repeating all above directions.