



Bulky
Round Neck Upside-Down
Raglan Pullovers
For
Babies And Children

ALL PATTERNS HAVE THREE STITCH GAUGES TO ACCOMMODATE
DIFFERENT THICKNESSES AND TYPES OF YARN.

By Jodie Raymond



Bulky
Round Neck Upside-Down
Raglan Pullovers
For
Babies And Children

These 'knit from the neck down' Bulky patterns for babies and children are the easiest sweaters. Complete diagram and written instructions.

"Have lots' of fun!"

By Jodie Raymond

P.O. Box 8631
Jacksonville, FL 32211
904-642-7148

COPYRIGHT: © September, 1986, by Jodie Raymond. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the author.

ISBN: 0-939669-07-2

First Printing - September, 1986.
Second Printing - March 21, 1987
Third Printing - January, 1988

FORWARD

At Last! Here are the Round Neck Upside-down Raglan patterns for the Bulky, or Chunky, machines. But, notice, there is a slight change in the formatting of these patterns. Each pattern is ONE (1) size only, just written in THREE (3) different stitch gauges. The many, many varieties of yarn that can be used on these machines, made it imperative to print these patterns in this manner. So, this book is filled with patterns from a practice, or soft sculptured doll, size - to children's size 14. Another book, "Bulky Round Neck Upside-down Raglans for Teenagers and Adults" will complete the entire size range. I am sorry that all sizes could not be printed in one book, but it would have been much too large to have been practical.

As for a little background on these patterns for those of you who may not have tried them before, this method of knitting from the neck down (hence the "upside-down" terminology) was developed and printed in 1980 for the standard knitting machines. That book is still a best seller, thanks to all of you knitters. The sweaters are very easy and fast. Many knitting instructors use this book as a beginning project for their new students, so novice knitters can make something useful right off the bat.

These patterns can be completed with the needles of the machine remaining in Work or Out-of-work positions throughout the sweater - making lace work, two color work, or tuck patterns easily knitted. Also, there are several different neckbands that can be used to make an unlimited variety of these fun and most wearable sweaters.

In the front of all my books are some "Random Thoughts and Suggestions". This is the place you will find various hints and techniques used in the book to make your knitting more enjoyable.

So, thank you for requesting this bulky book. I hope you have a great time knitting many pullovers. Will be looking to see a lot of happy little children wrapped in warm, upside-down sweaters - having the time of their lives.

The best to you,


Jodie

DEDICATION

This is dedicated to the knitters who love to knit on the big needle machines. To you who kept requesting these patterns, thank you for your patience and your help. See why I know knitters are the nicest people! And, I am so fortunate to be able to work, and share, with so many of you.

See you around soon,

Jodie

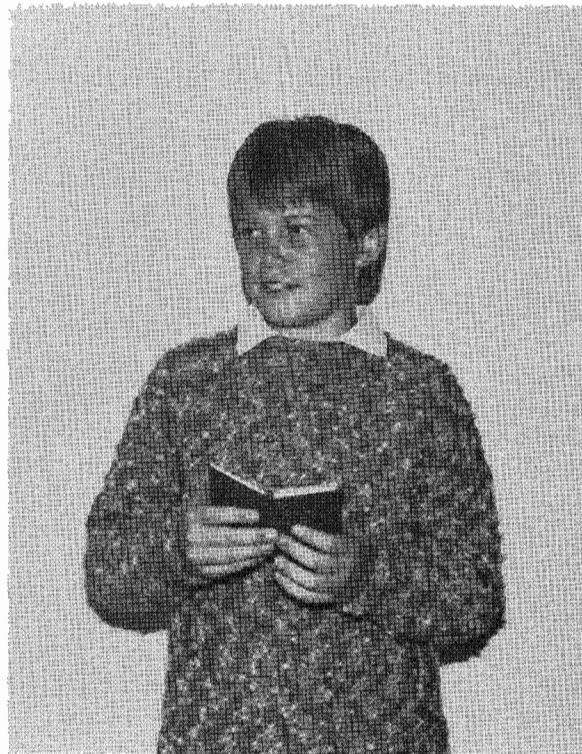

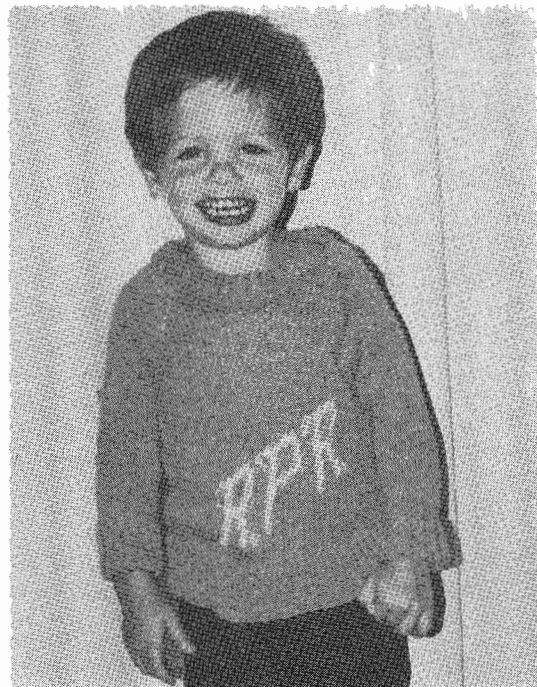
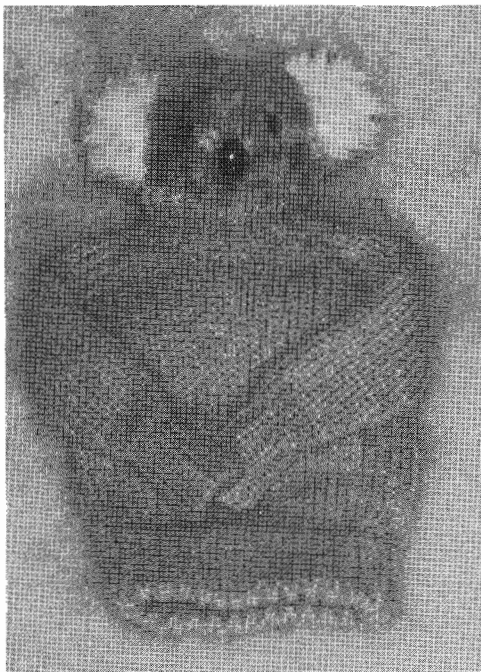
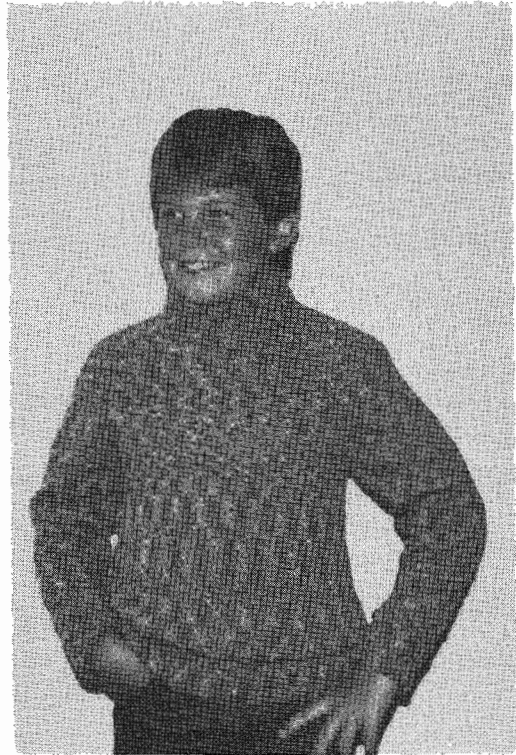
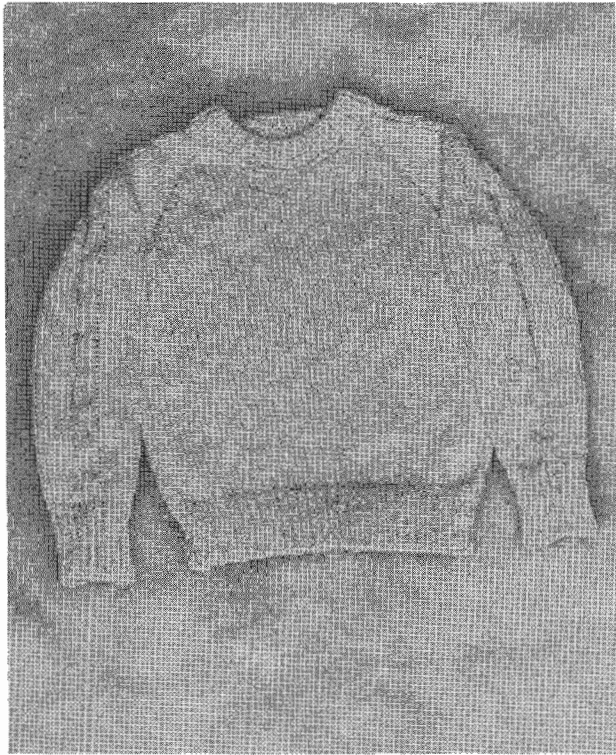


TABLE OF CONTENTS

Title Page	i.
Copyright	ii.
Forward	1.
Dedication	1.
Photographs	2.
Table of Contents	4.
Abbreviations and Terminology	5.
Needle Positions	5.
Other Publications	6.
Measurement Charts	7.
Random Thoughts And Suggestions	8.
Knitting Your Swatch On The Bulky	8.
Three Stitch Gauges For Each Sweater	9.
Diagram Knitting	10.
Short Row Refresher	11.
Measurements Needed For Sweater	12.
Pattern Placement	13.
Transferring Stitches With The Garter Bar	13.
Ribbing Suggestions	14.
Machine Knit Ribbing	14.
Hand Ribbing On The Machine	14.
Knitting Needle Ribbing	15.
Separate Ribbing - Kitchenered Later	15.
Mock Ribbing	15.
Stafford Ribbing	16.
Hints For Elasticity In Ribbing	16.
Stafford Ribber Cast-on And Cast-off	17.
Formation Of Raglan Slant	20.
Rapid Increases	20.
"E" Wrapping Increases	20.
Alternative For Lace Work	20.
Knitting Sleeve Without Needles In Hold	20.
Yarns To Use With These Patterns	21.
Blocking and Assembly	21.
Necklines	22.
Single Crewneck	22.
Double Crewneck	22.
Turtleneck - Close Fitting	23.
Mock Rib	23.
Enlarging The Neckband	23.
Turtleneck - Loose Fitting	24.
Practice	25.
Infant	29.
Six Month	33.
One Year	37.
Two Year	41.
Four Year	45.
Six Year	49.
Eight Year	53.
Ten Year	57.
Twelve Year	61.
Fourteen Year	65.

ABBREVIATIONS AND TERMINOLOGY

oz.	- ounce	ozs.	- ounces
st.	- stitch	sts.	- stitches
ndl.	- needle	ndls.	- needles
dec.	- decrease	inc.	- increase
cont.	- continue	0	- zero
R.	- row number	R.C.	- row counter
C.O.	- cast-on	S/R	- short row
Even	- same number of rows or stitches	Leading	- button on cam nearest to fabric
E.O.N.	- every other needle	E.O.R.	- every other row
U/A.	- underarm		

NEEDLE POSITIONS

Please check your manual for your needle selection.

(A)	- Out of work	(B)	- Work
(C or D)	- Needle selector	(D or E)	- Hold, or partial knitting

Armhole Slant - measure of the short rows only.

Armhole Depth - total length of armhole at raglan slant.

All patterns are written: STITCHES - ROWS - TIMES.
Both written and diagram instructions are included for all patterns of this book.

These instructions can be used on all makes of bulky, or chunky, machines. Even you can use them on the standard machines if you use every other needle and can achieve the stitch gauge required. This allows one to knit many types of thicker yarns than normally used on the standard machines.

The "Empty" buttons of the Toyota are the same as the "Part" buttons on the Brother and Knitking machines, or the "Slip" buttons of the Studio and Singer machines. The "Partial Knitting" buttons are the "Hold or I" buttons on the Toyota; the "Hold or II" buttons on the Brother and Knitking; or the "Russell Levers" for the Studio and Singer machines. For these, and other brands, just use the terminology that fits your particular brand of knitting machine.

Anytime you see an "0" in your particular size, it tells you NOT to use any of that operation. Move on to the next operation. Example: Dec. 1-2-6,(0,13) would mean to decrease one stitch, on both sides of your garment usually, every other row - six times for the first stitch gauge, NO times for the second stitch gauge, and thirteen times for the largest size stitch gauge. When you have completed the above directions, you would have decreased your knitting by 12 stitches, or no stitches, or 26 stitches, according to the stitch gauge sizing you were using, if you were decreasing on both sides of your garment.

If you see only one set of figures on your diagram, (that is, an instruction without any numbers in parentheses) this direction applies to all stitch gauges of these patterns. Example: Dec. 1-3-1 would mean decrease one stitch, every third row, one time. In this example, you would be losing one stitch on one side in three rows - or two stitches in three rows if you were decreasing on both sides of your sweater.

In the "Random Thoughts and Suggestions" section of this, and my other books, many helpful hints and techniques are discussed for your knitting pleasure.

Other publications of mine that you might enjoy are:

"JODIE'S FAVORITE DEMONSTRATIONS - VOLUME ONE"

"A SHIRT FOR ALL SEASONS"

"LET'S KNIT SOME BLOUSES"

"LET'S KNIT SOME SKIRTS"

"V-NECK UPSIDE-DOWN RAGLAN SWEATERS"

"ROUND NECK UPSIDE-DOWN RAGLAN PULLOVERS"

"SIGNATURE HATS AND CAPS"

MEASUREMENT CHART

These garments have been charted for the following FINISHED MEASUREMENTS. Raglan measurements are slightly different than normally used. The armholes are slanted and come up the neckline. To do this, the armhole is lower than in a set-in sleeve sweater. This makes the underarm sleeve and body seams shorter than usual.

Having an accurate swatch with correct stitch gauge and tension is absolutely essential for these sweaters to come out to the size stated. Be particularly careful as to the number of rows in your swatch. Block to dimensions on the diagram for the particular size you are knitting.

The measurements under "Inc. S/R" figures on the diagrams are the short rowed inches. The sleeve blocking measurements are located on the left of sleeve slant on the diagram. Length of the body and sleeves on the diagrams and written instructions are from the underarms TO THE RIBBING.

TINY RAGLAN PULLOVERS

<u>SIZE</u>	<u>PRACTICE</u>	<u>INFANT</u>	<u>SIX MOS.</u>	<u>ONE YR.</u>	<u>TWO YR.</u>
Chest	16"	19"	20"	22"	23"
Back of neck	3"	3½"	3-3/4"	4"	4"
Wrist	5"	5"	5½"	6"	6½"
Sleeve width	6"	8"	8½"	9"	9½"
Armhole Depth	3½"	4"	4½"	5"	5½"
Length to U/A	3½"	4½"	5"	6"	7"
Sleeve to U/A	3½"	5"	5½"	6½"	7½"

CHILDREN'S RAGLAN PULLOVERS

<u>SIZE</u>	<u>4</u>	<u>6</u>	<u>8</u>
Chest	25"	27"	28"
Back of Neck	4½"	4½"	4½"
Wrist	7"	7"	8"
½leeve width at U/A	10"	11"	11½"
Armhole depth	6"	6½"	7"
Length to U/A	8"	8½"	9½"
Sleeve to U/A	8½"	9"	10"

<u>SIZE</u>	<u>10</u>	<u>12</u>	<u>14</u>
Chest	29"	31"	33"
Back of Neck	4½"	5"	5"
Wrist	8"	9"	9"
Sleeve width at U/A	12½"	13½"	14"
Armhole depth	7"	8"	8"
Length to U/A	11"	12"	13"
Sleeve to U/A	12"	13"	14"

RANDOM THOUGHTS AND SUGGESTIONS

Many different types of yarn have been used in developing these patterns. While I have no favorites in particular, the bulky yarns do require a very true stitch gauge swatch. When you are working with such large stitches, it doesn't take much of an error in reading your swatch to put one into another complete size. So, please, be very careful in knitting your swatch at the same speed you will be knitting the garment. The quickness of your moving your carriage across the needle bed will change the size of the stitches on the needles.

One must prepare the swatch just as you plan on handling the finished garment. And, you must make a swatch for every different cone of yarn UNLESS it is the SAME COLOR AND SAME DYE LOT as used before. Block with steam, and above all else, let the swatch rest overnight to make sure it plans on staying in this form. Be sure to recheck the swatch the day you begin to knit. Don't take anything for granted. THE SWATCH MUST BE CORRECT IN ORDER TO KNIT A TRUE SIZE OF A PATTERN.

KNITTING YOUR SWATCH ON THE BULKY

It has been found that you can use the same method of making a swatch on the bulky as on the standard machine, if you are satisfied with that way. Just use about half the number of rows and stitches as in the other one.

For those of you who wish to try the way I do my bulky swatches, please read on.

"E" wrap with main color yarn, needles #10 right thru needles #10 left. Knit over these needles until ten rows are completed. Remove the main color yarn from the carriage and insert a contrasting yarn of approximately the same size into the main feeder. Knit two rows of this contrasting color. Remove yarn and replace with the main color yarn as before. Knit as many rows as you wish to equal one inch in your swatch. If you want 6 rows to equal one inch, then knit six rows. Now stop and mark off the STITCHES of your gauge by finding the needles on the outside of what you wish to be two inches across on the swatch. For instance, if you were trying to reach a swatch of 4 stitches to an inch, you would want to mark needles #5 right and #5 left. This would be done by hand knitting a contrast yarn through these two needles.

After marking these two needles on this one row, knit once more as many rows as you wish to equal one inch. This would be six rows again, if you were trying for 6 rows to equal the one inch. Remove main color yarn, replace it with a contrasting yarn, and knit two rows. Return once more the main color yarn into the feeder and knit about four more rows.

With the one prong tool, make eyelet holes to help you remember the tension your carriage was set. For instance,

if one makes five eyelet holes, leaves a space, and then another eyelet hole, it would SHOW the swatch had been knitted at tension 5.1. For example, the eyelets would look like this on the swatch:

0 0 0 0 0 0

You are half done with the swatch. With contrast yarn knit six to eight rows, increasing the number of the the tension dial on your carriage by TWO DOTS looser (higher increments). Put in main color yarn and repeat the entire swatch again at this new tension. Mark it in the same way by putting in the contrast yarns as before.

After you have completed the eyelet holes for this new swatch, knit about six more rows and then latch tool bind off the entire knitted swatch. Be sure and tube the swatch when you first remove it from the machine needles (stretch it in a vertical manner to set stitches as they should be).

Next, block it, measure it, and then let it dry and rest. If you have any doubts of the yarn, launder this knitted piece as you plan to handle the finished garment to make sure the swatch will remain constant. With regard to measuring the swatch, watch to see the contrast lines of yarn are straight across when blocked. If the swatch is distorted while blocking, at one side you could get one number of rows and on the other side you could get another reading. This really leads to confusion as to which side to believe. Keeping contrast rows horizontally straight prevents this problem. Makes for an easier time, for sure.

The lengthwise measurement for your ROW GAUGE is taken from the point of one "V" of a stitch to the point of the contrast yarn "V" - in other words, you must have the entire group of rows counted to be accurate with this swatch. And, when measuring across the swatch for your STITCH GAUGE, lay your ruler on the top of the knit side of the swatch and count from the insides of the marked stitches of contrast yarn. You should end up with two inches both in length and width in between the contrast color markings.

If your gauge happens to have more stitches than 4 stitches and 6 rows to an inch, then check to see if you can use the patterns for $4\frac{1}{2}$ sts. x $6\frac{1}{2}$ rows = 1", or 5 sts. x 7 rows = 1". The patterns are included. Good luck. Remember, the true swatch is the foundation of an accurately knitted garment. So, do take the time to do it correctly. You won't be sorry. That means remeasuring the swatch the next day after you have laundered it or before you begin knitting the sweater.

THREE STITCH GAUGES FOR EACH SWEATER

In working with the heavier yarns, it was found the gauges of 4 stitches x 6 rows = 1", $4\frac{1}{2}$ stitches x $6\frac{1}{2}$ rows = 1", and 5 stitches x 7 rows = 1" worked nicely with these infant and children's garments. Also, there is about 1" to 2" of ease added into these patterns. If you have any doubts which tension to use in your particular sweater,

choose the one that will make the larger sweater. The child will always grow into it, cuffs can be turned back, etc. If a loose, easy fitting sweater is desired, make one or two sizes larger than measurements. Also, in working with these patterns, some liberties had to be taken with a few numbers. As a rule, when a choice had to be made, the larger number was used to make the pattern work out.

The ribbing gauge is usually set about one-half of the main garment tension on both the main and ribber carriages. With some yarns, especially cotton, you might wish to knit an elastic yarn with the main yarn in the ribbing to help it maintain better stability.

If you try to knit these patterns with a stitch gauge other than the ones above - all bets are off as to the size you will end up with on your finished sweater.

DIAGRAM KNITTING

As most of you know, I did not have the luxury of learning to knit with an instructor because my first machine was mail ordered. When it was decided that I would write knitting pattern books, one prerequisite was to publish an instruction book that all knitters could enjoy. To accomplish this, diagram patterns and written instructions have been included in all my books. If you understand diagram knitting (it's easy once you get the hang of it), then use only the diagrams and go to it. Diagram knitting is the process of working from a drawn outline of the piece you are trying to knit (the first page of each pattern). On this drawing are the numbers of rows and stitches you will be using. With a few notes along the sides of the diagram, it takes but just a glance at the pattern to see where you are, or should be, or what will be coming up soon. It is a simple, accurate way of reading a pattern.

But, if you need a little bit more help in knitting these sweaters in the beginning, there are complete written directions to get you through the pattern. Once you have made a couple if these, using the written instructions while following along with the diagram, I'll bet most anything you will be able to work with the diagrams alone through most of the next sweater. However, with the written instructions available, you can always dig back into the book and get through the confusing parts.

Also, the diagrams for the patterns should be used as blocking outlines. This really speeds up the process. And, another use for these same diagrams, is as patterns to copy your selection onto a charting attachment's plastic sheet. I would definitely recommend using the charting attachment if you are using a tuck stitch, or some other exotic design, in one of these sweaters. The stitch gauges are just too hard to acquire in tuck patterns as the stitches are held and lifted in various degrees, making the fabric wider and shorter than normally knit in stockinette stitch. And with this method, the book's stitch gauge will be voided.

These patterns are read from the bottom of the diagrams to the top. Remember, these are upside-down patterns. You will be starting with a neckband and will build the sweater from this. After the neckband is knitted, three sections will be scrapped off to be used later. The back section of the neckband will be moved to the center of the machine and from this part of the neckband, the back of the sweater will be knitted. Next the front will be rehung on the machine and knitted. Finally, one sleeve part of the neckband will be hung back on the machine, along with the armhole edges of the front and back - and the sleeve knit right into the sweater by short row increasing. Upon completion of the other sleeve in the same manner, all the sewing to do will be the underarm seams (sleeves and body) and the edge of the neckband. Of course, this is done after you have blocked it. With machine knitting, let the machine do as much work as it will. This sweater comes off the machine all in one piece - front, back, and both sleeves - all knitted together in the correct places. That's what makes this such a fast, fun project.

SHORT ROW REFRESHER COURSE

After all the necessary stitches have been hung on the machine from the front armhole, back armhole, and the sleeve neckband, the sleeves will be knitted in by the automatic short row increase method. In case this is a new technique to you, here are the basic concepts. Step-by-step instructions will be given for each specific pattern later.

AUTOMATIC SHORT ROW INCREASING (Inc. S/R):

Put on your Partial Knit Button, or Buttons (Hold, I, II, or Russell Levers). Using the stitches in Hold (E) position, PUSH ONE (1) MORE STITCH THAN REQUIRED in your pattern into the Needle Selector (C or D) position, starting on the side AWAY FROM THE CARRIAGE. (Studio and Singer machines should only barely push in these needles. If you push them in too far, the stitches will drop off needles.)

Knit one row across. Now, pull the LAST KNITTED STITCH next to the needles in Hold (E) position, back into the Hold (E) position. This will form a wrap stitch around this last needle brought forward, when you knit the carriage to the other side - preventing a hole being formed when you turn around and knit the other way in the middle of a row (that's what is meant by "short rows").

AUTOMATIC SHORT ROW DECREASING (Dec. S/R):

Put on your Partial Knit Button, or Buttons, (Hold, I, II, or Russell Levers). On the side away from the carriage, PULL ONE LESS STITCH than desired decrease into Hold (E) position. Knit across to other side. Pull the last knitted stitch, next to the needles in Hold (E) position on the side where your carriage is now, back into Hold (E) position. This needle will be wrapped by your yarn when the carriage

is knitted to the other side, thus again not allowing a hole to form at the turn-around spot.

When knitting in the sleeves on this sweater, you will be working on both sides of one sleeve on the same row - pushing needles in on one side and wrapping a needle on the other side. It isn't hard once you get the hang of it, just follow the written directions carefully. It works.

MEASUREMENTS NEEDED FOR SWEATER

Raglan sweaters are easier to fit than set-in sleeve sweaters because there are no shoulder seams to worry about. If you wish to knit a sweater for someone whom you have not seen for awhile, this is it because of the "give" in the upper chest and shoulder area. Also, because it is knitted from the neck down, it is a simple matter to lengthen the body or sleeves by taking off the ribbing, correcting the problem with more of same yarn, or by adding a pattern of your choice, and then knitting on ribbing again. Takes a child through a lot of growing.

The armhole of a raglan sweater is normally 1" to 2" lower than a set-in sleeve sweater. This must be remembered when measuring for the length of the body and sleeves. And, these patterns DO NOT INCLUDE THE RIBBING on the body and sleeve. This will be extra length, so make allowances for this.

The measurements you will need are around the chest, the armhole depth, and the underarm lengths. There is approximately 1" to 2" ease added in these patterns for the chest. Measure around the fullest part of the chest and jot it down. Next, take a pencil and place it about two inches below the armpit (between arm and body). Using a tape, measure from the spot where the neck meets the torso - over the shoulder point - down the outside of the arm to an imaginary line even with the pencil. This is the armhole depth, or slant. Make note of this.

With the pencil still held in the same spot, measure from the pencil down to the point you want the body's ribbing to begin. Then with the pencil still in the same spot, bend the elbow slightly. Measure on outside part of arm from pencil to the place you wish the sleeve ribbing to start. These are all the measurements needed. Look in the book and find the size that matches your dimensions. That's all there is to it.

Notice on the diagram patterns, there are two different measurements on the armhole slant. The measurement directly under the short rowing operation is the specific inches for the short row work. There are extra stitches "e" casted-on at the end of the short rowing. They add length (or width) to this section. This measurement is shown on the left and is the one you should match to your measurements above.

Be sure to write down in your notes for whom the pattern was knitted, size used, yarn used, tension, pattern, date, etc. If this turns out just great, make a notation.

If there needs to be some adjustment on the next one, write that down. NEVER ERASE A PATTERN. Make notes on it. This way you will not need to worry whether you changed some figures or not. The notations will keep you straight. Use different colored pens to make notes for any changes. Often times, the first change is not exactly what was hoped to be accomplished, so write in another color what should be tried next. As time goes by, one can accumulate great fitting patterns for all those people in your life. Then you will be able to dig out a pattern, go to work knitting it, and surprise your loved one.

PATTERN PLACEMENT

THIS IS AN UPSIDE-DOWN SWEATER PATTERN. IF YOU USE A PATTERN WITH A DEFINITE TOP AND BOTTOM TO IT, REMEMBER TO PUT YOUR PATTERN CARD IN UPSIDE-DOWN, OR SET YOUR ELECTRONIC MACHINE, SO THE PATTERN WILL BE RIGHT WHEN FINISHED.

It is good practice to always keep the first and last stitches on all pieces made with two color work (fairisle) in the main garment color. If the automatic pattern selector moves the end needles out forward to pick up the contrast color, move them - by hand - back to the Work (B) position before knitting across the row.

Also, watch for selection of needles that will make only partial patterns. If the number of needles in use will knit only a partial pattern, it will look much better if you return the extra needles forming a piece of a pattern, back to the Work (B) position before knitting across the row. This makes a main color break in the pattern, but it is always near the seams. The end result is more pleasant.

TRANSFERRING STITCHES WITH THE GARTER BAR

To begin transferring stitches onto the garter bar in order to move them to another spot on the machine bed, first pull all needles to be transferred into Hold (E) position. The fabric on these needles should be pushed back to the machine bed.

Place the eyes of the garter bar on the hooks of the needles in Hold (E) position. Holding the garter bar firmly in the left hand, pull all stitches from the machine bed onto the garter bar. Once you start pulling the stitches from one direction, you must continue moving from that side to the other side, or you will have some stitches on the bar, some in the needle hooks - hung up, and some behind the needle latch. If this does occur, just slide all the stitches back behind the latches toward the back of the machine bed, and then start pulling stitches back on the bar again - moving in only one direction.

Once the stitches are on the garter bar, raise it and the fabric off the needles. Push these emptied needles back into Out-of-work (A) position. Move into the center of the machine bed and pull out to Hold (E) position the number of

needles you have stitches on the bar. Place the garter bar eyes back on the hooks of these selected needles. Your latches must be open to do this. Pull the knitted stitches onto these needles in Hold (E) position ONLY INTO THE HOOKS OF THE NEEDLES - NOT ALL THE WAY BACK TO THE NEEDLE BED.

When this is done, carefully lift the garter bar off the hooks. It helps sometimes to hold on to your fabric from underneath with the left hand. Using the straight edge of the garter bar, place it up against the needle butts. Push this back to move all needles into Work (B) position at one time. Check to see that all the stitches had a safe trip - you don't want to leave a drop stitch. Pick up the stray one dropped with your one prong tool, if necessary. It is now time to begin knitting the back of your sweater.

RIBBING SUGGESTIONS

MACHINE KNIT RIBBING:

Please check with your specific manuals for making this ribbing. They are most informative. Use any set-up that you wish for the neckbands and cuffs.

HAND RIBBING ON THE MACHINE:

Cast-on with an "e" wrap the number of stitches necessary for the neckband in an every-other-needle pattern with garment yarn on main bed. Of course, the first and last stitches will be on, even if it means two stitches together. Knit one row of ravel cord across these needles. Put the carriage back to the right, row counter zero, tension dial set two full tensions tighter (lower) than garment tension. Knit two rows across all working needles.

Pull all of the Out-of-work (A) needles needed to fill in the ribbing up into Work (B) position. Knit four more rows at same tension.

Moving across the stitches, release the first stitch that was in (A) position at the beginning - and let it run down to the ravel cord. Pick up that loop and using your latch tool, latch it up by pulling one strand of yarn in this ladder of yarn strands, through the newly formed stitch below it. Continue to the next stitch that was in (A) position in the beginning and do the same thing to it. Move across this row repeating this procedure until all the stitches starting in (A) position have been dropped down and latch tooled back.

Knit approximately another four to six rows, and then repeat releasing the same stitches, dropping them down to the point they were previously latched up, and then reforming them with latch tool as before. As you can now see, you are forming a knit stitch from these latched stitches, on the purl side of the garment. Thus you have real ribbing. This can also be done in 2 x 2 ribbing by placing two needles in Work (B) position and two needles Out-of-work (A) position at the start. You would repeat the same steps as in 1 x 1 ribbing over the different needle set up.

To hand rib from the opposite direction (e.i. coming down from the body or sleeve), place a marker cord in with your yarn at the row you wish to begin the ribbing and knit one row. Knit as many rows as you wish at two full tensions tighter than garment tension. Knit the last row about FIVE FULL TENSIONS LOOSER as it will be a bind-off row.

When this is finished, release the first stitch that needs to be changed into a knit stitch. Let it run down to the place the marker cord is found. Then latch tool the stitch back up through the last yarn strand and hang it back on the needle. Repeat this across the row on every stitch that needs to be made into the knit stitch. When all this is finished, using the latch tool, remove the stitches from the needles with the method discussed in the Stafford Bind Off, keeping the stitches in knit or purl formation.

HAND KNITTING THE RIBBING:

It is also possible to remove the stitches from the machine needles and place them on regular hand knitting needles when ready to make the ribbing. Then do a normal ribbing as described in hand knitting manuals. Be sure to bind off in a ribbing pattern. The neckband can be made in the same way - scrapping off the segments - and then placing the necessary stitches on the machine.

MAKING RIBBING SEPARATELY AND KITCHENERING IT LATER:

The ribbing can be made separately on the double bed machine, scrapped off, then kitchenered to the sweater parts that have been completed and scrapped off also. Knit about 6 rows of waste yarn when you are scrapping off a segment - to keep the stitches from unravelling.

MOCK RIBBING:

Using the necessary stitches for the size you need, cast-on every-other-needle. Set tension two full tensions tighter than garment tension. Knit TWICE the number of rows that you want in your neckband, plus one more row. This will put your carriage over on the left. Put on your "Leading" empty, part, or slip button, and move the carriage in a free pass to the right hand side of your machine. Pull the empty needles in between the working needles into the Hold (E) position. Using the yarn from the left hand side of the bed, "e" cast-on to the right over these empty needles in Hold (E) position. Return this yarn to the carriage. Fold up the bottom edge of your mock rib and hang every other "e" wrapped loop onto the corresponding needles. (These will be the needles in Work (B) position.) Turn tension up 6 full tensions and knit one row to enclose the neckband. Scrap off into four sections.

To use mock ribbing on the cuffs and bottoms of the sweater one must reverse the procedure. After the last row of the sweater or sleeve is knitted, transfer every-other-stitch to the adjoining needle, either by a lace carriage or by hand. Place the emptied needles back to the Out-of-work

(A) position. Turn tension two full tensions tighter than main garment tension. On the first row of this rib, put in a marker row of different colored crochet cotton, or ravel cord, with your garment yarn so you can see where to hang these stitches later. Knit TWICE the number of rows you wish for your ribbing on every other needle. When desired rows are knitted, hang stitches on corresponding needles and loosely sew off with a double-eye needle threaded with garment yarn.

STAFFORD RIBBING CAST-OFF:

After trying many of the machine ribber bind offs, it is felt this gives the best edge. It maintains the stitches integrity as either a knit or purl stitch; it has a lot of elasticity for the stretch that is needed; and it has a very nice finished edge to it. Plus, it is very easy to do. The late Fred and Frances Stafford graciously allowed me to print it to share with you. It is hoped you will try it and enjoy.

HINT TO MAKE RIBBING RETAIN STRETCHING QUALITIES:

Using an elastic thread in the ribbing is helpful and even necessary with some yarns, to keep the ribbing firm - allow it to stretch - and return to it's original shape. This is true with cotton yarns in particular. Many brands of this very fine elastic thread can be purchased at your dealer. If you can't locate any, give me a call.

DIFFERENT RIBBER CAST-ON AND CAST-OFF

By Fred and Frances Stafford

When you first begin using your new ribber, you may find that you are not completely satisfied with the appearance of the edges of either the cast-on row, or the bind-off row when you follow the instructions in your manual. Here is another cast-on and an easy bind-off that will give a uniformly neat edge with just the right amount of elasticity for armhole and neckbands, etc.

CAST-ON

1. Set main carriage on the right, ribber carriage on left, ribber down in Out-of-work position. Pull out the Hold position on the main bed any even number of stitches you desire, "e" wrap cast-on from left to right. Thread up the carriage, knit one row from right to left, using the proper lever to knit these needles back into Work (B) position.
2. Pull ribber into place, join main and ribber carriages. Beginning at the right, leave first 2 needles on main bed. Transfer 3rd and every other needle to ribber bed, ending with the last needle on the main bed. Return all empty needles to "A" position. The reason for leaving 2 needles on one end of the main bed is to keep the sequence of 1x1 rib when the seam is finished, using the weaving stitch and taking in one whole stitch on each side for the seam.
3. Using a needle pusher, pull out the main bed working needles just far enough for the ends to be even with the ends of the gate posts on the ribber bed. Insert the comb from behind the row of knitting so that the teeth of the comb come up between the needles on the main bed, thus preventing the comb from splitting the yarn. Insert the wire in the comb, pull back the needles on the main bed to work position and drop the comb so that it rests on the zigzag yarn stitches between the two beds.
4. Place weights as desired. You are now ready to begin ribbing. To make the first row of ribbing easier, pull all needles on both beds out to Hold position. MAKE SURE THAT ALL LATCHES ARE OPEN. Knit across, letting the machine knit the needles back into Work position. (Note: If you use a Brother or Knitking machine, the ribber needles need to be brought out only to "C" position, not "D" position, as a Studio or Singer.)

Please note that there is a right and wrong side to the cast on. So, if you are doing a weaving or purl-side pattern, when you finish the ribbing and transfer all

stitches to the main bed, be sure to turn over the stitches with a garter bar.

The nice thing about this method of casting on is that you may transfer stitches to the ribber in Step #2 in any combination you wish, such as knit 1, purl 1; knit 2, purl 2; knit 3, purl 3.

BIND-OFF

This is an easy bind off, finished on the machine, that requires no hand sewing with a tapestry needle to complete. It follows the stitches; that is, knits the knit stitches and purls the purl stitches, thus giving a neat, unobtrusive edge similar to hand knitting that has enough elasticity, but not so much that the edge flares out.

1. Pick up stitches around the armhole, neck, or wherever you wish to place the ribbing. Place all stitches on the main bed and manually knit one row to form a base row that is not so tight that the machine will tear the stitches when the first row is knit.
2. Transfer desired stitches to the ribber bed for 1x1 ribbing, keeping the 2 end stitches on the right end and 1 end stitch on the left end of the main bed to make the seam stitches come out evenly.
3. Insert comb as described in #3, under cast-on. Hang weights. Pull out to Hold Position all needles on both beds for the first row of ribbing. Be sure all latches are open. Do the desired number of rows of ribbing.
4. After the last row of ribbing is completed, knit one row at least 4 full tensions higher than the ribbing tension on both beds. Now transfer all ribber stitches to the main bed, ready to do a slip stitch bind off. Remove all weights and comb.
5. Using the 1x1 needle pusher, pull out to C position all stitches that are knit as you face them (these are all the stitches brought up from the ribber bed.) Using the pusher to set the needles as described is very helpful to get the needles in the proper position, thus preventing mistakes which could otherwise easily be made. And by pushing all the knit sts. slightly forward of B position, it is easy to tell whether the next stitch is a knit or a purl stitch.
6. Placing the left hand on the knitting so that the thumb presses against the garment underneath the needles and the forefinger touches the butts of the needles, push the

6. (cont).
first needle out far enough to allow the stitch to slip behind the latch. Hook the latch tool in the hook of this stitch, letting the finger push the butt of the needle back out of work as the stitch slides off the needle onto the hook of the latch tool. Slip it behind the latch of the tool ready for the next stitch. Repeat with the 2nd stitch (also a purl st.). When the stitch has come off the needle, pull it through the stitch behind the latch of the tool, completing the stitch. This is the technique used in the regular slip stitch bind off. Do all purl stitches (main bed sts.) in this manner.
7. Using the latch tool, from behind the first knit stitch (from the ribber), lift that stitch off the hook of the needle onto the latch tool. Slip the stitch through the other stitch on the latch tool. Let this stitch slide behind the latch of the tool, ready for the next stitch. Push empty needle out of work.
8. The next stitch being a purl, slip it off the needle onto the latch tool as in Step #6. Pull this stitch through the stitch already on the latch tool.
9. Continue in this manner, doing the regular slip stitch bind off, but picking off the knit stitches from back to front, and slipping the purl stitches from the needle from the front, until all stitches are bound off.

A little practice with this and you will never want to go back to the slower and more tedious ways of binding off.

FORMATION OF RAGLAN SLANT OF SWEATER

RAPID INCREASING:

This book's instructions are written for the Rapid Increase Method of forming the slants of the armholes on both front and back. This way creates a small eyelet row where the raglan sleeves join the body. It is the quickest way to knit these sweaters and the joining of the raglan is quite attractive. This is done by pulling a new needle from the Out-of-work (A) position into Work (B) position (or even clear out to Hold (E) position on some slippery yarns) on the side NEXT to the carriage EVERY ROW before knitting across.

"E" WRAPPING:

If you wish to avoid the eyelet look on the raglan seam, it is very easily done. Instead of just pulling out a new needle as above - take the yarn and "E" wrap over the new needle pulled up. This prevents the eyelet occurring.

ALTERNATIVE:

If you have knit the front and back of the sweater using the Rapid Increasing method (forming the loops) and then decide you want a filled in look, don't panic. We can still do it. Pick up the piece of yarn laying below the loop and hang that on your needles to knit in the sleeve. It looks great, and some yarns even produce a decorative line up the raglan seams when handled in this fashion.

KNITTING SLEEVE WITHOUT NEEDLES IN HOLD

At times you might wish to knit the sleeves in without having all the sleeve stitches on the machine at one time in the Hold (E) position, such as doing lace, tuck, or some other difficult fairisle. This can be handled with ease.

Hang only the sleeve stitches from the neckband that have been placed on waste yarn. Thread up your carriage and set your machine and pattern to knit as usual. Pick up ONE loop from one side of the armhole slant of the sweater body of the sweater on the side AWAY from the carriage and place it on the needle brought up from Out-of-work (A) position. Knit across. Pick up a loop of the other side of the sweater and hang it on a new needle on that side of the sleeve and knit across. Continue picking up one stitch on the side AWAY from the carriage and knitting one row across until all stitches for sleeve are in Work (B) position. Hang all the "E" wrapped stitches from underarms on the needles at the same time (I'm talking about the extra ones put into the underarm to form the square). Thus your lace carriage is able to move freely over all the needles because they all remain in Work (B) position.

YARNS TO BE USED WITH THESE PATTERNS

These are bulky patterns and are specifically designed for the heavier yarns. Any yarn, or twists of several yarns, that will allow you to knit in the stitch gauges of 4 stitches and 6 rows equalling one inch; 4 stitches and 6 rows equalling one inch; and 5 stitches and 7 rows equalling one inch will result in a sweater of the dimensions given. Yarns have been used in the samples from Newton's Yarn Country, Millor, Tamm, Cardinal, Heirloom, as well as hand knitting yarns. Also, several thin yarns have been used by twisting several strands together until the yarn was thick enough to reach the above stitch gauges. So, let your imagination go. Create your very own special texture, and colors, of yarn to make your very own spectacular design.

BLOCKING AND ASSEMBLY

In most of my knitting, I prefer to make the back section first. It usually has the least shaping; therefore, it is the easiest. When it is completed, head for the blocking board. Using the blocking measurements from your diagram, pin it out to see if it is working correctly. If so, then go ahead and steam it. If not, try to see what your problem might be. Check your stitch gauge again, or your machine tension. Maybe, you will have to rip it out; but, at least it is only the back and the yarn will still be useable since no steam has been put to it as yet.

Continue to check and block each piece as it comes from the machine. The stitches to be picked up will be easier to find, and the garment will need only a steam touch-up along the seams when you are finished weaving it together.

Blocking is one of the most important steps in turning out a great looking garment. Use enough steam to really set the stitches. I use a sole plate over my iron for steaming. DO NOT BLOCK THE RIBBING. It will lose it's elasticity. On the edge of regular ribbing, I take a double-eye needle, run it through the cast-on edge, and pull down on these stitches. It takes the curling out of the edge and sets these stitches. Looks a great deal better.

After the sweater is knitted and blocked, weave the neckband together with a bar-to-bar stitch - maintaining the established ribbed pattern. Using the yarn at the top of each sleeve's raglan slant, weave the last loop into the neckband, tie off and weave ends in. Weave the sweater together with the same bar-to-bar stitch, beginning at the bottom edge of body and moving toward the underarm. Then weave the sleeve in the same fashion, starting at cuff and moving toward the underarm. If using a lace or fairisle pattern, be sure to match up your designs. At all times one should make any increases or decreases match when sewing a garment together. Secure and tie off. Slip ends into the seams. It looks terrific, doesn't it. I knew you could do it.

NECKLINES

You have decided the size sweater you wish to knit, the yarn you want to use, and the design, and it's placement, desired on your creation. The stitch gauge swatch has been knit and allowed to rest to make sure it will hold it's shape. Next, it is time to decide which neckline will be the best for this sweater. Naturally, your cuffs and bottom edges of the sweater will match.

SINGLE CREWNECK:

This is great for the bulky sweaters as it does not have the double thickness under the chin as other ones. Also, often a bulky sweater will be used as an outer layer of clothing with a collared shirt worn underneath. The collars lay better with this neckline.

Using your ribber manual, cast-on the ribbing of your choice - 1x1; 1x2; or 2x2, etc. - over the amount of needles required in your pattern for the entire neckband (look at the pattern diagram). Rib for approximately 6 to 8 rows, using the tension described in your manual. Transfer the ribber stitches up to the main bed. Knit one row across all stitches with main garment yarn at MAIN GARMENT TENSION. Break yarn. The carriage is now on the left. Scrap this neckband off in the following manner, by using the numbers from your pattern, take off one sleeve, then the front, and then the other sleeve (the back will not be scrapped off). The front section MUST be in the middle for your neckband seam to be in the back of your sweater.

Pull all stitches except the ones for the first sleeve into Hold (E) position. Put on partial knit buttons (Hold, I, II, or Russell Levers). With scrap yarn, knit 4 rows over these first stitches. Break scrap yarn. Run empty carriage across these just knit stitches to remove them from machine. Push these just emptied needles back into Out-of-work (A) position. Return carriage to left.

Push in the needles for the front neckline to Needle Selector (C or D) position. With scrap yarn, knit 4 rows across these stitches. Break yarn and remove these stitches from machine. Return just emptied needles back to the Out-of-work (A) position. Return carriage back to left.

Repeat the directions between the *'s for the other sleeve stitches. The remaining stitches are for the back neckband. These can be scrapped off as above and rehung on the center needles of the machine bed, or transferred to the center of your machine with the garter bar, as described on page 13. These stitches will be used first to knit your sweater.

DOUBLE CREWNECK:

Using the directions for the "Single Crewneck", rib twice the number of rows for the doubled neckband. **Upon completion of ribbing, transfer all ribber stitches up to the main bed. Drop your ribber bed and remove the ribber

comb and weights from the edge of your ribbing. Fold the bottom edge up and hang the ribbing cast-on edge on every other corresponding needle. Set the main bed carriage at least three full tensions looser than garment tension. Knit one row across all stitches to enclose your neckband. This will reduce the doubled stitches down to a single stitch on each needle. Do this row very loosely so it will slip over one's head. Carriage should now be on the left. Break yarn.** Scrap off this neckband in sections the same as in the Single neckband directions between the *'s.

TURTLENECK - CLOSE FITTING:

Using the same directions above for the Doubled Crewneck, rib approximately 40 rows - starting the ribbing a full tension larger than normal. Change tensions on both the ribber carriage and the main carriage as follows:

Example:	Tension	3.0	Rows	1 thru	10	(Larger tensions
		2.2	"	11 "	20	may be used.)
		2.1	"	21 "	25	
		2.2	"	26 "	30	
		3.0	"	31 "	40	

Upon completion, enclose, using directions from "Doubled Crewneck" at **. If the ribbing seems a bit too snug, open the tension even higher - it must be able to slip over the head.

MOCK RIB NECKBAND:

Using the directions for Mock Ribbing described on page 15, knit this on every other needle. Remember when hanging this neckband, keep the needles on their corresponding needles so there will not be a biasing of the neckband. This neckband does not stretch as the others. It is almost a necessity to knit in the elastic thread with this one to have it maintain it's original shape. Also, be sure it will pass over the head after you have enclosed the stitches. If it is too tight, you might add some stitches to the top of the sleeves, as described below.

ENLARGING THE NECKBAND:

In the top of EACH sleeve section of the neckband, when you are first setting up the needles - add 2, 4, or 6 (or even more if you want) - depending on how much extra room you wish. Work the band as above. Scrap off these additional stitches with the amount called for in the original pattern. However, these MUST be removed from the sleeve sections while you are knitting the sleeve into your garment. It is accomplished by inside decreases:



It is best to knit these sleeves in without the needles in hold as described on page 20. Begin to short row increase sleeves as instructed for two rows. *Keeping the one center stitch always the same, move one stitch on each side of this center stitch over to the adjoining stitch. This means you would have now decreased two stitches and have an empty needle on each side of the center stitch. With tool, or garter bar, move each side in towards the center stitch to fill in the space. Short row increase 2 more rows as before.* Repeat between *'s until you are rid of the extra stitches you put in the top of the sleeve neckband. When all these internal decreases are finished, hang all the remaining loops and stitches on the correct amount of needles. Continue short row increasing your sleeve.

TURTLENECK - LOOSE FITTING:

The usual turtleneck sweater has a wider neckline than these patterns. In order to adapt the patterns for this neckline, you must add additional stitches to the sleeves. These then must be reduced back as in the above directions. Tension plays a large part in a beautiful collar. They can be very large in length - even to the point of being pulled up over the head into a hood. Also, one can knit them long enough for the cast off stitches to be fastened to the beginning of the collar to make a beautiful double turtleneck that lays so prettily around the neck. Or, this can be knit in "Close Rib (Full Needle Rib)" in all the ways mentioned above.

Begin the neckband with a very loose tension - usually main garment tension, instead of ribber tension. Approximately 60 rows make a nice drape around the neck. Slowly tighten both your main carriage and your ribber carriage tension until one-half of the collar is completed. Then reverse the procedure and loosen your tension on both beds until you are at the beginning tension.

As stated before, these collars can be enclosed as above neckbands or can remain loose to fold back. Here is an example of changes of tensions one can use:

Tension	6.0	Rows	1 thru 10
"	5.2	"	11 " 20
"	5.1	"	21 " 30
"	4.2	"	31 " 35
"	5.1	"	36 " 40
"	5.2	"	41 " 50
"	6.0	"	51 " 60

You may change this neckband to suit your needs and yarn. Add fairisle patterns to the outside part of this collar for a smashing change. If you do add fairisle, remember to open up the tension even more as the double yarn will tend to draw it in.





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

PRACTICE SIZE DIAGRAM

Material: 3 to 5 ozs.

Any yarn, or combination
of yarns, that give one of
the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1"
5 sts. x 7 rows = 1".

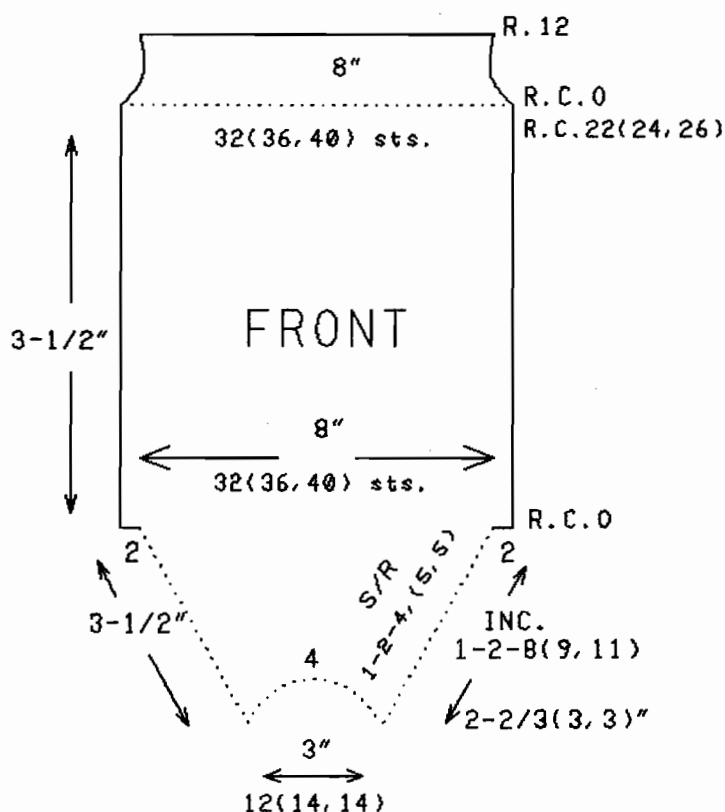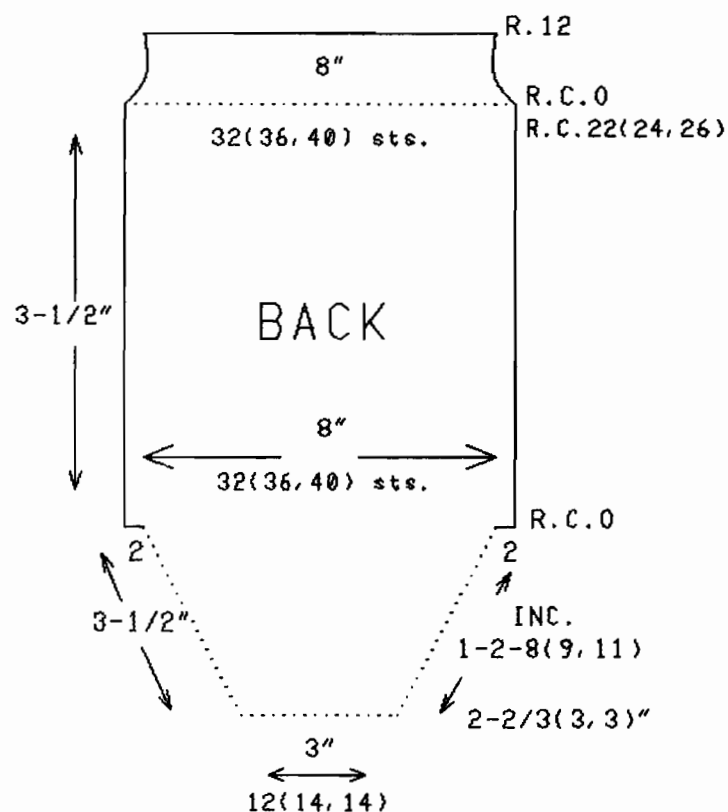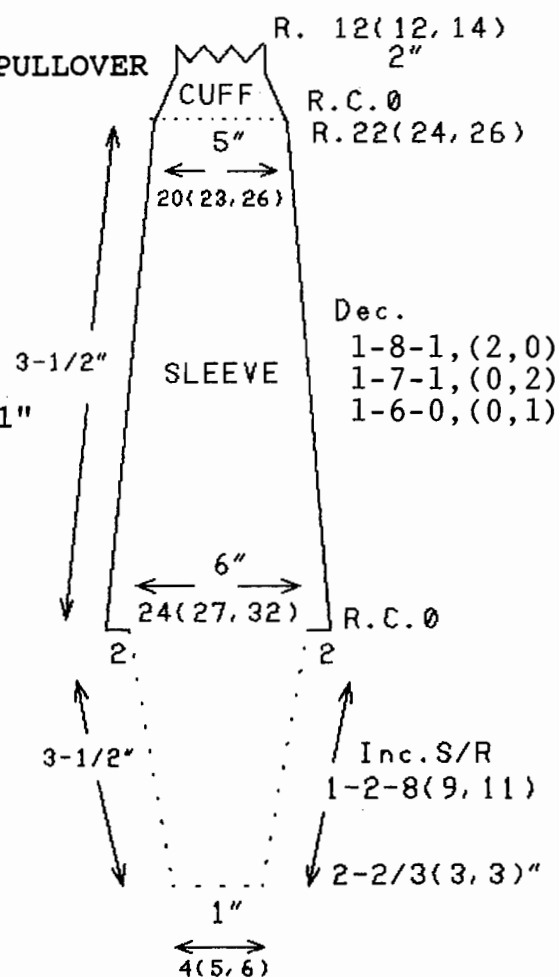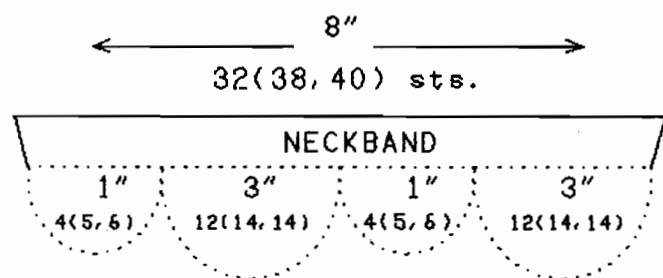

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

PRACTICE SIZE

WRITTEN INSTRUCTIONS

The neckband of 32,(38,40) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 12,(14,14) stitches on to the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R.16,(18,22). The carriage should now be on the right and 28,(32,36) needles should be in work.

Pull 2 ndls. out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also, with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 32,(36,40) ndls. working and your carriage is on the right hand side.

R.C. 0. Knit even to R.22,(24,26). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some different and innovating ways to change the looks of this bulky sweater.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 12,(14,14) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW st. on left of last working st. from Out-of-work (A) position to Work

PRACTICE SIZE - FRONT: (cont.)

(B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.)* Knit back to left. Repeat between *'s 2,(3,3) more times. Row counter should now read R.7,(9,9) and you should have 8,(10,10) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but TWO (1/2 of center increase) should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #2, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R C. 7,(9,9). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When completed, knit carriage back to the right.

R.C. 8,(10,10). At this point you should have 8,(10,10) sts. in work on the right of zero. and 12,(14,14) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 21,(25,25) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 16,(18,22) and you have 28,(32,36) ndls. in work.

R.C. 16,(18,22). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Complete the front the same as the back beginning with BACK: ** R.C. 0. directions.

SLEEVE:

Pick up and hang 4,(5,6) sts. from the scrap of one of the sleeves in the neckband, on to the center 4,(5,6) ndls. of your machine. Pick up and hang 8,(9,11) loops and 2 sts. from one side of the front raglan armhole - on to the ndls. next to the sts. of the top of the sleeve. Pick up and hang 8,(9,11) loops and 2 sts. from the back raglan armhole - on the other side of the 4,(5,6) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 24,(27,32) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 4,(5,6) sts. PLUS 1 more st. on the left hand

PRACTICE SIZE - SLEEVE: (cont.)

side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work. R.C. now reads 20,(22,26).

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve from the underarm now using the three prong tool for the decreases, which are - 1-8-1,(2,0); 1-7-1,(0,2) and 1-6-0,(0,1).

Knit even to R. 22,(24,26). You should end with 20,(23,26) sts. Complete the cuff of the sweater as you finished the body of the garment. About 12,(12,14) rows of regular ribbing works out nicely or about 25,(29,29) rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book.

That really was easy, wasn't it. Now, to go on and knit a bunch for all the kids in your family. Have fun!





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

INFANT SIZE DIAGRAM

Material: 4 to 6 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

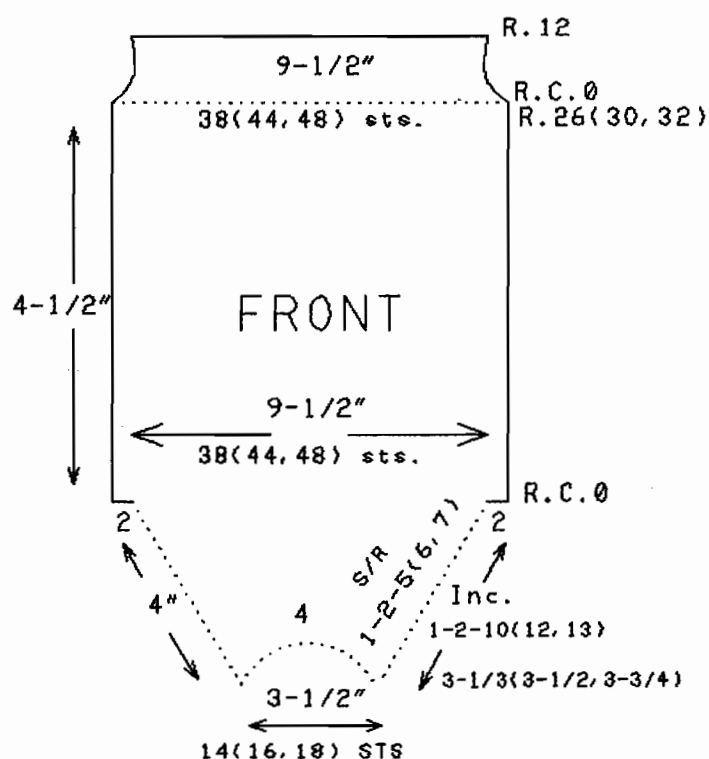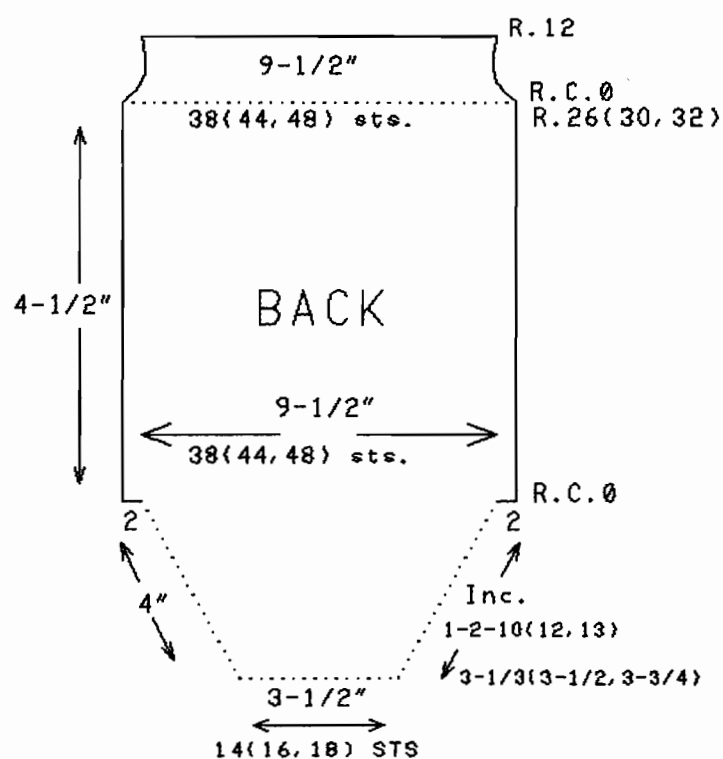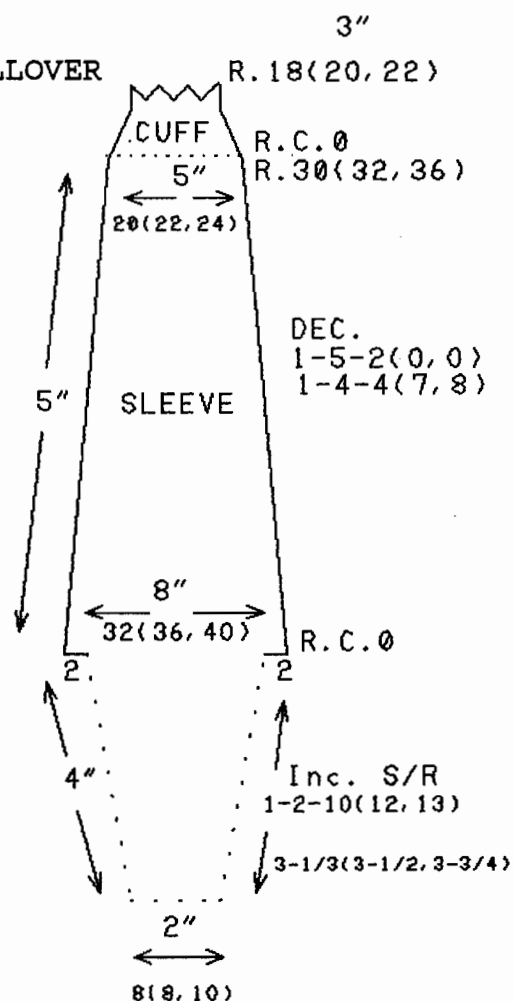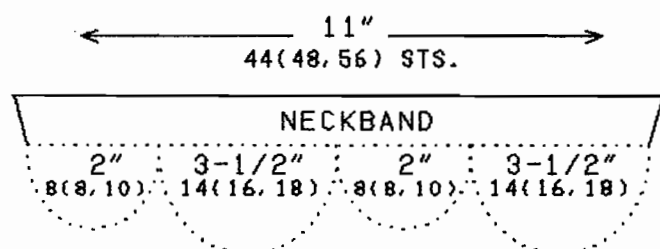

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

INFANT SIZE

WRITTEN INSTRUCTIONS

The neckband of 44,(48,56) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 14,(16,18) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 20,(24,26). The carriage should now be on the right and 34,(40,44) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 38,(44,48) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 26,(30,32). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 14,(16,18) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

INFANT SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 3,(4,5) more times. Row counter should now read R. 9,(11,13) and you should have 10,(12,14) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but two (1/2 of center increase) should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #2, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 9,(11,13). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 10,(12,14). At this point you should have 10,(12,14) sts. in work on the right of zero, and 14,(16,18) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I,II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 25,(29,33) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 20,(24,26) and you have 34,(40,44) ndls. in work.

R.C. 20,(24,26). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(8,10) sts. from the scrap of one of the sleeves in the neckband, onto the center 8,(8,10) ndls. of your machine. Pick up and hang 10,(12,13) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 10,(12,13) loops and 2 sts. from the back raglan armhole - on the other side of the 8,(8,10) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 32,(36,40) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(8,10) sts. PLUS 1 more st.

INFANT SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-5-2,(0,0); and 1-4-4,(7,8).

Knit even to R. 30,(32,36). You should end with 20,(22,24) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18,(20,22) rows of regular ribbing works out nicely or about 37,(41,43) rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. How many of these did you say you needed to knit? They do knit up very fast, thank goodness. Go to it.





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

SIX MONTH SIZE

Material: 6 to 8 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

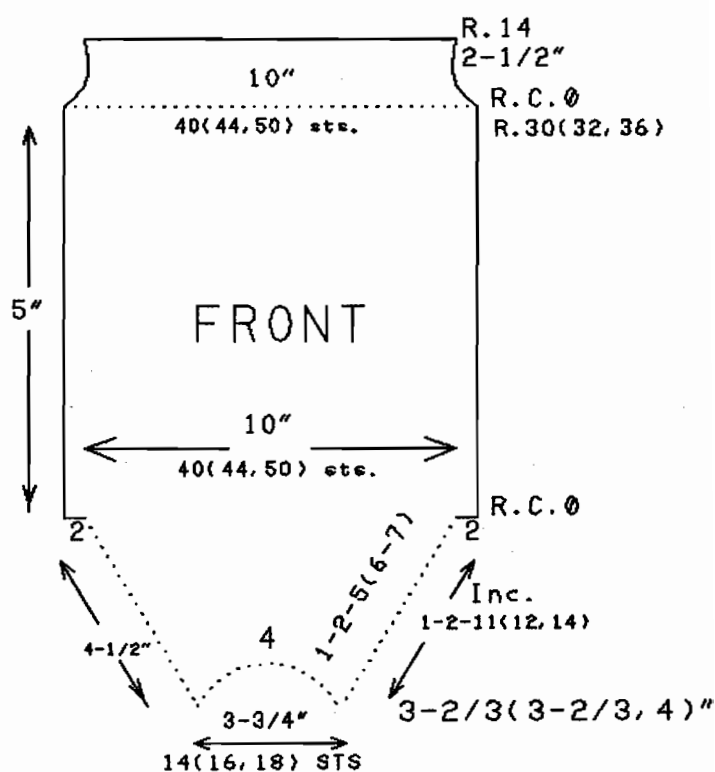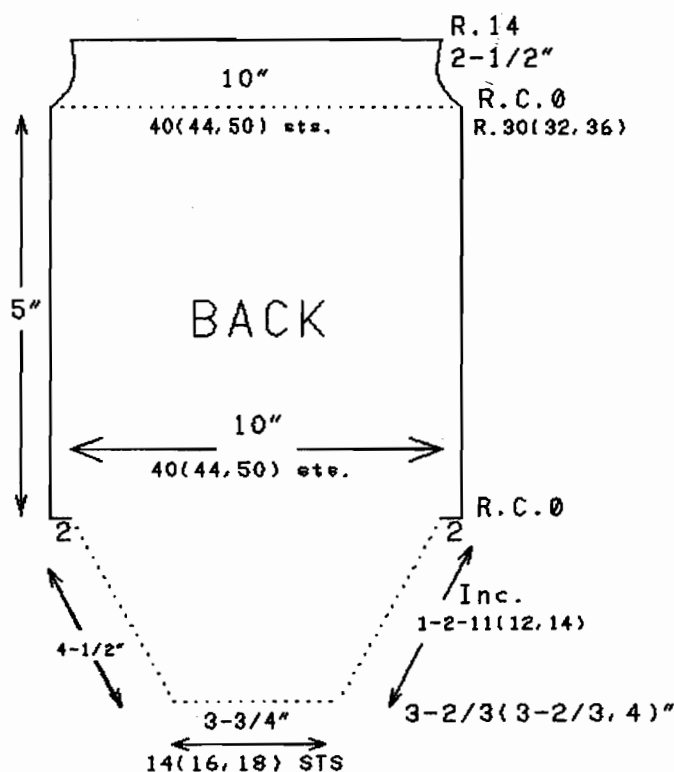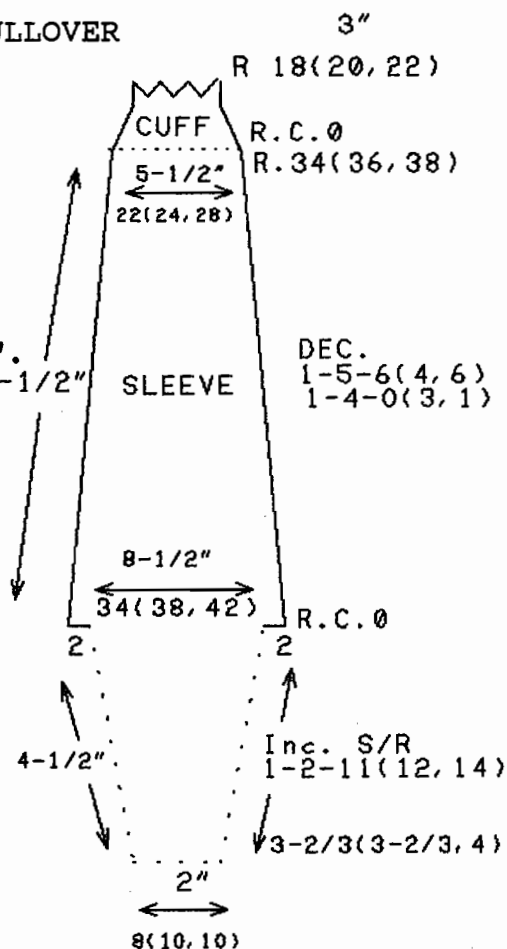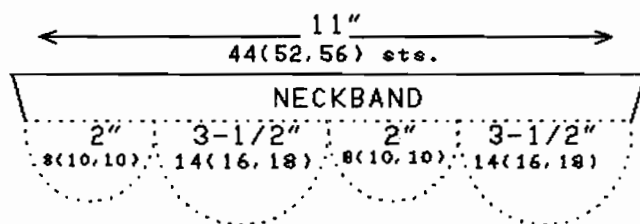

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

SIX MONTH SIZE

WRITTEN INSTRUCTIONS

The neckband of 44,(52,56) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 14,(16,18) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 22,(24,28). The carriage should now be on the right and 36,(40,46) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 40,(44,50) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 30,(32,36). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 14,(16,18) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

SIX MONTH SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 3,(4,5) more times. Row counter should now read R. 9,(11,13) and you should have 10,(12,14) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but two (1/2 of center increase) should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #2, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 9,(11,13). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 10,(12,14). At this point you should have 10,(12,14) sts. in work on the right of zero, and 14,(16,18) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I,II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 25,(29,33) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 22,(24,28) and you have 36,(40,46) ndls. in work.

R.C. 22,(24,28). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from ***'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(10,10) sts. from the scrap of one of the sleeves in the neckband, onto the center 8,(10,10) ndls. of your machine. Pick up and hang 11,(12,14) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 11,(12,14) loops and 2 sts. from the back raglan armhole - on the other side of the 8,(10,10) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 34,(38,42) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(10,10) sts. PLUS 1 more st.

SIX MONTH SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-5-6,(4,6); and 1-4-0,(3,1).

Knit even to R. 34,(36,38). You should end with 22,(24,28) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. They are getting easier, aren't they.





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

ONE YEAR SIZE DIAGRAM

Material: 7 to 10 ozs.

Any yarn, or combination
of yarns, that give one of
the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

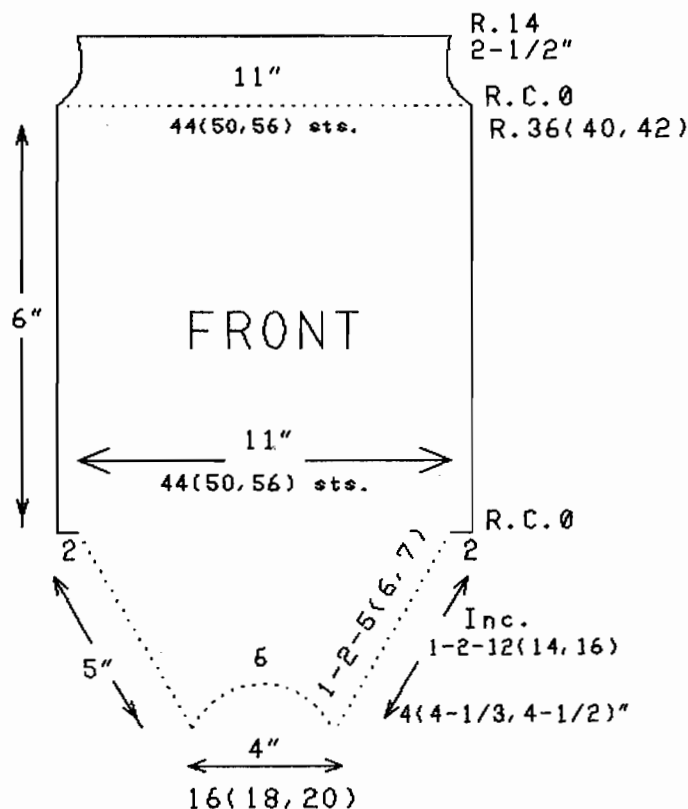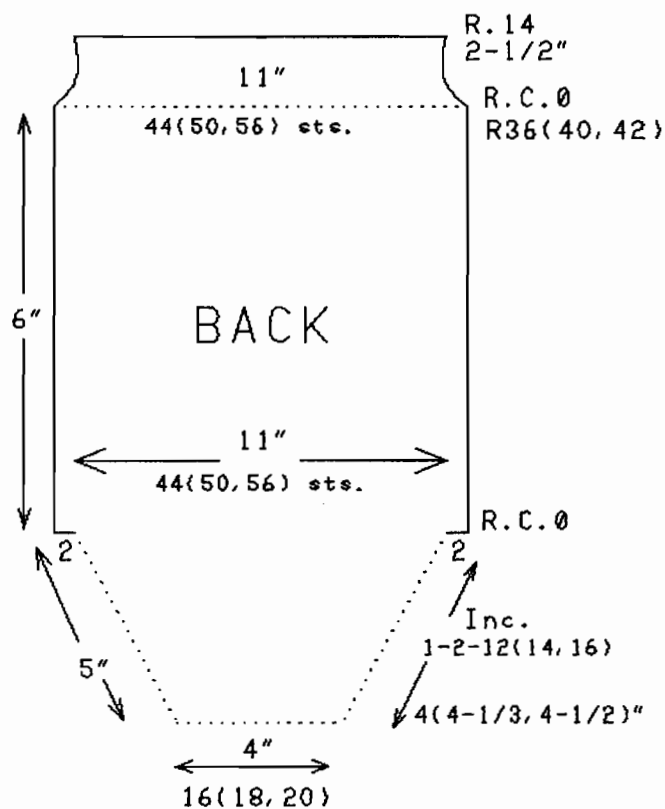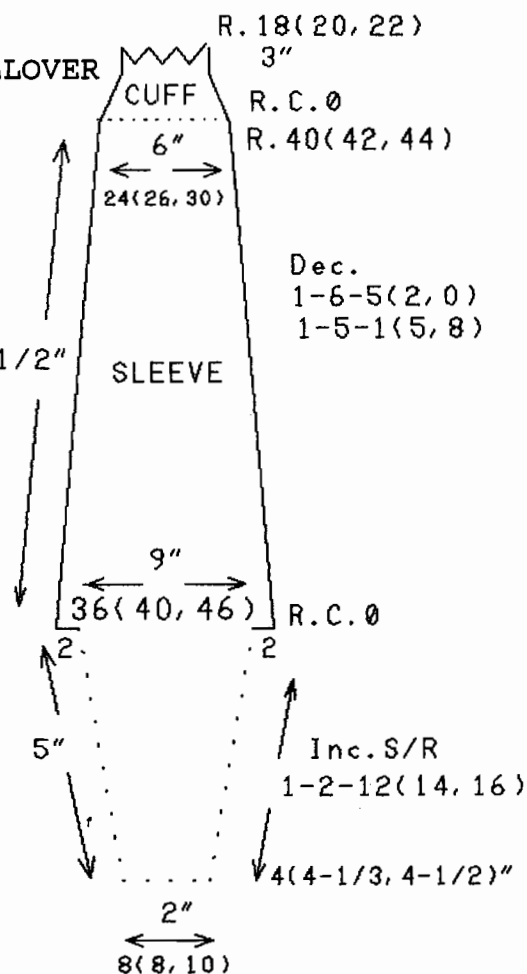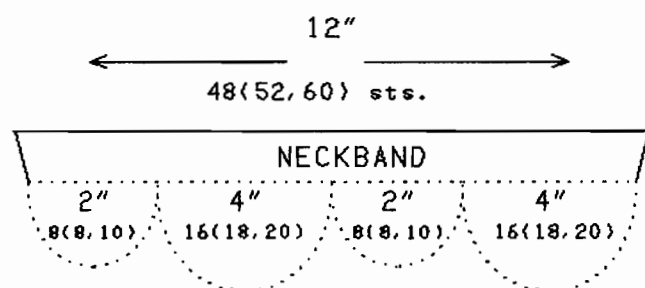

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

ONE YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 48,(52,60) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 16,(18,20) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 24,(28,32). The carriage should now be on the right and 40,(46,52) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 44,(50,56) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 36,(40,42). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 16,(18,20) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. *Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

ONE YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 3,(4,5) more times. Row counter should now read R. 9,(11,13) and you should have 10,(12,14) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 9,(11,13). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 10,(12,14). At this point you should have 10,(12,14) sts. in work on the right of zero, and 16,(18,20) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 27,(31,35) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 24,(28,32) and you have 40,(46,52) ndls. in work.

R.C. 24,(28,32). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from ***'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(8,10) from the scrap of one of the sleeves in the neckband, onto the center 8,(8,10) ndls. of your machine. Pick up and hang 12,(14,16) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 12,(14,16) loops and 2 sts. from the back raglan armhole - on the other side of the 8,(8,10) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 36,(40,46) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(8,10) sts. PLUS 1 more st.

ONE YEAR SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-6-5,(2,0); and 1-5-1,(5,8).

Knit even to R. 40,(42,44). You should end with 24,(26,30) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. My goodness, the sweaters just get prettier all the time.




BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

TWO YEAR SIZE DIAGRAM

Material: 7 to 10 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

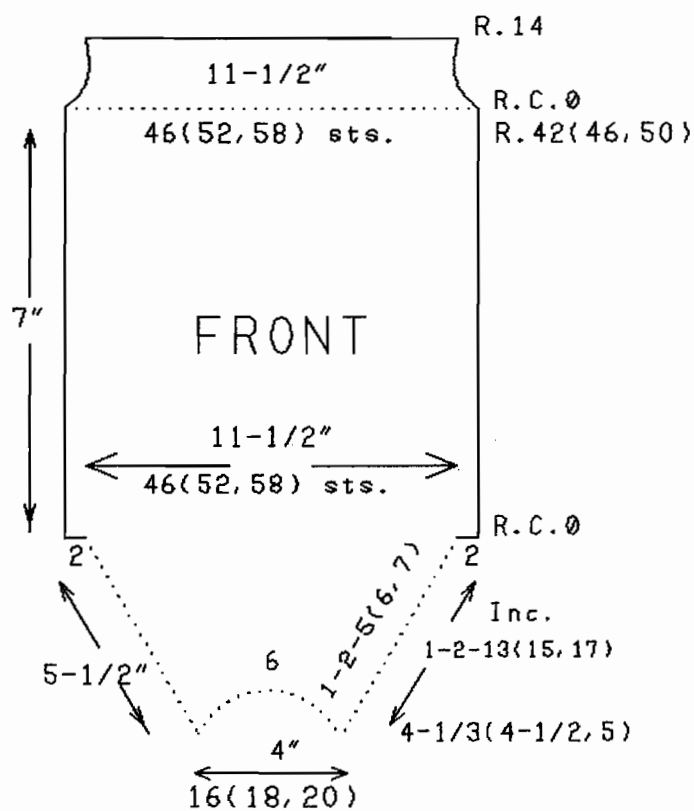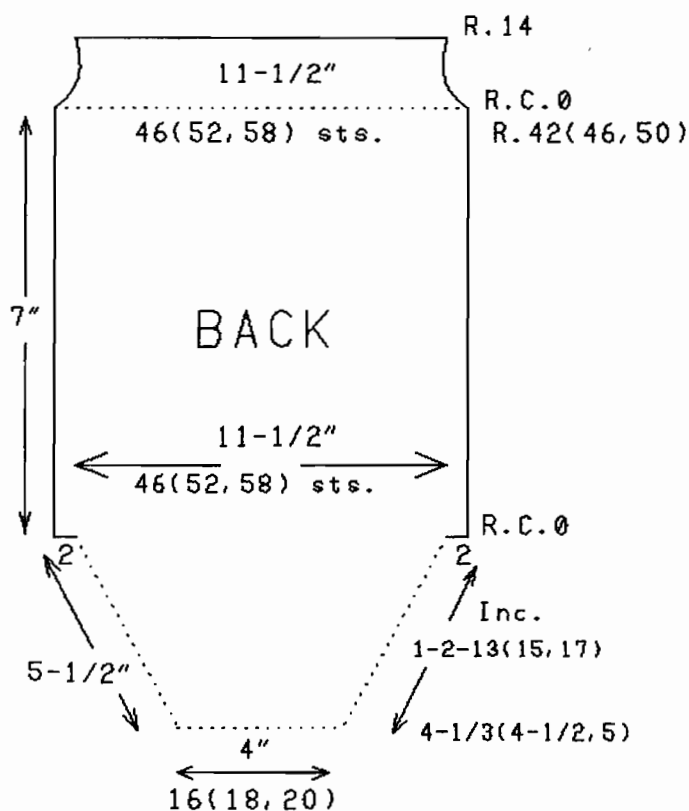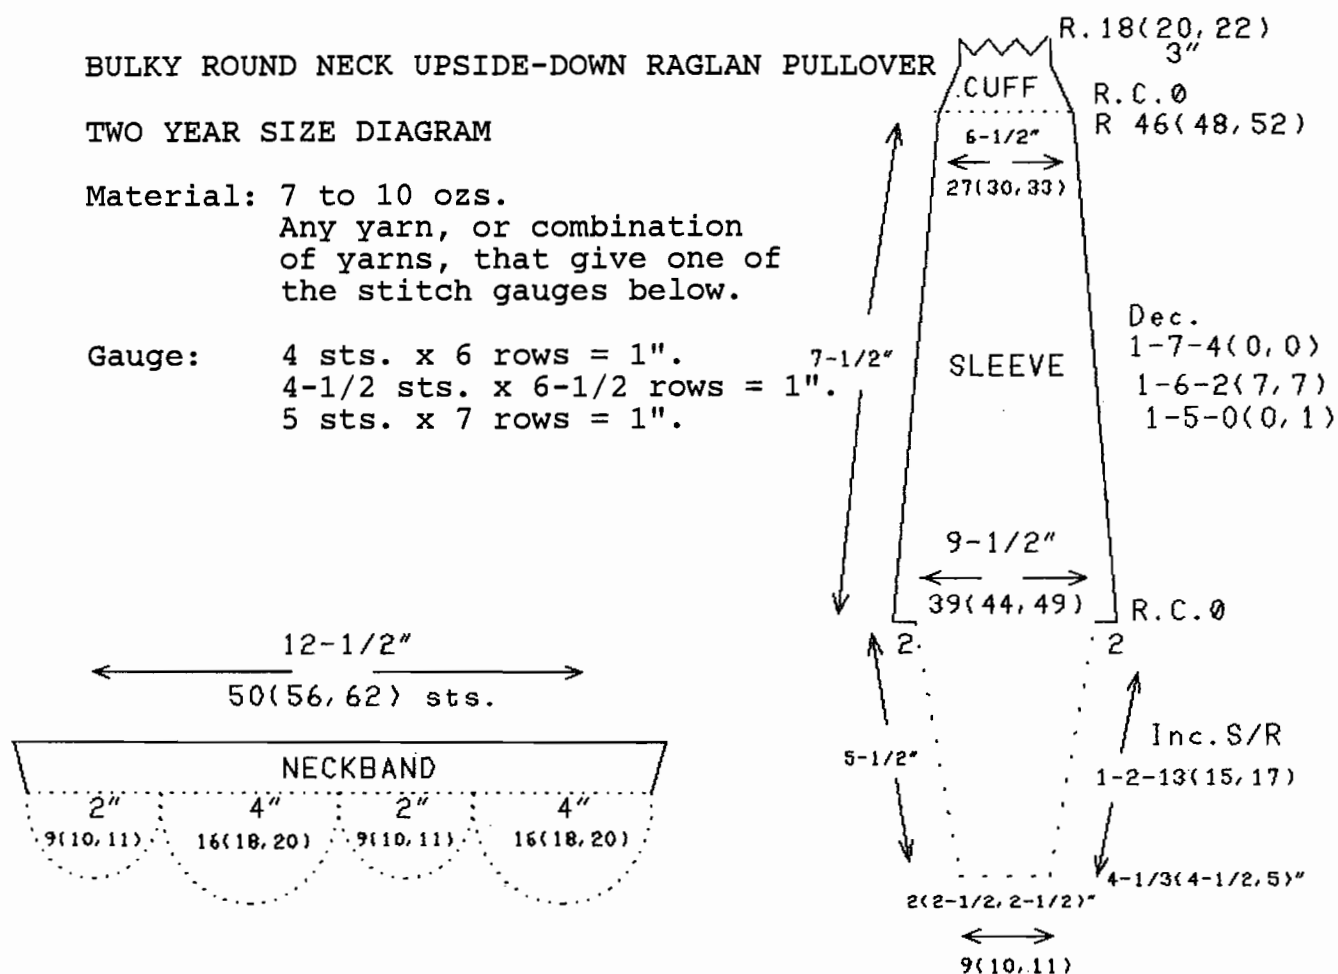

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

TWO YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 50,(56,62) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 16,(18,20) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 26,(30,34). The carriage should now be on the right and 42,(48,54) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 46,(52,58) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 42,(46,50). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 16,(18,20) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

TWO YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 3,(4,5) more times. Row counter should now read R. 9,(11,13) and you should have 10,(12,14) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 9,(11,13). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 10,(12,14). At this point you should have 10,(12,14) sts. in work on the right of zero, and 16,(18,20) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 27,(31,35) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 26,(30,34) and you have 42,(48,54) ndls. in work.

R.C. 26,(30,34). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from *'s from "Back" directions.

SLEEVE:

Pick up and hang 9,(10,11) from the scrap of one of the sleeves in the neckband, onto the center 9,(10,11) ndls. of your machine. Pick up and hang 13,(15,17) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 13,(15,17) loops and 2 sts. from the back raglan armhole - on the other side of the 9,(10,11) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 39,(44,49) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 9,(10,11) sts. PLUS 1 more st.

TWO YEAR SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-7-4,(0,0); 1-6-2(7,7); and 1-5-0,(0,1).

Knit even to R. 46,(48,52). You should end with 27,(30,33) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.





Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. Congratulations. You are doing very well.

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

FOUR YEAR SIZE DIAGRAM

Material: 8 to 11 ozs.
Any yarn, or combination
of yarns, that give one of
the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

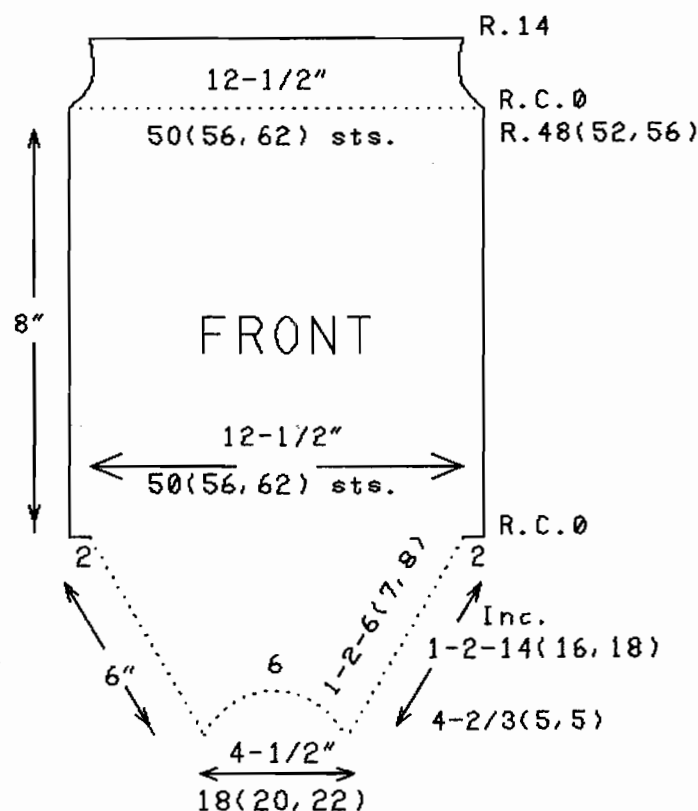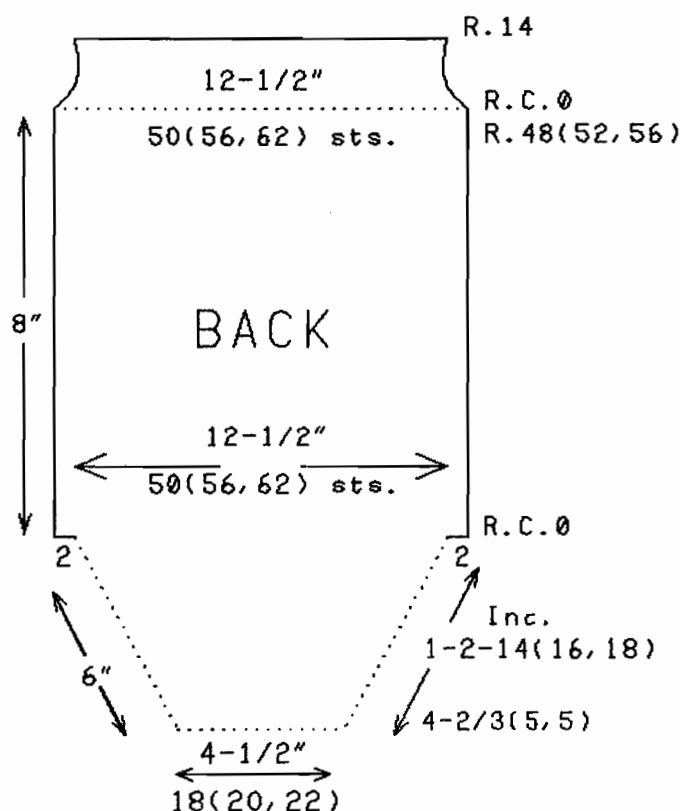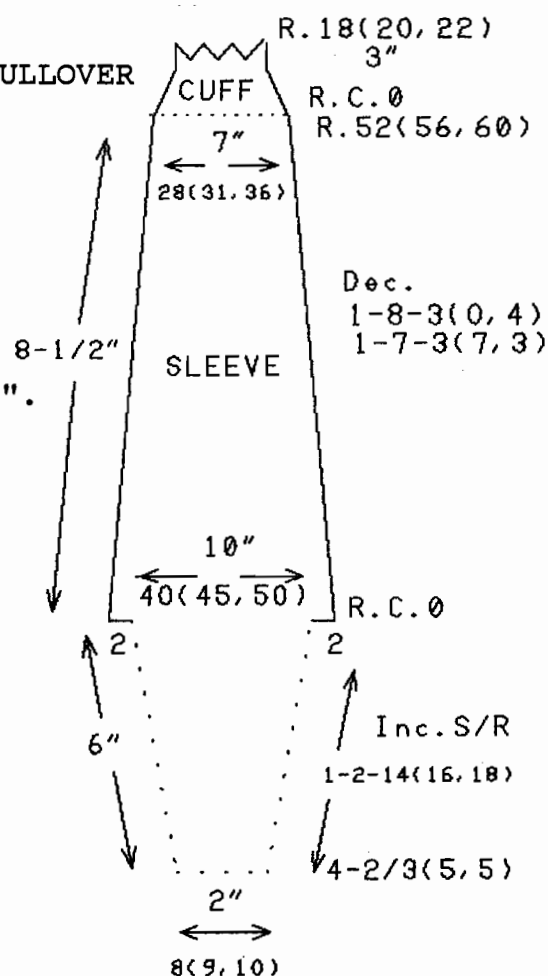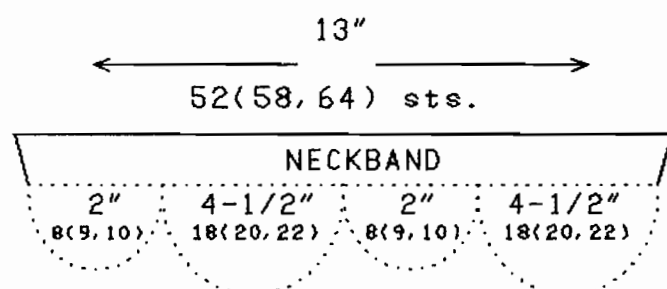

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

FOUR YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 52,(58,64) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 18,(20,22) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 28,(32,36). The carriage should now be on the right and 46,(52,58) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 50,(56,62) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 48,(52,56). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 18,(20,22) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

FOUR YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 4,(5,6) more times. Row counter should now read R. 11,(13,15) and you should have 12,(14,16) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 11,(13,15). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 12,(14,16). At this point you should have 12,(14,16) sts. in work on the right of zero, and 18,(20,22) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 31,(35,39) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 28,(32,36) and you have 46,(52,58) ndls. in work.

R.C. 28,(32,36). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from ***'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(9,10) from the scrap of one of the sleeves in the neckband, onto the center 8,(9,10) ndls. of your machine. Pick up and hang 14,(16,18) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 14,(16,18) loops and 2 sts. from the back raglan armhole - on the other side of the 8,(9,10) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 40,(45,50) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(9,10) sts. PLUS 1 more st.

FOUR YEAR SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-8-3,(0,4); and 1-7-3,(7,3).

Knit even to R. 52,(56,60). You should end with 28,(31,36) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. They are looking great. Keep it up.





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

SIX YEAR SIZE DIAGRAM

Material: 9 to 12 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

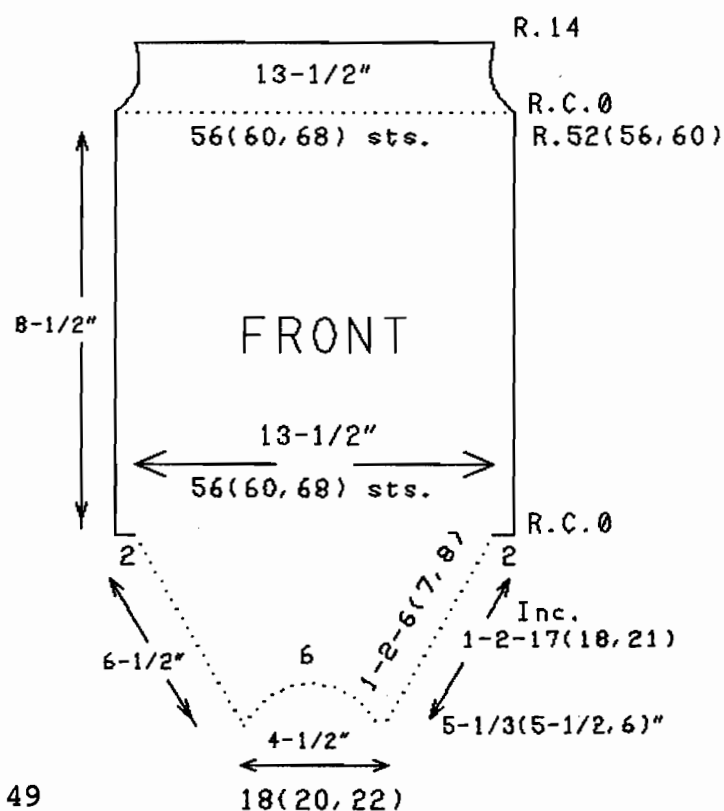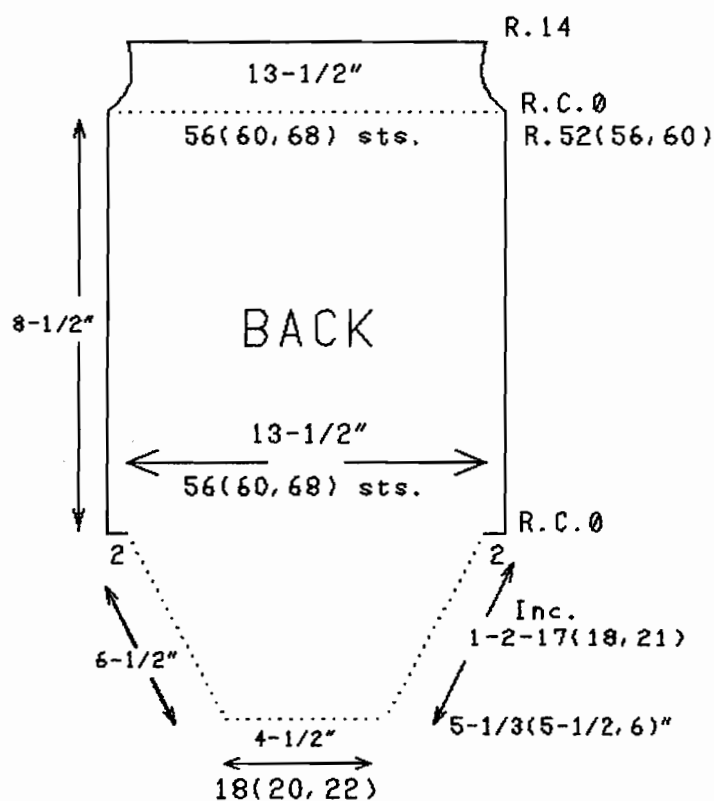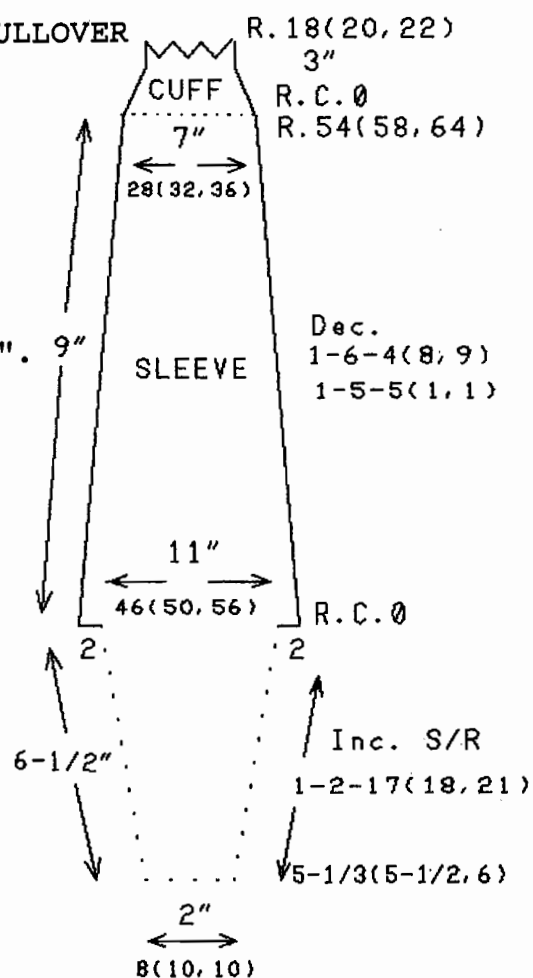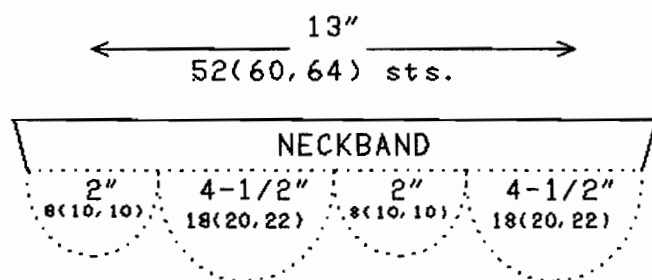

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

SIX YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 52,(60,64) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 18,(20,22) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 34,(36,42). The carriage should now be on the right and 52,(56,64) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 56,(60,68) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 52,(56,60). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 18,(20,22) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

SIX YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 4,(5,6) more times. Row counter should now read R. 11,(13,15) and you should have 12,(14,16) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 11,(13,15). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 12,(14,16). At this point you should have 12,(14,16) sts. in work on the right of zero, and 18,(20,22) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 31,(35,39) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 34,(36,42) and you have 52,(56,64) ndls. in work.

R.C. 34,(36,42). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(10,10) from the scrap of one of the sleeves in the neckband, onto the center 8,(10,10) ndls. of your machine. Pick up and hang 17,(18,21) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 17,(18,21) loops and 2 sts. from the back raglan armhole - on the other side of the 8,(10,10) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 46,(50,56) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(10,10) sts. PLUS 1 more st.

SIX YEAR SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-6-4,(8,9); and 1-5-5,(1,1).

Knit even to R. 54,(58,64). You should end with 28,(32,36) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. Sure hoping you are enjoying the knitting of these sweaters.





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

EIGHT YEAR OLD DIAGRAM

Material: 9 to 13 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

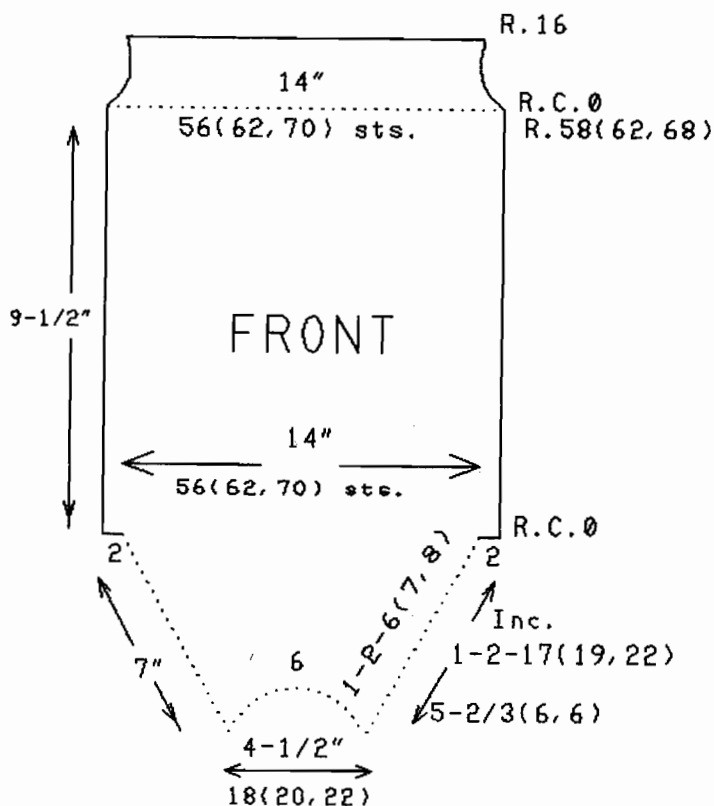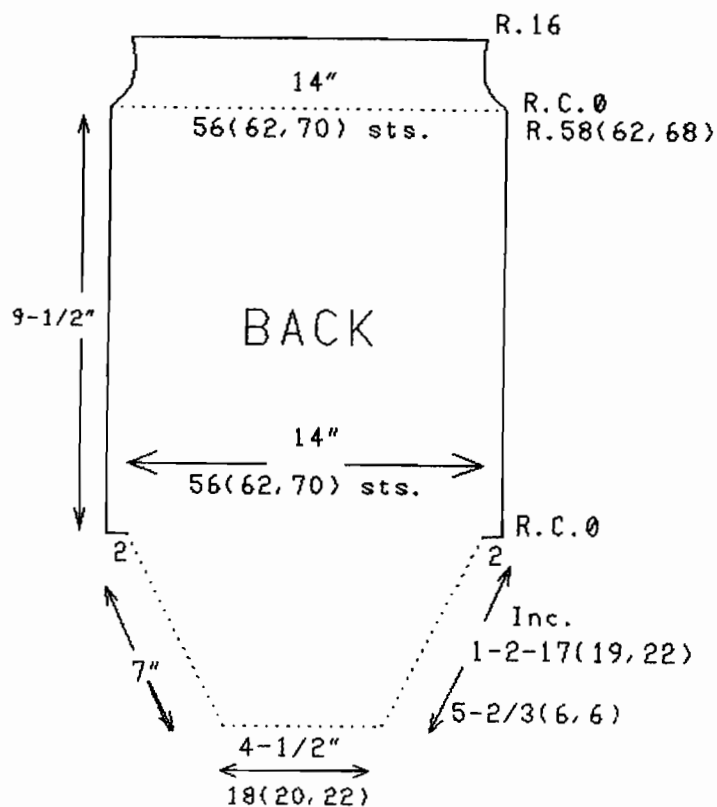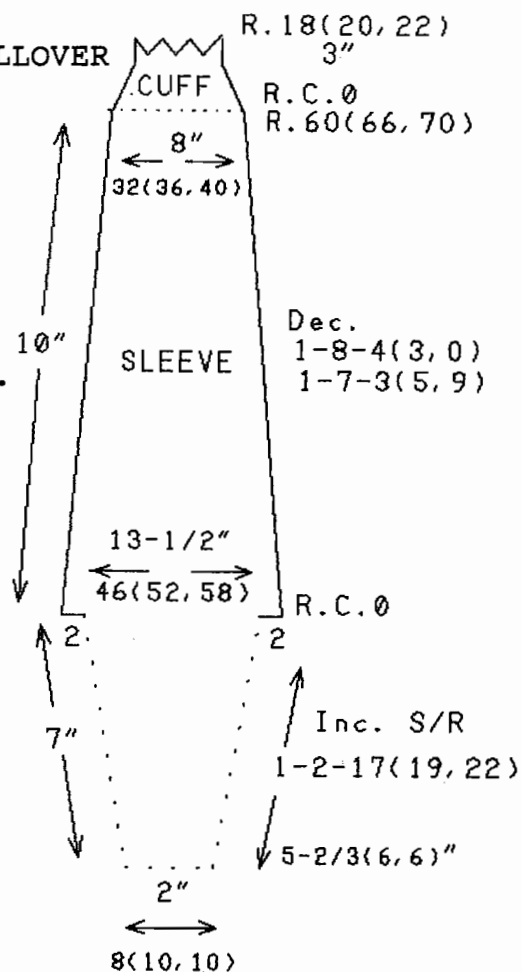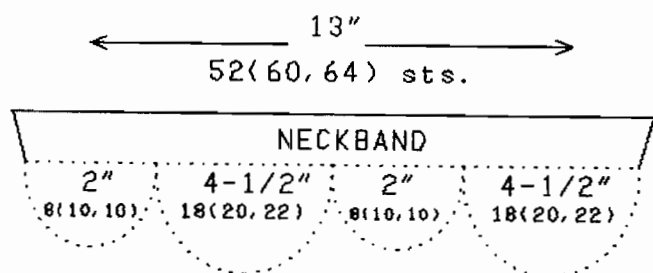

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

EIGHT YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 52,(60,64) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 18,(20,22) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 34,(38,44). The carriage should now be on the right and 52,(58,66) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 56,(62,70) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 58,(62,68). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 18,(20,22) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

EIGHT YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 4,(5,6) more times. Row counter should now read R. 11,(13,15) and you should have 12,(14,16) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 11,(13,15). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 12,(14,16). At this point you should have 12,(14,16) sts. in work on the right of zero, and 18,(20,22) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 31,(35,39) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 34,(38,44) and you have 52,(58,66) ndls. in work.

R.C. 34,(38,44). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 8,(10,10) from the scrap of one of the sleeves in the neckband, onto the center 8,(10,10) ndls. of your machine. Pick up and hang 17,(19,22) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 17,(19,22) loops and 2 sts. from the back raglan armhole - on the other side of the 8,(10,10) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 46,(52,58) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 8,(10,10) sts. PLUS 1 more st.

EIGHT YEAR SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-8-4,(3,0); and 1-7-3,(5,9).





Knit even to R. 60,(66,70). You should end with 32,(36,40) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. They are very easy and fast, aren't they?

TEN YEAR SIZE DIAGRAM

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

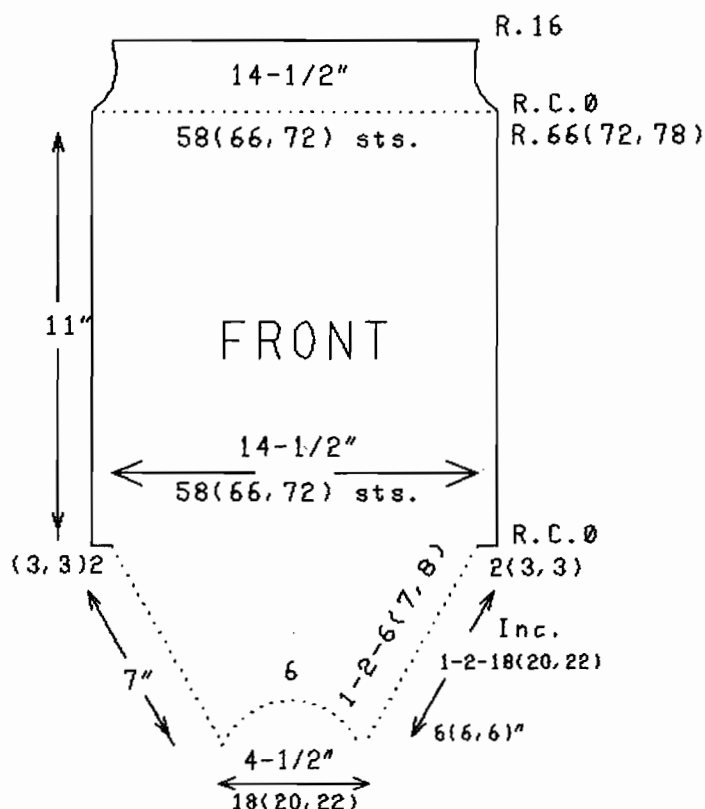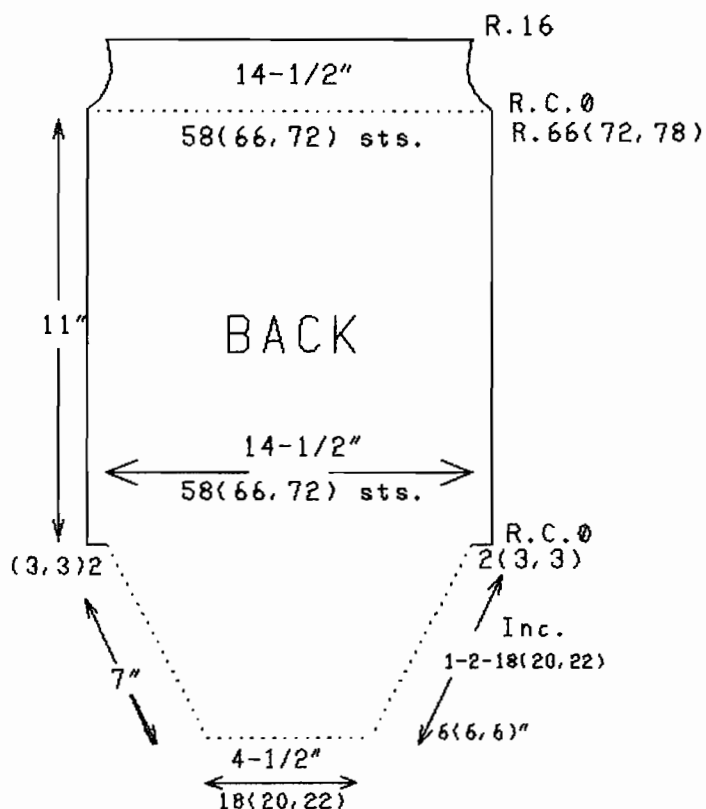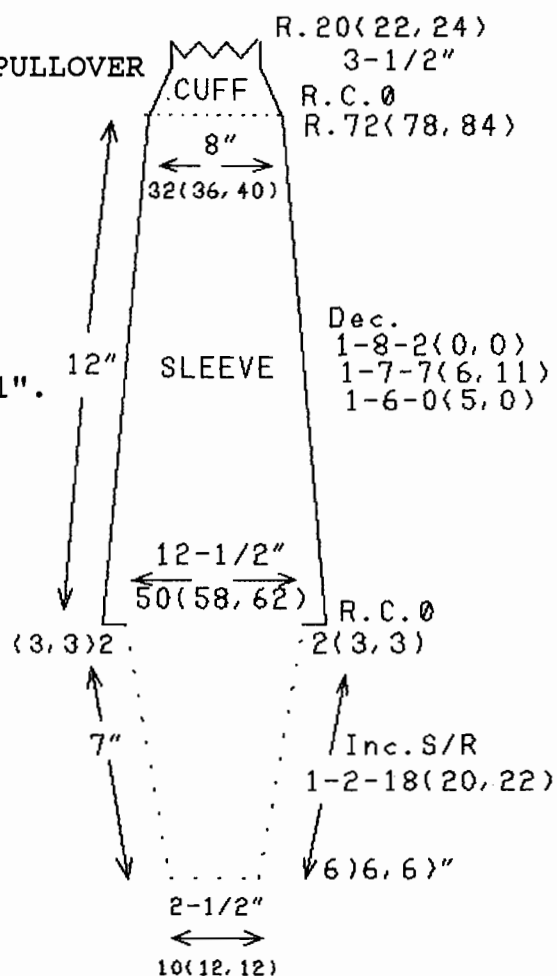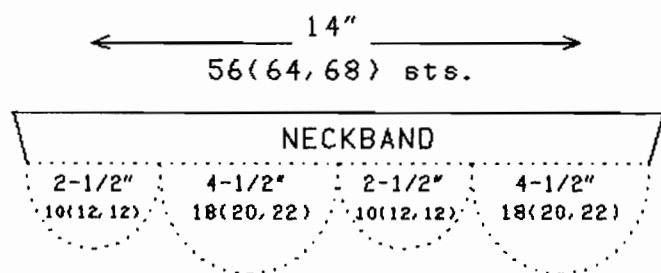

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

TEN YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 56,(64,68) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 18,(20,22) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 36,(40,44). The carriage should now be on the right and 54,(60,66) needles should be in work.

Pull 2,(3,3) needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2,(3,3) ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 58,(66,72) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 66,(72,78). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 18,(20,22) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

TEN YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 4,(5,6) more times. Row counter should now read R. 11,(13,15) and you should have 12,(14,16) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 11,(13,15). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 12,(14,16). At this point you should have 12,(14,16) sts. in work on the right of zero, and 18,(20,22) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 31,(35,39) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 36,(40,44) and you have 54,(60,66) ndls. in work.

R.C. 36,(40,44). Carriage on the right. Pull out 2,(3,3) new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2,(3,3) new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from ***'s from "Back" directions.

SLEEVE:

Pick up and hang 10,(12,12) from the scrap of one of the sleeves in the neckband, onto the center 10,(12,12) ndls. of your machine. Pick up and hang 18,(20,22) loops and 2,(3,3) sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 18,(20,22) loops and 2,(3,3) sts. from the back raglan armhole - on the other side of the 10,(12,12) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After these are hung, you should have 50,(58,62) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 10,(12,12) sts. PLUS

TEN YEAR SIZE - SLEEVE: (cont.)

1 more on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2,(3,3) sts. on each side. Now, make a multiple increase by pushing 2,(3,3) sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2,(3,3) sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-8-2,(0,0); 1-7-7,(6,11); and 1-6-0,(5,0).

Knit even to R. 72,(78,84). You should end with 32,(36,40) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. The child that receives this sweater will have as much fun wearing it as you did making it.





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

TWELVE YEAR SIZE DIAGRAM

Material: 11 to 14 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

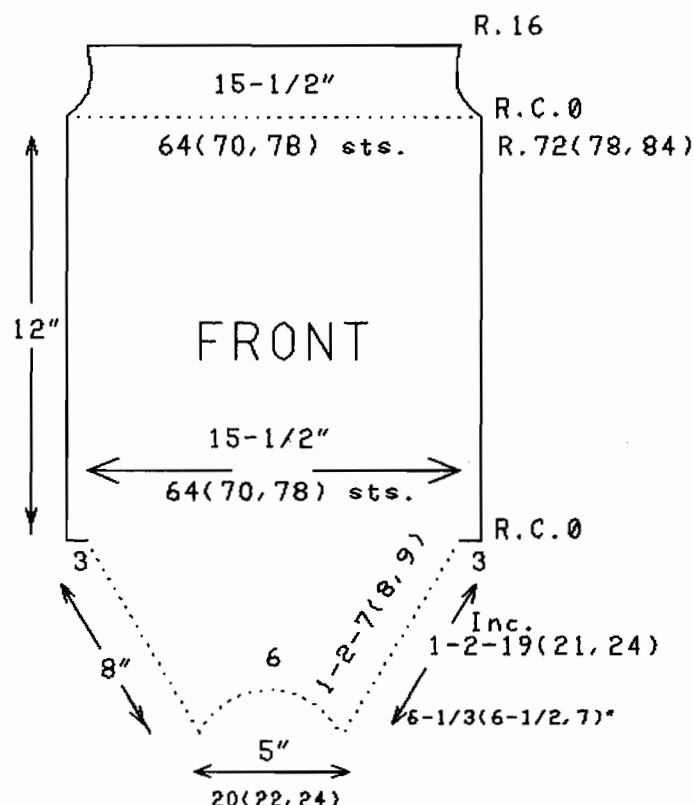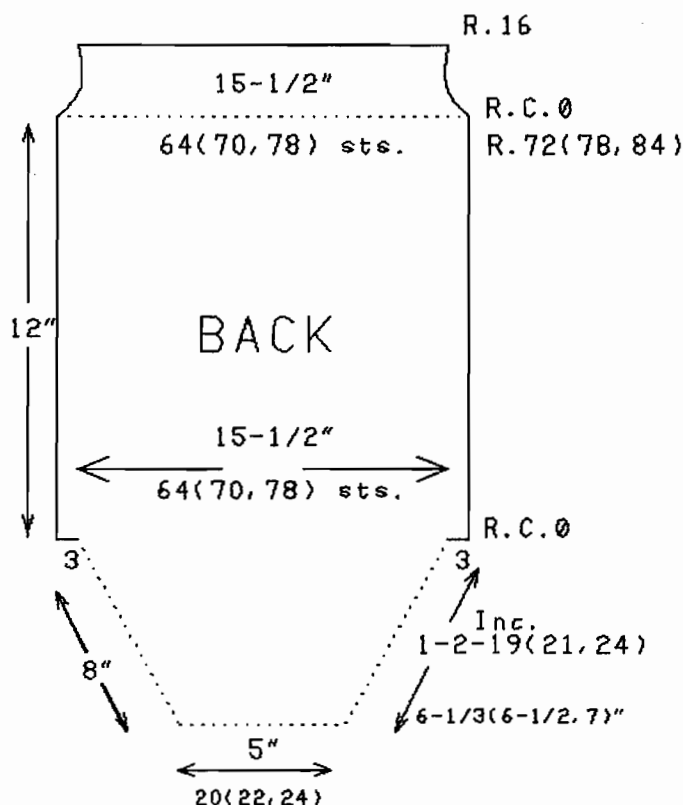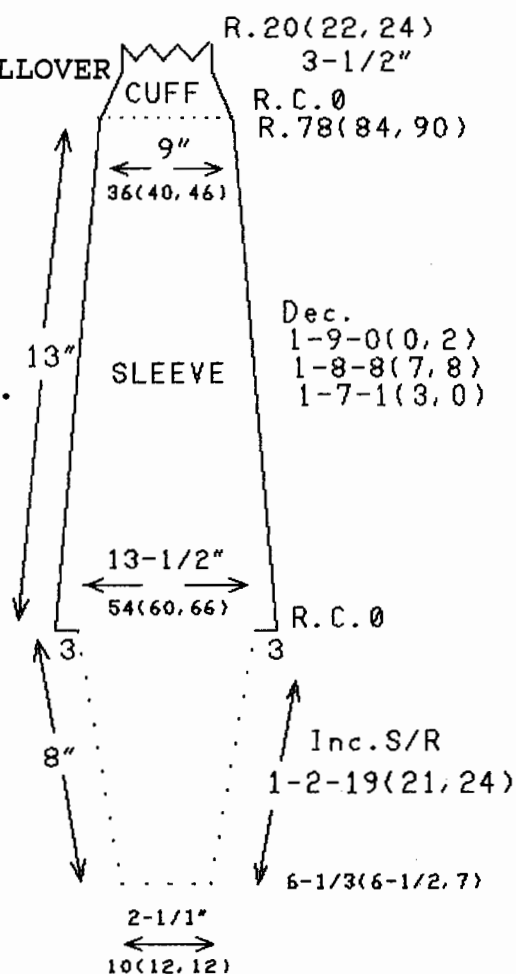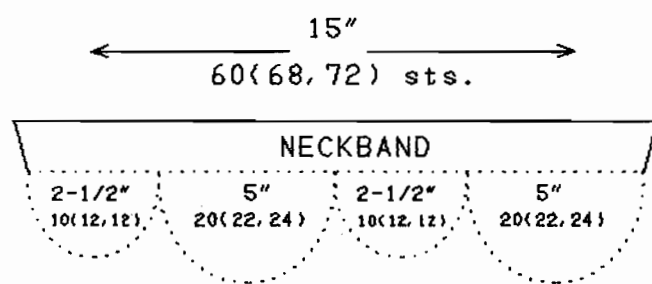

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

TWELVE YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 60,(68,72) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 20,(22,24) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 38,(42,48). The carriage should now be on the right and 58,(64,72) needles should be in work.

Pull 3 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 3 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 64,(70,78) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 72,(78,84). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 20,(22,24) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

TWELVE YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 5,(6,7) more times. Row counter should now read R. 13,(15,17) and you should have 14,(16,18) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but three, (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3, left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 13,(15,17). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 14,(16,18). At this point you should have 14,(16,18) sts. in work on the right of zero, and 20,(22,24) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 35,(39,43) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 38,(42,48) and you have 58,(64,72) ndls. in work.

R.C. 38,(42,48). Carriage on the right. Pull out 3 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 3 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 10,(12,12) from the scrap of one of the sleeves in the neckband, onto the center 10,(12,12) ndls. of your machine. Pick up and hang 19,(21,24) loops and 3 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 19,(21,24) loops and 3 sts. from the back raglan armhole - on the other side of the 10,(12,12) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 54,(60,66) sts. on the machine. Pull all these ndls. into Hold (E) position. Push in the center 10,(12,12) sts. PLUS 1 more

TWELVE YEAR SIZE - SLEEVE: (cont.)

on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 3 sts. on each side. Now, make a multiple increase by pushing 3 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 3 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-9-0,(0,2); 1-8-8,(7,8); and 1-7-1,(3,0).

Knit even to R. 78,(84,90). You should end with 36,(40,46) sts. Complete the cuff of the sweater as you finished the body of the garment. About 18 to 22 rows of regular ribbing works out nicely or about 37 to 43 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book. These make great school sweaters. How many do you think you could handle?





BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

FOURTEEN YEAR SIZE DIAGRAM

Material: 12 to 15 ozs.

Any yarn, or combination of yarns, that give one of the stitch gauges below.

Gauge: 4 sts. x 6 rows = 1".
4-1/2 sts. x 6-1/2 rows = 1".
5 sts. x 7 rows = 1".

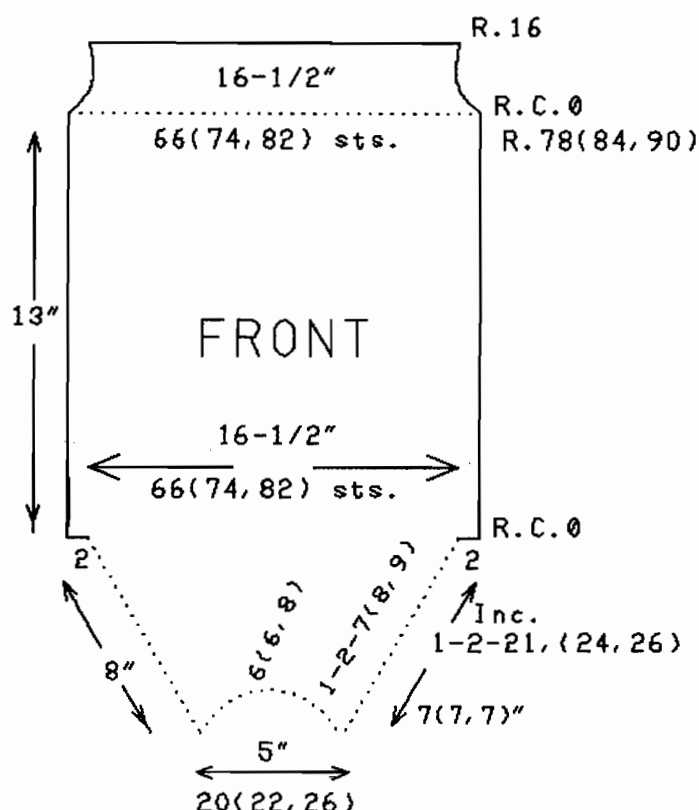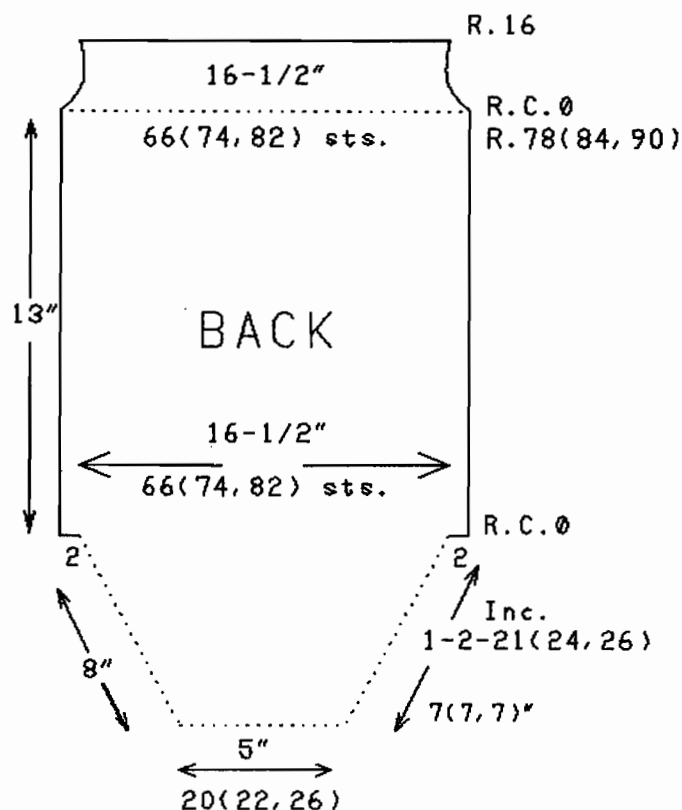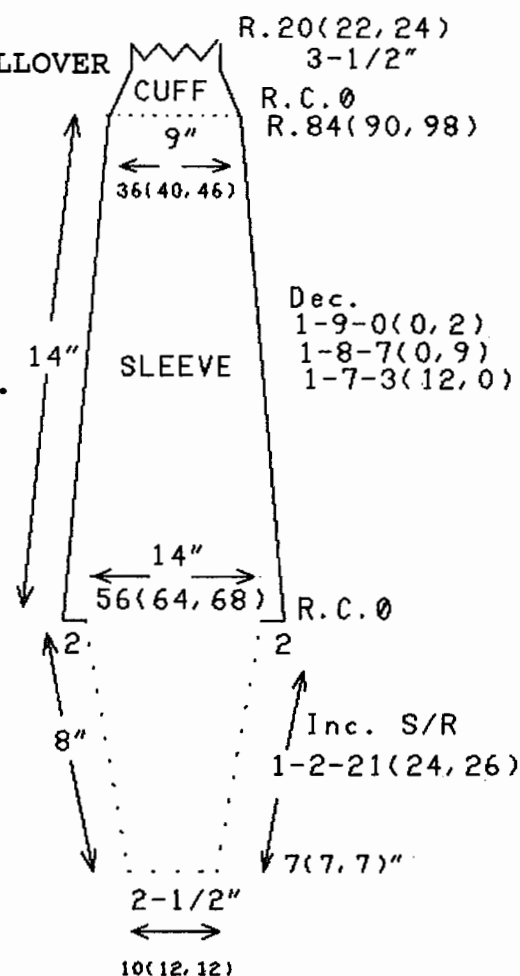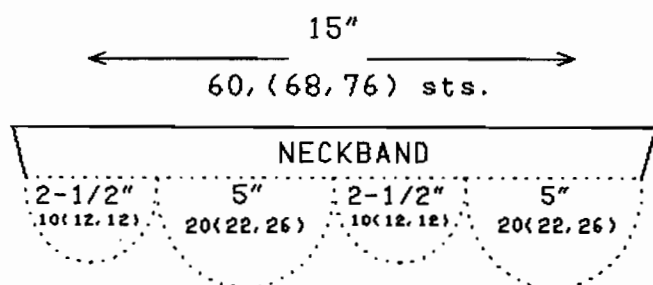

BULKY ROUND NECK UPSIDE-DOWN RAGLAN PULLOVER

FOURTEEN YEAR SIZE

WRITTEN INSTRUCTIONS

The neckband of 60,(68,76) stitches has been completed and sections have been scrapped off. Move, or rehang, the back 20,(22,26) stitches on the center needles of your machine.

BACK:

R.C. 0. Put the carriage on the right at proper garment tension, and main color yarn threaded in main feeder. *On the side next to the carriage, pull 1 NEW needle from Out-of-work (A) position - up to the Work (B) position. Knit 1 row. Repeat operation on left side - bringing up one NEW needle to Work (B) position and then knit across back to the right side.* Repeat from *'s to R. 42,(48,52). The carriage should now be on the right and 62,(70,78) needles should be in work.

Pull 2 needles out to Hold (E) position on the right hand side. Using yarn threaded in carriage, "e" cast-on over these extra ndls. Knit 1 row to left. Pull out 2 ndls. on left to Hold (E) position, and "e" cast-on over these extra ndls. also with yarn from carriage. Knit back 1 row to the right. It is necessary to pull the "e" cast-on sts. into Hold (E) position for a couple of rows, so they won't fall off. At this time you should have a total of 66,(74,82) ndls. working and your carriage is on the right hand side.

**R.C. 0. Knit even to R. 78,(84,90). Now you are ready for the ribbing at the bottom of your sweater. If making ribbing on the machine, - raise ribber bed, transfer needles in the pattern desired to the ribber bed. Proceed to rib with directions from your manual. For alternatives, please turn to Page 14 and try some inventive and different methods.

FRONT:

R.C. 0. Carriage is on the LEFT, set at garment tension, and main color yarn threaded through carriage. Rehang the front 20,(22,26) sts. from the neckband scrap, on to the center of machine bed. Pull all these ndls. to Hold (E) position. Put on partial knitting buttons (Hold, I, II, or Russell Levers).

*** Push the first 2 sts. next to the carriage (on the LEFT) from Hold (E) position into Needle Selector (C or D) position, and AT THE SAME TIME, pull one NEW ndl. from Out-of-work (A) position to Work (B) position - beside the 2 ndls. just pushed in. Knit across to the right. (There are 3 sts. in Work (B) position now). Pull the ndl. next to the ndls. in Hold (E) position back out to Hold (E) position again. (Now 2 sts. remain working.) Knit back to the left hand side. * Push next 2 sts. in Hold (E) position, back to Needle Selector (C or D) position; pull 1 NEW ndl. on left

FOURTEEN YEAR SIZE - FRONT: (cont.)

of last working st. from Out-of-work (A) position to Work (B) position. Knit across. (5 sts. now in work.) Pull the last Work (B) position ndl. next to the sts. in Hold (E) position - back into the Hold (E) position (you are forming a wrap st.).* Knit back to left. Repeat between *'s 5,(6,7) more times. Row counter should now read R. 13,(15,17) and you should have 14,(16,18) sts. in work on the left hand side of ndls. in Hold (E) position. All ndls. but 3,(3,4) - (1/2 of center increase), should now be in work on the left hand side of the neckband.*** Break yarn and place it over ndl. #3,(3,4) left, and let it hang below machine bed. Better put a clothespin on it so it won't get tangled while you are knitting the other half of the front's curve.

R.C. 13,(15,17). Pull ALL ndls. back into Hold (E) position. Move the carriage to the right beyond the last needles being used. Put the row counter to R.C. 0. Repeat "Front" between ***'s over the ndls. right of "O", reversing all sides and directions. When finished, knit carriage back to the right.

R.C. 14,(16,18). At this point you should have 14,(16,18) sts. in work on the right of zero, and 20,(22,26) ndls. in Hold all together. Carriage is on the right. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Pull 1 new ndl. from Out-of-work (A) position to Work (B) position on the right hand side. Knit across ALL sts., putting them into Work (B) position. 35,(39,45) ndls. are now working. Continue pulling up 1 new ndl. from Out-of-work (A) position to Work (B) position NEXT TO THE CARRIAGE until row counter reads R. 42,(48,52) and you have 62,(70,78) ndls. in work.

R.C. 42,(48,52). Carriage on the right. Pull out 2 new ndls. next to carriage to Hold (E) position; and with the yarn from the carriage, "e" cast-on over these new ndls. Knit 1 row to left. Pull out 2 new ndls. next to carriage on this side. "E" cast-on over these ndls. and then knit back to the right hand side.

R.C. 0. Repeat from **'s from "Back" directions.

SLEEVE:

Pick up and hang 10,(12,12) from the scrap of one of the sleeves in the neckband, onto the center 10,(12,12) ndls. of your machine. Pick up and hang 21,(24,26) loops and 2 sts. from one side of the front raglan armhole - onto the ndls. next to the sts. of the top of the sleeve. Pick up and hang 21,(24,26) loops and 2 sts. from the back raglan armhole - on the other side of the 10,(12,12) sts. from the same sleeve. These loops and stitches INCLUDE the "e" cast-on stitches added at the end of the rapid increase of the raglan slant. Be careful to keep both purl sides facing you. After you have them hung, you should have 56,(64,68) sts. on the machine. Pull all these ndls. into Hold (E)

FOURTEEN YEAR SIZE - SLEEVE: (cont.)

position. Push in the center 10,(12,12) sts. PLUS 1 more on the left hand side to the Needle Selector (C or D) position. Carriage is on the right. Put on partial knitting buttons (Hold, I, II, or Russell Levers). Thread carriage with garment yarn, pulling it up on the shelf of your fabric presser - and over the top of the ndls. in Hold (E) position on right side. Hold yarn down with your fingers between the last ndl. in Hold (E) position and the first ndl. in Needle Selector (C or D) position. This will prevent your yarn from tangling in the carriage brushes.

R.C. 0. Set tension for garment tension. Knit across to the left. Pull last knitted st. on the left, back to Hold (E) position for a wrap st. Push 2 sts. next to working ndls. that are in Hold (E) position on right hand side to Needle Selector (C or D) position. Knit across to the right. Pull last knitted st. back to Hold (E) position for another wrap st. Continue increasing sts. into Work (B) position - alternating the pushing and pulling of sts. from side to side until all sts. are in Work (B) position, EXCEPT 2 sts. on each side. Now, make a multiple increase by pushing 2 sts. to Needle Selector (C or D) position all at one time - on the right hand side. Knit across. Then push 2 sts. on left into Needle Selector (C or D) position and knit across. Knit back to right across all sts. in work.

R.C. 0. Take off partial knitting buttons (Hold, I, II, or Russell Levers). Knit the sleeve down from the underarm now using the three prong tool for the decreases, which are 1-9-0,(0,2); 1-8-7,(0,9); and 1-7-3,(12,0).

Knit even to R. 84,(90,98). You should end with 36,(40,46) sts. Complete the cuff of the sweater as you finished the body of the garment. About 20 to 24 rows of regular ribbing works out nicely or about 41 to 47 rows of mock ribbing will be necessary.

Hang and knit in the second sleeve in the above manner. Follow the blocking and assembly instructions found in the "Random Hints and Suggestions" located in the front of this book.

Well, that's the last sweater in this book. Look for the patterns for teenagers and adults in another book. There were just too many pages for only one. Hope you had a great time with these sweaters. See you around.

ISBN: 0-939669-07-2