# **Analysis Report**

# v3

Duration	932.612 μs
Grid Size	[ 1024,1,1 ]
Block Size	[ 1024,1,1 ]
Registers/Thread	32
Shared Memory/Block	28 KiB
Shared Memory Requested	64 KiB
Shared Memory Executed	64 KiB
Shared Memory Bank Size	4 B

[0] Quadro K620


GPU UIID         GPU-1er8bc5c-b0a8-9167-636d-16994a50ac47           Compute Capability         5.0           Max. Threads per Block         1024           Max. Threads per Multiprocessor         2048           Max. Shared Memory per Block         48 KiB           Max. Shared Memory per Multiprocessor         64 KiB           Max. Registers per Block         65536           Max. Registers per Multiprocessor         65536           Max. Grid Dimensions         [ 2147483647, 65535, 65535 ]           Max. Block Dimensions         [ 1024, 1024, 64]           Max. Warps per Multiprocessor         64           Max. Warps per Multiprocessor         32           Single Precision FLOP/s         863.232 GigaFLOP/s           Double Precision FLOP/s         26.976 GigaFLOP/s           Number of Multiprocessors         3           Multiprocessor Clock Rate         1.124 GHz           Concurrent Kernel         true           Max IPC         6           Global Memory Bandwidth         28.8 GB/s           Global Memory Size         4 KiB           L2 Cache Size         2 MiB           Memcpy Engines         1           PCIe Generation         2           PCIe Link Rate         5 Gbit/s <th colspan="10">[0] Quadro K620</th>	[0] Quadro K620									
Max. Threads per Block         1024           Max. Threads per Multiprocessor         2048           Max. Shared Memory per Block         48 KiB           Max. Shared Memory per Multiprocessor         64 KiB           Max. Registers per Block         65536           Max. Registers per Multiprocessor         65536           Max. Grid Dimensions         [ 2147483647, 65535, 65535 ]           Max. Block Dimensions         [ 1024, 1024, 64 ]           Max. Warps per Multiprocessor         64           Max. Warps per Multiprocessor         32           Single Precision FLOP/s         863.232 GigaFLOP/s           Double Precision FLOP/s         26.976 GigaFLOP/s           Number of Multiprocessors         3           Multiprocessor Clock Rate         1.124 GHz           Concurrent Kernel         true           Max IPC         6           Threads per Warp         32           Global Memory Bandwidth         28.8 GB/s           Global Memory Size         1.946 GiB           Constant Memory Size         64 KiB           L2 Cache Size         2 MiB           Memcpy Engines         1           PCIe Generation         2           PCIe Link Rate         5 Gbit/s	GPU UUID	GPU-1ef8bc5c-b0a8-9167-636d-16994a50ac47								
Max. Threads per Multiprocessor         2048           Max. Shared Memory per Block         48 KiB           Max. Shared Memory per Multiprocessor         64 KiB           Max. Registers per Block         65536           Max. Registers per Multiprocessor         65536           Max. Grid Dimensions         [ 2147483647, 65535, 65535 ]           Max. Block Dimensions         [ 1024, 1024, 64 ]           Max. Blocks per Multiprocessor         32           Single Precision FLOP/s         863.232 GigaFLOP/s           Double Precision FLOP/s         26.976 GigaFLOP/s           Number of Multiprocessors         3           Multiprocessor Clock Rate         1.124 GHz           Concurrent Kernel         true           Max IPC         6           Threads per Warp         32           Global Memory Bandwidth         28.8 GB/s           Global Memory Size         64 KiB           L2 Cache Size         2 MiB           Memcpy Engines         1           PCIe Ceneration         2           PCIe Link Rate         5 Gbit/s	Compute Capability	5.0								
Max. Shared Memory per Block         48 KiB           Max. Shared Memory per Multiprocessor         64 KiB           Max. Registers per Block         65536           Max. Registers per Multiprocessor         65536           Max. Grid Dimensions         [ 2147483647, 65535, 65535 ]           Max. Block Dimensions         [ 1024, 1024, 64 ]           Max. Warps per Multiprocessor         64           Max. Blocks per Multiprocessor         32           Single Precision FLOP/s         863.232 GigaFLOP/s           Double Precision FLOP/s         26.976 GigaFLOP/s           Number of Multiprocessors         3           Multiprocessor Clock Rate         1.124 GHz           Concurrent Kernel         true           Max IPC         6           Threads per Warp         32           Global Memory Bandwidth         28.8 GB/s           Global Memory Size         1.946 GiB           Constant Memory Size         64 KiB           L2 Cache Size         2 MiB           Memcpy Engines         1           PCIe Generation         2           PCIe Link Rate         5 Gbit/s	Max. Threads per Block	1024								
Max. Shared Memory per Multiprocessor       64 KiB         Max. Registers per Block       65536         Max. Registers per Multiprocessor       65536         Max. Grid Dimensions       [2147483647, 65535, 65535]         Max. Block Dimensions       [1024, 1024, 64]         Max. Warps per Multiprocessor       64         Max. Blocks per Multiprocessor       32         Single Precision FLOP/s       863.232 GigaFLOP/s         Double Precision FLOP/s       26.976 GigaFLOP/s         Number of Multiprocessors       3         Multiprocessor Clock Rate       1.124 GHz         Concurrent Kernel       true         Max IPC       6         Threads per Warp       32         Global Memory Bandwidth       28.8 GB/s         Global Memory Size       1.946 GiB         Constant Memory Size       64 KiB         L2 Cache Size       2 MiB         Memory Engines       1         PCIe Generation       2         PCIe Link Rate       5 Gbit/s	Max. Threads per Multiprocessor	2048								
Max. Registers per Block         65536           Max. Registers per Multiprocessor         65536           Max. Grid Dimensions         [ 2147483647, 65535, 65535 ]           Max. Block Dimensions         [ 1024, 1024, 64 ]           Max. Warps per Multiprocessor         64           Max. Blocks per Multiprocessor         32           Single Precision FLOP/s         863.232 GigaFLOP/s           Double Precision FLOP/s         26.976 GigaFLOP/s           Number of Multiprocessors         3           Multiprocessor Clock Rate         1.124 GHz           Concurrent Kernel         true           Max IPC         6           Threads per Warp         32           Global Memory Bandwidth         28.8 GB/s           Global Memory Size         1.946 GiB           Constant Memory Size         64 KiB           L2 Cache Size         2 MiB           Memcpy Engines         1           PCIe Generation         2           PCIe Link Rate         5 Gbit/s	Max. Shared Memory per Block	48 KiB								
Max. Registers per Multiprocessor       65536         Max. Grid Dimensions       [ 2147483647, 65535, 65535 ]         Max. Block Dimensions       [ 1024, 1024, 64 ]         Max. Warps per Multiprocessor       64         Max. Blocks per Multiprocessor       32         Single Precision FLOP/s       863.232 GigaFLOP/s         Double Precision FLOP/s       26.976 GigaFLOP/s         Number of Multiprocessors       3         Multiprocessor Clock Rate       1.124 GHz         Concurrent Kernel       true         Max IPC       6         Threads per Warp       32         Global Memory Bandwidth       28.8 GB/s         Global Memory Size       1.946 GiB         Constant Memory Size       64 KiB         L2 Cache Size       2 MiB         Memcpy Engines       1         PCIe Generation       2         PCIe Link Rate       5 Gbit/s	Max. Shared Memory per Multiprocessor	64 KiB								
Max. Grid Dimensions         [ 2147483647, 65535, 65535 ]           Max. Block Dimensions         [ 1024, 1024, 64 ]           Max. Warps per Multiprocessor         64           Max. Blocks per Multiprocessor         32           Single Precision FLOP/s         863.232 GigaFLOP/s           Double Precision FLOP/s         26.976 GigaFLOP/s           Number of Multiprocessors         3           Multiprocessor Clock Rate         1.124 GHz           Concurrent Kernel         true           Max IPC         6           Threads per Warp         32           Global Memory Bandwidth         28.8 GB/s           Global Memory Size         1.946 GiB           Constant Memory Size         64 KiB           L2 Cache Size         2 MiB           Memcpy Engines         1           PCIe Generation         2           PCIe Link Rate         5 Gbit/s	Max. Registers per Block	65536								
Max. Block Dimensions  [1024, 1024, 64]  Max. Warps per Multiprocessor  Max. Blocks per Multiprocessor  32  Single Precision FLOP/s  B63.232 GigaFLOP/s  Double Precision FLOP/s  Number of Multiprocessors  34  Multiprocessor Clock Rate  1.124 GHz  Concurrent Kernel  true  Max IPC  6  Threads per Warp  32  Global Memory Bandwidth  28.8 GB/s  Global Memory Size  1.946 GiB  Constant Memory Size  4 KiB  L2 Cache Size  2 MiB  Memcpy Engines  1  PCIe Generation  2  PCIe Link Rate  5 Gbit/s	Max. Registers per Multiprocessor	65536								
Max. Warps per Multiprocessor  Max. Blocks per Multiprocessor  32 Single Precision FLOP/s  Be63.232 GigaFLOP/s  Double Precision FLOP/s  Number of Multiprocessors  3 Multiprocessor Clock Rate  1.124 GHz  Concurrent Kernel  true  Max IPC  6 Threads per Warp  32 Global Memory Bandwidth  28.8 GB/s  Global Memory Size  1.946 GiB  Constant Memory Size  4 KiB  L2 Cache Size  2 MiB  Memcpy Engines  1 PCIe Generation  2 PCIe Link Rate  6  6  6  6  6  6  6  6  6  6  6  6  6	Max. Grid Dimensions	[ 2147483647, 65535, 65535 ]								
Max. Blocks per Multiprocessor       32         Single Precision FLOP/s       863.232 GigaFLOP/s         Double Precision FLOP/s       26.976 GigaFLOP/s         Number of Multiprocessors       3         Multiprocessor Clock Rate       1.124 GHz         Concurrent Kernel       true         Max IPC       6         Threads per Warp       32         Global Memory Bandwidth       28.8 GB/s         Global Memory Size       1.946 GiB         Constant Memory Size       64 KiB         L2 Cache Size       2 MiB         Memcpy Engines       1         PCIe Generation       2         PCIe Link Rate       5 Gbit/s	Max. Block Dimensions	[ 1024, 1024, 64 ]								
Single Precision FLOP/s863.232 GigaFLOP/sDouble Precision FLOP/s26.976 GigaFLOP/sNumber of Multiprocessors3Multiprocessor Clock Rate1.124 GHzConcurrent KerneltrueMax IPC6Threads per Warp32Global Memory Bandwidth28.8 GB/sGlobal Memory Size1.946 GiBConstant Memory Size64 KiBL2 Cache Size2 MiBMemcpy Engines1PCIe Generation2PCIe Link Rate5 Gbit/s	Max. Warps per Multiprocessor	64								
Double Precision FLOP/s26.976 GigaFLOP/sNumber of Multiprocessors3Multiprocessor Clock Rate1.124 GHzConcurrent KerneltrueMax IPC6Threads per Warp32Global Memory Bandwidth28.8 GB/sGlobal Memory Size1.946 GiBConstant Memory Size64 KiBL2 Cache Size2 MiBMemcpy Engines1PCIe Generation2PCIe Link Rate5 Gbit/s	Max. Blocks per Multiprocessor	32								
Number of Multiprocessors  Multiprocessor Clock Rate  Concurrent Kernel  true  Max IPC  6  Threads per Warp  32  Global Memory Bandwidth  28.8 GB/s  Global Memory Size  1.946 GiB  Constant Memory Size  4 KiB  L2 Cache Size  2 MiB  Memcpy Engines  1  PCIe Generation  2  PCIe Link Rate  5 Gbit/s	Single Precision FLOP/s	863.232 GigaFLOP/s								
Multiprocessor Clock Rate  Concurrent Kernel  Max IPC  6  Threads per Warp  32  Global Memory Bandwidth  28.8 GB/s  Global Memory Size  1.946 GiB  Constant Memory Size  64 KiB  L2 Cache Size  2 MiB  Memcpy Engines  1  PCIe Generation  2  PCIe Link Rate  5 Gbit/s	Double Precision FLOP/s	26.976 GigaFLOP/s								
Concurrent Kernel true  Max IPC 6  Threads per Warp 32  Global Memory Bandwidth 28.8 GB/s  Global Memory Size 1.946 GiB  Constant Memory Size 64 KiB  L2 Cache Size 2 MiB  Memcpy Engines 1  PCIe Generation 2  PCIe Link Rate 5 Gbit/s	Number of Multiprocessors	3								
Max IPC6Threads per Warp32Global Memory Bandwidth28.8 GB/sGlobal Memory Size1.946 GiBConstant Memory Size64 KiBL2 Cache Size2 MiBMemcpy Engines1PCIe Generation2PCIe Link Rate5 Gbit/s	Multiprocessor Clock Rate	1.124 GHz								
Threads per Warp  Global Memory Bandwidth  28.8 GB/s  Global Memory Size  1.946 GiB  Constant Memory Size  64 KiB  L2 Cache Size  2 MiB  Memcpy Engines  1  PCIe Generation  2  PCIe Link Rate  5 Gbit/s	Concurrent Kernel	true								
Global Memory Bandwidth  28.8 GB/s  Global Memory Size  1.946 GiB  Constant Memory Size  64 KiB  L2 Cache Size  2 MiB  Memcpy Engines  1  PCIe Generation  2  PCIe Link Rate  5 Gbit/s	Max IPC	6								
Global Memory Size 1.946 GiB Constant Memory Size 64 KiB L2 Cache Size 2 MiB Memcpy Engines 1 PCIe Generation 2 PCIe Link Rate 5 Gbit/s	Threads per Warp	32								
Constant Memory Size 64 KiB  L2 Cache Size 2 MiB  Memcpy Engines 1  PCIe Generation 2  PCIe Link Rate 5 Gbit/s	Global Memory Bandwidth	28.8 GB/s								
L2 Cache Size2 MiBMemcpy Engines1PCIe Generation2PCIe Link Rate5 Gbit/s	Global Memory Size	1.946 GiB								
Memcpy Engines 1 PCIe Generation 2 PCIe Link Rate 5 Gbit/s	Constant Memory Size	64 KiB								
PCIe Generation 2 PCIe Link Rate 5 Gbit/s	L2 Cache Size	2 MiB								
PCIe Link Rate 5 Gbit/s	Memcpy Engines	1								
	PCIe Generation	2								
PCIe Link Width 16	PCIe Link Rate	5 Gbit/s								
	PCIe Link Width	16								

## 1. Compute, Bandwidth, or Latency Bound

The first step in analyzing an individual kernel is to determine if the performance of the kernel is bounded by computation, memory bandwidth, or instruction/memory latency. The results below indicate that the performance of kernel "v3" is most likely limited by instruction and memory latency. You should first examine the information in the "Instruction And Memory Latency" section to determine how it is limiting performance.

#### 1.1. Kernel Performance Is Bound By Instruction And Memory Latency

This kernel exhibits low compute throughput and memory bandwidth utilization relative to the peak performance of "Quadro K620". These utilization levels indicate that the performance of the kernel is most likely limited by the latency of arithmetic or memory operations. Achieved compute throughput and/or memory bandwidth below 60% of peak typically indicates latency issues.

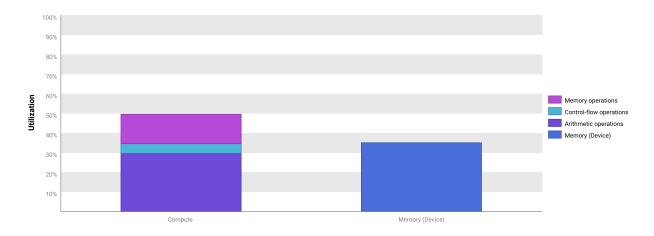

#### 2. Instruction and Memory Latency

Instruction and memory latency limit the performance of a kernel when the GPU does not have enough work to keep busy. The results below indicate that the GPU does not have enough work because instruction execution is stalling excessively.

#### 2.1. Instruction Latencies May Be Limiting Performance

Instruction stall reasons indicate the condition that prevents warps from executing on any given cycle. The following chart shows the break-down of stalls reasons averaged over the entire execution of the kernel. The kernel has good theoretical and achieved occupancy indicating that there are likely sufficient warps executing on each SM. Since occupancy is not an issue it is likely that performance is limited by the instruction stall reasons described below.

Constant - A constant load is blocked due to a miss in the constants cache.

Instruction Fetch - The next assembly instruction has not yet been fetched.

Memory Dependency - A load/store cannot be made because the required resources are not available or are fully utilized, or too many requests of a given type are outstanding. Data request stalls can potentially be reduced by optimizing memory alignment and access patterns.

Not Selected - Warp was ready to issue, but some other warp issued instead. You may be able to sacrifice occupancy without impacting latency hiding and doing so may help improve cache hit rates.

Execution Dependency - An input required by the instruction is not yet available. Execution dependency stalls can potentially be reduced by increasing instruction-level parallelism.


Pipeline Busy - The compute resource(s) required by the instruction is not yet available.

Synchronization - The warp is blocked at a \_\_syncthreads() call.

Memory Throttle - Large number of pending memory operations prevent further forward progress. These can be reduced by combining several memory transactions into one.

Texture - The texture sub-system is fully utilized or has too many outstanding requests.

Optimization: Resolve the primary stall issue; other.

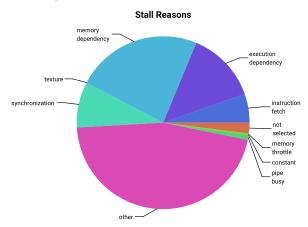


#### 2.2. Occupancy Is Not Limiting Kernel Performance

The kernel's block size, register usage, and shared memory usage allow it to fully utilize all warps on the GPU.


Variable	Achieved	Theoretical	al Device Limit   Grid Size: [ 1024,1,1 ] (1024 blocks) Block Size: [ 1024,1,1 ] (1024 threads)																	
Occupancy Per SM																				
Active Blocks		2	32	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
Active Warps	59.92	64	64	0	5	1	0	15	20	25	3	80	35	40	45	5 5	50	55	60	64
Active Threads		2048	2048	0	256		512	512 768		1024		4	1280		1536		1792		2048	
Occupancy	93.6%	100%	100%	0%		15%			30%		45%			60%		75%		90%		100%
Warps																				
Threads/Block		1024	1024	0		128		256		384		512	)	640		768		896		1024
Warps/Block		32	32	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
Block Limit		2	32	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
Registers																				
Registers/Thread		32	65536	0		8192		16384	1	24576	5	3276	8	4096	0	4915	2	5734	4	<b>-</b> 65536
Registers/Block		32768	65536	0				16k				321	k			48k	(			64k
Block Limit		2	32	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
Shared Memory																				
Shared Memory/Block		28672	65536	0				16k				321	k			48k				64k
Block Limit		2	32	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32

## 2.3. Occupancy Charts


The following charts show how varying different components of the kernel will impact theoretical occupancy.

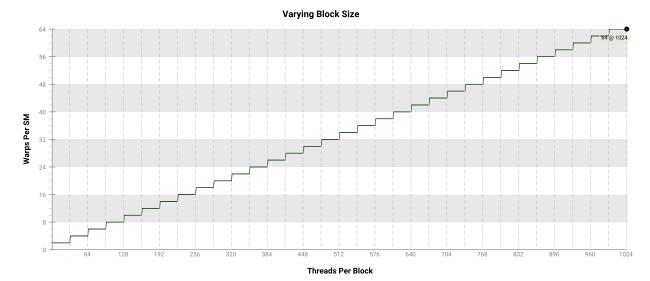

#### Varying Register Count

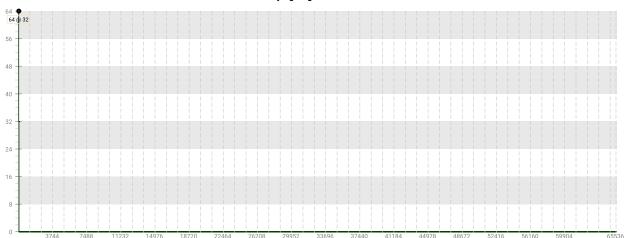


Registers Per Thread

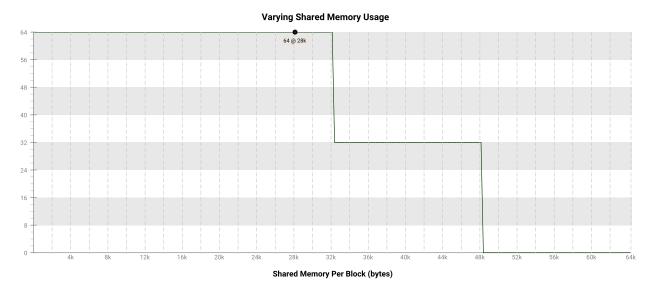

#### 2.4. Multiprocessor Utilization

The kernel's blocks are distributed across the GPU's multiprocessors for execution. Depending on the number of blocks and the execution duration of each block some multiprocessors may be more highly utilized than others during execution of the kernel. The following chart shows the utilization of each multiprocessor during execution of the kernel.

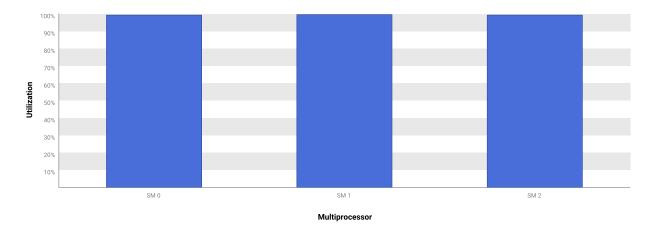

#### 3. Compute Resources

GPU compute resources limit the performance of a kernel when those resources are insufficient or poorly utilized.

#### 3.1. Function Unit Utilization

Different types of instructions are executed on different function units within each SM. Performance can be limited if a function unit is over-used by the instructions executed by the kernel. The following results show that the kernel's performance is not limited by overuse of any function unit.

Load/Store - Load and store instructions for shared and constant memory.


Texture - Load and store instructions for local, global, and texture memory.

Single - Single-precision integer and floating-point arithmetic instructions.

Double - Double-precision floating-point arithmetic instructions.


Special - Special arithmetic instructions such as sin, cos, popc, etc.

Control-Flow - Direct and indirect branches, jumps, and calls.

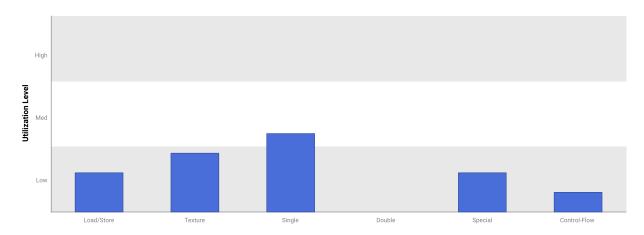

#### 3.2. Instruction Execution Counts

The following chart shows the mix of instructions executed by the kernel. The instructions are grouped into classes and for each class the chart shows the percentage of thread execution cycles that were devoted to executing instructions in that class. The "Inactive" result shows the thread executions that did not execute any instruction because the thread was predicated or inactive due to divergence.

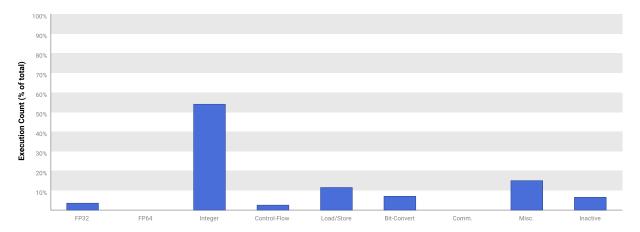

#### 3.3. Floating-Point Operation Counts

The following chart shows the mix of floating-point operations executed by the kernel. The operations are grouped into classes and for each class the chart shows the percentage of thread execution cycles that were devoted to executing operations in that class. The results do not sum to 100% because non-floating-point operations executed by the kernel are not shown in this chart.



#### 4. Memory Bandwidth

Memory bandwidth limits the performance of a kernel when one or more memories in the GPU cannot provide data at the rate requested by the kernel.

#### 4.1. Memory Bandwidth And Utilization

The following table shows the memory bandwidth used by this kernel for the various types of memory on the device. The table also shows the utilization of each memory type relative to the maximum throughput supported by the memory.

