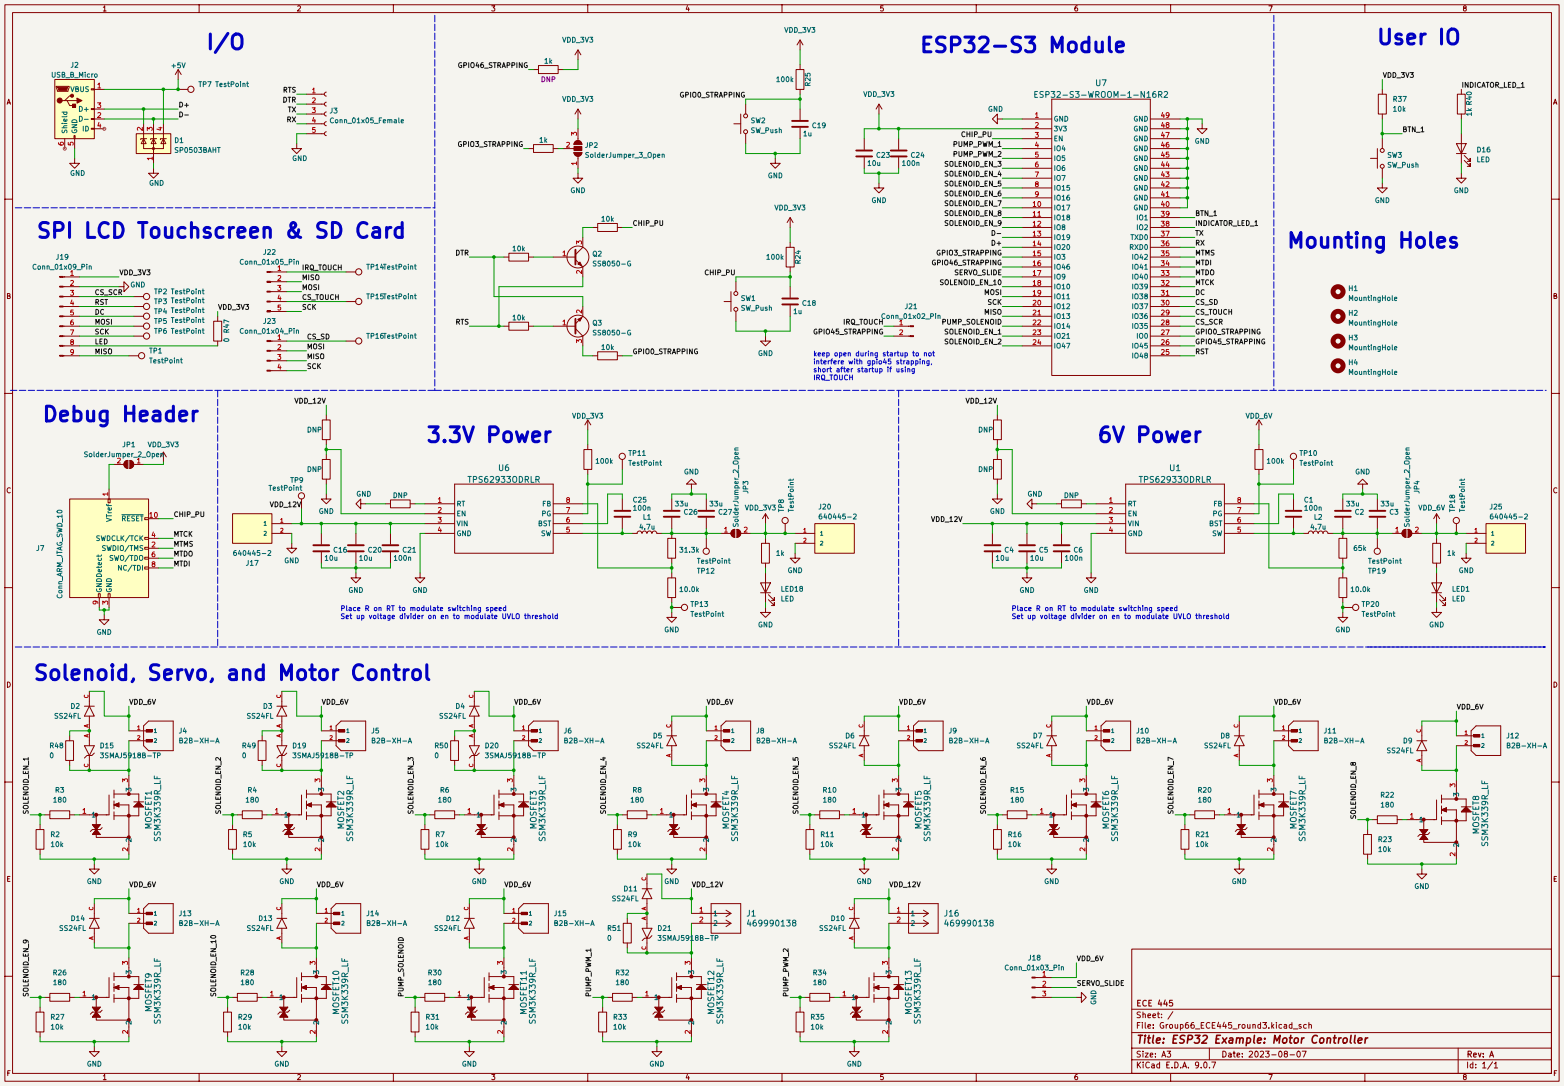
I/O
SPI LCD Touchscreen & SD Card
ESP32-S3 Module
User IO
Mounting Holes
Debug Header
3.3V Power
6V Power
Solenoid, Servo, and Motor Control
ESP32-S3-WROOM-1-N16R2
TPS62933ODRLR
keep open during startup to not interfere with gpio45 strapping. short after startup if using IRQ_TOUCH
Place R on RT to modulate switching speed
Set up voltage divider on en to modulate UVLO threshold
ECE 445
Sheet: /
File: Group66_ECE445_round3.kicad_sch
Title: ESP32 Example: Motor Controller
Size: A3
Date: 2023-08-07
Rev: A
KiCad E.D.A. 9.0.7
Id: 1/1