


DECODER

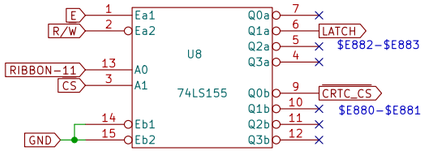


LATCH

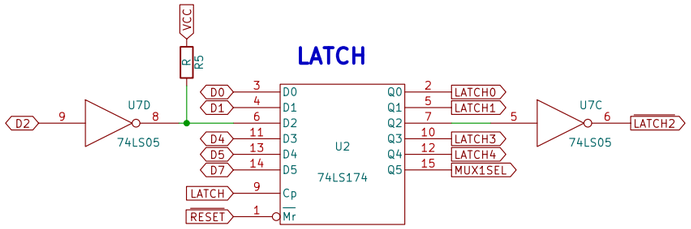


MULTIPLEXERS

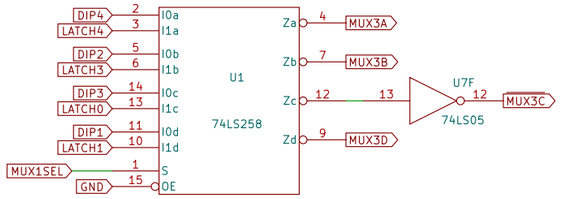


CRTC HEADER

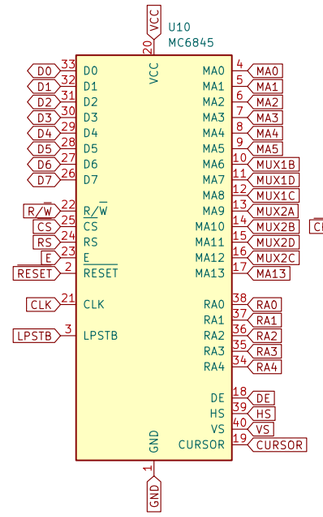


CRTC

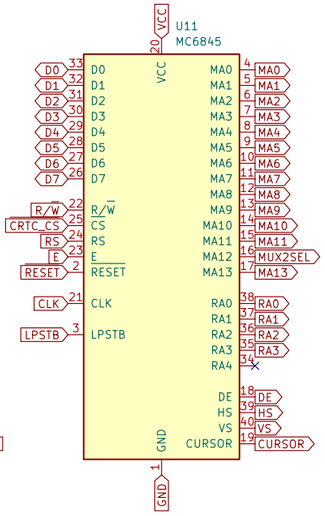


XCVR



CHAR ROM




CHAR ROM HEADER




The CHR ROM socket supports a 2316 (2K) or 2332 (4K). Normally it is only 2K except for SuperPET or some DIN machines.
* Pin 18 is used as A11.
* Pin 21 is used as /CS


Address Translation

U10	U11	U11
---	---	---
MODE:	TEXT	HIRES
MA5	MA5	RA0
MA6	MA6	RA1
MA7	MA7	RA2
MA8	MA8	MA5
MA9	MA9	MA6
MA10	MA10	MA7
MA11	MA11	MA8
MA12	MA12	MA9

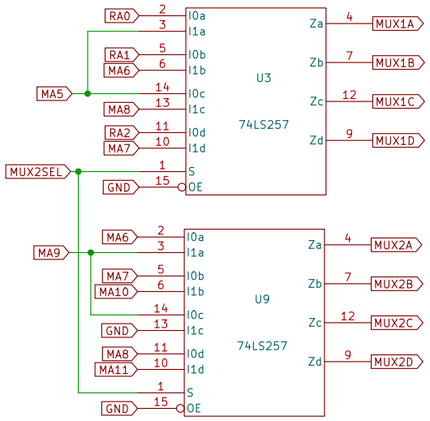


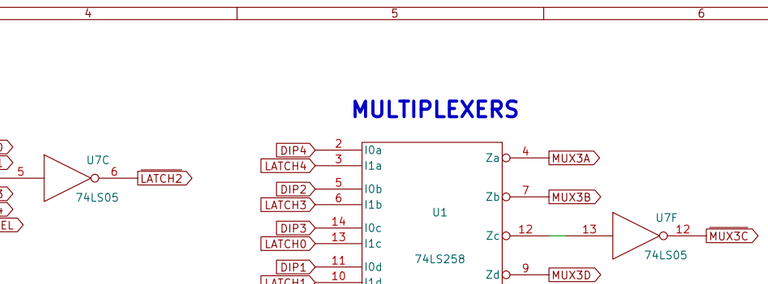

DIP SWITCHES



RIBBON CABLE



8296 HRE Clone

This is a clone of the Commodore 8296 High-Res Emulator (HRE) board. The HRE is a board plus firmware that emulates the Commodore High-Speed Grahic (HSG) board which contains a Thomson EF9365/EF9366 Video Display Processor (VDP). The HRE firmware implements the same BASIC commands as the HSG but does the drawing with the 6502 processor rather than the VDP chip.


Thanks to Andy Grady for sorting out some of the traces under the chips!

CREATED: 2016-04-22
UPDATED: 2026-10-12

SPARES



BYPASS CAPS



8296 HRE Clone

Emulates HSG Board

Cloned by Steve J. Gray
Commodore

Sheet: /
File: hre-clone.kicad_sch

Title: HRE Clone

Size: A3	Date: 2026-10-11	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1

WORK IN PROGRESS