

DECODER

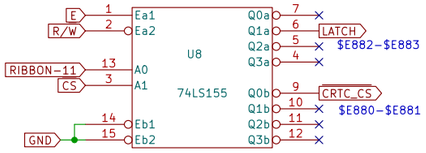


LATCH

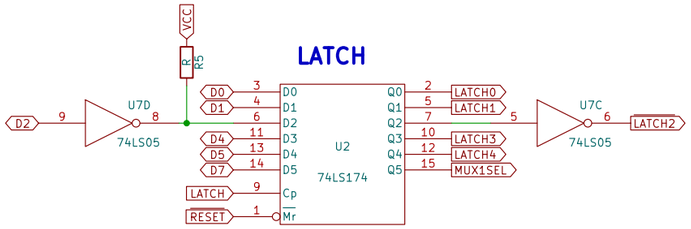


MULTIPLEXERS


CRTC HEADER

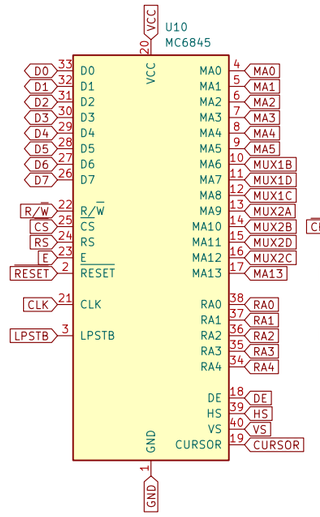


CRTC

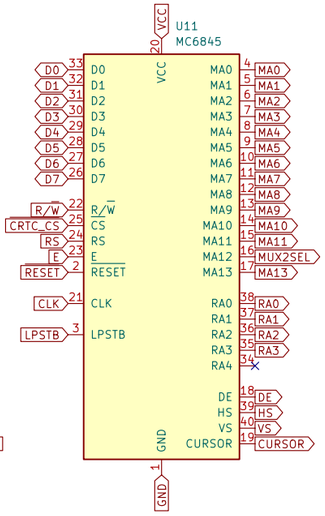


XCVR



CHAR ROM




CHAR ROM HEADER




The CHR ROM socket supports a 2316 (2K) or 2332 (4K). Normally it is only 2K except for SuperPET or some DIN machines.
* Pin 18 is used as A11.
* Pin 21 is used as /CS

Address Translation


	U10	U11	U11
	---	---	---
MODE:	TEXT	HIRES	
MA5	MA5	RA0	
MA6	MA6	RA1	
MA7	MA7	RA2	
MA8	MA8	MA5	
MA9	MA9	MA6	
MA10	MA10	MA7	
MA11	MA11	MA8	
MA12	MA12	MA9	

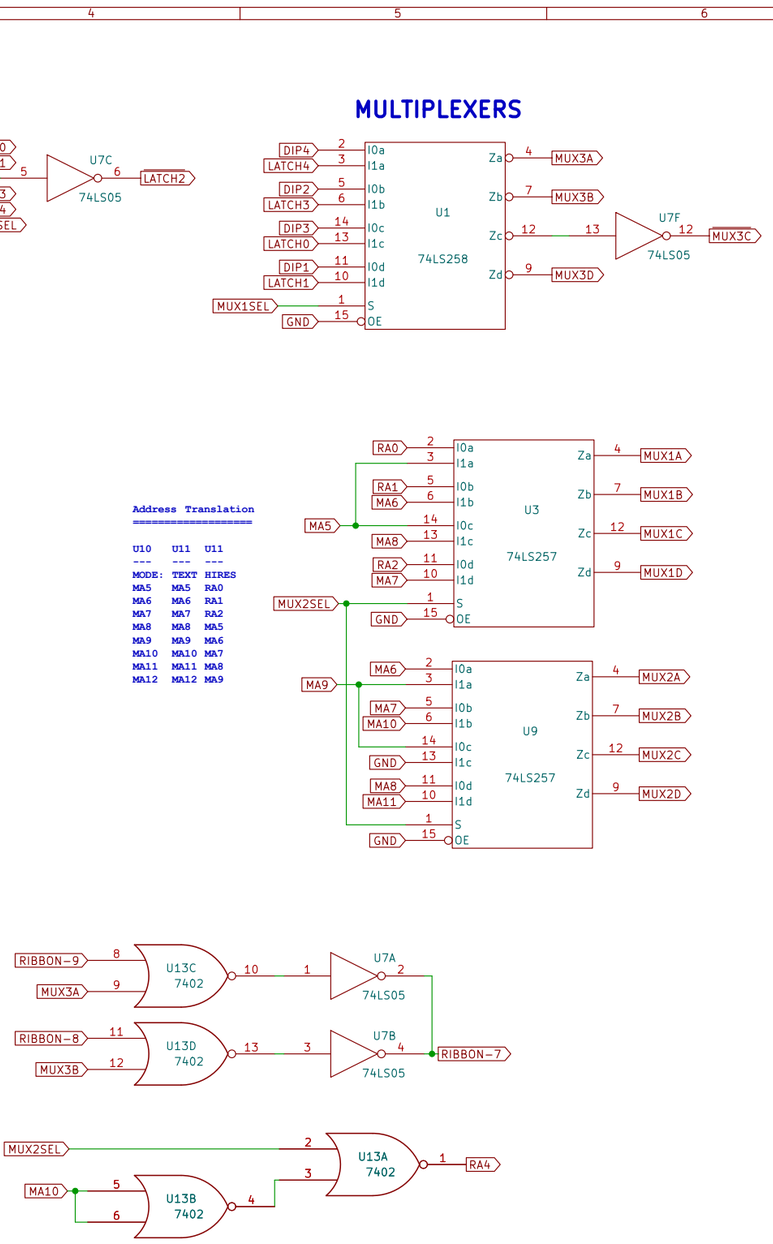

DIP SWITCHES




RIBBON CABLE



SPARES



BYPASS CAPS



8296 HRE Clone (Mini)

This is a clone of the Commodore 8296 High-Res Emulator (HRE) board. The HRE is a board plus firmware that emulates the Commodore High-Speed Grahic (HSG) board which contains a Thomson EF9365/EF9366 Video Display Processor (VDP). The HRE firmware implements the same BASIC commands as the HSG but does the drawing with the 6502 processor rather than the VDP chip.

Thanks to Andy Grady for sorting out some of the traces under the chips!

This MINI version has been compacted by overlapping the IC headers and the respective chips, moving an IC and shifting some parts, plus optimizing the routing. It should be cheaper to produce.

CREATED: 2016-10-12
UPDATED: 2026-10-13

WORK IN PROGRESS!!!

8296 HRE Clone

Emulates HSG Board

Cloned by Steve J. Gray
Commodore

Sheet: /
File: hre-clone.kicad_sch

Title: HRE Clone

Size: A3	Date: 2026-10-11	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1