




CART EDGE

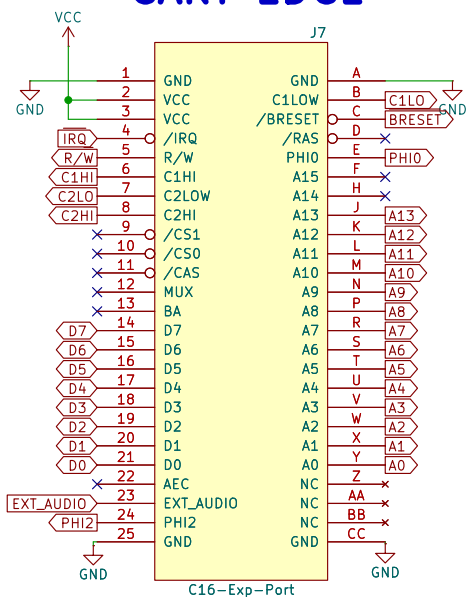


ROM

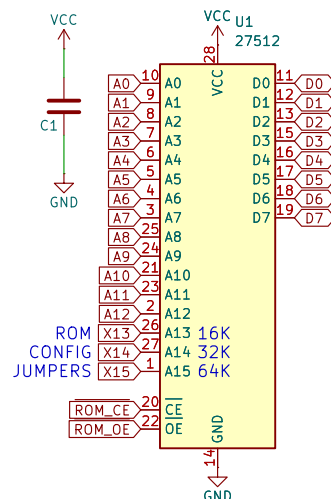

SPEECH

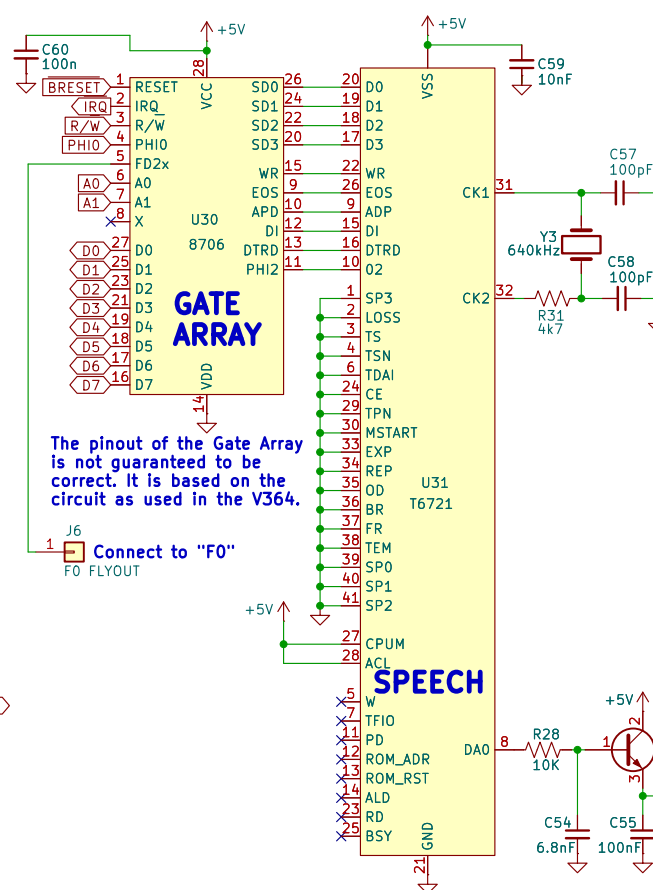


AUDIO JACK



The Speech is connected to the **EXTERNAL AUDIO** pin on the cartridge port unless a TRS cable is plugged in.

ROM CONFIG

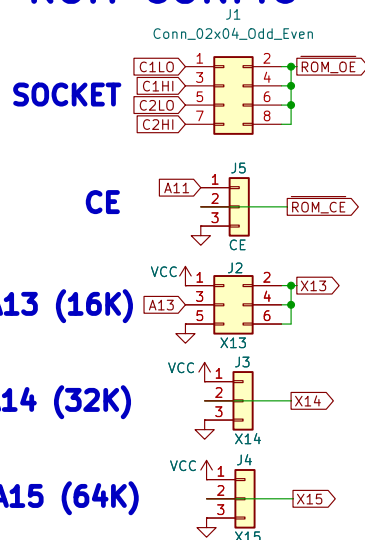

DESCRIPTION

This is a TED Magic Voice cartridge. It is based on the circuit in the Commodore V364 prototype. It uses a custom Gate Array chip that replaced the 6525TPI, LA05-124 and TTL chips in the C64 Magic Voice. It has a ROM socket that supports various capacities and configurations.

The TED series PLA chip has an unused "F0" pin which is for the Gate Array. You must connect Pin 17 of the Gate Array to the F0 connector on the cartridge.

*** IMPORTANT:
 *** This PCB is a prototype to help in
 *** developing a replacement drop-in
 *** Gate Array chip for the V364 Remake!!!
 *** It is NOT complete or tested!

CREATED: 2026-09-13
 UPDATED: 2026-09-15

TED Magic Voice Proto

Steve J. Gray

Sheet: /
 File: TED-MV.kicad_sch

Title: TED Magic Voice

Size: A4
 KiCad E.D.A. 10.0.6

Date: 2026-09-15
 Rev:
 Id: 1/1

Un-tested! Use at own risk!