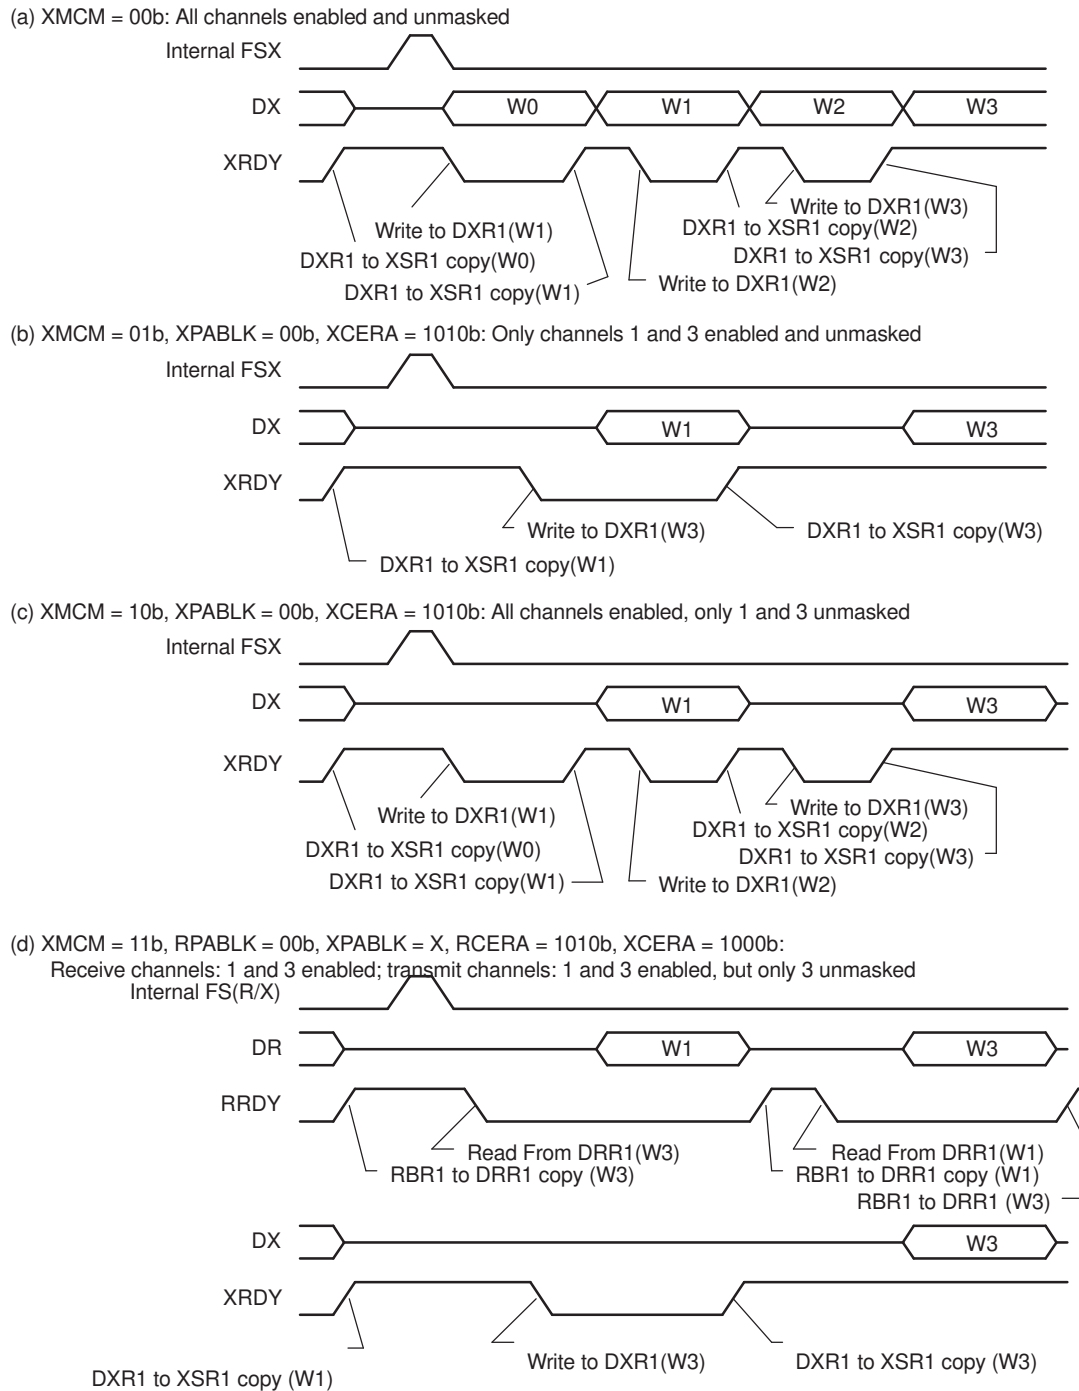


Figure 12-35. Activity on McBSP Pins for the Possible Values of XMCM


12.7 SPI Operation Using the Clock Stop Mode

This chapter explains how to use the McBSP in SPI mode.

12.7.1 SPI Protocol

The SPI protocol is a master-slave configuration with one master device and one or more slave devices. The interface consists of the following four signals:

- Serial data input (also referred to as master in/slave out, or SPISOMI)