

Bühler Ecoline Pro 84


Injection Unit

Injection Force dynamic	288 kN
Injection Force Intensified	771 kN
Plunger Stroke	700 mm
Maximum plunger Velocity	8.5 m/s
Injection Height	0 ... -300 mm

Closing Unit

Maximum Locking Force	8400 kN
Ejector Force	225 kN
Ejector Stroke	175 mm
Die Height	400 - 1000 mm
Die opening Stroke	800 mm
Smallest permissible	
Die Dimensions	720 x 720 mm
Maximum permissible	
Surface Pressure	100 N/mm ²

p/Q²-Diagram

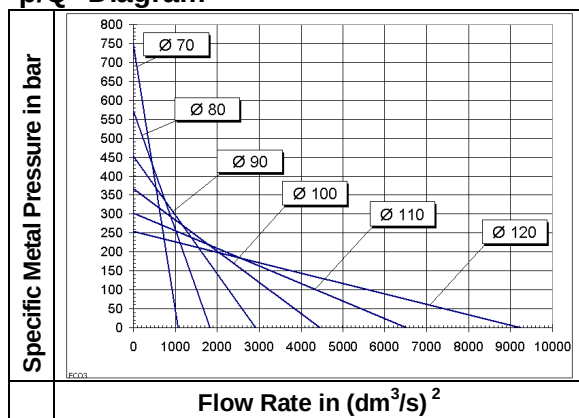

Hydraulic System

Installed Load	35 kW
Max. System Pressure	210 bar
Filling Quantity	1180 dm ³
Water Cooling	2 m³/h

Nitrogen/Accumulator

Maximum idle Pressure	165 bar
Filling Quantity	100 l





Production Data

Plunger Diameter	mm	70	80	90	100	110	120
Maximum Casting Volume	cm ³	1795	2344	2967	3663	4432	5275
Maximum Casting Weight Al	kg	4.5	5.86	7.41	9.15	11.08	13.2
Maximum Metal Pressure	bar	1976	1512	1195	968	800	672
Maximum Projected Area	cm ²	419	547	693	855	1035	1232

The maximum casting weight is calculated according to (DIN 24480):

$$\frac{2}{3} \times \text{Plunger Stroke} \times \text{Plunger Surface} \times \text{Density (Al: 2,5 kg/dm}^3\text{)}$$


Platen

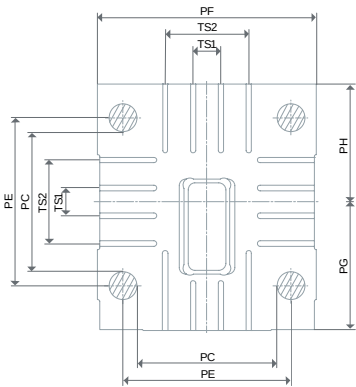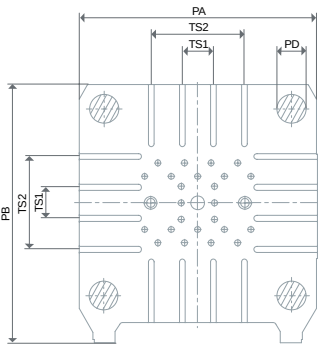

	mm:
PA	= 1380
PB	= 1516
PC	= 900
PD	= 170
PE	= 1070
PF	= 1430
PG	= 837.5
PH	= 769

Dimension/Weight

Installed Load at 400V / 50 Hz = 37 kW
 Weight of machine (ready for production) = 34500 kg

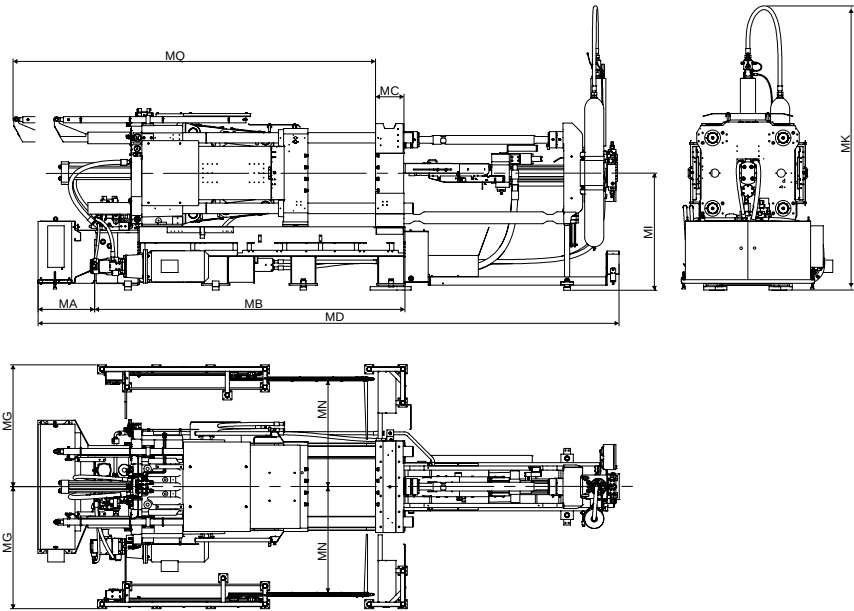

MA	= 700
MB	= 4420
MC	= 410
MD	= 7950
MG	= 1766
MI	= 1602
MK	= 3678
MN	= 1600
MO	= 7100