


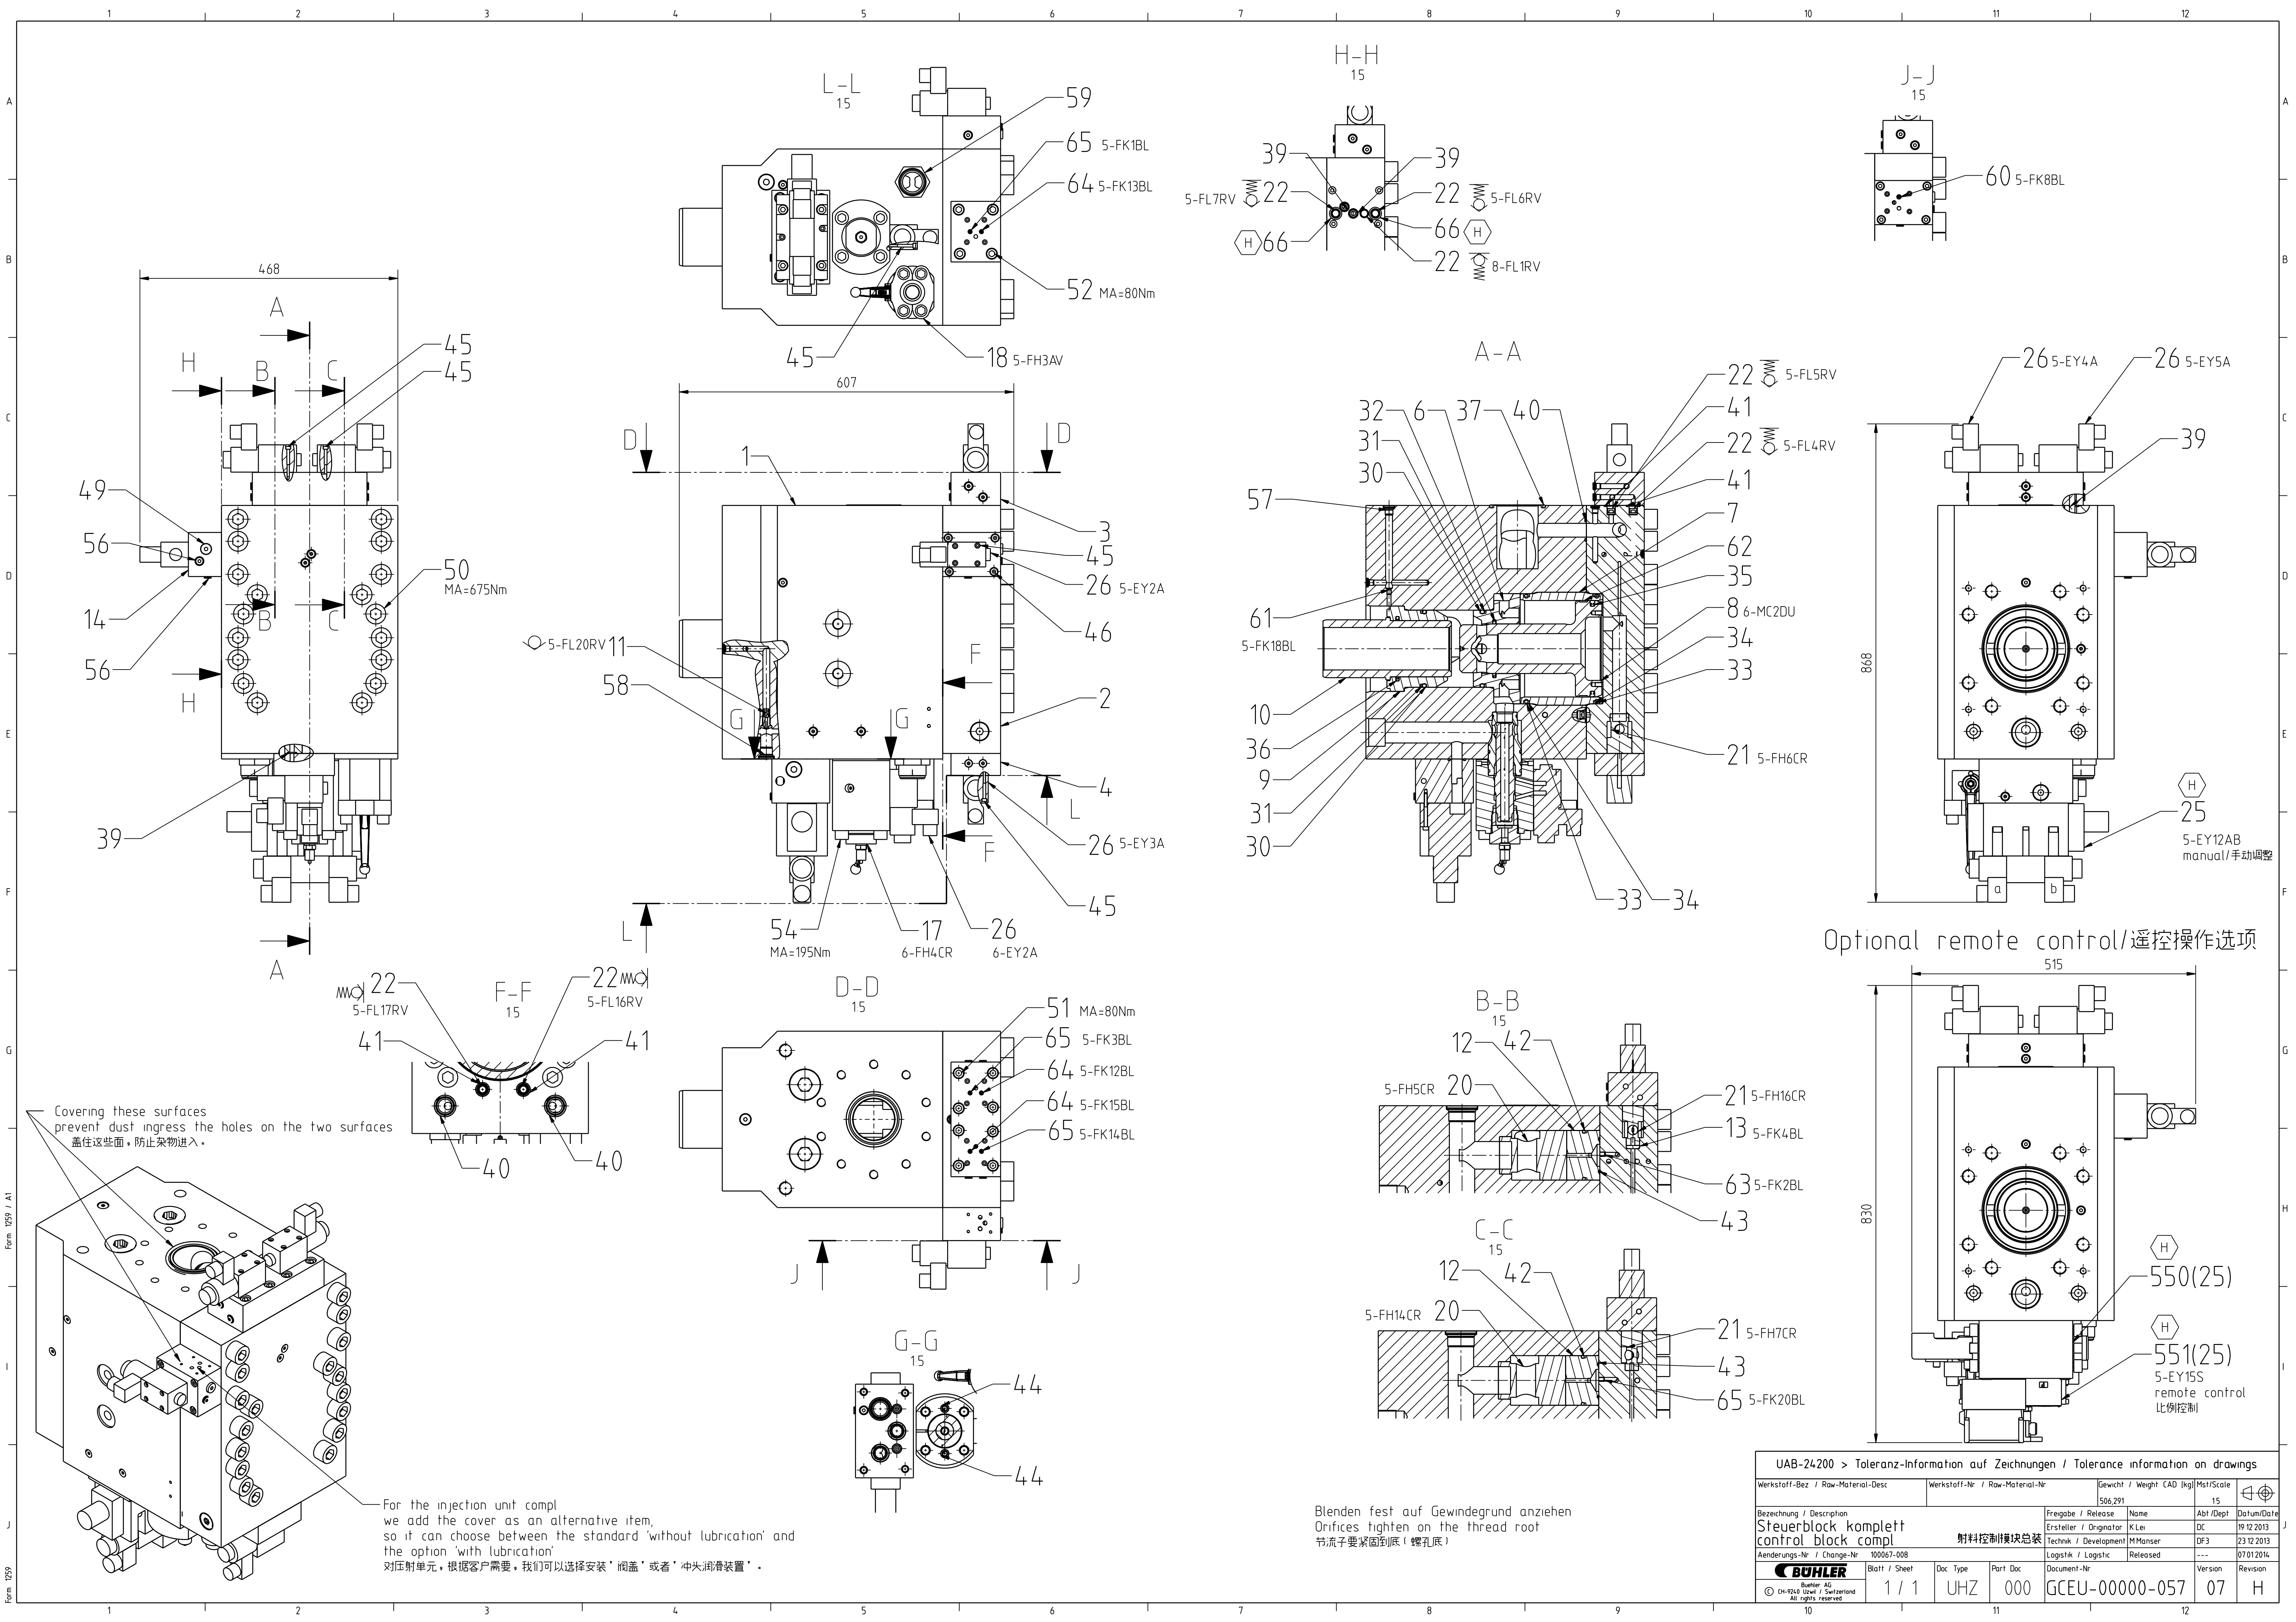

Covering these surfaces prevent dust ingress the holes on the two surfaces
盖住这些面，防止杂物进入。

For the injection unit compl we add the cover as an alternative item, so it can choose between the standard 'without lubrication' and the option 'with lubrication'
对注射单元，根据客户需要，我们可以选择安装‘阀盖’或者‘中央润滑装置’。

Blenden fest auf Gewindegrund anziehen
Orifices tighten on the thread root
节流子要紧固到底（螺孔底）

UAB-24200 > Toleranz-Information auf Zeichnungen / Tolerance information on drawings							
Werkstoff-Bez / Raw-Material-Desc		Werkstoff-Nr / Raw-Material-Nr		Gewicht / Weight CAD [kg]		Mst/Scale	
				506,291		15	
Bezeichnung / Description				Freigabe / Release		Abt./Dept	
Steuerblock komplett control block compl				Ersteller / Originator		K.Lie	
				Technik / Development		M.Manser	
Änderungs-Nr / Change-Nr				Logistik / Logistic		Released	
100067-008						---	
				Blatt / Sheet		Doc. Type	
Bühler AG CH-9200 Liestal / Switzerland All rights reserved				1 / 1		UHZ	
				Part Doc		000	
				Document-Nr		Version	
				GCEU-00000-057		07	
						Revision	
						H	