
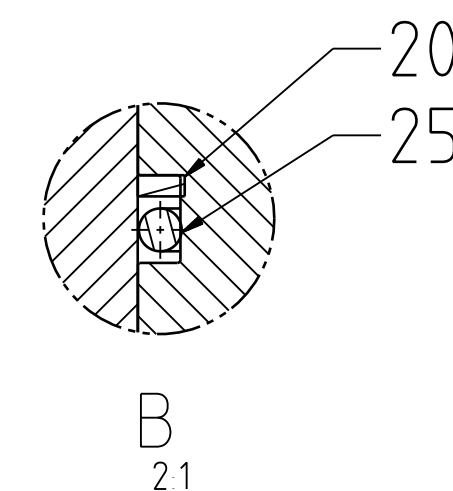






										Gusstoleranzen nach DIN ISO 8667 Cast/tolerances as per DIN ISO 8667										Werkstoff-Bez / Raw-Material-Desc										Werkstoff-Nr / Raw-Material-Nr										Gewicht / Weigth CAD [kg]										MSt/Scale																																																	
																														68145										12																																																											
NISO Saubere Fläche, Herstellverfahren freigelegt, Grabschneifen oder egalisiert ohne Zugabe Schweißmittel Maximale Ra 125 µm										Schweißen Wenn auf der Zeichnung nicht speziell vermerkt - gilt für Schweißverbindungen DIN EN 25817, Bewertungskategorie C - gilt für Kehlnähte nach DIN EN 25817, Bewertungskategorie C - gilt für Kehlnähte nach DIN EN 25817, Bewertungskategorie C Maximale Ra 125 µm										Welding If on the drawing not otherwise specified - for welded connection DIN EN 25817, Acceptance level C - for welded connection DIN EN 25817, Acceptance level C - for welded connection DIN EN 25817, Acceptance level C Maximaler Ra 125 µm										Bezeichnung / Description Ventilgruppe komplett valve group compl										Freigabe / Release Ersteller / Originator K.Lei Technik / Development M.Hanser Logistik / Logistic Released										Abt/Dept DECEO DF3 ---										Datum/Date 07.12.2010 07.12.2010 09.12.2010																																							
										Spannelemente Bezeichnung / Nennung M58se zoll Anlag vier spannelemente Bezeichnung / Din vier spannelemente Bezeichnung / Din										Spanning elements designation / Name M58se zoll Anlag vier spannelemente Bezeichnung / Din vier spannelemente Bezeichnung / Din										Änderungs-Nr / Change-Nr 100067-002										Blatt / Sheet 1 / 1										Doc Type UHZ										Part Doc 000										Document-Nr GCEU-10050-001										Version 02										Revision C									
										Clear surface Manufacturing method at workshops: discretely Roughly ground or levelled without additional material. Weld filler has to be level with surface Maximum roughness Ra 125 µm										Maximaler Ra 125 µm Maximum roughness Ra 125 µm										Maximaler Ra 125 µm Maximum roughness Ra 125 µm										BUEHLER Blatt / Sheet 1 / 1										Doc Type UHZ										Part Doc 000										Document-Nr GCEU-10050-001										Version 02										Revision C									