
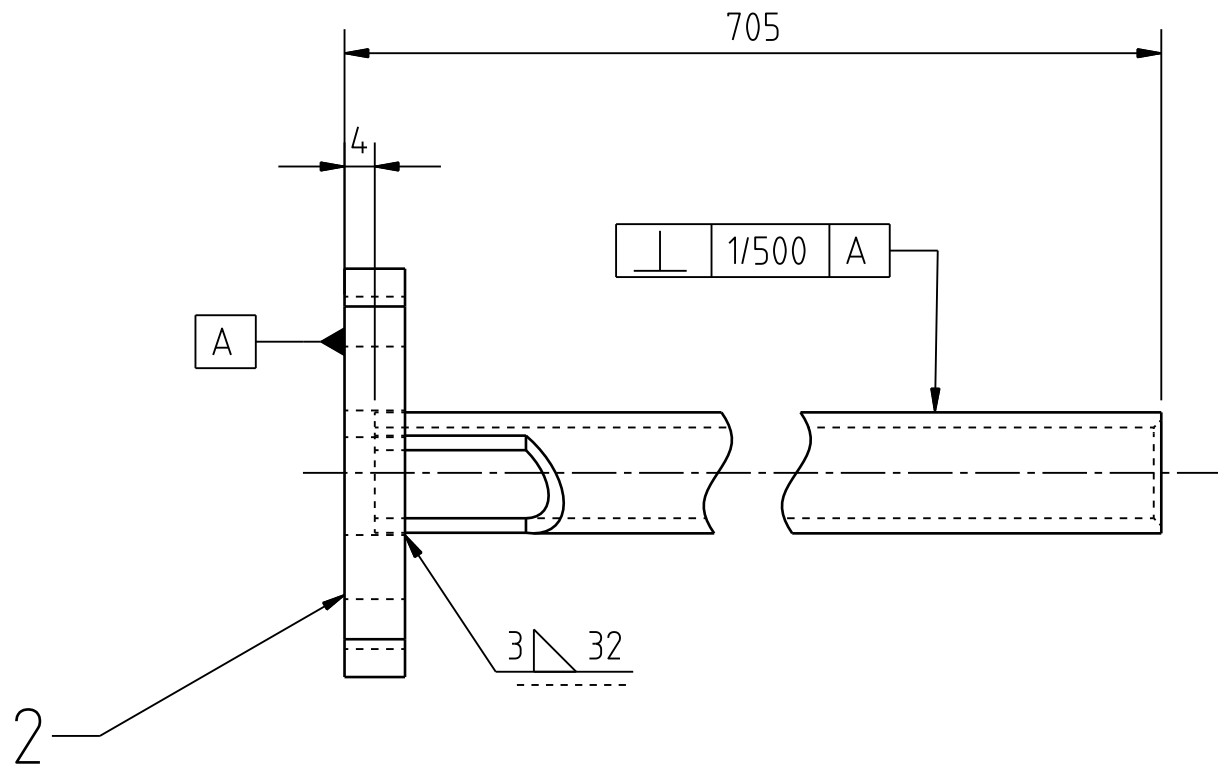


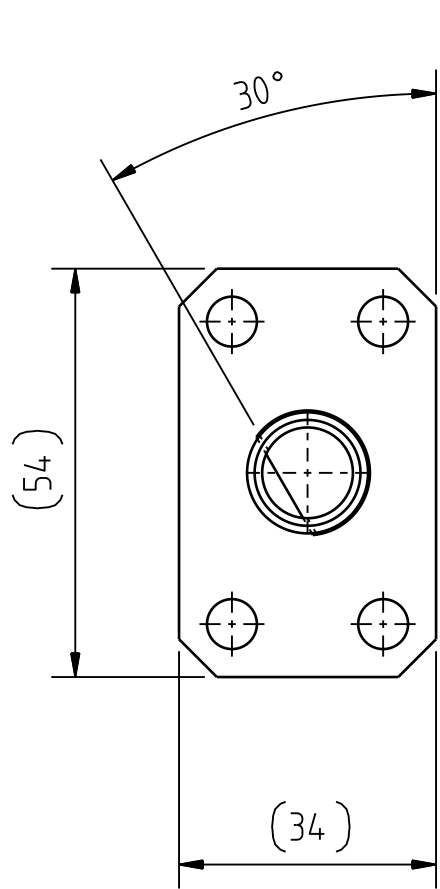

Gusstoleranzen nach DIN ISO 8062  
Casting tolerance as per DIN ISO 8062

|                                                                                       |  |                                |          |                           |                |           |                                                                                       |            |
|---------------------------------------------------------------------------------------|--|--------------------------------|----------|---------------------------|----------------|-----------|---------------------------------------------------------------------------------------|------------|
| Werkstoff-Bez / Raw-Material-Desc                                                     |  | Werkstoff-Nr / Raw-Material-Nr |          | Gewicht / Weight CAD [kg] |                | Mst/Scale |  |            |
|                                                                                       |  |                                |          | 0,788                     |                | 11        |                                                                                       |            |
| Bezeichnung / Description<br>Rohr komplett<br>pipe compl                              |  |                                |          | Freigabe / Release        |                | Name      | Abt /Dept                                                                             | Datum/Date |
|                                                                                       |  |                                |          | Ersteller / Originator    |                | M Spring  | DE4                                                                                   | 13 02 2013 |
|                                                                                       |  |                                |          | Technik / Development     |                | M Spring  | DE4                                                                                   | 20 02 2013 |
| Änderungs-Nr / Change-Nr 100499-000                                                   |  |                                |          | Logistik / Logistic       |                | Released  | ---                                                                                   | 0103 2013  |
|  |  | Blatt / Sheet                  | Doc Type | Part Doc                  | Document-Nr    |           | Version                                                                               | Revision   |
| © Buehler AG<br>CH-9240 Uzwil / Switzerland<br>All rights reserved                    |  | 1 / 1                          | UHZ      | 000                       | GKU -10873-001 |           | 00                                                                                    | A          |

|          |                                                                                                                                                                       |  |                                                                                                                                                                                                     |  |                                                                                                                                                                                   |  |                                                                                                   |  |      |  |    |  |           |  |                                          |  |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------|--|------|--|----|--|-----------|--|------------------------------------------|--|
| N10<br>✓ | Saubere Fläche, Herstellverfahren freigestellt<br>freigeschliffen oder egalisiert ohne Zugabe Schweißnaht<br>flächenbündig abgearbeitet<br>Maximale Rauheit Ra 125 µm |  | Schweißen<br>Wenn auf der Zeichnung nicht speziell vermerkt<br>- gilt fuer Schweissverbindungen DIN EN 25817, Bewertungsgruppe C<br>- gilt fuer die Kehlnahtbezeichnungen DIN EN 22553, Nahtdicke a |  | Welding<br>If on the drawing not otherwise specified<br>- for welded connection DIN EN 25817, Acceptance level C<br>- for welded fillet indication DIN EN 22553, Weld thickness a |  | Spanabnehmende Bearbeitung / Machining                                                            |  |      |  |    |  |           |  |                                          |  |
|          |                                                                                                                                                                       |  |                                                                                                                                                                                                     |  |                                                                                                                                                                                   |  | Masse ohne Tol. Angabe fuer spanabnehmende Bearbeitung / Dim without tol indication for machining |  |      |  |    |  |           |  |                                          |  |
|          | Maximale Rauheit Ra µm                                                                                                                                                |  | N10                                                                                                                                                                                                 |  | N9                                                                                                                                                                                |  | N7                                                                                                |  | N6   |  | N4 |  | N3        |  |                                          |  |
|          | Maximum roughness Ra µm                                                                                                                                               |  | 125                                                                                                                                                                                                 |  | 63                                                                                                                                                                                |  | 16                                                                                                |  | 08   |  | 02 |  | 01        |  |                                          |  |
|          |                                                                                                                                                                       |  | ueber                                                                                                                                                                                               |  | bis                                                                                                                                                                               |  | Toleranz                                                                                          |  | over |  | to |  | Tolerance |  | Kurze Schenkellaenge / Short side length |  |