
BTR (주)비티알수성
www.btrsoosung.com

Passion in Movement

Passion in Motion

Pencil






Thin

Freight



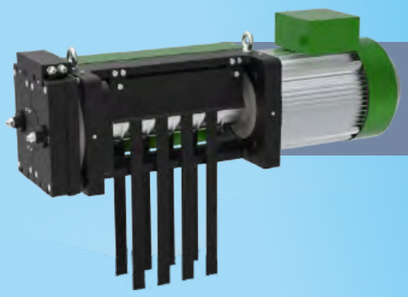

Belt

2026.02

BTR (주)비티알수성
www.btrsoosung.com

22770 인천시 서구 파랑로 466번길 88 (청라동 청라IHP첨단산업단지 내)
88, Parang-ro 466beon-gil, Seo-gu, Incheon, 22770, Republic of Korea (Incheon Hightech Park)
Tel. 032-575-6136 (+82 32 575 6136)
Fax. 032-575-6117 (+82 32 575 6117)
E-mail. kjs@btrsoosung.com
www.btrsoosung.com

Technical parameters may be changed to variations without notice.

2026.02

www.btrsoosung.com

ISO-9001, 45001




CSA & CE Certificate




Patents





GEARLESS TRACTION MACHINE

BTR® SOOSUNG

"고객에게 신뢰를 받고, 모든 직원에게 자부심을 심어주는 국내 초일류 회사"

글로벌 엘리베이터 업체의 까다로운 품질과 성능을 만족하여 현대엘리베이터, TKE, 오티스, 미쓰비시, 후지텍에 다년간 공급한 경험을 통해 국내시장의 60% 이상을 점유하여 업계의 "Game Changer"로 도약하고 있습니다.
스마트 물류센터, 시험타워 그리고 조립라인을 구현하여 고객 만족을 극대화하고자 총력을 다하고 있습니다. 또한 매년 10회 이상의 해외 주요 전시회를 참가하고 미국, 캐나다 CSA/US(UL)인증 및 유럽 CE인증을 취득하여 동남아를 비롯한 세계시장 개척도 시작하였습니다.
최고의 품질과 서비스 제공이 "존재의 이유"라는 경영철학을 바탕으로 고객의 신뢰와 사랑을 받으며 함께 발전하는 회사를 만들고자 최선을 다하고 있습니다.

■ 성장사업 제품 육성 ■ Market Share 확대 ■ 新성장동력 발굴, 전개 ■ 新조직문화정립 ■ 핵심인재 육성

우리의 파트너사

자이엘리베이터 · TKE · OTIS · MITSUBISHI ELECTRIC Changes for the Better · FUJITEC · 현대엘리베이터

History (연혁)

2010 주식회사 비티알수성 설립

2012 CE, CSA 인증서 취득
TRUMP250, TRUMP380
NUMEN, NUMEN3

2013 CE인증서 취득
NUMEN3

2014 CE인증서 취득
NUMEN5

2017 인천 청라 IHP 신공장
첨단산업단지 부지 매입

2018 ISO 인증서 취득 (NUMEN5)
-에스컬레이터 시험인증서 취득 (역주행방지)
-연구개발전담부서 설립

2019 인천 청라 IHP 신공장
준공 및 확장이전

2020 16톤 기어리스 TM 세계최초개발

2023 이노비즈(INNOBIZ) 인증 취득

2024 메인비즈(MAINBIZ) 인증 취득
벤처기업(Venture Enterprise) 인증 취득
신공장 조립라인 구축

2025 54m 테스트타워 완공
기업부설연구소 설립
CE인증서 취득
DIANA3, DIANA6, DIANA7
VENZ8, VENZ9
NUMEN2, NUMEN3M, NUMEN3B, NUMEN4, NUMEN5






Pencil

06 DIANA3
08 DIANA6 (Φ240)
10 DIANA6 (Φ320)
12 DIANA7
14 VENZ8 (1:1)
16 VENZ8 (2:1)
18 VENZ9

Thin

20 NUMEN
22 NUMEN2
24 NUMEN3
26 NUMEN3B
28 NUMEN4
30 NUMEN5
32 NUMENDB2

Freight

34 TRUMP250
36 TRUMP380 (1:1)
38 TRUMP380 (2:1)
40 TRUMP380L
42 TRUMP328

Belt


44 PANTOM1 (300~1000kg)
46 PANTOM1 (1150,1275kg)

※ 당사제품을 하부형으로 적용시는 일부 구조와 가격이 달라지므로 당사에 별도 문의 바랍니다.


제품적용 Map

"고객에게 신뢰를 받고, 모든 직원에게 자부심을 심어주는 국내 초일류 회사"

1 : 1 Roping Scope

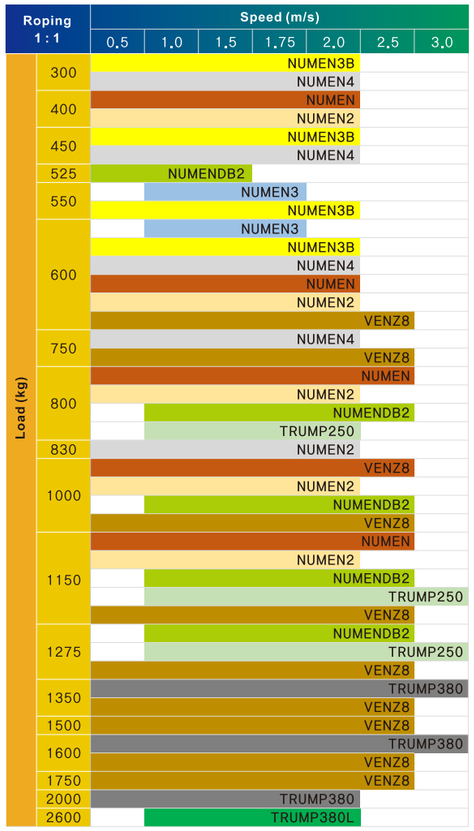

2 : 1 Roping Scope

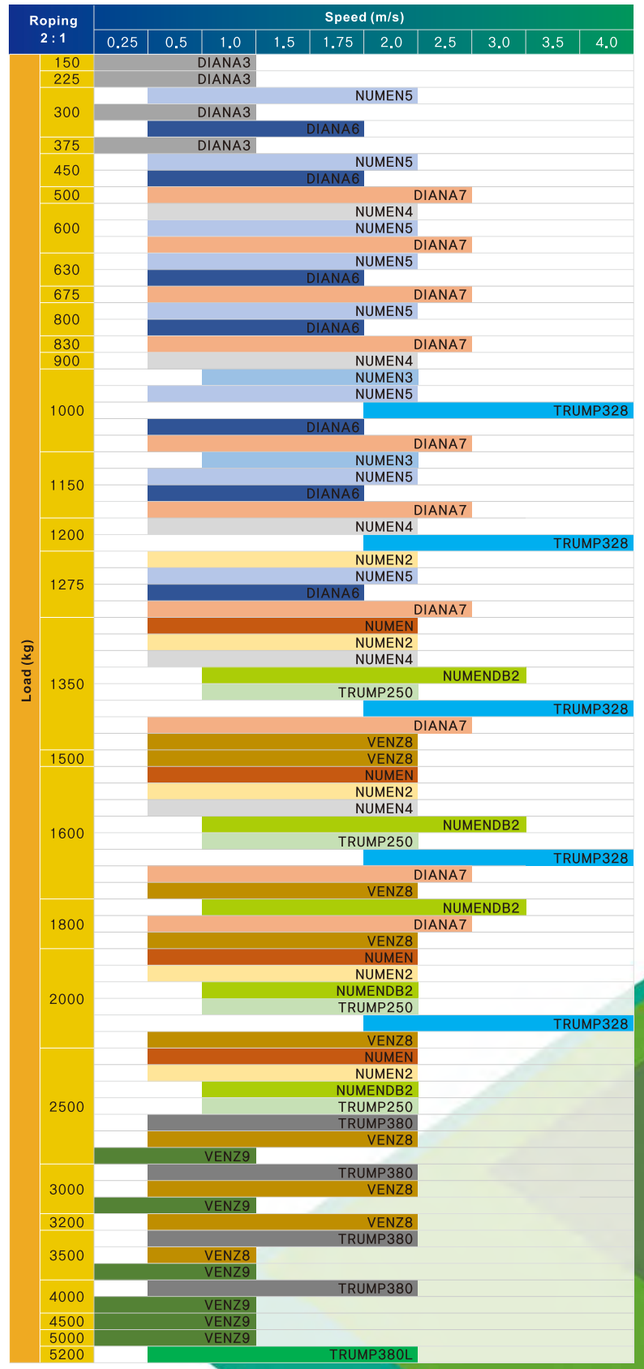




DIANA3

(Sheave Φ240)

Max Axle Load		2500 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		24
IP Rating		IP 41
Brake	Current	2 x 1.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 300 [N·m]

Dimension

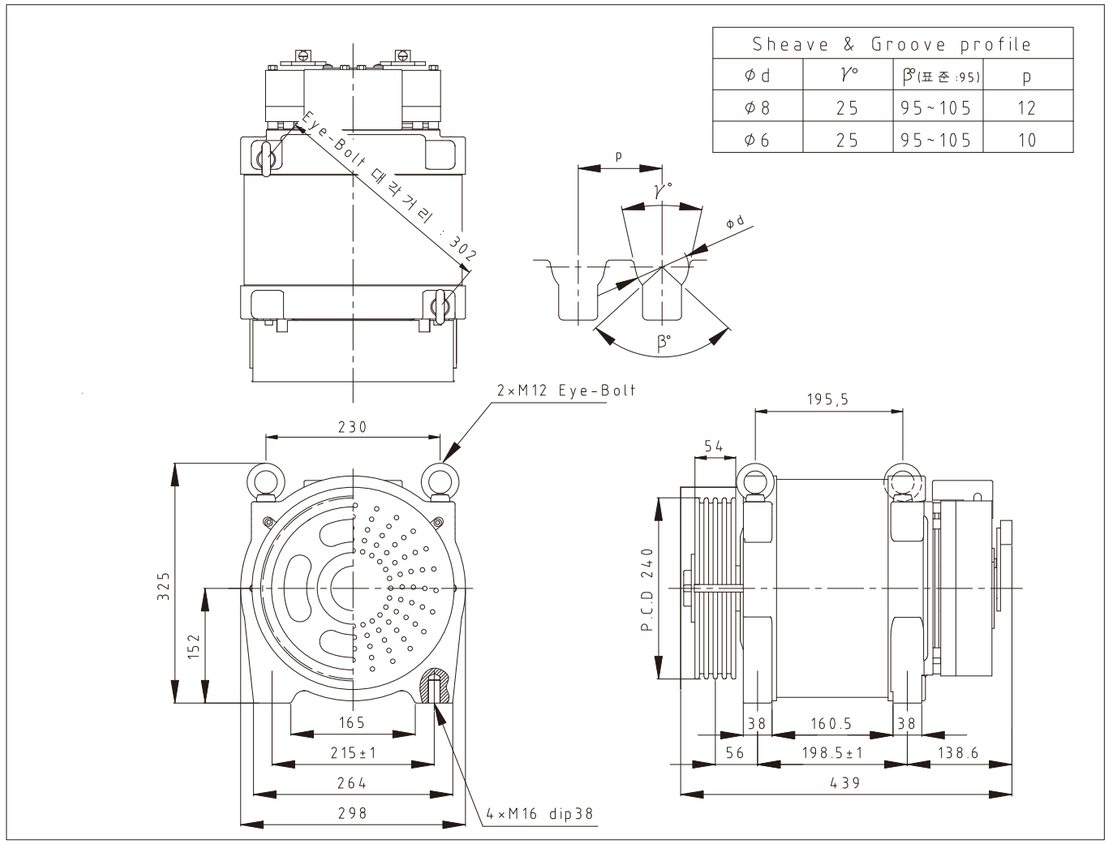

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
DIANA3-025-150-2	2:1	150	0.25	0.25	340	3	8	40	60	240	Φ6x4 (Φ8x3)	250
DIANA3-05-150-2			0.5	0.5		3	16	80				
DIANA3-10-150-2			1.0	1		4	31.8	159				
DIANA3-025-225-2		225	0.25	0.38		5	8	40	90			
DIANA3-05-225-2			0.5	0.75		5	16	80				
DIANA3-10-225-2			1.0	1.5		6	31.8	159				
DIANA3-025-300-2		300	0.25	0.5		6	8	40	120		Φ6x5 (Φ8x3)	
DIANA3-05-300-2			0.5	1		6	16	80				
DIANA3-10-300-2			1.0	2		8	31.8	159				
DIANA3-025-375-2		375	0.25	0.63		8	8	40	150		Φ6x5 (Φ8x4)	
DIANA3-05-375-2			0.5	1.3		8	16	80				
DIANA3-10-375-2			1.0	2.5		9	31.8	159				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

PENCIL




DIANA6


(Sheave Φ240)

Max Axle Load		5000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		24
IP Rating		IP 41
Brake	Current	2 x 1.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 900 [N·m]

Dimension



Sheave & Groove profile							
Sheave P.C.D	Rope No.	a	b	Φd	γ°	β°(표준:95)	p
Φ320	8,9R	105.5	114	Φ8	25	95~105	12
	~7R	93.5	90				
Φ240	~10R	105.5	114	Φ6	25	95~105	11
	11R	105.5	114	Φ6	25	95~105	10

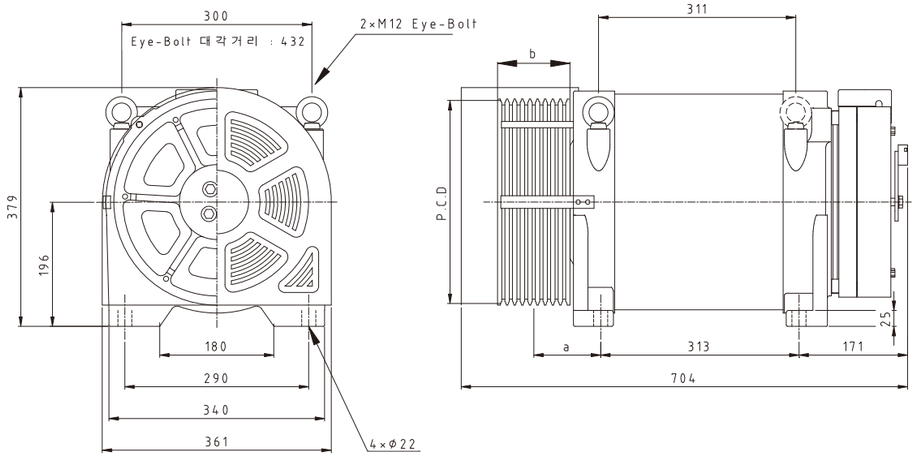

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
DIANA6-05-300-2	2:1	300	0.5	1	340	4	16	80	120	240	Φ6x6	197
DIANA6-10-300-2			1.0	2		5	31.8	159				
DIANA6-15-300-2			1.5	3		8	47.8	239				
DIANA6-17.5-300-2			1.75	3.5		9	55.8	279				
DIANA6-05-450-2		450	0.5	1.5		5	16	80	181		Φ6x7	217
DIANA6-10-450-2			1.0	3		7	31.8	159				
DIANA6-15-450-2			1.5	4.5		12	47.8	239				
DIANA6-17.5-450-2			1.75	5.3		13	55.8	279				
DIANA6-05-630-2		630	0.5	2.1		7	16	80	253		Φ6x7	237
DIANA6-10-630-2			1.0	4.2		10	31.8	159				
DIANA6-15-630-2			1.5	6.3		16	47.8	239				
DIANA6-17.5-630-2			1.75	7.4		18	55.8	279				
DIANA6-05-800-2		800	0.5	2.7		8	16	80	321		Φ6x8	259
DIANA6-10-800-2			1.0	5.3		12	31.8	159				
DIANA6-15-800-2			1.5	8		20	47.8	239				
DIANA6-17.5-800-2			1.75	9.4		21	55.8	279				
DIANA6-05-1000-2		1000	0.5	3.3		9	16	80	401		Φ6x9	280
DIANA6-10-1000-2			1.0	6.7		15	31.8	159				
DIANA6-15-1000-2			1.5	10		24	47.8	239				
DIANA6-17.5-1000-2			1.75	11.7		27	55.8	279				
DIANA6-05-1150-2		1150	0.5	3.7		11	16	80	461		Φ6x10	300
DIANA6-10-1150-2			1.0	7.5		17	31.8	159				
DIANA6-15-1150-2			1.5	11.2		26	47.8	239				
DIANA6-17.5-1150-2			1.75	13.2		29	55.8	279				
DIANA6-05-1275-2		1275	0.5	4.3		12	16	80	511		Φ6x10 or Φ6x11	325
DIANA6-10-1275-2			1.0	8.5		20	31.8	159				
DIANA6-15-1275-2			1.5	12.7		27	47.8	239				
DIANA6-17.5-1275-2			1.75	14.9		32	55.8	279				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.
[주의] Φ6x11R의 경우, 피치 10mm (좌측 Sheave&Groove profile 참조)

PENCIL




DIANA6


(Sheave Φ320)

Max Axle Load		5000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		24
IP Rating		IP 41
Brake	Current	2 x 1.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 900 [N·m]

Dimension



Sheave & Groove profile							
Sheave P.C.D	Rope No.	a	b	Φd	γ°	β°(표준 :95)	p
Φ320	8,9R	105.5	114	Φ8	25	95~105	12
	~7R	93.5	90				
Φ240	~10R	105.5	114	Φ6	25	95~105	11
	11R	105.5	114	Φ6	25	95~105	10

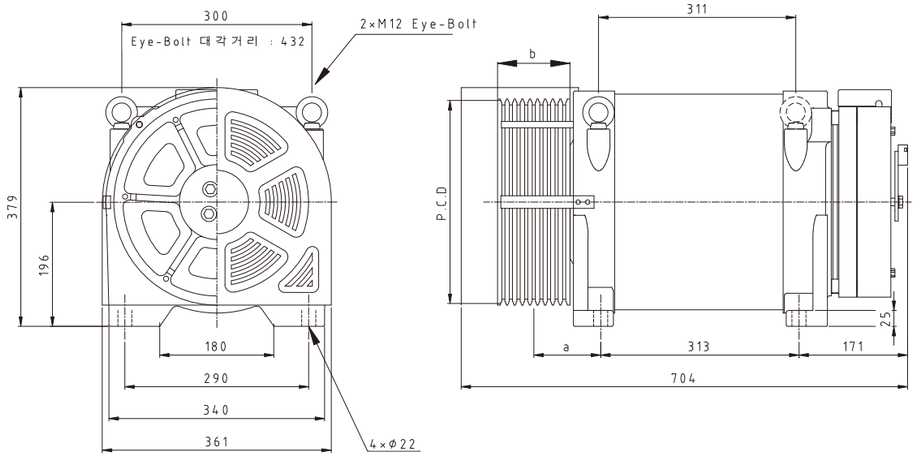

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
DIANA6-05-300-2	2:1	300	0.5	1	340	4	12	60	160	320	Φ8x4	197
DIANA6-10-300-2			1.0	2		5	23.8	119				
DIANA6-15-300-2			1.5	3		8	35.8	179				
DIANA6-17.5-300-2			1.75	3.5		9	41.8	209				
DIANA6-05-450-2		450	0.5	1.5		5	12	60	240		Φ8x4	217
DIANA6-10-450-2			1.0	3		7	23.8	119				
DIANA6-15-450-2			1.5	4.5		12	35.8	179				
DIANA6-17.5-450-2			1.75	5.3		13	41.8	209				
DIANA6-05-630-2		630	0.5	2.1		7	12	60	340		Φ8x5	237
DIANA6-10-630-2			1.0	4.2		10	23.8	119				
DIANA6-15-630-2			1.5	6.3		16	35.8	179				
DIANA6-17.5-630-2			1.75	7.4		18	41.8	209				
DIANA6-05-800-2		800	0.5	2.7		8	12	60	430		Φ8x6	259
DIANA6-10-800-2			1.0	5.3		12	23.8	119				
DIANA6-15-800-2			1.5	8		20	35.8	179				
DIANA6-17.5-800-2			1.75	9.4		21	41.8	209				
DIANA6-05-1000-2		1000	0.5	3.3		9	12	60	535		Φ8x7	280
DIANA6-10-1000-2			1.0	6.7		15	23.8	119				
DIANA6-15-1000-2			1.5	10		24	35.8	179				
DIANA6-17.5-1000-2			1.75	11.7		27	41.8	209				
DIANA6-05-1150-2		1150	0.5	3.7		11	12	60	600		Φ8x8	300
DIANA6-10-1150-2			1.0	7.5		17	23.8	119				
DIANA6-15-1150-2			1.5	11.2		26	35.8	179				
DIANA6-17.5-1150-2			1.75	13.2		29	41.8	209				
DIANA6-05-1275-2		1275	0.5	4.3		12	12	60	681		Φ8x9	325
DIANA6-10-1275-2			1.0	8.5		20	23.8	119				
DIANA6-15-1275-2			1.5	12.7		27	35.8	179				
DIANA6-17.5-1275-2			1.75	14.9		32	41.8	209				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

PENCIL




DIANA7

(Sheave Φ400)

Max Axle Load		7000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32
IP Rating		IP 41
Brake	Current	2 x 1.8 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 1500 [N·m]

Dimension

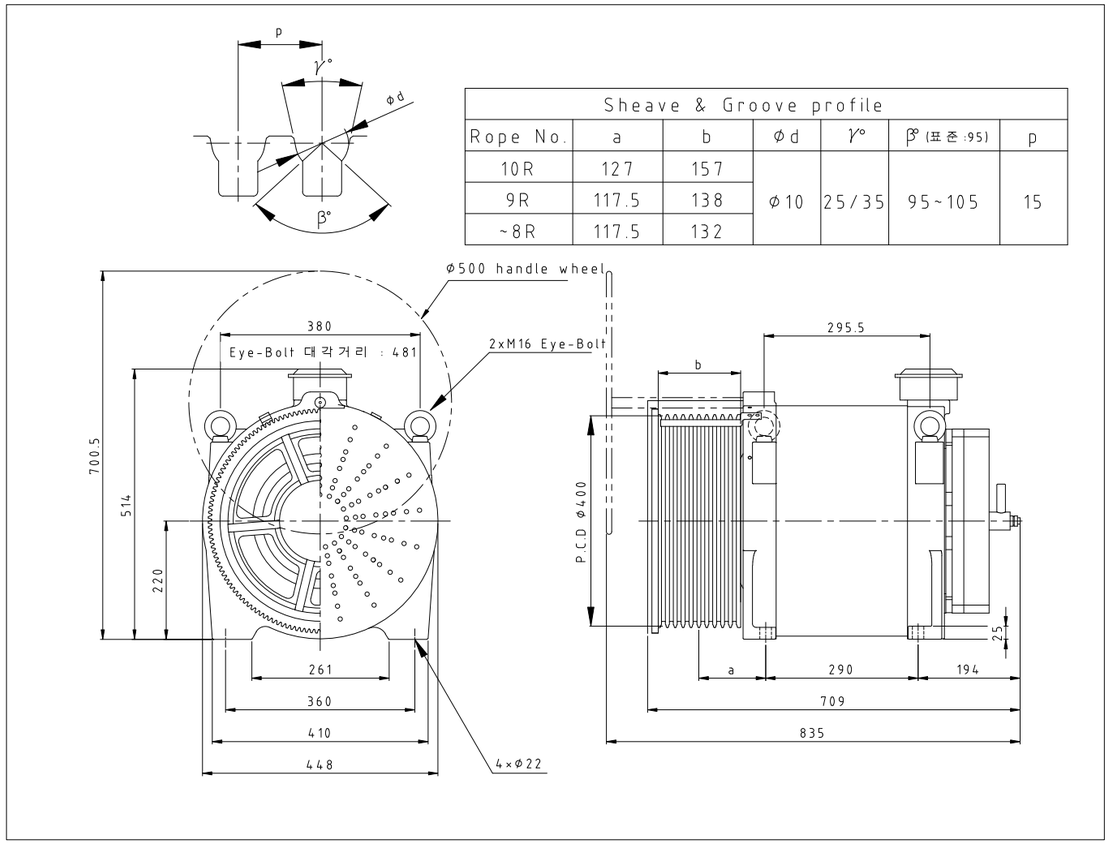


Sheave & Groove profile						
Rope No.	a	b	Φd	γ°	β° (표준 :95)	p
10R	127	157	Φ10	25/35	95~105	15
9R	117.5	138				
~8R	117.5	132				

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
DIANA7-05-500-2	2:1	500	0.5	1.7	340	9	12.8	48	334	400	Φ10x3 or Φ10x4	400
DIANA7-10-500-2			1.0	3.3		9	25.3	95				
DIANA7-15-500-2			1.5	5		12	38.1	143				
DIANA7-17.5-500-2			1.75	5.8		14	44.5	167				
DIANA7-20-500-2			2.0	6.7		15	50.9	191				
DIANA7-25-500-2			2.5	8.4		19	63.7	239				
DIANA7-05-600-2		600	0.5	2		10	12.8	48	401		Φ10x4	400
DIANA7-10-600-2			1.0	4		10	25.3	95				
DIANA7-15-600-2			1.5	6		14	38.1	143				
DIANA7-17.5-600-2			1.75	7		16	44.5	167				
DIANA7-20-600-2			2.0	8		18	50.9	191				
DIANA7-25-600-2			2.5	10		22	63.7	239				
DIANA7-05-675-2		675	0.5	2.3		12	12.8	48	451		Φ10x4 or Φ10x5	400
DIANA7-10-675-2			1.0	4.5		12	25.3	95				
DIANA7-15-675-2			1.5	6.8		16	38.1	143				
DIANA7-17.5-675-2			1.75	7.9		18	44.5	167				
DIANA7-20-675-2			2.0	9		20	50.9	191				
DIANA7-25-675-2			2.5	11.3		25	63.7	239				
DIANA7-05-830-2		830	0.5	2.8		14	12.8	48	555		Φ10x4 or Φ10x5	400
DIANA7-10-830-2			1.0	5.5		14	25.3	95				
DIANA7-15-830-2			1.5	8.3		19	38.1	143				
DIANA7-17.5-830-2			1.75	9.7		22	44.5	167				
DIANA7-20-830-2			2.0	11.1		24	50.9	191				
DIANA7-25-830-2			2.5	13.9		31	63.7	239				
DIANA7-05-1000-2		1000	0.5	3.3		17	12.8	48	669		Φ10x5 or Φ10x6	400
DIANA7-10-1000-2			1.0	6.7		17	25.3	95				
DIANA7-15-1000-2			1.5	10		23	38.1	143				
DIANA7-17.5-1000-2			1.75	11.7		27	44.5	167				
DIANA7-20-1000-2			2.0	13.4		29	50.9	191				
DIANA7-25-1000-2			2.5	16.7		37	63.7	239				
DIANA7-05-1150-2		1150	0.5	3.8		19	12.8	48	765		Φ10x7	400
DIANA7-10-1150-2			1.0	7.7		19	25.3	95				
DIANA7-15-1150-2			1.5	11.5		26	38.1	143				
DIANA7-17.5-1150-2			1.75	13.5		30	44.5	167				
DIANA7-20-1150-2			2.0	15.4		33	50.9	191				
DIANA7-25-1150-2			2.5	19.2		42	63.7	239				
DIANA7-05-1275-2		1275	0.5	4.3		19	12.8	48	852		Φ10x7	420
DIANA7-10-1275-2			1.0	8.5		19	25.3	95				
DIANA7-15-1275-2			1.5	12.7		28	38.1	143				
DIANA7-17.5-1275-2			1.75	14.9		33	44.5	167				
DIANA7-20-1275-2			2.0	17		37	50.9	191				
DIANA7-25-1275-2			2.5	21.3		46	63.7	239				
DIANA7-05-1350-2		1350	0.5	4.5		20	12.8	48	905		Φ10x8	430
DIANA7-10-1350-2			1.0	9		20	25.3	95				
DIANA7-15-1350-2			1.5	13.5		30	38.1	143				
DIANA7-17.5-1350-2			1.75	15.8		35	44.5	167				
DIANA7-20-1350-2			2.0	18		39	50.9	191				
DIANA7-25-1350-2			2.5	22.5		49	63.7	239				
DIANA7-05-1600-2		1600	0.5	5.3		24	12.8	48	1073		Φ10x9	430
DIANA7-10-1600-2			1.0	10.7		24	25.3	95				
DIANA7-15-1600-2			1.5	16		35	38.1	143				
DIANA7-17.5-1600-2			1.75	18.7		40	44.5	167				
DIANA7-20-1600-2			2.0	21.4		46	50.9	191				
DIANA7-25-1600-2			2.5	26.7		58	63.7	239				
DIANA7-05-1800-2		1800	0.5	6		30	12.8	48	1203		Φ10x10	450
DIANA7-10-1800-2			1.0	12		30	25.3	95				
DIANA7-15-1800-2			1.5	18		38	38.1	143				
DIANA7-17.5-1800-2			1.75	21		45	44.5	167				
DIANA7-20-1800-2			2.0	24		52	50.9	191				
DIANA7-25-1800-2			2.5	30		62	63.7	239				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


PENCIL

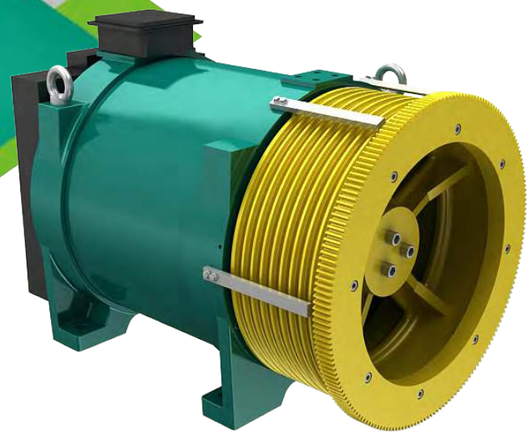

VENZ8

1:1 Roping		(Sheave Φ520, Φ480)
Max Axle Load		9000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32
IP Rating		IP 41
Brake	Current	2 x 2.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 3500 [N·m]

Dimension

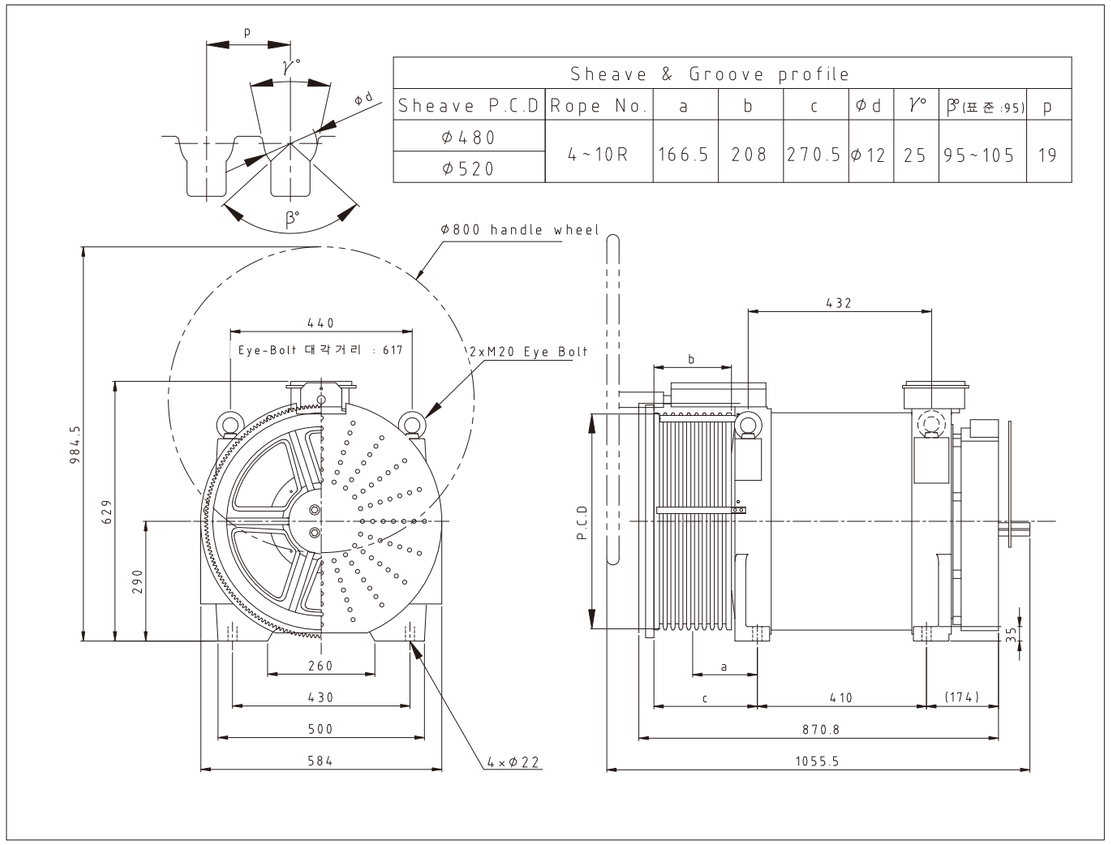


Sheave & Groove profile								
Sheave P.C.D	Rope No.	a	b	c	Φd	γ°	β°(표준:95)	p
Φ480	4~10R	166.5	208	270.5	Φ12	25	95~105	19
Φ520								

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
VENZ8-05-600-1	1:1	600	0.5	2	340	12	4.8	18	1061	520	Φ12x4	720
VENZ8-10-600-1			1.0	4		12	9.9	37				
VENZ8-15-600-1			1.5	6		21	14.7	55				
VENZ8-17.5-600-1			1.75	7		21	17.1	64				
VENZ8-20-600-1			2.0	8		21	19.5	73				
VENZ8-25-600-1			2.5	10		31	24.5	92				
VENZ8-05-750-1		750	0.5	2.5		15	4.8	18	1326		Φ12x5	720
VENZ8-10-750-1			1.0	5		15	9.9	37				
VENZ8-15-750-1			1.5	7.5		26	14.7	55				
VENZ8-17.5-750-1			1.75	8.8		26	17.1	64				
VENZ8-20-750-1			2.0	10		26	19.5	73				
VENZ8-25-750-1			2.5	12.5		39	24.5	92				
VENZ8-05-1000-1		1000	0.5	3.3		19	4.8	18	1753		Φ12x6	740
VENZ8-10-1000-1			1.0	6.7		19	9.9	37				
VENZ8-15-1000-1			1.5	10		34	14.7	55				
VENZ8-17.5-1000-1			1.75	11.7		34	17.1	64				
VENZ8-20-1000-1			2.0	13.4		34	19.5	73				
VENZ8-25-1000-1			2.5	16.7		51	24.5	92				
VENZ8-05-1150-1		1150	0.5	3.8		22	4.8	18	2016		Φ12x7	740
VENZ8-10-1150-1			1.0	7.7		22	9.9	37				
VENZ8-15-1150-1			1.5	11.5		39	14.7	55				
VENZ8-17.5-1150-1			1.75	13.4		39	17.1	64				
VENZ8-20-1150-1			2.0	15.4		39	19.5	73				
VENZ8-25-1150-1			2.5	19.2		58	24.5	92				
VENZ8-05-1275-1		1275	0.5	4.3		24	4.8	18	2281		Φ12x8	780
VENZ8-10-1275-1			1.0	8.5		24	9.9	37				
VENZ8-15-1275-1			1.5	12.8		44	14.7	55				
VENZ8-17.5-1275-1			1.75	14.9		44	17.1	64				
VENZ8-20-1275-1			2.0	17		44	19.5	73				
VENZ8-25-1275-1			2.5	21.3		65	24.5	92				
VENZ8-05-1350-1		1350	0.5	4.5		25	4.8	18	2388		Φ12x8	850
VENZ8-10-1350-1			1.0	9		25	9.9	37				
VENZ8-15-1350-1			1.5	13.5		46	14.7	55				
VENZ8-17.5-1350-1			1.75	15.8		46	17.1	64				
VENZ8-20-1350-1			2.0	18		46	19.5	73				
VENZ8-25-1350-1			2.5	22.6		69	24.5	92				
VENZ8-05-1500-1		1500	0.5	5		27	4.8	18	2653		Φ12x9	1100
VENZ8-10-1500-1			1.0	10		27	9.9	37				
VENZ8-15-1500-1			1.5	15		51	14.7	55				
VENZ8-17.5-1500-1			1.75	17.5		51	17.1	64				
VENZ8-20-1500-1			2.0	20		51	19.5	73				
VENZ8-25-1500-1			2.5	25.1		76	24.5	92				
VENZ8-05-1600-1		1600	0.5	5.3		29	4.8	18	2812		Φ12x10	1200
VENZ8-10-1600-1			1.0	10.7		29	9.9	37				
VENZ8-15-1600-1			1.5	16		55	14.7	55				
VENZ8-17.5-1600-1			1.75	18.7		55	17.1	64				
VENZ8-20-1600-1			2.0	21.4		55	19.5	73				
VENZ8-25-1600-1			2.5	26.7		82	24.5	92				
VENZ8-05-1750-1		1750	0.5	5.8		32	5.3	20	2817	480	Φ12x10	1200
VENZ8-10-1750-1			1.0	11.7		32	10.7	40				
VENZ8-15-1750-1			1.5	17.5		60	16	60				
VENZ8-17.5-1750-1			1.75	20.5		60	18.7	70				
VENZ8-20-1750-1			2.0	23.4		60	21.3	80				
VENZ8-25-1750-1			2.5	29.2		89	26.4	99				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


PENCIL

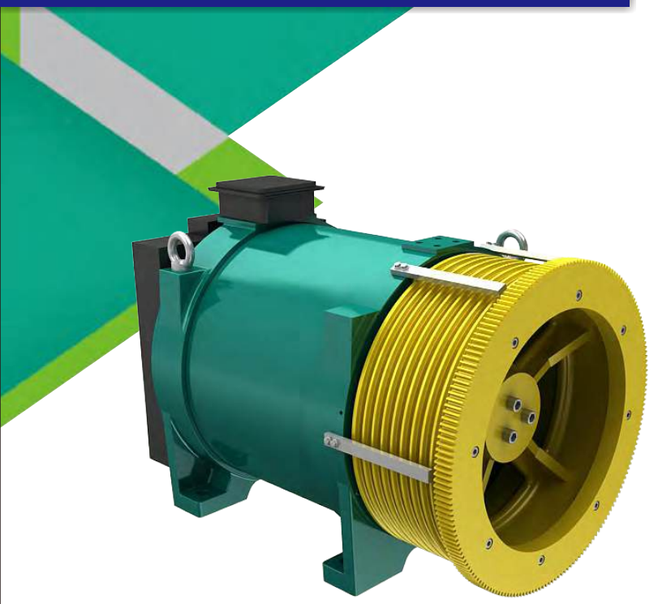

VENZ8

2:1 Roping		(Sheave Φ520, Φ480)
Max Axle Load		9000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32
IP Rating		IP 41
Brake	Current	2 x 2.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 3500 [N·m]

Dimension

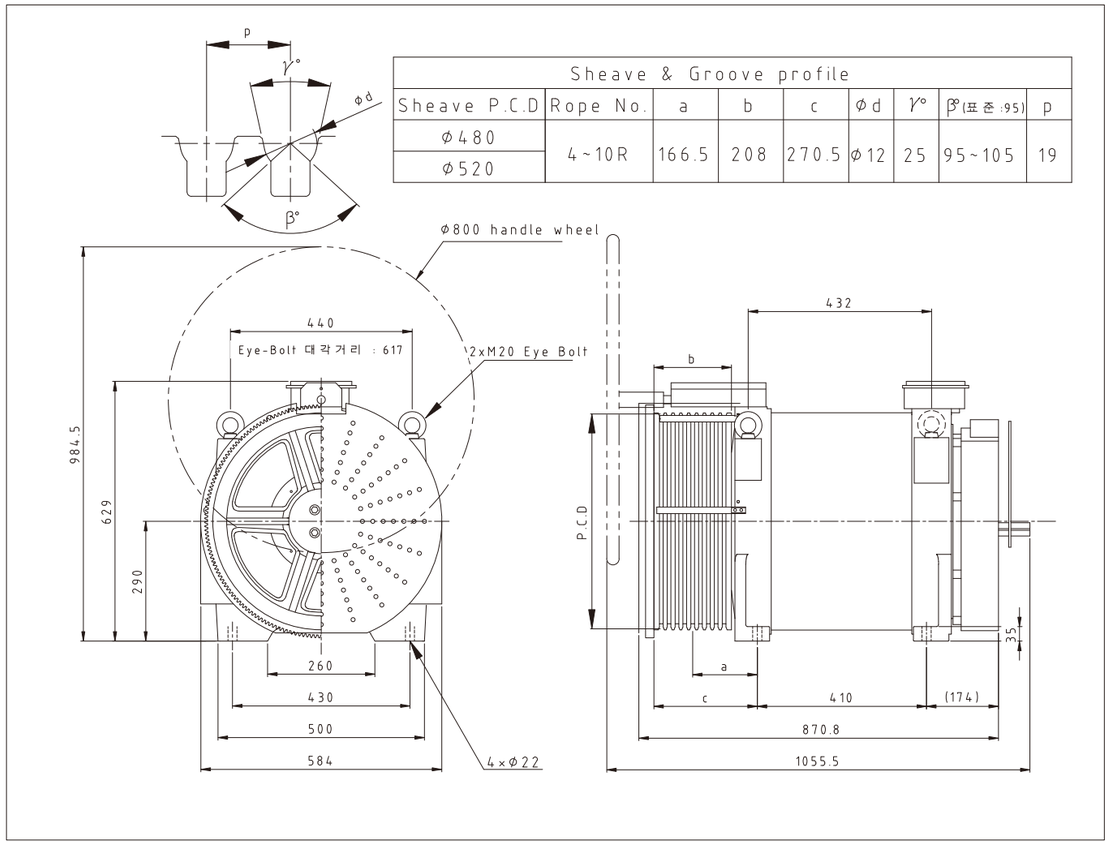

Sheave & Groove profile								
Sheave P.C.D	Rope No.	a	b	c	Φd	γ°	β°(표준:95)	p
Φ480	4~10R	166.5	208	270.5	Φ12	25	95~105	19
Φ520								

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
VENZ8-05-1350-2	2:1	1350	0.5	4.5	340	13	9.9	37	1173	520	Φ12x4 or Φ12x5	720
VENZ8-10-1350-2			1.0	9		23	19.5	73				
VENZ8-15-1350-2			1.5	13.5		35	29.3	110				
VENZ8-17.5-1350-2			1.75	15.8		40	34.4	129				
VENZ8-20-1350-2			2.0	18		46	39.2	147				
VENZ8-05-1500-2		1500	0.5	5		15	9.9	37	1303		Φ12x6	720
VENZ8-10-1500-2			1.0	10		26	19.5	73				
VENZ8-15-1500-2			1.5	15		39	29.3	110				
VENZ8-17.5-1500-2			1.75	17.5		45	34.4	129				
VENZ8-20-1500-2			2.0	20		51	39.2	147				
VENZ8-05-1600-2		1600	0.5	5.3		15	9.9	37	1390		Φ12x6	740
VENZ8-10-1600-2			1.0	10.7		27	19.5	73				
VENZ8-15-1600-2			1.5	16		41	29.3	110				
VENZ8-17.5-1600-2			1.75	18.7		47	34.4	129				
VENZ8-20-1600-2			2.0	21.4		54	39.2	147				
VENZ8-05-1800-2		1800	0.5	6		18	9.9	37	1564		Φ12x7	740
VENZ8-10-1800-2			1.0	12		31	19.5	73				
VENZ8-15-1800-2			1.5	18		46	29.3	110				
VENZ8-17.5-1800-2			1.75	21		54	34.4	129				
VENZ8-20-1800-2			2.0	24.1		61	39.2	147				
VENZ8-05-2000-2		2000	0.5	6.7		19	9.9	37	1737		Φ12x7	780
VENZ8-10-2000-2			1.0	13.4		34	19.5	73				
VENZ8-15-2000-2			1.5	20		51	29.3	110				
VENZ8-17.5-2000-2			1.75	23.4		59	34.4	129				
VENZ8-20-2000-2			2.0	26.7		67	39.2	147				
VENZ8-05-2500-2		2500	0.5	8.4		23	9.9	37	2172		Φ12x8	850
VENZ8-0.75-2500-2			0.75	12.5		42	14.7	55				
VENZ8-10-2500-2			1.0	16.7		42	19.5	73				
VENZ8-15-2500-2			1.5	25.1		63	29.3	110				
VENZ8-17.5-2500-2			1.75	29.2		74	34.4	129				
VENZ8-20-2500-2			2.0	33.4		84	39.2	147				
VENZ8-05-3000-2		3000	0.5	10		27	9.9	37	2606		Φ12x9	1100
VENZ8-10-3000-2			1.0	20		51	19.5	73				
VENZ8-15-3000-2			1.5	30.1		76	29.3	110				
VENZ8-17.5-3000-2			1.75	35.1		88	34.4	129				
VENZ8-20-3000-2			2.0	40.1		101	39.2	147				
VENZ8-05-3200-2		3200	0.5	10.7		29	9.9	37	2780		Φ12x10	1200
VENZ8-10-3200-2			1.0	21.4		55	19.5	73				
VENZ8-15-3200-2			1.5	32.1		82	29.3	110				
VENZ8-17.5-3200-2			1.75	37.4		95	34.4	129				
VENZ8-20-3200-2			2.0	42.8		108	39.2	147				
VENZ8-05-3500-2		3500	0.5	11.7		32	10.7	40	2807	480	Φ12x10	1200
VENZ8-10-3500-2			1.0	23.4		60	21.3	80				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

PENCIL




VENZ9

(Sheave Φ520)

Max Axle Load		15000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32
IP Rating		IP 41
Brake	Current	2 x 3.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 5500 [N·m]

Dimension

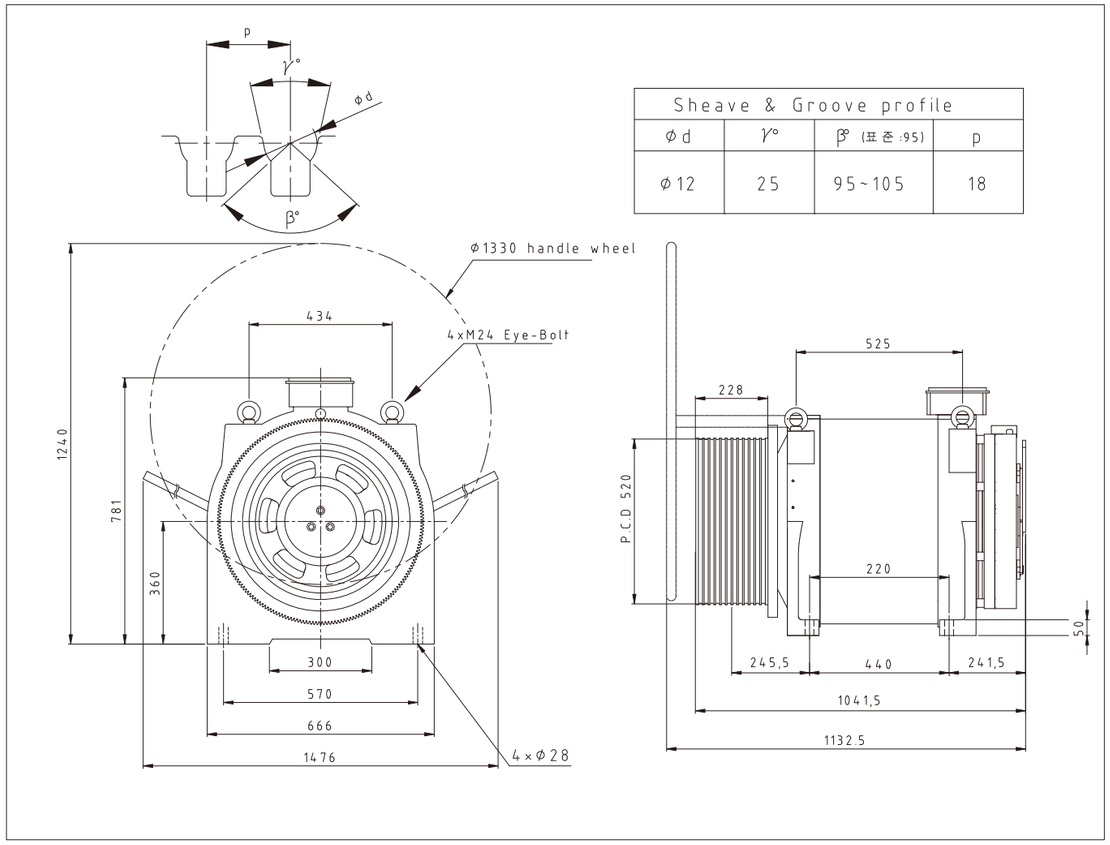

Sheave & Groove profile			
Φd	γ°	β° (표준 :95)	p
Φ12	25	95~105	18

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
VENZ9-025-2500-2	2:1	2500	0.25	4.2	340	22	4.8	18	2170	520	Φ12x6	1600
VENZ9-05-2500-2			0.5	8.4		22	9.9	37				
VENZ9-10-2500-2			1.0	16.7		39	19.5	73				
VENZ9-025-3000-2		3000	0.25	5		26	4.8	18	2607		Φ12x8	
VENZ9-05-3000-2			0.5	10		26	9.9	37				
VENZ9-10-3000-2			1.0	20.1		47	19.5	73				
VENZ9-025-3500-2		3500	0.25	5.8		31	4.8	18	3041		Φ12x9	
VENZ9-05-3500-2			0.5	11.7		31	9.9	37				
VENZ9-10-3500-2			1.0	23.4		55	19.5	73				
VENZ9-025-4000-2		4000	0.25	6.7		35	4.8	18	3476		Φ12x10	
VENZ9-05-4000-2			0.5	13.4		35	9.9	37				
VENZ9-10-4000-2			1.0	26.7		63	19.5	73				
VENZ9-025-4500-2		4500	0.25	7.5		39	4.8	18	3910		Φ12x11	
VENZ9-05-4500-2			0.5	15		39	9.9	37				
VENZ9-10-4500-2			1.0	30.1		71	19.5	73				
VENZ9-025-5000-2		5000	0.25	8.4		43	4.8	18	4344		Φ12x12	
VENZ9-05-5000-2			0.5	16.7		43	9.9	37				
VENZ9-10-5000-2			1.0	33.4		78	19.5	73				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

PENCIL




NUMEN


(Sheave Φ410, Φ500)

Max Axle Load		7000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		30
IP Rating		IP 41
Brake	Current	2 x 1.7 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 2175 [N·m]

Dimension



Groove & Sheave profile					
Sheave P.C.D	d	γ°	β°(표준:105)	p	a
φ500	φ12	25	95~105	19	149
φ500	φ10	25	95~105	16	149
φ410	φ10	25	95~105	14	150

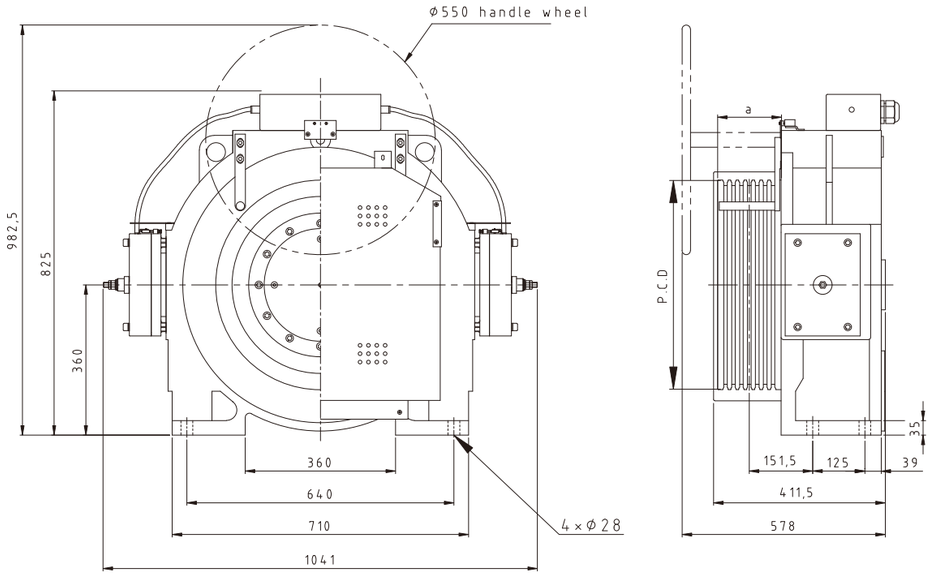

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMEN-05-400-1	1:1	400	0.5	1.4	320	6	4.8	19	680	500	Φ12x3	780
NUMEN-10-400-1			1.0	2.7		8	9.5	38				
NUMEN-15-400-1			1.5	4		11	14.2	57				
NUMEN-17.5-400-1			1.75	4.7		13	16.7	67				
NUMEN-20-400-1			2.0	5.4		15	19	76				
NUMEN-05-600-1		600	0.5	2		7	4.8	19	1020		Φ12x4	
NUMEN-10-600-1			1.0	4		11	9.5	38				
NUMEN-15-600-1			1.5	6.1		15	14.2	57				
NUMEN-17.5-600-1			1.75	7.1		17	16.7	67				
NUMEN-20-600-1			2.0	8.1		19	19	76				
NUMEN-05-800-1		800	0.5	2.7		9	4.8	19	1360		Φ12x4	
NUMEN-10-800-1			1.0	5.5		14	9.5	38				
NUMEN-15-800-1			1.5	8.3		21	14.2	57				
NUMEN-17.5-800-1			1.75	9.5		22	16.7	67				
NUMEN-20-800-1			2.0	10.9		25	19	76				
NUMEN-25-800-1			2.5	13.6		30	24	96				
NUMEN-05-1000-1		1000	0.5	3.4		11	4.8	19	1700		Φ12x5	
NUMEN-10-1000-1			1.0	6.8		17	9.5	38				
NUMEN-15-1000-1			1.5	10.2		26	14.2	57				
NUMEN-17.5-1000-1			1.75	11.9		27	16.7	67				
NUMEN-20-1000-1			2.0	13.6		30	19	76				
NUMEN-25-1000-1			2.5	17		37	24	96				
NUMEN-05-1150-1		1150	0.5	3.8		11.5	4.8	19	1900		Φ12x6	
NUMEN-10-1150-1			1.0	7.4		20	9.5	38				
NUMEN-15-1150-1			1.5	11.4		29	14.2	57				
NUMEN-17.5-1150-1			1.75	13.3		30.5	16.7	67				
NUMEN-20-1150-1			2.0	15		34	19	76				
NUMEN-25-1150-1			2.5	19		43	24	96				
NUMEN-05-1350-2	2:1	1350	0.5	4.6	320	15	9.5	38	1148	500	Φ12x5	780
NUMEN-10-1350-2			1.0	9.2		23	19	76				
NUMEN-15-1350-2			1.5	14.7		34	28.7	115				
NUMEN-17.5-1350-2			1.75	16		37	33.5	134				
NUMEN-20-1350-2			2.0	18.4		41	38.2	153				
NUMEN-05-1600-2		1600	0.5	5.5		14	9.5	38	1360		Φ12x6	
NUMEN-10-1600-2			1.0	10.9		25	19	76				
NUMEN-15-1600-2			1.5	17.3		40	28.7	115				
NUMEN-17.5-1600-2			1.75	19		43	33.5	134				
NUMEN-20-1600-2			2.0	21.8		48	38.2	153				
NUMEN-05-2000-2		2000	0.5	6.8		17	9.5	38	1700		Φ12x7	
NUMEN-10-2000-2			1.0	13.6		30	19	76				
NUMEN-15-2000-2			1.5	20.5		50	28.7	115				
NUMEN-17.5-2000-2			1.75	23.8		54	33.5	134				
NUMEN-20-2000-2			2.0	27.2		60	38.2	153				
NUMEN-05-2500-2		2500	0.5	8.3		21	11.7	47	1740	410	Φ10x10	780
NUMEN-10-2500-2			1.0	16.6		40	23.3	93				
NUMEN-15-2500-2			1.5	25.5		60	35	140				
NUMEN-17.5-2500-2			1.75	29.1		67	40.8	163				
NUMEN-20-2500-2			2.0	33.2		76	46.5	186				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

THIN




NUMEN2


(Sheave Φ500, Φ550, Φ640)

Max Axle Load		7000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		30
IP Rating		IP 41
Brake	Current	2 x 1.9 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 2623.75 [N·m]

Dimension



Groove & Sheave profile							
Sheave P.C.D	a	b	c	d	γ°	β°(표준 :105)	p
φ500	156,5	163	435	φ12	25	95~105	19
φ550							
φ640	145	155	446	φ12	25	95~105	19
				φ14	25	95~105	19
				φ16	25	95~105	24

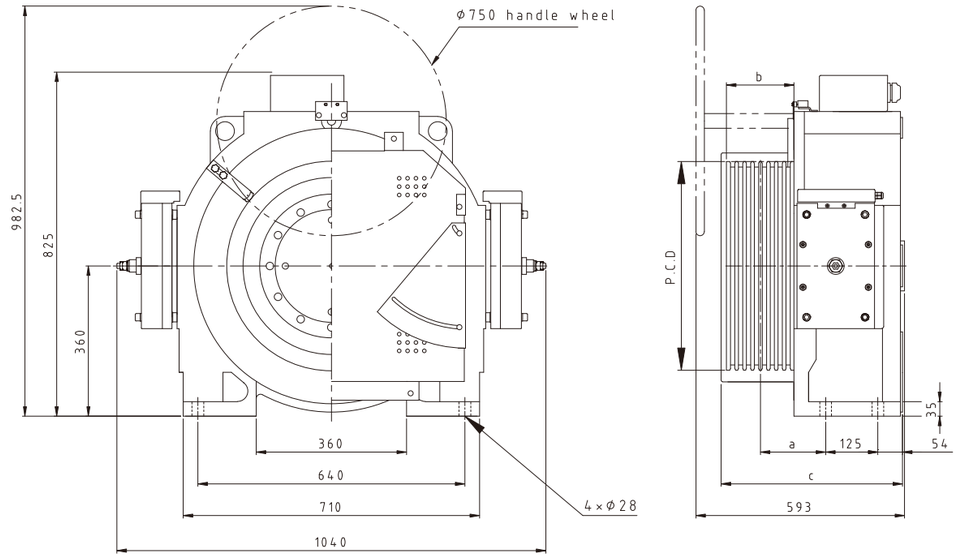

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMEN2-05-400-1	1:1	400	0.5	1.4	320	5	3.7	15	840	640	Φ12x3 or Φ12x4	830
NUMEN2-075-400-1			0.75	2		6	5.6	22				
NUMEN2-10-400-1			1.0	2.8		7	7.5	30				
NUMEN2-15-400-1			1.5	4.1		10	11.3	45				
NUMEN2-17.5-400-1			1.75	4.8		12	13	52				
NUMEN2-20-400-1			2.0	5.5		13	15	60				
NUMEN2-05-600-1		600	0.5	2.1		7	3.7	15	1260		Φ12x4 or Φ12x5	
NUMEN2-075-600-1			0.75	3		9	5.6	22				
NUMEN2-10-600-1			1.0	4.2		11	7.5	30				
NUMEN2-15-600-1			1.5	6.2		15	11.3	45				
NUMEN2-17.5-600-1			1.75	7.1		17	13	52				
NUMEN2-20-600-1			2.0	8.4		20	15	60				
NUMEN2-05-800-1		800	0.5	2.6		9	3.7	15	1680		Φ12x4 or Φ12x5 (4-6)	
NUMEN2-075-800-1			0.75	4		12	5.6	22				
NUMEN2-10-800-1			1.0	5.3		14	7.5	30				
NUMEN2-15-800-1			1.5	7.9		20	11.3	45				
NUMEN2-17.5-800-1			1.75	9.2		22	13	52				
NUMEN2-20-800-1			2.0	10.6		25	15	60				
NUMEN2-05-1000-1		1000	0.5	3.3		10	3.7	15	2099		Φ12x5 or Φ12x6	
NUMEN2-075-1000-1			0.75	5		14	5.6	22				
NUMEN2-10-1000-1			1.0	6.6		17	7.5	30				
NUMEN2-15-1000-1			1.5	9.9		25	11.3	45				
NUMEN2-17.5-1000-1			1.75	11.6		27	13	52				
NUMEN2-20-1000-1			2.0	13.2		30	15	60				
NUMEN2-05-1150-1		1150	0.5	3.8		13	4.3	17	2099	550	Φ12x7 (6-8)	
NUMEN2-075-1150-1			0.75	5.7		16	6.5	26				
NUMEN2-10-1150-1			1.0	7.6		19	8.7	35				
NUMEN2-15-1150-1			1.5	11.4		27	13	52				
NUMEN2-17.5-1150-1			1.75	13.3		30	15.2	61				
NUMEN2-20-1150-1			2.0	15.2		33	17.3	69				
NUMEN2-05-1275-1		1275	0.5	4.1		14	4.8	19	2099	500	Φ12x8 (6-8)	
NUMEN2-075-1275-1			0.75	6.3		17	7.2	29				
NUMEN2-10-1275-1			1.0	8.4		21	9.5	38				
NUMEN2-15-1275-1			1.5	12.6		33	14.3	57				
NUMEN2-17.5-1275-1			1.75	14.7		36	16.7	67				
NUMEN2-20-1275-1			2.0	16.8		40	19	76				
NUMEN2-05-1350-2	2:1	1350	0.5	4.6	320	15	7.5	30	1417	640	Φ12x4 or Φ12x5 (4-6)	830
NUMEN2-075-1350-2			0.75	6.7		19	11.2	45				
NUMEN2-10-1350-2			1.0	9.2		23	15	60				
NUMEN2-15-1350-2			1.5	14.7		34	22.5	90				
NUMEN2-17.5-1350-2			1.75	16		37	26	104				
NUMEN2-20-1350-2			2.0	18.4		41	29.8	119				
NUMEN2-05-1600-2		1600	0.5	5.3		14	7.5	30	1680		Φ12x4 or Φ12x5 (4-6)	
NUMEN2-075-1600-2			0.75	7.9		20	11.3	45				
NUMEN2-10-1600-2			1.0	10.6		25	15	60				
NUMEN2-15-1600-2			1.5	15.8		40	22.5	90				
NUMEN2-17.5-1600-2			1.75	18.5		43	26	104				
NUMEN2-20-1600-2			2.0	21.1		48	29.8	119				
NUMEN2-05-2000-2		2000	0.5	6.6		17	7.5	30	2099		Φ12x5 or Φ12x6	
NUMEN2-075-2000-2			0.75	9.9		25	11.3	45				
NUMEN2-10-2000-2			1.0	13.2		30	15	60				
NUMEN2-15-2000-2			1.5	19.8		50	22.5	90				
NUMEN2-17.5-2000-2			1.75	23.1		54	26	104				
NUMEN2-20-2000-2			2.0	26.4		60	29.8	119				
NUMEN2-05-2500-2		2500	0.5	8.3		21	9.5	38	2099	500	Φ12x8 (6-8)	
NUMEN2-075-2500-2			0.75	12.6		33	14.3	57				
NUMEN2-10-2500-2			1.0	16.6		40	19	76				
NUMEN2-15-2500-2			1.5	24.8		60	28.7	115				
NUMEN2-17.5-2500-2			1.75	29.1		67	33.5	134				
NUMEN2-20-2500-2			2.0	33.2		76	38.3	153				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

THIN




NUMEN3

(Sheave Φ410, Φ480)

Max Axle Load		3000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		20
IP Rating		IP 41
Brake	Current	2 x 0.95 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 1018.75 [N·m]

Dimension

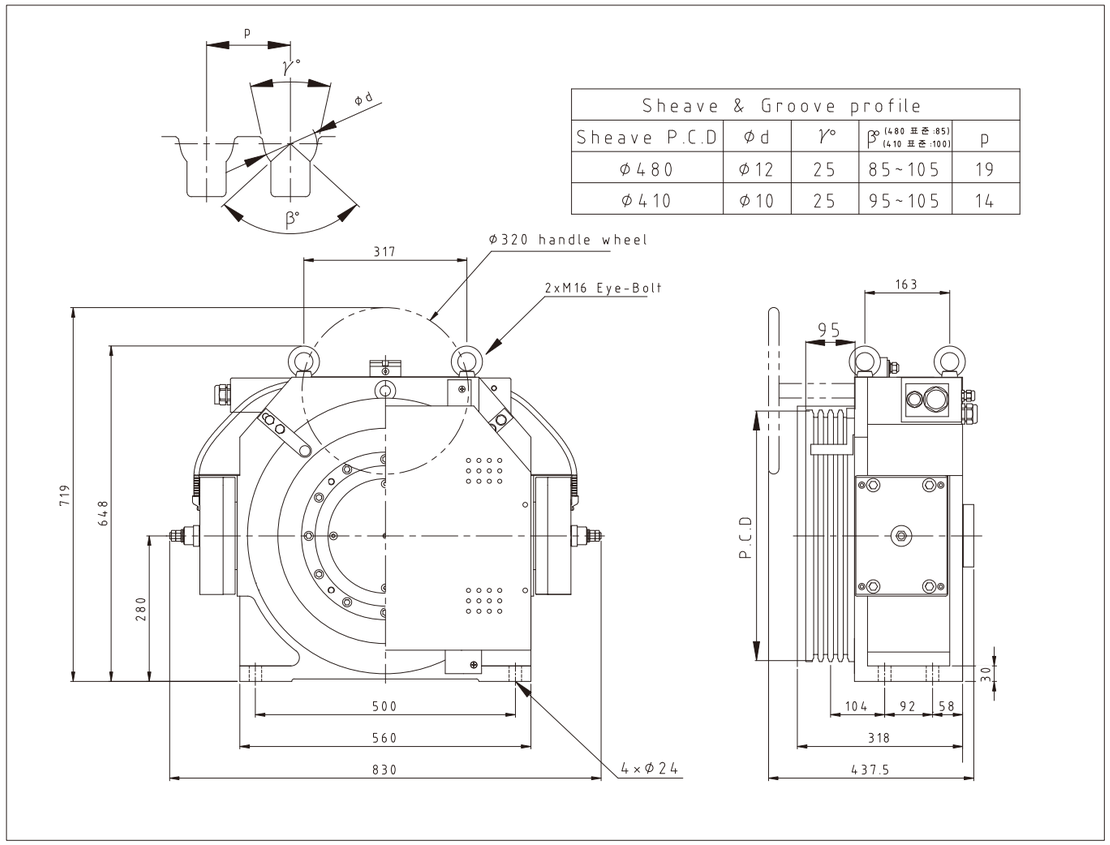

Sheave & Groove profile				
Sheave P.C.D	φd	γ°	β° (480 표준:85) (410 표준:100)	p
φ480	φ12	25	85~105	19
φ410	φ10	25	95~105	14

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMEN3-10-550-1	1:1	550	1.0	3.4	320	10	6.6	40	815	480	Φ12x3 or Φ12x4	420
NUMEN3-15-550-1			1.5	5.1		13	10	60				
NUMEN3-17.5-550-1			1.75	6		16	11.6	70				
NUMEN3-10-600-1		600	1.0	3.9		10	7.8	47	800	410	Φ10x6	
NUMEN3-15-600-1			1.5	5.8		14	11.6	70				
NUMEN3-17.5-600-1			1.75	6.8		17	13.6	82				
NUMEN3-10-1000-2	2:1	1000	1.0	6.8	320	16	15.5	93	700	410	Φ10x5	420
NUMEN3-15-1000-2			1.5	10.2		26	23.3	140				
NUMEN3-17.5-1000-2			1.75	11.9		29	27.2	163				
NUMEN3-20-1000-2			2.0	13.6		32	31	186				
NUMEN3-10-1150-2		1150	1.0	7.8		17	15.5	93	800		Φ10x6	
NUMEN3-15-1150-2			1.5	12.5		26	23.3	140				
NUMEN3-17.5-1150-2			1.75	13.7		30	27.2	163				
NUMEN3-20-1150-2			2.0	15.6		36	31	186				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.




NUMEN3B

(Sheave Φ480)

Max Axle Load		3800 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32
IP Rating		IP 41
Brake	Current	2 x 1.7 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 1170 [N·m]

Dimension

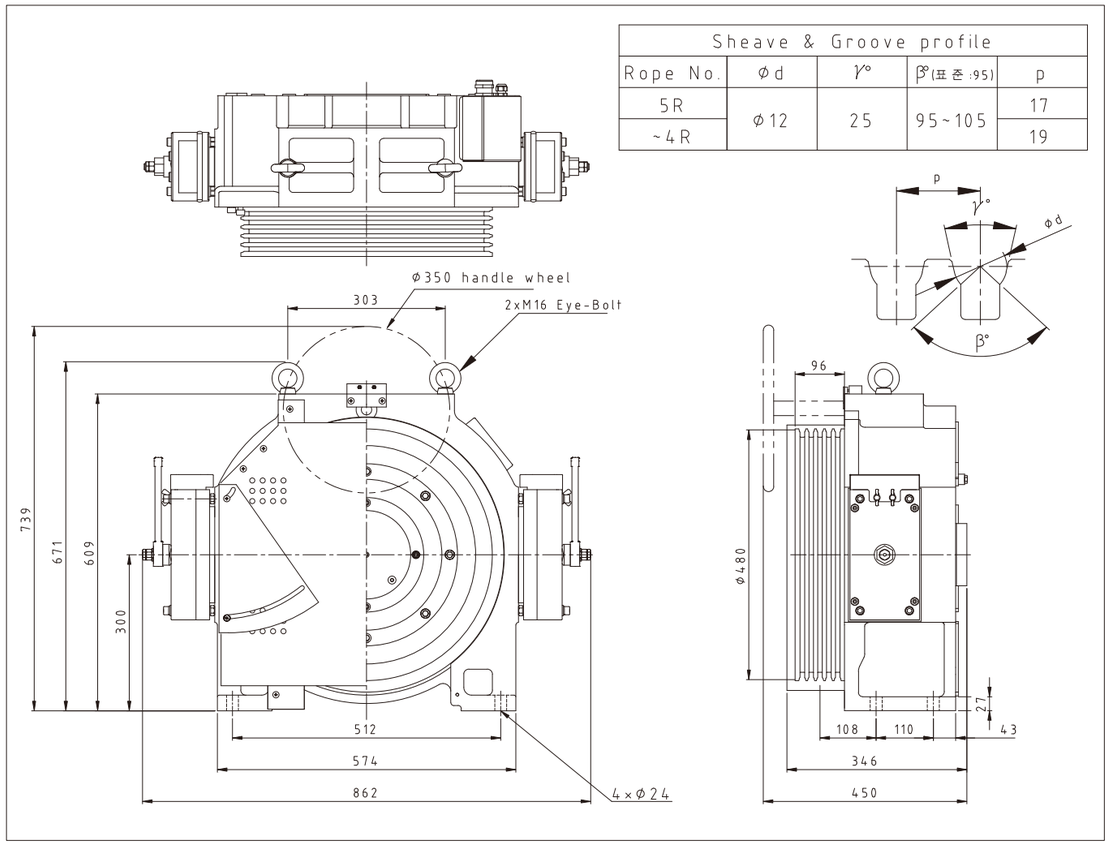


Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMEN3B-05-300-1	1:1	300	0.5	1	320	3.2	5.3	20	468	480	Φ12x3 or Φ12x4	420
NUMEN3B-075-300-1			0.75	1.5		4	8	30				
NUMEN3B-10-300-1			1.0	2		4.6	10.6	40				
NUMEN3B-15-300-1			1.5	3		6.5	15.9	60				
NUMEN3B-17.5-300-1			1.75	3.6		8	18.6	70				
NUMEN3B-20-300-1			2.0	4		9	21.3	80				
NUMEN3B-05-450-1		450	0.5	1.5		4.6	5.3	20	718		Φ12x3 or Φ12x4	
NUMEN3B-075-450-1			0.75	2.2		5.8	8	30				
NUMEN3B-10-450-1			1.0	3		7	10.6	40				
NUMEN3B-15-450-1			1.5	4.5		11	15.9	60				
NUMEN3B-17.5-450-1			1.75	5.2		14	18.6	70				
NUMEN3B-20-450-1			2.0	5.9		16	21.3	80				
NUMEN3B-05-550-1		550	0.5	1.9		7	5.3	20	908		Φ12x3 or Φ12x4	
NUMEN3B-075-550-1			0.75	2.8		8.5	8	30				
NUMEN3B-10-550-1			1.0	3.7		10	10.6	40				
NUMEN3B-15-550-1			1.5	5.5		14	15.9	60				
NUMEN3B-17.5-550-1			1.75	6.5		17	18.6	70				
NUMEN3B-20-550-1			2.0	7.5		19	21.3	80				
NUMEN3B-05-600-1		600	0.5	2		7	5.3	20	936		Φ12x4 or Φ12x5	
NUMEN3B-075-600-1			0.75	2.9		8.5	8	30				
NUMEN3B-10-600-1			1.0	3.9		10	10.6	40				
NUMEN3B-15-600-1			1.5	5.8		14	15.9	60				
NUMEN3B-17.5-600-1			1.75	6.8		17	18.6	70				
NUMEN3B-20-600-1			2.0	7.9		19	21.3	80				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

THIN

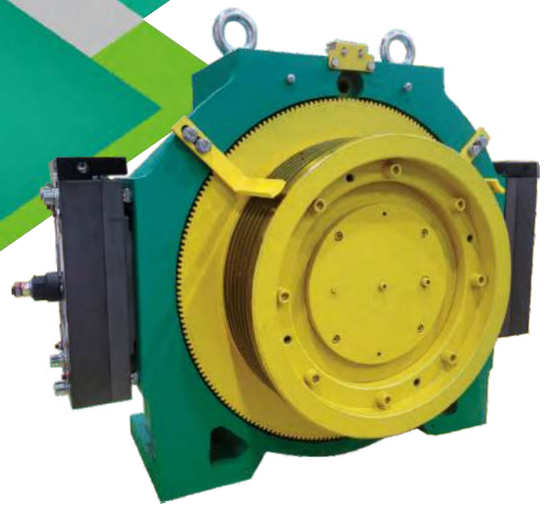


NUMEN4

(Sheave Φ410, Φ480)

Max Axle Load		5500 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32
IP Rating		IP 41
Brake	Current	2 x 1.5 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 1531.25 [N·m]

Dimension

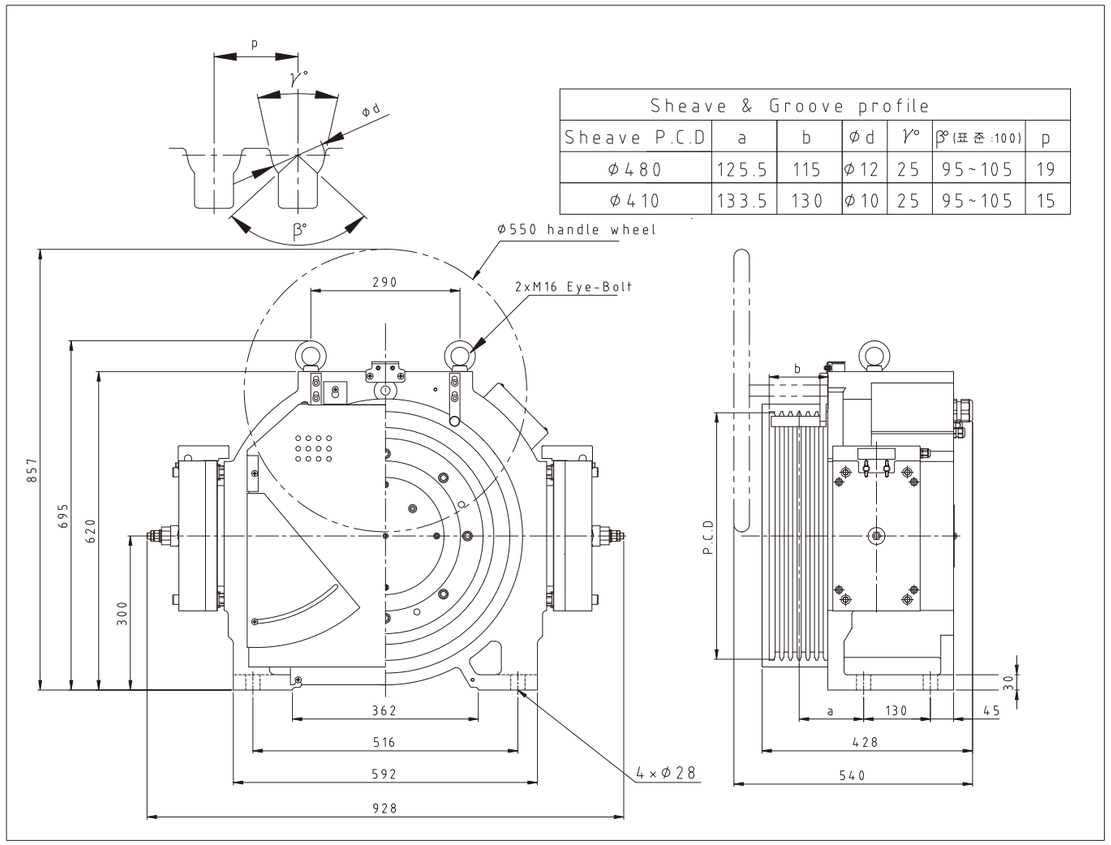

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMEN4-05-300-1	1:1	300	0.5	1	320	3.5	5.3	20	476	480	Φ12x3	420
NUMEN4-10-300-1			1.0	2		5.5	10.6	40				
NUMEN4-15-300-1			1.5	3		7.5	15.9	60				
NUMEN4-17.5-300-1			1.75	3.5		9	18.6	70				
NUMEN4-20-300-1			2.0	4		11	21.3	80				
NUMEN4-05-450-1		450	0.5	1.5		4.8	5.3	20	713		Φ12x4	420
NUMEN4-10-450-1			1.0	3		9	10.6	40				
NUMEN4-15-450-1			1.5	4.5		11	15.9	60				
NUMEN4-17.5-450-1			1.75	5.2		12	18.6	70				
NUMEN4-20-450-1			2.0	5.9		16	21.3	80				
NUMEN4-05-600-1		600	0.5	2		7	5.3	20	951		Φ12x3 or Φ12x4 or Φ12x5	420
NUMEN4-10-600-1			1.0	4		11	10.6	40				
NUMEN4-15-600-1			1.5	5.9		15	15.9	60				
NUMEN4-17.5-600-1			1.75	6.9		17	18.6	70				
NUMEN4-20-600-1			2.0	7.9		19	21.3	80				
NUMEN4-05-750-1		750	0.5	2.6		8	5.3	20	1225		Φ12x4 or Φ12x5	530
NUMEN4-10-750-1			1.0	5.1		14	10.6	40				
NUMEN4-15-750-1			1.5	7.7		19	15.9	60				
NUMEN4-17.5-750-1			1.75	8.9		22	18.6	70				
NUMEN4-20-750-1			2.0	10.2		23	21.3	80				
NUMEN4-05-830-1		830	0.5	2.7		9	6.2	23	1116	410	Φ10x7	530
NUMEN4-10-830-1			1.0	5.4		14	12.5	47				
NUMEN4-15-830-1			1.5	8.2		21	18.6	70				
NUMEN4-17.5-830-1			1.75	9.5		22	21.8	82				
NUMEN4-20-830-1			2.0	10.9		26	24.8	93				
NUMEN4-05-600-2	2:1	600	0.5	2	320	5.5	10.6	40	475	480	Φ12x3 or Φ12x4	420
NUMEN4-10-600-2			1.0	4		11	21.3	80				
NUMEN4-15-600-2			1.5	5.9		15	31.8	119				
NUMEN4-17.5-600-2			1.75	6.9		17	37.1	139				
NUMEN4-20-600-2			2.0	7.9		19	42.4	159				
NUMEN4-05-900-2		900	0.5	3		9	10.6	40	710		Φ12x4 or Φ12x5	420
NUMEN4-10-900-2			1.0	5.9		16	21.3	80				
NUMEN4-15-900-2			1.5	8.9		24	31.8	119				
NUMEN4-17.5-900-2			1.75	10.4		26	37.1	139				
NUMEN4-20-900-2			2.0	11.9		30	42.4	159				
NUMEN4-05-1200-2		1200	0.5	4		11	10.6	40	951		Φ12x3 or Φ12x4 or Φ12x5	420
NUMEN4-10-1200-2			1.0	7.9		19	21.3	80				
NUMEN4-15-1200-2			1.5	11.9		30	31.8	119				
NUMEN4-17.5-1200-2			1.75	13.9		32	37.1	139				
NUMEN4-20-1200-2			2.0	15.8		38	42.4	159				
NUMEN4-05-1350-2		1350	0.5	4.6		14	10.6	40	1100		Φ12x4 or Φ12x5	530
NUMEN4-10-1350-2			1.0	9.2		20	21.3	80				
NUMEN4-15-1350-2			1.5	13.8		32	31.8	119				
NUMEN4-17.5-1350-2			1.75	16		34	37.1	139				
NUMEN4-20-1350-2			2.0	18.4		41	42.4	159				
NUMEN4-05-1600-2		1600	0.5	5.4		17	12.5	47	1116	410	Φ10x7	530
NUMEN4-10-1600-2			1.0	10.9		24	24.8	93				
NUMEN4-15-1600-2			1.5	16.3		37	37.3	140				
NUMEN4-17.5-1600-2			1.75	19		40	43.5	163				
NUMEN4-20-1600-2			2.0	21.8		48	49.7	186				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

THIN




NUMEN5

(Sheave Φ400)

Max Axle Load		3500 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		32(300~1150kg) / 20(1275kg)
IP Rating		IP 41
Brake	Current	2 x 1.56 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 1037.5 [N·m]

Dimension

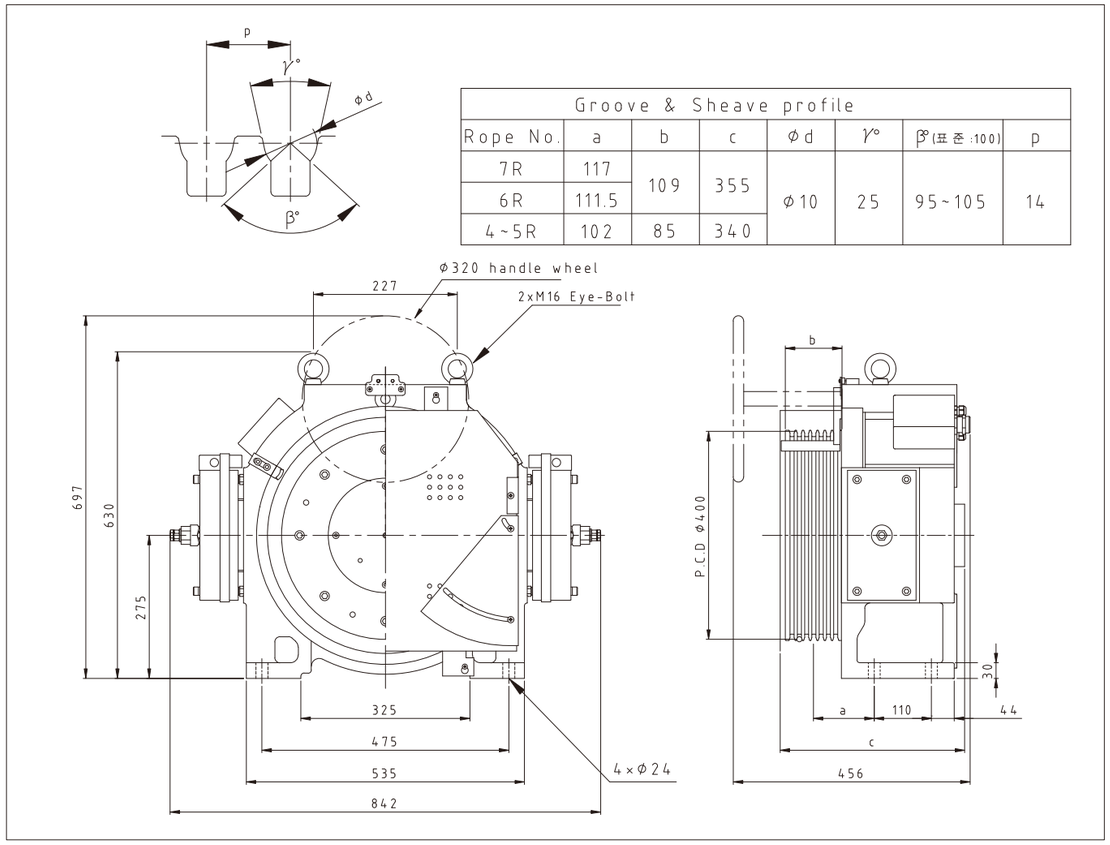

Groove & Sheave profile							
Rope No.	a	b	c	Φd	γ°	β°(표준:100)	p
7R	117	109	355	Φ10	25	95~105	14
6R	111.5						
4~5R	102	85	340				

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMEN5-05-300-2	2:1	300	0.5	1	330	3	12.8	48	195	400	Φ10x4	350
NUMEN5-10-300-2			1.0	2		5	25.6	96				
NUMEN5-15-300-2			1.5	3		7	38.2	143				
NUMEN5-17.5-300-2			1.75	3.4		10	44.6	167				
NUMEN5-20-300-2			2.0	4		11	51	191				
NUMEN5-05-450-2		450	0.5	1.5		4	12.8	48	293		Φ10x4	
NUMEN5-10-450-2			1.0	3		7	25.6	96				
NUMEN5-15-450-2			1.5	4.5		11	38.2	143				
NUMEN5-17.5-450-2			1.75	5.2		12	44.6	167				
NUMEN5-20-450-2			2.0	5.9		15	51	191				
NUMEN5-05-630-2		600/630	0.5	2.1		6	12.8	48	420		Φ10x4	
NUMEN5-10-630-2			1.0	4.2		10	25.6	96				
NUMEN5-15-630-2			1.5	6.7		15	38.2	143				
NUMEN5-17.5-630-2			1.75	7.3		16	44.6	167				
NUMEN5-20-630-2			2.0	8.4		18	51	191				
NUMEN5-05-800-2		800	0.5	2.6		7	12.8	48	530		Φ10x5	
NUMEN5-10-800-2			1.0	5.3		12	25.6	96				
NUMEN5-15-800-2			1.5	8		19	38.2	143				
NUMEN5-17.5-800-2			1.75	9.3		21	44.6	167				
NUMEN5-20-800-2			2.0	10.7		24	51	191				
NUMEN5-05-1000-2		1000	0.5	3.3		9	12.8	48	650		Φ10x5	
NUMEN5-10-1000-2			1.0	6.5		15	25.6	96				
NUMEN5-15-1000-2			1.5	9.8		23	38.2	143				
NUMEN5-17.5-1000-2			1.75	11.4		26	44.6	167				
NUMEN5-20-1000-2			2.0	13.1		28	51	191				
NUMEN5-05-1150-2		1150	0.5	3.8		11	12.8	48	756		Φ10x6	
NUMEN5-10-1150-2			1.0	7.6		17	25.6	96				
NUMEN5-15-1150-2			1.5	11.3		27	38.2	143				
NUMEN5-17.5-1150-2			1.75	13.2		30	44.6	167				
NUMEN5-20-1150-2			2.0	15.2		36	51	191				
NUMEN5-05-1275-2		1275	0.5	4.1		13	8	48	827		Φ10x6 or Φ10x7	
NUMEN5-10-1275-2			1.0	8.3		19	16	96				
NUMEN5-15-1275-2			1.5	12.5		29	23.8	143				
NUMEN5-17.5-1275-2			1.75	14.5		32	27.8	167				
NUMEN5-20-1275-2			2.0	16.5		38	31.8	191				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


THIN



NUMENDB2

Double Wrap		(Sheave Φ410)
Max Axle Load		12000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		30
IP Rating		IP 41
Brake	Current	2 x 1.9 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 1901 [N·m]

Dimension

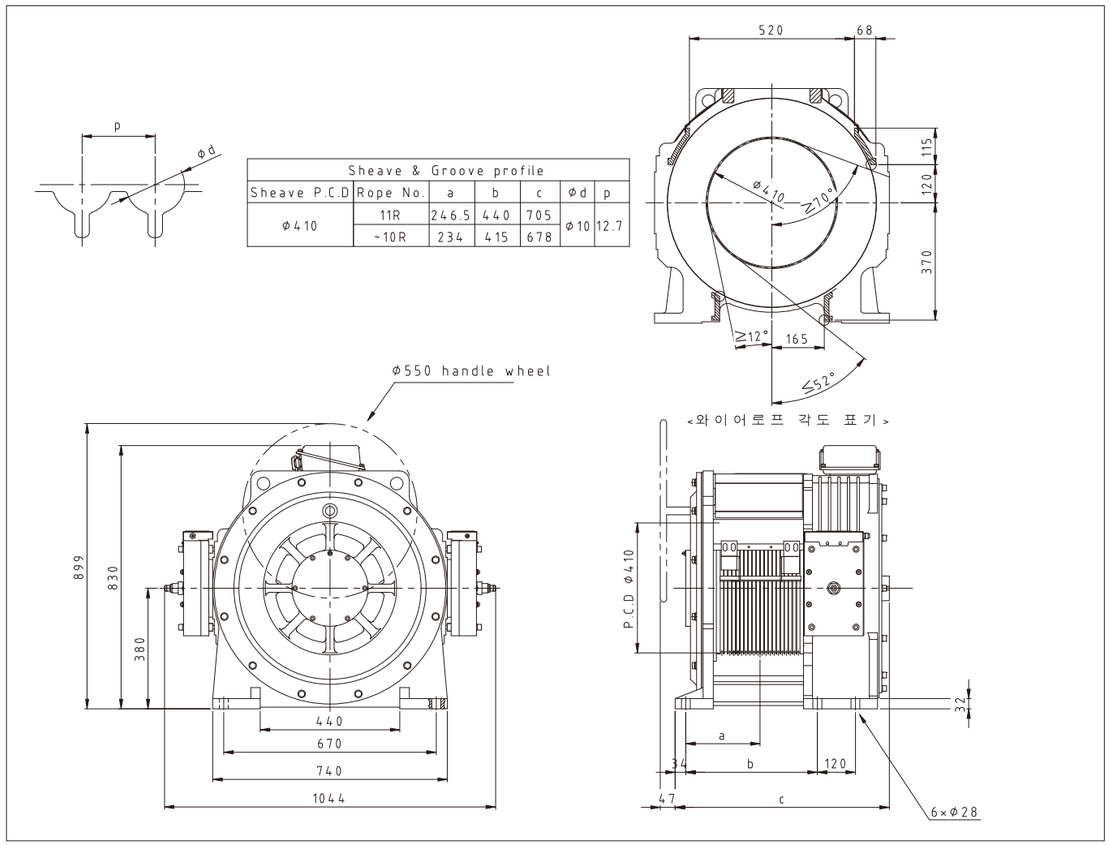

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
NUMENDB2-05-500-1	1:1	500	0.5	1.7	330	4	5.8	23	678	410	Φ10x16	875
NUMENDB2-10-500-1			1.0	3.3		7	11.5	46				
NUMENDB2-15-500-1			1.5	5		10	17.5	70				
NUMENDB2-10-800-1		800	1.0	5.3		14	11.5	46	1084		Φ10x16	
NUMENDB2-15-800-1			1.5	7.9		20	17.5	70				
NUMENDB2-17.5-800-1			1.75	9.2		22	20.4	82				
NUMENDB2-20-800-1			2.0	10.6		25	23.2	93				
NUMENDB2-25-800-1			2.5	13.2		30	29	116				
NUMENDB2-10-1000-1		1000	1.0	6.6		17	11.5	46	1355		Φ10x18	
NUMENDB2-15-1000-1			1.5	10.6		25	17.5	70				
NUMENDB2-17.5-1000-1			1.75	11.6		27	20.4	82				
NUMENDB2-20-1000-1			2.0	13.2		30	23.2	93				
NUMENDB2-25-1000-1			2.5	16.5		37	29	116				
NUMENDB2-10-1150-1		1150	1.0	7.6		19	11.5	46	1558		Φ10x20	
NUMENDB2-15-1150-1			1.5	11.4		27	17.5	70				
NUMENDB2-17.5-1150-1			1.75	13.3		30	20.4	82				
NUMENDB2-20-1150-1			2.0	15.2		33	23.2	93				
NUMENDB2-25-1150-1			2.5	19		42	29	116				
NUMENDB2-10-1275-1		1275	1.0	8.4		21	11.5	46	1728		Φ10x22	
NUMENDB2-15-1275-1			1.5	12.6		33	17.5	70				
NUMENDB2-17.5-1275-1			1.75	14.7		36	20.4	82				
NUMENDB2-20-1275-1			2.0	16.8		40	23.2	93				
NUMENDB2-25-1275-1			2.5	21		48	29	116				
NUMENDB2-0.5-1000-2	2:1	1000	0.5	3.3	330	10	11.5	46	678	410	Φ10x14	875
NUMENDB2-1.0-1000-2			1.0	6.6		15	23.2	93				
NUMENDB2-1.5-1000-2			1.5	9.9		23	34.9	140				
NUMENDB2-1.75-1000-2			1.75	11.6		27	40.8	163				
NUMENDB2-0.5-1350-2		1350	0.5	4.5		15	11.5	46	915		Φ10x14	
NUMENDB2-1.0-1350-2			1.0	8.9		23	23.2	93				
NUMENDB2-1.5-1350-2			1.5	13.4		34	34.9	140				
NUMENDB2-1.75-1350-2			1.75	15.6		37	40.8	163				
NUMENDB2-0.5-1600-2		1600	0.5	5.3		14	11.5	46	1084		Φ10x16	
NUMENDB2-1.0-1600-2			1.0	10.6		25	23.2	93				
NUMENDB2-1.5-1600-2			1.5	15.8		40	34.9	140				
NUMENDB2-1.75-1600-2			1.75	18.5		43	40.8	163				
NUMENDB2-0.5-1800-2		1800	0.5	5.9		18	11.5	46	1220		Φ10x18	
NUMENDB2-1.0-1800-2			1.0	11.9		31	23.2	93				
NUMENDB2-1.5-1800-2			1.5	17.8		43	34.9	140				
NUMENDB2-1.75-1800-2			1.75	20.8		46	40.8	163				
NUMENDB2-0.5-2000-2		2000	0.5	6.6		17	11.5	46	1355		Φ10x20	
NUMENDB2-1.0-2000-2			1.0	13.2		30	23.2	93				
NUMENDB2-1.5-2000-2			1.5	19.8		50	34.9	140				
NUMENDB2-1.75-2000-2			1.75	23.1		54	40.8	163				
NUMENDB2-0.5-2500-2		2500	0.5	8.3		21	11.5	46	1692		Φ10x22	
NUMENDB2-1.0-2500-2			1.0	16.5		40	23.2	93				
NUMENDB2-1.5-2500-2			1.5	24.8		60	34.9	140				
NUMENDB2-1.75-2500-2			1.75	28.9		67	40.8	163				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


THIN



TRUMP250

Double Wrap		(Sheave Φ406)
Max Axle Load		10000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		24
IP Rating		IP 21
Brake	Current	2 x 1.6 / 2 x 0.8 [A] (Open / Hold)
	Voltage	DC 200 / 100 [V] (Open / Hold)
	Torque	2 x 2200 [N·m]

Dimension

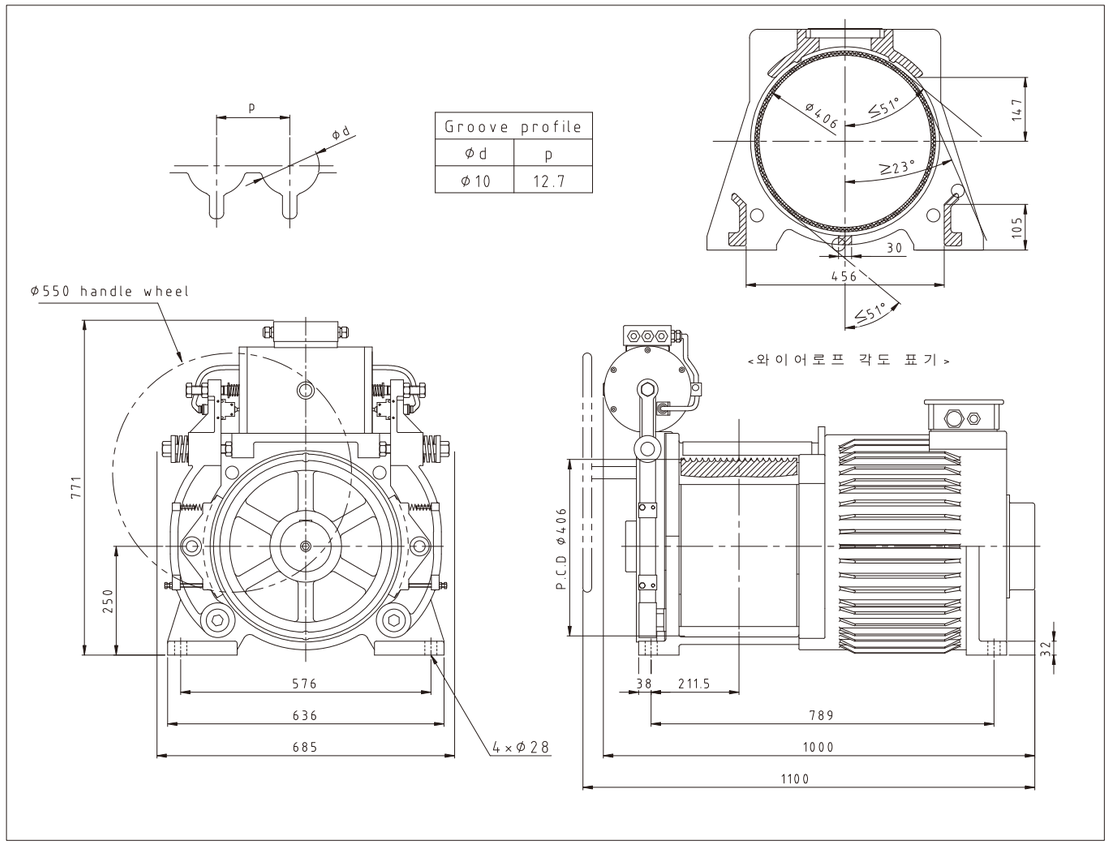

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
TRUMP250-10-800-1F	1:1	800	1.0	5.5	335	14	9.4	47	1126	406	Φ10x7	638
TRUMP250-15-800-1F			1.5	8.3		22	14.2	71				
TRUMP250-17.5-800-1F			1.75	9.8		24	16.4	82				
TRUMP250-20-800-1F			2.0	11.2		26	18.8	94				
TRUMP250-10-1150-1F		1150	1.0	6.9		18	9.4	47	1410		Φ10x9	730
TRUMP250-15-1150-1F			1.5	10.4		25	14.2	71				
TRUMP250-17.5-1150-1F			1.75	12.3		28	16.4	82				
TRUMP250-20-1150-1F			2.0	14		33	18.8	94				
TRUMP250-25-1150-1F			2.5	17.4		40	23.6	118				
TRUMP250-30-1150-1F			3.0	20.8		48	28.2	141				
TRUMP250-10-1275-1F		1275	1.0	8.7		23	9.4	47	1760		Φ10x11	775
TRUMP250-15-1275-1F			1.5	13.8		34	14.2	71				
TRUMP250-17.5-1275-1F			1.75	15.3		37	16.4	82				
TRUMP250-20-1275-1F			2.0	17.5		42	18.8	94				
TRUMP250-25-1275-1F			2.5	21.7		50	23.6	118				
TRUMP250-30-1275-1F			3.0	26		59	28.2	141				
TRUMP250-10-1350-2F	2:1	1350	1.0	9.5	335	22	18.8	94	950	406	Φ10x7	624
TRUMP250-15-1350-2F			1.5	14		34	28.2	141				
TRUMP250-17.5-1350-2F			1.75	16.5		37	33	165				
TRUMP250-20-1350-2F			2.0	18.9		43	37.6	188				
TRUMP250-10-1600-2F		1600	1.0	11.2		26	18.8	94	1126			638
TRUMP250-15-1600-2F			1.5	16.6		41	28.2	141				
TRUMP250-17.5-1600-2F			1.75	19.5		45	33	165				
TRUMP250-20-1600-2F			2.0	22.4		52	37.6	188				
TRUMP250-10-2000-2F		2000	1.0	14		32	18.8	94	1410		Φ10x9	730
TRUMP250-15-2000-2F			1.5	20.8		48	28.2	141				
TRUMP250-17.5-2000-2F			1.75	24.4		53	33	165				
TRUMP250-20-2000-2F			2.0	28		61	37.6	188				
TRUMP250-10-2500-2F		2500	1.0	17.5		40	18.8	94	1760		Φ10x11	775
TRUMP250-15-2500-2F			1.5	25.9		60	28.2	141				
TRUMP250-17.5-2500-2F			1.75	30.4		67	33	165				
TRUMP250-20-2500-2F			2.0	35		76	37.6	188				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


FREIGHT



TRUMP380

1:1 Roping		(Sheave Φ530, Φ600)
Max Axle Load		10000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		30
IP Rating		IP 54
Brake	Current	2 x 2.0 / 2 x 1.0 [A] (Open / Hold)
	Voltage	DC 200 / 100 [V] (Open / Hold)
	Torque	2 x 2688 ~ 2 x 4391 [N·m]

Dimension

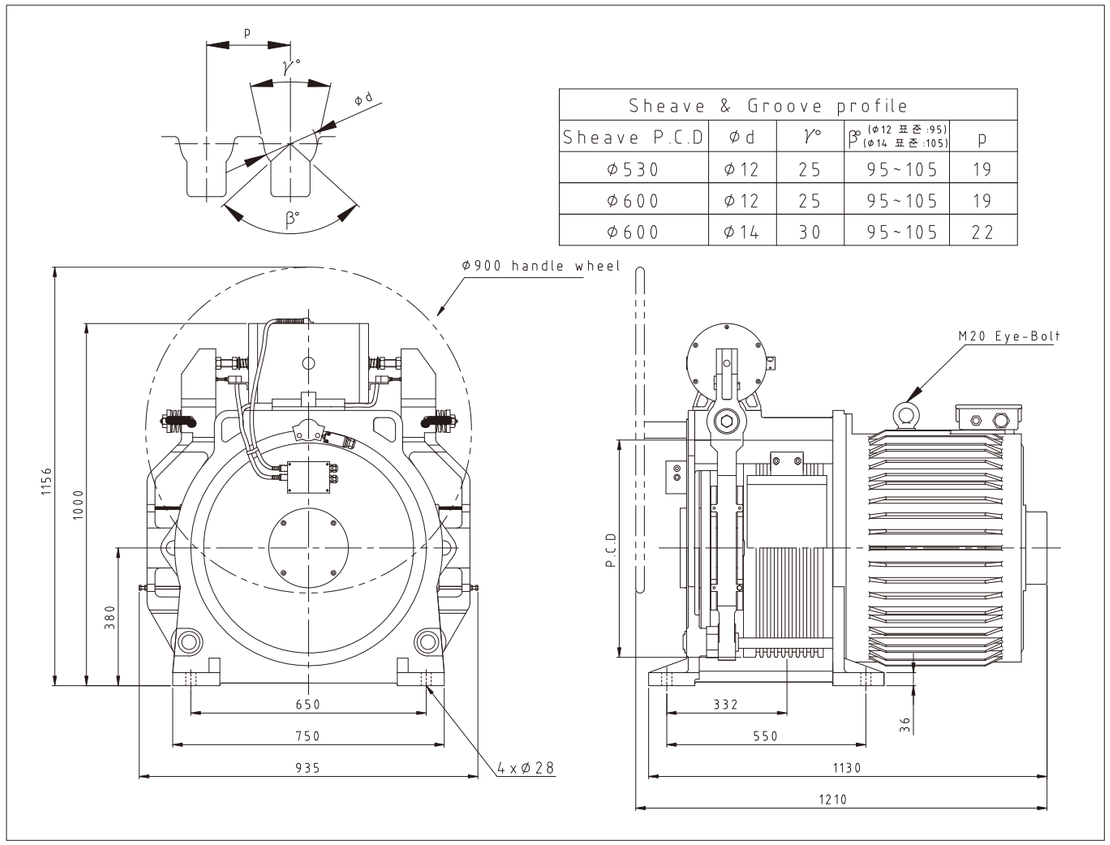

Sheave & Groove profile				
Sheave P.C.D	Φd	γ°	β° (Φ12 표준 :95) (Φ14 표준 :105)	p
Φ530	Φ12	25	95~105	19
Φ600	Φ12	25	95~105	19
Φ600	Φ14	30	95~105	22

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
TRUMP380-05-1350-1	1:1	1350	0.5	4.4	320	14	4.5	18	2324	530	Φ12x8	1220
TRUMP380-10-1350-1			1.0	8.8		24	9	36				
TRUMP380-15-1350-1			1.5	13.2		34	13.5	54				
TRUMP380-17.5-1350-1			1.75	15.4		37	15.8	63				
TRUMP380-20-1350-1			2.0	17.5		44	18	72				
TRUMP380-25-1350-1			2.5	21.9		52	22.5	90				
TRUMP380-30-1350-1			3.0	26.3		61	27	108				
TRUMP380-05-1600-1		1600	0.5	5.2		17	4.5	18	2754		Φ12x9	1270
TRUMP380-10-1600-1			1.0	10.4		28	9	36				
TRUMP380-15-1600-1			1.5	15.6		40	13.5	54				
TRUMP380-17.5-1600-1			1.75	18.2		43	15.8	63				
TRUMP380-20-1600-1			2.0	20.8		52	18	72				
TRUMP380-25-1600-1			2.5	26		61	22.5	90				
TRUMP380-30-1600-1			3.0	31.2		72	27	108				
TRUMP380-05-1350-1	1:1	1350	0.5	4.4	320	14	4	16	2631	600	Φ12x8 (Φ14x6)	1220
TRUMP380-10-1350-1			1.0	8.8		24	8	32				
TRUMP380-15-1350-1			1.5	13.2		34	12	48				
TRUMP380-17.5-1350-1			1.75	15.4		37	14	56				
TRUMP380-20-1350-1			2.0	17.5		44	16	64				
TRUMP380-25-1350-1			2.5	21.9		52	20	80				
TRUMP380-30-1350-1			3.0	26.3		61	23.8	95				
TRUMP380-05-1600-1		1600	0.5	5.2		17	4	16	3118		Φ12x9 (Φ14x6)	1270
TRUMP380-10-1600-1			1.0	10.4		28	8	32				
TRUMP380-15-1600-1			1.5	15.6		40	12	48				
TRUMP380-17.5-1600-1			1.75	18.2		43	14	56				
TRUMP380-20-1600-1			2.0	20.8		52	16	64				
TRUMP380-25-1600-1			2.5	26		61	20	80				
TRUMP380-30-1600-1			3.0	31.2		72	23.8	95				
TRUMP380-05-2000-1	1:1	2000	0.5	6.5	320	19	4.5	18	3448	530	Φ12x12	1480
TRUMP380-10-2000-1			1.0	13		33	9	36				
TRUMP380-15-2000-1			1.5	20.8		51	13.5	54				
TRUMP380-17.5-2000-1			1.75	22.8		55	15.8	63				
TRUMP380-20-2000-1			2.0	26		62	18	72				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


FREIGHT



TRUMP380

2:1 Roping		(Sheave Φ530, Φ600)
Max Axle Load		10000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		30
IP Rating		IP 54
Brake	Current	2 x 2.0 / 2 x 1.0 [A] (Open / Hold)
	Voltage	DC 200 / 100 [V] (Open / Hold)
	Torque	2 x 2688 ~ 2 x 4391 [N·m]

Dimension

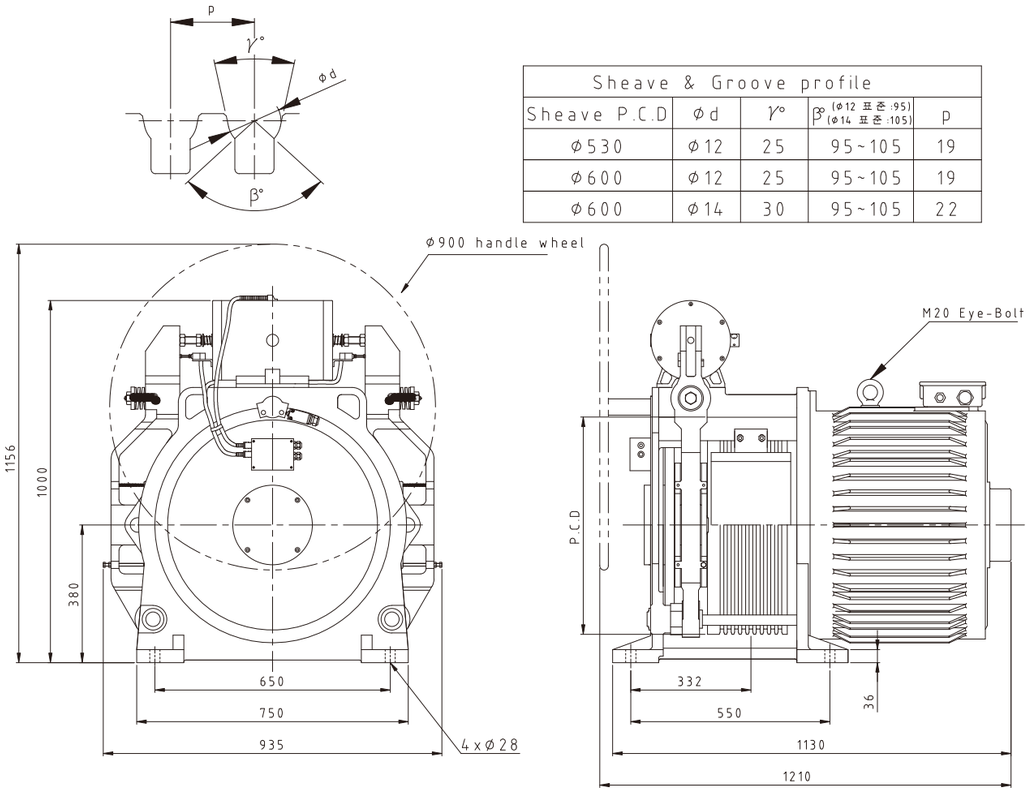

Sheave & Groove profile				
Sheave P.C.D	Φd	γ°	β° (Φ12 표준 :95) (Φ14 표준 :105)	p
Φ530	Φ12	25	95~105	19
Φ600	Φ12	25	95~105	19
Φ600	Φ14	30	95~105	22

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
TRUMP380-05-2500-2	2:1	2500	0.5	8.1	320	21	9	36	2150	530	Φ12x8	1220
TRUMP380-10-2500-2			1.0	16.2		40	18	72				
TRUMP380-15-2500-2			1.5	24.3		57	27	108				
TRUMP380-17.5-2500-2			1.75	28.4		67	31.5	126				
TRUMP380-20-2500-2			2.0	32.5		76	36	144				
TRUMP380-05-3000-2		3000	0.5	9.8		25	9	36	2586		Φ12x9	1270
TRUMP380-10-3000-2			1.0	19.5		46	18	72				
TRUMP380-15-3000-2			1.5	31.2		68	27	108				
TRUMP380-17.5-3000-2			1.75	34.1		79	31.5	126				
TRUMP380-20-3000-2			2.0	39		89	36	144				
TRUMP380-05-3500-2		3500	0.5	11.4		29	9	36	3010		Φ12x10	1270
TRUMP380-10-3500-2			1.0	22.7		54	18	72				
TRUMP380-15-3500-2			1.5	36.4		79	27	108				
TRUMP380-17.5-3500-2			1.75	39.8		92	31.5	126				
TRUMP380-20-3500-2			2.0	45.4		103	36	144				
TRUMP380-05-4000-2		4000	0.5	13		33	9	36	3443		Φ12x12	1480
TRUMP380-10-4000-2			1.0	26		62	18	72				
TRUMP380-15-4000-2			1.5	41.6		90	27	108				
TRUMP380-17.5-4000-2			1.75	45.5		105	31.5	126				
TRUMP380-20-4000-2			2.0	51.9		118	36	144				
TRUMP380-05-2500-2	2:1	2500	0.5	8.1	320	21	8	32	2435	600	Φ12x8 (Φ14x6)	1220
TRUMP380-10-2500-2			1	16.2		40	16	64				
TRUMP380-15-2500-2			1.5	24.3		57	23.8	95				
TRUMP380-17.5-2500-2			1.75	28.4		67	27.8	111				
TRUMP380-20-2500-2			2.0	32.5		76	31.8	127				
TRUMP380-05-3000-2		3000	0.5	9.8		25	8	32	2927		Φ12x9 (Φ14x6)	1270
TRUMP380-10-3000-2			1.0	19.5		46	16	64				
TRUMP380-15-3000-2			1.5	31.2		72	23.8	95				
TRUMP380-17.5-3000-2			1.75	34.1		79	27.8	111				
TRUMP380-20-3000-2			2.0	39		89	31.8	127				
TRUMP380-05-3500-2		3500	0.5	11.4		29	8	32	3407		Φ12x10 (Φ14x6)	1270
TRUMP380-10-3500-2			1.0	22.7		54	16	64				
TRUMP380-15-3500-2			1.5	36.4		79	23.8	95				
TRUMP380-17.5-3500-2			1.75	39.8		92	27.8	111				
TRUMP380-20-3500-2			2.0	45.4		103	31.8	127				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

FREIGHT




TRUMP380L

(Sheave Φ650)

Max Axle Load		20000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		30
IP Rating		IP 54
Brake	Current	2 x 3.7 / 2 x 1.85 [A] (Open / Hold)
	Voltage	DC 200 / 100 [V] (Open / Hold)
	Torque	2 x 6437.5 [N·m]

Dimension

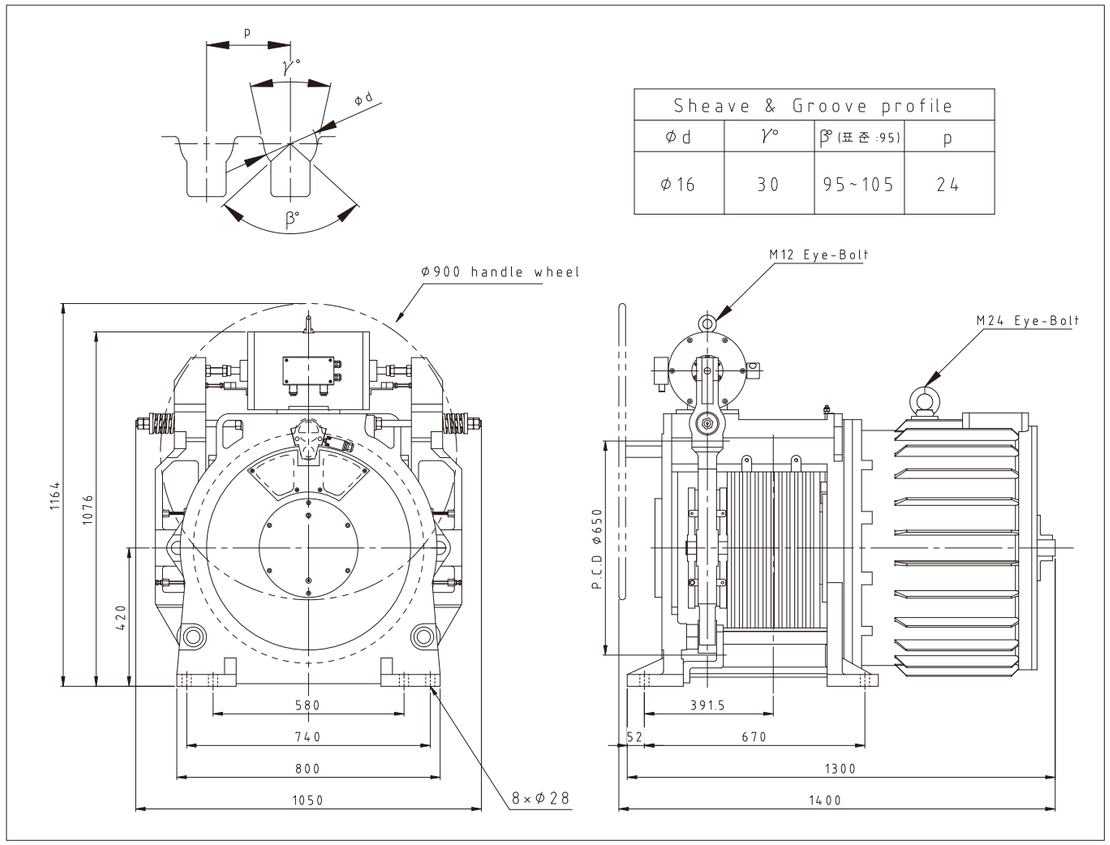


Sheave & Groove profile			
Φd	γ°	β° (표준 :95)	p
Φ16	30	95~105	24

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
TRUMP380L-10-2600-1	1:1	2600	1.0	15.9	320	42	7.3	29	5150	650	Φ16x9	2400
TRUMP380L-15-2600-1			1.5	23.8		59	11	44			Φ16x10	
TRUMP380L-17.5-2600-1			1.75	27.7		68	12.8	51			Φ16x11	
TRUMP380L-20-2600-1			2.0	31.7		76	14.7	59			Φ16x11	
TRUMP380L-05-5200-2	2:1	5200	0.5	15.9	320	42	7.3	29	5150	650	Φ16x11	2400
TRUMP380L-10-5200-2			1.0	31.7		76	14.7	59				
TRUMP380L-15-5200-2			1.5	47.6		120	22	88				
TRUMP380L-17.5-5200-2			1.75	55.5		135	25.7	103				
TRUMP380L-20-5200-2			2.0	63.4		156	29.5	118				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.


FREIGHT

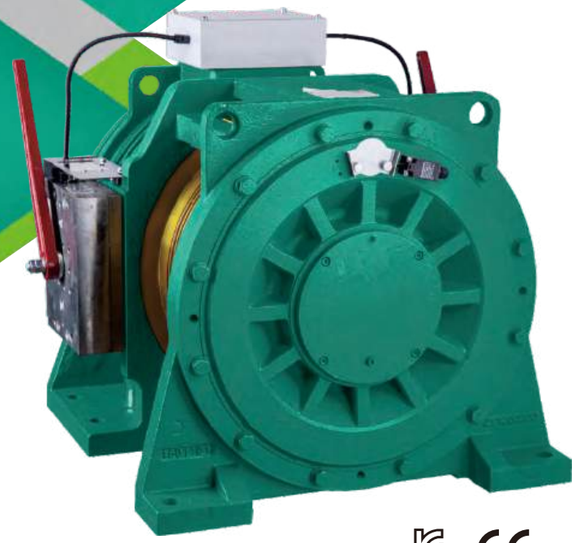

TRUMP328

Double Wrap		(Sheave Φ480)
Max Axle Load		15000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		20
IP Rating		IP 31
Brake	Current	2 x 1.1 / 2 x 0.55 [A] (Open / Hold)
	Voltage	DC 200 / 100 [V] (Open / Hold)
	Torque	2 x 1950 [N·m]

Dimension

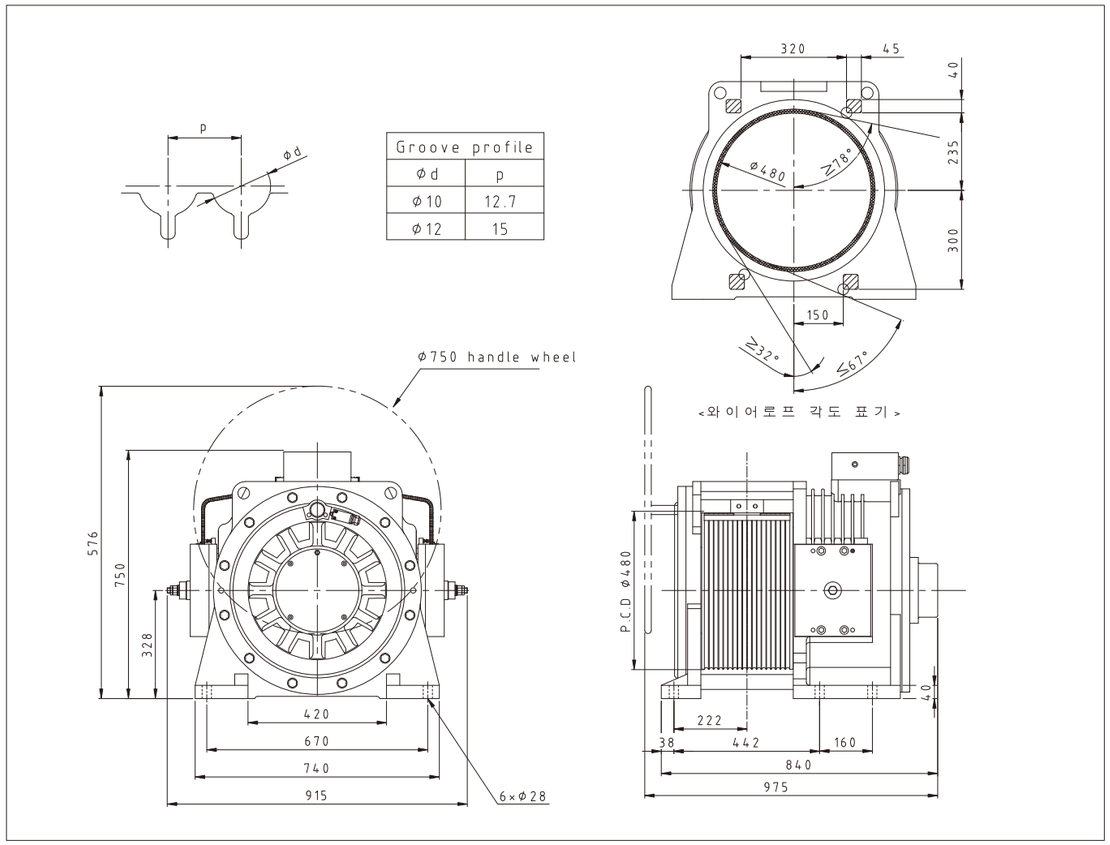

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia.	d x No	
TRUMP328-20-1000-2F			2.0	13.7		31	26.5	159				
TRUMP328-25-1000-2F			2.5	17.2		38	33.2	199				
TRUMP328-30-1000-2F		1000	3.0	20.5		46	39.8	239	819			1030
TRUMP328-35-1000-2F			3.5	23.9		55	46.4	279				
TRUMP328-40-1000-2F			4.0	27.3		64	53.1	318				
TRUMP328-20-1200-2F			2.0	15.6		35	26.5	159				
TRUMP328-25-1200-2F			2.5	19.5		44	33.2	199				
TRUMP328-30-1200-2F		1200	3.0	23.4		53	39.8	239	936			1050
TRUMP328-35-1200-2F			3.5	27.3		63	46.4	279				
TRUMP328-40-1200-2F			4.0	31.2		70	53.1	318				
TRUMP328-20-1350-2F			2.0	17.5		39	26.5	159				
TRUMP328-25-1350-2F			2.5	21.9		49	33.2	199				
TRUMP328-30-1350-2F	2:1	1350	3.0	26.3	320	60	39.8	239	1053	480	Φ10x8 or Φ10x9 or Φ10x10 or Φ12x8	1050
TRUMP328-35-1350-2F			3.5	30.7		71	46.4	279				
TRUMP328-40-1350-2F			4.0	35		79	53.1	318				
TRUMP328-20-1600-2F			2.0	20.8		48	26.5	159				
TRUMP328-25-1600-2F			2.5	26		59	33.2	199				
TRUMP328-30-1600-2F		1600	3.0	31.2		71	39.8	239	1249			1080
TRUMP328-35-1600-2F			3.5	36.4		85	46.4	279				
TRUMP328-40-1600-2F			4.0	41.6		97	53.1	318				
TRUMP328-20-2000-2F			2.0	26		62	26.5	159				
TRUMP328-25-2000-2F			2.5	32.5		76	33.2	199				
TRUMP328-30-2000-2F		2000	3.0	39		92	39.8	239	1560			1100
TRUMP328-35-2000-2F			3.5	45.5		105	46.4	279				
TRUMP328-40-2000-2F			4.0	52		123	53.1	318				

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.

FREIGHT




PANTOM1

(Sheave Φ104)

Max Axle Load		4000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		10
IP Rating		IP 41
Brake	Current	2 x 1.1 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 300 [N·m]

Dimension

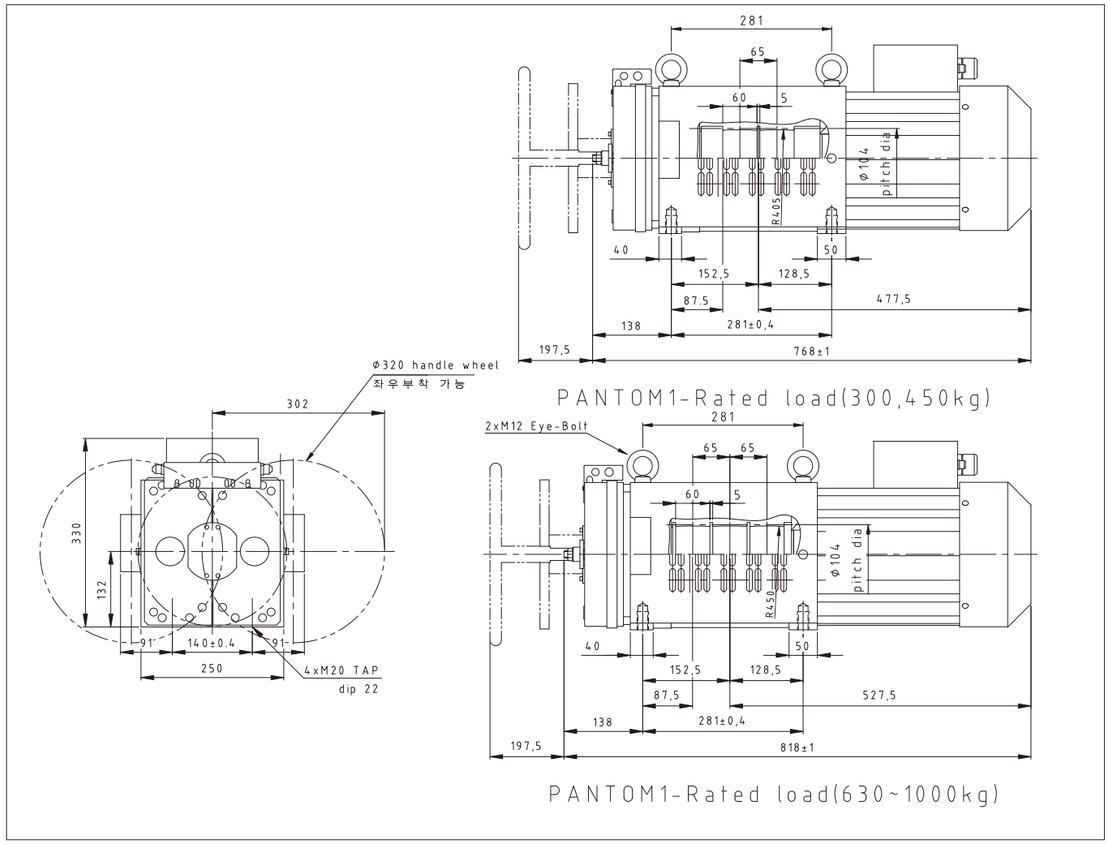

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia. (mm)	Belt No	
PANTOM1-025-300-2	2:1	300	0.25	0.5	380	3.0	7.7	92	52	104	2	125
PANTOM1-05-300-2			0.5	1		2.8	15.3	184	52			
PANTOM1-10-300-2			1	2		5.6	30.6	367	52			
PANTOM1-15-300-2			1.5	3		8.2	45.9	551	52			
PANTOM1-17.5-300-2			1.75	3.5		8.2	53.6	643	52			
PANTOM1-20-300-2			2	4		9.2	61.3	735	52			
PANTOM1-025-450-2		450	0.25	0.75		4.3	7.7	92	78		2	125
PANTOM1-05-450-2			0.5	1.5		4.1	15.3	184	78			
PANTOM1-10-450-2			1	3		8.2	30.6	367	78			
PANTOM1-15-450-2			1.5	4.5		12.1	45.9	551	78			
PANTOM1-17.5-450-2			1.75	5.3		12.2	53.6	643	79			
PANTOM1-20-450-2			2	6		13.6	61.3	735	78			
PANTOM1-025-630-2		630	0.25	1.1		7.7	7.7	92	114		3	130
PANTOM1-05-630-2			0.5	2.1		7.2	15.3	184	109			
PANTOM1-10-630-2			1	4.2		10.5	30.6	367	109			
PANTOM1-15-630-2			1.5	6.3		15.7	45.9	551	109			
PANTOM1-17.5-630-2			1.75	7.4		18.1	53.6	643	110			
PANTOM1-20-630-2			2	8.4		18.9	61.3	735	109			
PANTOM1-025-800-2		800	0.25	1.4		8.3	7.7	92	145		3	140
PANTOM1-05-800-2			0.5	2.7		7.9	15.3	184	140			
PANTOM1-10-800-2			1	5.4		13.4	30.6	367	141			
PANTOM1-15-800-2			1.5	8		19.5	45.9	551	139			
PANTOM1-17.5-800-2			1.75	9.4		21.7	53.6	643	140			
PANTOM1-20-800-2			2	10.7		24.2	61.3	735	139			
PANTOM1-025-1000-2		1000	0.25	1.7		9.5	7.7	92	177		3	150
PANTOM1-05-1000-2			0.5	3.4		9.3	15.3	184	176			
PANTOM1-10-1000-2			1	6.7		16.6	30.6	367	174			
PANTOM1-15-1000-2			1.5	10		25.2	45.9	551	173			
PANTOM1-17.5-1000-2			1.75	11.7		26.8	53.6	643	174			
PANTOM1-20-1000-2			2	13.4		30.8	61.3	735	174			
PANTOM1-025-300-2		300	0.25	0.5	220	6.0	7.7	92	52		2	125
PANTOM1-05-300-2			0.5	1		5.6	15.3	184	52			
PANTOM1-10-300-2			1	2		11.1	30.6	367	52			
PANTOM1-15-300-2			1.5	3		18.4	45.9	551	52			
PANTOM1-17.5-300-2			1.75	3.5		18.4	53.6	643	52			
PANTOM1-20-300-2			2	4		18.5	61.3	735	52			
PANTOM1-025-450-2		450	0.25	0.75		8.6	7.7	92	78		2	125
PANTOM1-05-450-2			0.5	1.5		8.3	15.3	184	78			
PANTOM1-10-450-2			1	3		16.4	30.6	367	78			
PANTOM1-15-450-2			1.5	4.5		27.2	45.9	551	78			
PANTOM1-17.5-450-2			1.75	5.3		27.5	53.6	643	79			
PANTOM1-20-450-2			2	6		27.3	61.3	735	78			
PANTOM1-025-630-2		630	0.25	1.1		15.2	7.7	92	114		3	130
PANTOM1-05-630-2			0.5	2.1		14.1	15.3	184	109			
PANTOM1-10-630-2			1	4.2		21.0	30.6	367	109			
PANTOM1-15-630-2			1.5	6.3		31.5	45.9	551	109			
PANTOM1-025-800-2		800	0.25	1.4		16.3	7.7	92	145		3	140
PANTOM1-05-800-2			0.5	2.7		15.5	15.3	184	140			
PANTOM1-10-800-2			1	5.4		25.9	30.6	367	141			
PANTOM1-025-1000-2		1000	0.25	1.7		19.4	7.7	92	177		3	150
PANTOM1-05-1000-2			0.5	3.4		19.1	15.3	184	176			
PANTOM1-10-1000-2			1	6.7		30.8	30.6	367	174			

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.




PANTOM1

(Sheave Φ104)

Max Axle Load		4000 [kg]
Working Duty		S5-40% ED
Ins. Class		F
Poles		10
IP Rating		IP 41
Brake	Current	2 x 1.1 [A] (Open / Hold)
	Voltage	DC 110 [V] (Open / Hold)
	Torque	2 x 300 [N·m]

Dimension

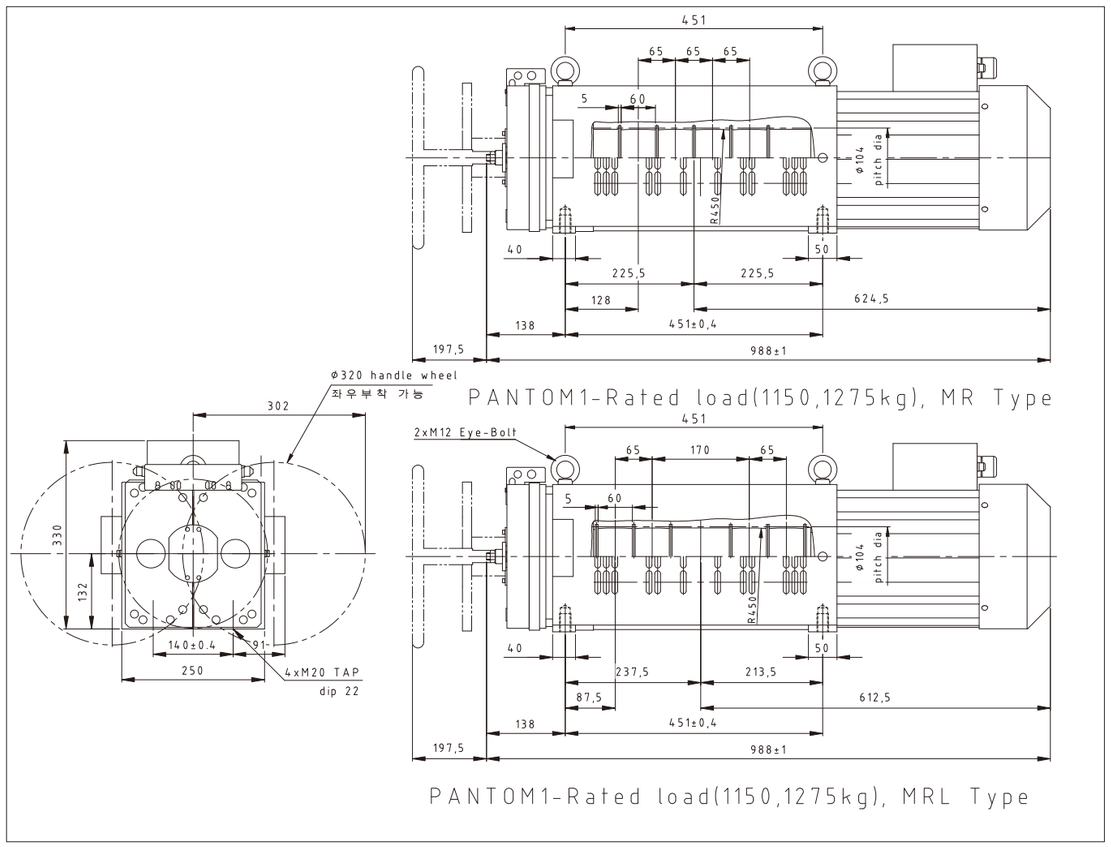

Specification

Type	Roping	Load (kg)	Speed (m/s)	Motor						Sheave		Weight (kg)
				Output (kW)	Volt. (V)	Current (A)	Freq. (Hz)	Rev. (rpm)	Rated Torque (N·m)	Dia. (mm)	Belt No	
PANTOM1-025-1150-2	2:1	1150	0.25	2	380	11.3	7.7	92	208	104	4	160
PANTOM1-05-1150-2			0.5	3.9		10.8	15.3	184	202			
PANTOM1-10-1150-2			1	7.7		18.5	30.6	367	200			
PANTOM1-15-1150-2			1.5	11.6		30.5	45.9	551	201			
PANTOM1-17.5-1150-2			1.75	13.5		30.4	53.6	643	201			
PANTOM1-20-1150-2			2	15.4		35.5	61.3	735	200			
PANTOM1-025-1275-2		1275	0.25	2.1		11.8	7.7	92	218			
PANTOM1-05-1275-2			0.5	4.2		11.6	15.3	184	218			
PANTOM1-10-1275-2			1	8.4		20.2	30.6	367	219			
PANTOM1-15-1275-2			1.5	12.6		33.1	45.9	551	218			
PANTOM1-17.5-1275-2			1.75	14.7		33.1	53.6	643	218			
PANTOM1-20-1275-2			2	16.8		38.7	61.3	735	218			
PANTOM1-025-1150-2		1150	0.25	2	220	22.6	7.7	92	208			
PANTOM1-05-1150-2			0.5	3.9		21.6	15.3	184	202			
PANTOM1-025-1275-2		1275	0.25	2.1		23.7	7.7	92	218			
PANTOM1-05-1275-2			0.5	4.2		23.3	15.3	184	218			

※ 위 시방은 지속적 기술개발에 따라 예고 없이 변경 가능합니다. Above spec can be changed by continous development without pre-notice.
※ A종 로프를 권장합니다.