www.kliftmotor.com

(주)K-LIFT

TOTAL SOLUTION PROVIDER IN ELEVATOR

케이리프트는 최고가 되기 위해 최고의 노력으로 전진합니다.

새로운 미래를 만들어가는 **케이리프트**가
Traction machine 업계의 새로운 미래를
만들어 가겠습니다.

탄탄한 기술력을 바탕으로
고객과의 동반 성장을 주도하고
고객 감동을 위해 매순간 최선을 다하고 있으며
고객 Needs에 부합되는 최상의 제품 구현을 위한
기술개발에 최선을 다하고 있습니다.

건축산업과 산업체 실무 현장 실무자의 의견을
최대한 반영한 장비의 빠른 공급은
케이리프트의 자랑 입니다.

끊임없는 도전정신과 열정으로 경쟁력을 강화하여
새로운 능력, 전문성 구축을 위해 최선을 다하는
기업으로 거듭나겠습니다.

케이리프트의 최고를 위한 도전은 계속됩니다.









Product List | 제품리스트

■ K1-480

Shaft Load	**6,000 kg**
Wrapping	Single
Ropping	**1 : 1**
Usage	Machine Room
Rated Speed	**0.75~2.0 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110V, 1.64Ax2
Braking Torque	2x1,425 N·m (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
480	12	19	30°	105°




■ K1-520

Shaft Load	**8,000 kg**
Wrapping	Single
Ropping	**1 : 1**
Usage	Machine Room
Rated Speed	**0.75~2.0 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110V, 2.1Ax2
Braking Torque	2x2,600 N·m (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
520	12	19	30°	105°

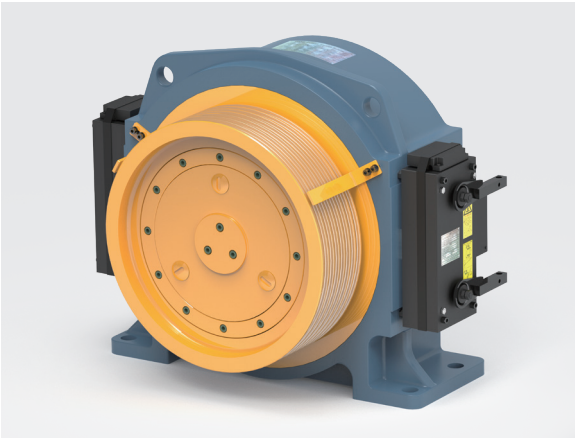


■ K2-400

Shaft Load	**3,000 kg**
Wrapping	Single
Ropping	**2 : 1**
Usage	Machine Room / Machine Room Less
Rated Speed	**0.5~2.5 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110V, 1.38Ax2
Braking Torque	2X994 N·m (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
400	12	19	30°	105°
			35°	95°

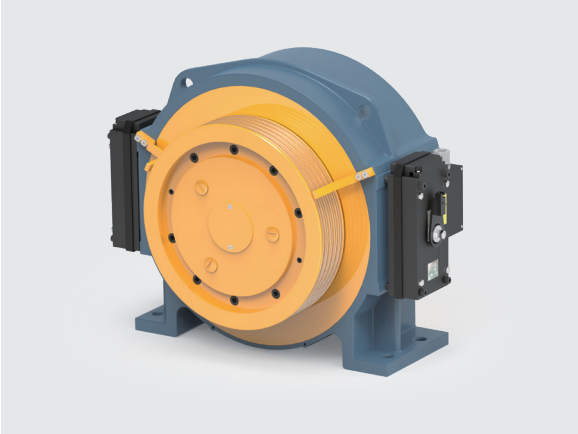


■ K2-520F

Shaft Load	**15,000 kg**
Wrapping	Single
Ropping	**2 : 1**
Usage	Machine Room
Rated Speed	**0.5~2.0 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110/70, 3×4.5/2.86
Braking Torque	≥2×5945 (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
520	12	19	30°	105°
			35°	95°

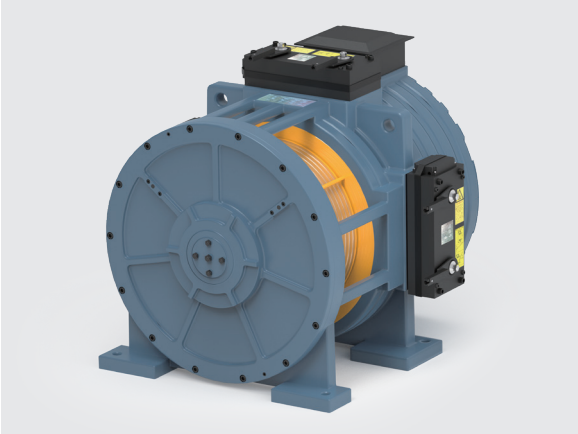


*주) 제품의 성능향상을 위해 예고 없이 사양이 변경될 수 있습니다. Specification can be changed without prior notice for product improvement.


K1-480 | 450kg - 750kg


Shaft Load	**6,000 kg**
Wrapping	Single
Ropping	**1 : 1**
Usage	Machine Room
Rated Speed	**0.75~2.0 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110V, 1.64Ax2
Braking Torque	2x1,425 N·m (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
480	12	19	30°	105°

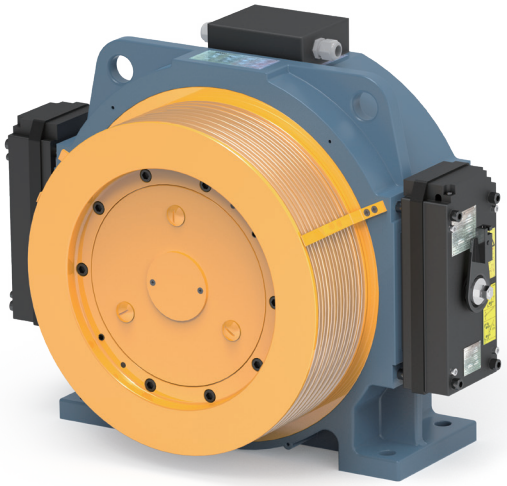

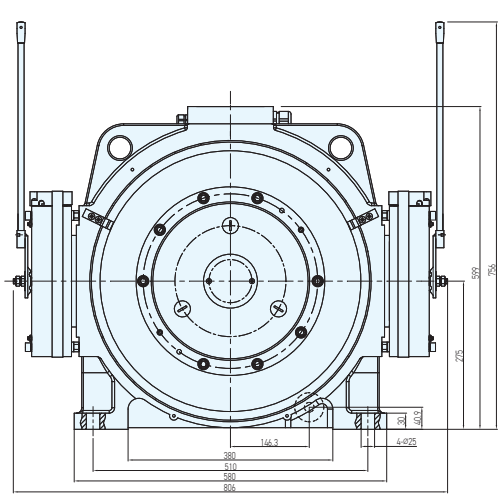

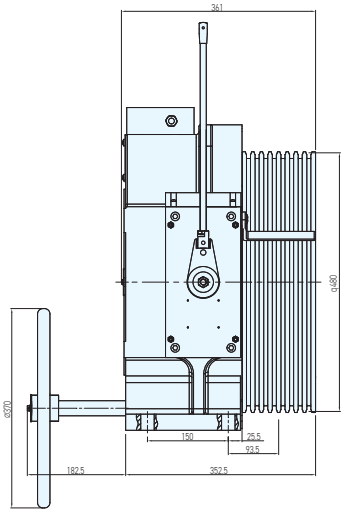

Load (kg)	Speed (m/s)	Roping	Poles	Voltage (V)	Motor Parameter					Brake parameter				Sheave Parameter		
					Rated power (kW)	Rated Torque (N.m)	Rated Speed (RPM)	Rated Erequency (Hz)	Rated Current (A)	Current (A)	Voltage (V)	Rated power (W)	Braking Torque (N.m)	nxd (mm, ϕ)	Diameter (ϕ)	Pitch (mm)
450	0.75	1:1	32	380	2.2	695	30	8	5	2×1.64	DC110	2×180	2×1425	4×ϕ12	480	19
	1				2.8		40	10.7	6.6							
	1.5				4.3		60	16	10							
	1.75				4.9		70	18.7	11.6							
	2				5.6		80	21.3	13.2							
550	0.75				2.6	763	30	8	6					4×ϕ12	480	19
	1				3.4		40	10.7	8							
	1.5				5.2		60	16	11							
	1.75				6		70	18.7	12.8							
	2				6.9		80	21.3	16							
680	0.75				3.2	1040	30	8	7.5					5×ϕ12	480	19
	1				4.3		40	10.7	10							
	1.5				6.4		60	16	15							
	1.75				7.4		70	18.7	17.5							
	2				8.5		80	21.3	20							
750	0.75				3.6	1140	30	8	8.3					5×ϕ12	480	19
	1				4.7		40	10.7	11							
	1.5				7.1		60	16	16.5							
	1.75				8.2		70	18.7	19.3							
	2				9.4		80	21.3	22							


*주) 제품의 성능향상을 위해 예고 없이 사양이 변경될 수 있습니다. Specification can be changed without prior notice for product improvement.


K1-520 | 750kg - 1275kg


Shaft Load	**8,000 kg**
Wrapping	Single
Ropping	**1 : 1**
Usage	Machine Room
Rated Speed	**0.75~2.0 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110V, 2.1Ax2
Braking Torque	2x2,600 N·m (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
520	12	19	30°	105°

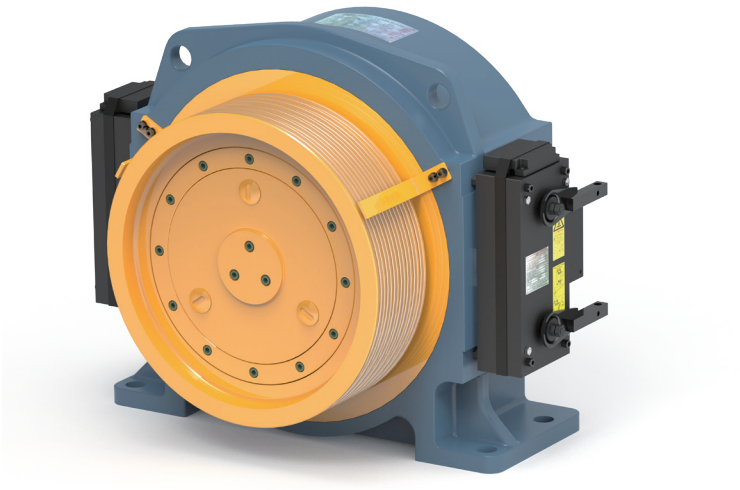

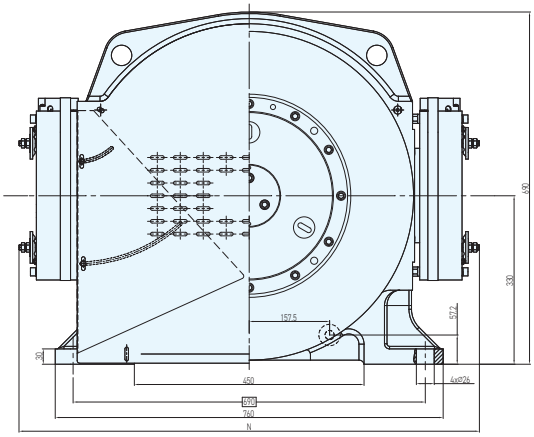

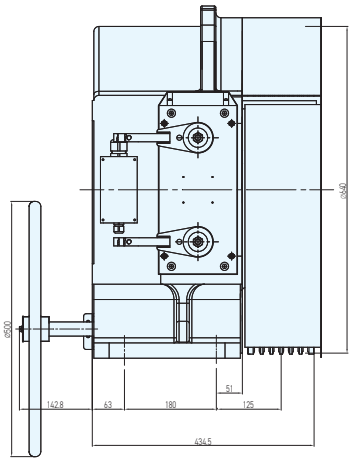

Load (kg)	Speed (m/s)	Roping	Poles	Voltage (V)	Motor Parameter					Brake parameter				Sheave Parameter		
					Rated power (kW)	Rated Torque (N.m)	Rated Speed (RPM)	Rated Erequency (Hz)	Rated Current (A)	Current (A)	Voltage (V)	Rated power (W)	Braking Torque (N.m)	nxd (mm, ϕ)	Diameter (ϕ)	Pitch (mm)
750	0.75	1:1	32	380	3.7	1245	28	7.5	9.4	2×2.1	DC110V	2×231	2×2600	4×ϕ12	520	19
	1				4.8		37	9.9	12							
	1.5				7.2		55	14.7	18.3							
	1.75				8.4		64	17.1	21							
	2				9.6		73	19.5	22.5							
800	0.75				3.9	1328	28	7.5	10					5×ϕ12	520	19
	1				5.1		37	9.9	12.8							
	1.5				7.7		55	14.7	19.5							
	1.75				9		64	17.1	22.4							
	2				10.2		73	19.5	24							
1000	0.75				4.8	1660	28	7.5	12					5,6×ϕ12	520	19
	1				6.4		37	9.9	16							
	1.5				9.6		55	14.7	24.1							
	1.75				11.2		64	17.1	28							
	2				12.7		73	19.5	30							
1150	0.75				5.5	1914	28	7.5	13.8					6,7×ϕ12	520	19
	1				7.4		37	9.9	18.4							
	1.5				11		55	14.7	27.6							
	1.75				12.9		64	17.1	32.2							
	2				14.7		73	19.5	34							
1275	0.75				6	2080	28	7.5	15					6,7×ϕ12	520	19
	1				8		37	9.9	20							
	1.5				12		55	14.7	30							
	1.75				14		64	17.1	35							
	2				16		73	19.5	37							


*주) 제품의 성능향상을 위해 예고 없이 사양이 변경될 수 있습니다. Specification can be changed without prior notice for product improvement.


K2-400 | 450kg - 1250kg


Shaft Load	**3,000 kg**
Wrapping	Single
Ropping	**2 : 1**
Usage	Machine Room
Rated Speed	**0.5~2.5 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110V, 1.38Ax2
Braking Torque	2X994 N·m (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
400	12	19	30°	105°
			35°	95°

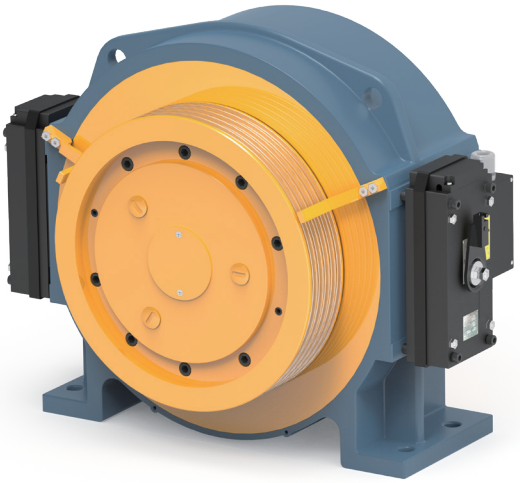

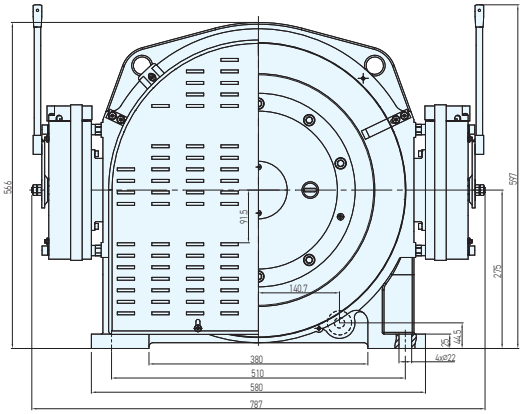

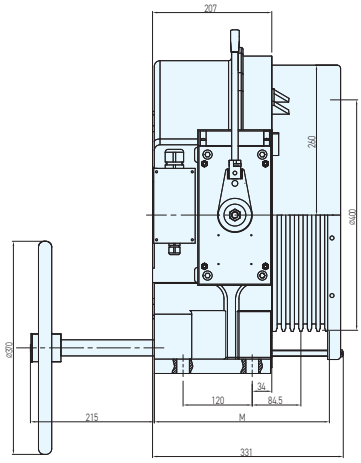

Load (kg)	Speed (m/s)	Roping	Poles	Voltage (V)	Motor Parameter					Brake parameter				Sheave Parameter		
					Rated power (kW)	Rated Torque (N.m)	Rated Speed (RPM)	Rated Erequency (Hz)	Rated Current (A)	Current (A)	Voltage (V)	Rated power (W)	Braking Torque (N.m)	nxd (mm, ϕ)	Diameter (ϕ)	Pitch (mm)
450	0.5	2:1	32	380	1.4	286	48	12.8	3.4	2×1.15	DC110V	2x129	2×710	ϕ400	3,4,5×ϕ10	19
	1				2.9		96	25.6	6.9							
	1.5				4.3		144	38.4	10.4							
	1.75				5		168	44.8	11.3							
630	0.5				2	400	48	12.8	4.8						3,4,5×ϕ10	19
	1				4		96	25.6	9.6							
	1.5				6		144	38.4	14.5							
	1.75				7		168	44.8	15.8							
800	0.5				2.5	510	48	12.8	6						3,4,5×ϕ10	19
	1				5		96	25.6	12							
	1.5				7.8		144	38.4	18.5							
	1.75				9		168	44.8	21							
	2				10.2		189	50.4	25							
	2.5				12.8		240	64	32							
1000	0.5				3.2	640	48	12.8	7.8				2×850		3,4,5×ϕ10	19
	1				6.4		96	25.6	15							
	1.5				9		144	38.4	22							
	1.75				11		168	44.8	26							
	2				13.5	670	189	50.4	31.5							
	2.5				17		240	64	39							
1150	0.5				3.7	730	48	12.8	8.5	2X1.38	DC110	2x152	2×913	ϕ400	3,4,5×ϕ10	19
	1				7.3		96	25.6	16.5							
	1.5				11		144	38.4	25							
	1.75				12.8		168	44.8	29							
	2				14.6		189	50.4	33							
	2.5				18.5		240	64	42							
1250	0.5				4	795	48	12.8	9				2×994		3,4,5×ϕ10	19
	1				8		96	25.6	18							
	1.5				12		144	38.4	27.5							
	1.75				14		168	44.8	31							
	2				16		189	50.4	36							
	2.5				20		240	64	46							


*주) 제품의 성능향상을 위해 예고 없이 사양이 변경될 수 있습니다. Specification can be changed without prior notice for product improvement.


K2-520F | 3500kg - 5500kg


Shaft Load	**15,000 kg**
Wrapping	Single
Ropping	**2 : 1**
Usage	Machine Room
Rated Speed	**0.5~2.0 m/s**
Protection Class	IP41 (F)
Rated Power	ϕ3, AC380V(AC220V)
Brake	Electro Magnetic Dual Brake
Excitation Voltage	DC110/70, 3×4.5/2.86
Braking Torque	≥2×5945 (max.)
Encoder	Heidenhain 1387-2048

Groove Profile (mm)

ϕD	ϕd	P	γ	β
520	12	19	30°	30°
			35°	95°

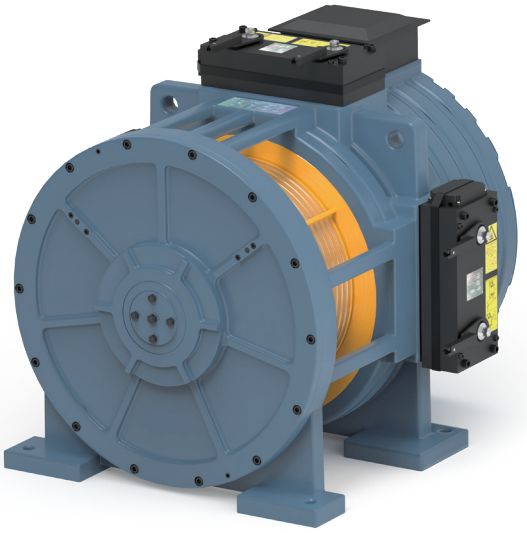

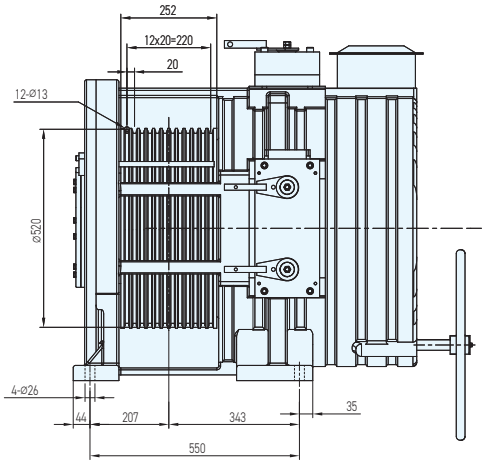

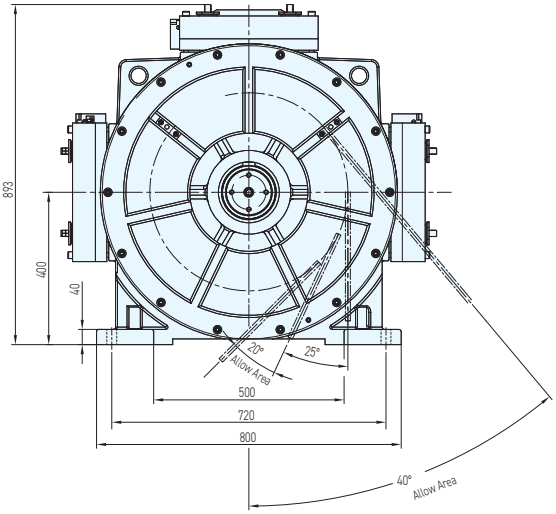

Load (kg)	Speed (m/s)	Roping	Poles	Voltage (V)	Motor Parameter					Brake parameter				Sheave Parameter		
					Rated power (kW)	Rated Torque (N.m)	Rated Speed (RPM)	Rated Erequency (Hz)	Rated Current (A)	Current (A)	Voltage (V)	Rated power (W)	Braking Torque (N.m)	nxd (mm, ϕ)	Diameter (ϕ)	Pitch (mm)
3500	0.5	2:1	32	380	11.7	3026	37	9.9	26	3×4.5/2.86	DC110/70	3×495/200	≥2×3783	520	7,8,9×ϕ12	19
	1				23.3		73	19.5	52.5							
	1.5				34.9		110	29.3	79							
	1.75				40.7		129	34.4	92							
	2				46.6		147	39.2	105							
4000	0.5				13.3	3459	37	9.9	30				≥2×4324	520	7,8,9×ϕ12	19
	1				26.6		73	19.5	60							
	1.5				39.9		110	29.3	90							
	1.75				46.6		129	34.4	105							
	2				53.2		147	39.2	120							
5000	0.5				16.7	4324	37	9.9	37.5				≥2×5405	520	7,8,9×ϕ12	19
	1				33.3		73	19.5	75							
	1.5				49.9		110	29.3	102.5							
	1.75				58.2		129	34.4	131							
	2				66.5		147	39.2	150							
5500	0.5				18.4	4756	37	9.9	41.3				≥2×5945	520	7,8,9×ϕ12	19
	1				36.8		73	19.5	82.5							
	1.5				55.1		110	29.3	112.8							
	1.75				64.4		129	34.4	144							
	2				73.6		147	39.2	165							
7000	0.25	4:1			11.7	3026	37	9.9	26	3×4.5/2.86	DC110/70	3×495/200	≥2×3783	520	7,8,9×ϕ12	19
	0.5				23.3		73	19.5	52.5							
	1				46.6		147	39.2	105							
8000	0.25				13.3	3459	37	9.9	30				≥2×4324	520	7,8,9×ϕ12	19
	0.5				26.6		73	19.5	60							
	1				53.2		147	39.2	120							
10000	0.25				16.7	4324	37	9.9	37.5				≥2×5405	520	7,8,9×ϕ12	19
	0.5				33.3		73	19.5	75							
	1				66.5		147	39.2	150							
11000	0.25				18.4	4756	37	9.9	41.3				≥2×5945	520	7,8,9×ϕ12	19
	0.5				36.8		73	19.5	82.5							
	1				73.6		147	39.2	165							

*주) 제품의 성능향상을 위해 예고 없이 사양이 변경될 수 있습니다. Specification can be changed without prior notice for product improvement.

Ver. 100 2024. 08. Design & 3D Rendering by 032indesign T.032-8888-032 / 1522-7664

(주)K-LIFT
TOTAL SOLUTION PROVIDER IN ELEVATOR

본사 : 서울특별시 강서구 마곡중앙6로 11 보타닉파크타워3, 1017호
공장 : 경기도 김포시 종생로 97
전화 : 02-6951-2291
팩스 : 070-8282-2291
e-mail : k1@kliftmotor.com
www.kliftmotor.com