SPEChpc™ 2021 Tiny Result

Cray
(Test Sponsor: University of Bristol)

Isambard 2: XC50 (ThunderX2)

SPEChpc 2021_tny_base = 2.87

SPEChpc 2021_tny_peak = Not Run

hpc2021 License: ?
Test Sponsor: University of Bristol
Tested by: University of Bristol

Test Date: Jul-2022
Hardware Availability: May-2018
Software Availability: Mar-2020

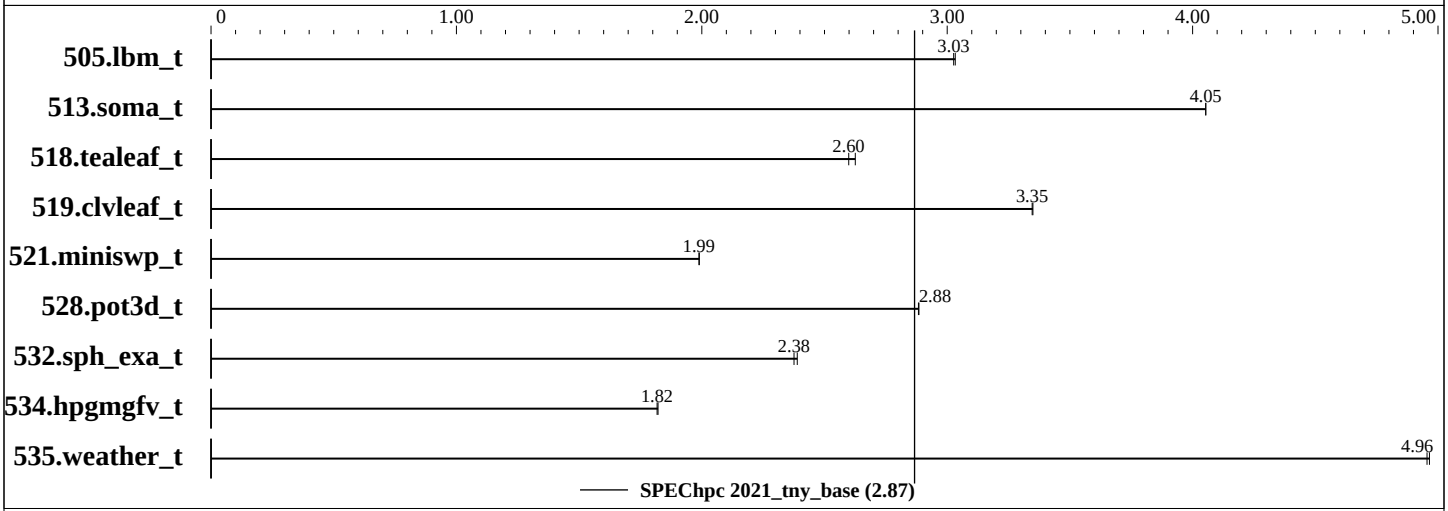

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	MPI	128	1	742	3.03	**743**	**3.03**											
513.soma_t	MPI	128	1	913	4.05	**913**	**4.05**											
518.tealeaf_t	MPI	128	1	628	2.63	**635**	**2.60**											
519.clvleaf_t	MPI	128	1	493	3.35	**493**	**3.35**											
521.miniswp_t	MPI	128	1	**805**	**1.99**	804	1.99											
528.pot3d_t	MPI	128	1	737	2.88	**737**	**2.88**											
532.sph_exa_t	MPI	128	1	**821**	**2.38**	816	2.39											
534.hpgmgfv_t	MPI	128	1	**646**	**1.82**	645	1.82											
535.weather_t	MPI	128	1	650	4.97	**651**	**4.96**											

SPEChpc 2021_tny_base = 2.87
SPEChpc 2021_tny_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Tiny Result

Cray
(Test Sponsor: University of Bristol)

Isambard 2: XC50 (ThunderX2)

SPEChpc 2021_tny_base = 2.87

SPEChpc 2021_tny_peak = Not Run

hpc2021 License: ?
Test Sponsor: University of Bristol
Tested by: University of Bristol

Test Date: Jul-2022
Hardware Availability: May-2018
Software Availability: Mar-2020

Hardware Summary

Type of System:	Homogenous Cluster
Compute Node:	ThunderX2
Interconnect:	Cray Aries
Compute Nodes Used:	2
Total Chips:	4
Total Cores:	128
Total Threads:	512
Total Memory:	512 GB
Max. Peak Threads:	--

Software Summary

Compiler:	HPE Cray Programming Environment (CPE), C/C++/Fortran: Cray clang version 11.0.4
MPI Library:	HPE Cray Programming Environment (CPE), Cray-mvapich2 Version 2.3.6
Other MPI Info:	--
Other Software:	--
Base Parallel Model:	MPI
Base Ranks Run:	128
Base Threads Run:	1
Peak Parallel Models:	Not Run
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--
Max. Peak Threads:	--
Min. Peak Threads:	--

Node Description: ThunderX2

Hardware

Number of nodes:	2
Uses of the node:	Compute
Vendor:	N/A
Model:	N/A
CPU Name:	Marvell ThunderX2 CN9980
CPU(s) orderable:	N/A
Chips enabled:	2
Cores enabled:	64
Cores per chip:	32
Threads per core:	4
CPU Characteristics:	Permanent turbo to 2.5 GHz
CPU MHz:	2100
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	32 MB I+D on chip per chip 0.5 MB shared / 64 cores
Other Cache:	None
Memory:	256 GB (8 x 32 GB)
Disk Subsystem:	--
Other Hardware:	None
Accel Count:	N/A
Accel Model:	N/A
Accel Vendor:	N/A
Accel Type:	N/A
Accel Connection:	N/A
Accel ECC enabled:	N/A
Accel Description:	N/A
Adapter:	None
Number of Adapters:	0
Slot Type:	None

(Continued on next page)

Software

Accelerator Driver:	--
Adapter:	None
Adapter Driver:	None
Adapter Firmware:	None
Operating System:	SUSE Linux Enterprise Server 15 SP1 Linux 4.12.14-197.7_5.0.99-cray_ari_s
Local File System:	xfs
Shared File System:	None
System State:	Multi-user, run level 3
Other Software:	None

Node Description: ThunderX2

Hardware (Continued)

Data Rate:	None
Ports Used:	0
Interconnect Type:	None

Interconnect Description: Cray Aries

Hardware

Vendor:	Cray
Model:	N/A
Switch Model:	N/A
	N/A
Number of Switches:	N/A
Number of Ports:	N/A
Data Rate:	14 Gb/s
Firmware:	N/A
Topology:	Dragonfly
Primary Use:	MPI Traffic

Software

: --

Submit Notes

```
The config file option 'submit' was used.
```

Compiler Version Notes

```
==============================================================================
 FC  519.clvleaf_t(base) 528.pot3d_t(base) 535.weather_t(base)
------------------------------------------------------------------------------
Cray Fortran : Version 11.0.4
------------------------------------------------------------------------------

==============================================================================
 CC  505.lbm_t(base) 513.soma_t(base) 518.tealeaf_t(base) 521.miniswp_t(base)
     534.hpgmgfv_t(base)
------------------------------------------------------------------------------
Cray clang version 11.0.4  (bc9473a12d1f2f43cde01f962a11240263bd8908)
Target: aarch64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/cray/pe/cce/11.0.4/cce-clang/aarch64/share/../bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 532.sph_exa_t(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Cray clang version 11.0.4  (bc9473a12d1f2f43cde01f962a11240263bd8908)
Target: aarch64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/cray/pe/cce/11.0.4/cce-clang/aarch64/share/../bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`ftn`

Base Optimization Flags

C benchmarks:
`-Ofast`

C++ benchmarks:
`-Ofast`

Fortran benchmarks:
`-Ofast`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.0.3 on 2022-07-03 14:34:35+0000.
Report generated on 2022-07-03 18:14:46 by hpc2021 PDF formatter v1.0.3.