SPEChpc™ 2021 Tiny Result

Cray
(Test Sponsor: University of Bristol)

Isambard 2: XC50 (ThunderX2)

SPEChpc 2021_tny_base = 1.61

SPEChpc 2021_tny_peak = Not Run

hpc2021 License: ?
Test Sponsor: University of Bristol
Tested by: University of Bristol

Test Date: Jun-2022
Hardware Availability: May-2018
Software Availability: Mar-2020

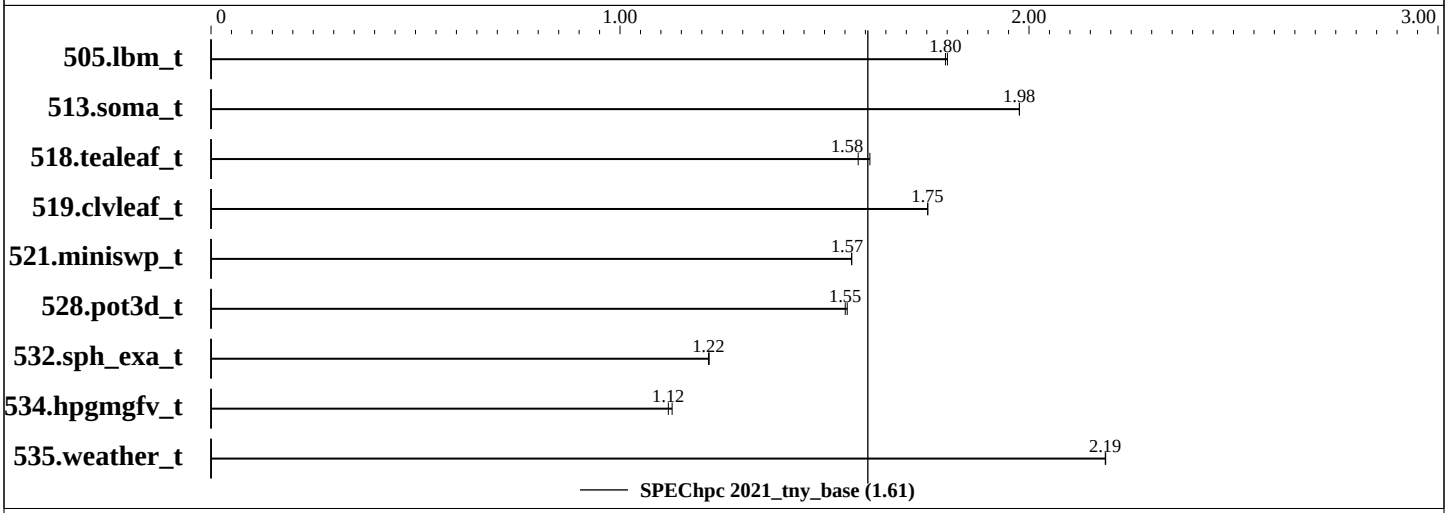

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	MPI	64	1	1250	1.80	**1253**	**1.80**											
513.soma_t	MPI	64	1	**1872**	**1.98**	1872	1.98											
518.tealeaf_t	MPI	64	1	1024	1.61	**1043**	**1.58**											
519.clvleaf_t	MPI	64	1	**942**	**1.75**	941	1.75											
521.miniswp_t	MPI	64	1	**1022**	**1.57**	1021	1.57											
528.pot3d_t	MPI	64	1	**1370**	**1.55**	1366	1.56											
532.sph_exa_t	MPI	64	1	1601	1.22	**1603**	**1.22**											
534.hpgmgfv_t	MPI	64	1	1042	1.13	**1051**	**1.12**											
535.weather_t	MPI	64	1	**1475**	**2.19**	1474	2.19											

SPEChpc 2021_tny_base = 1.61
SPEChpc 2021_tny_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Tiny Result

Cray
(Test Sponsor: University of Bristol)

Isambard 2: XC50 (ThunderX2)

SPEChpc 2021_tny_base = 1.61

SPEChpc 2021_tny_peak = Not Run

hpc2021 License: ?
Test Sponsor: University of Bristol
Tested by: University of Bristol

Test Date: Jun-2022
Hardware Availability: May-2018
Software Availability: Mar-2020

Hardware Summary

Type of System:	SMP
Compute Node:	ThunderX2
Interconnect:	Cray Aries
Compute Nodes Used:	1
Total Chips:	2
Total Cores:	64
Total Threads:	256
Total Memory:	256 GB
Max. Peak Threads:	--

Software Summary

Compiler:	HPE Cray Programming Environment (CPE), C/C++/Fortran: GCC Version 9.3.0
MPI Library:	HPE Cray Programming Environment (CPE), Cray-mvapich2 Version 2.3.6
Other MPI Info:	--
Other Software:	--
Base Parallel Model:	MPI
Base Ranks Run:	64
Base Threads Run:	1
Peak Parallel Models:	Not Run
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--
Max. Peak Threads:	--
Min. Peak Threads:	--

Node Description: ThunderX2

Hardware

Number of nodes:	1
Uses of the node:	Compute
Vendor:	N/A
Model:	N/A
CPU Name:	Marvell ThunderX2 CN9980
CPU(s) orderable:	N/A
Chips enabled:	2
Cores enabled:	64
Cores per chip:	32
Threads per core:	4
CPU Characteristics:	Permanent turbo to 2.5 GHz
CPU MHz:	2100
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	32 MB I+D on chip per chip 0.5 MB shared / 64 cores
Other Cache:	None
Memory:	256 GB (8 x 32 GB)
Disk Subsystem:	--
Other Hardware:	None
Accel Count:	N/A
Accel Model:	N/A
Accel Vendor:	N/A
Accel Type:	N/A
Accel Connection:	N/A
Accel ECC enabled:	N/A
Accel Description:	N/A
Adapter:	None
Number of Adapters:	0
Slot Type:	None

(Continued on next page)

Software

Accelerator Driver:	--
Adapter:	None
Adapter Driver:	None
Adapter Firmware:	None
Operating System:	SUSE Linux Enterprise Server 15 SP1 Linux 4.12.14-197.7_5.0.99-cray_ari_s
Local File System:	xfs
Shared File System:	None
System State:	Multi-user, run level 3
Other Software:	None

Node Description: ThunderX2

Hardware (Continued)

Data Rate:	None
Ports Used:	0
Interconnect Type:	None

Interconnect Description: Cray Aries

Hardware

Vendor:	Cray
Model:	N/A
Switch Model:	N/A
	N/A
Number of Switches:	N/A
Number of Ports:	N/A
Data Rate:	14 Gb/s
Firmware:	N/A
Topology:	Dragonfly
Primary Use:	MPI Traffic

Software

: --

Submit Notes

```
The config file option 'submit' was used.
```

Compiler Version Notes

```
==============================================================================
 FC  519.clvleaf_t(base) 528.pot3d_t(base) 535.weather_t(base)
------------------------------------------------------------------------------
GNU Fortran (GCC) 9.3.0 20200312 (Cray Inc.)
Copyright (C) 2019 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
 CXXC 532.sph_exa_t(base)
------------------------------------------------------------------------------
g++ (GCC) 9.3.0 20200312 (Cray Inc.)
Copyright (C) 2019 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
 CC  505.lbm_t(base) 513.soma_t(base) 518.tealeaf_t(base) 521.miniswp_t(base)
     534.hpgmgfv_t(base)
------------------------------------------------------------------------------
gcc (GCC) 9.3.0 20200312 (Cray Inc.)
Copyright (C) 2019 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`ftn`

Base Optimization Flags

C benchmarks:
`-Ofast`

C++ benchmarks:
`-Ofast`

Fortran benchmarks:
`-Ofast`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.0.3 on 2022-06-30 13:40:06+0000.
Report generated on 2022-06-30 20:09:16 by hpc2021 PDF formatter v1.0.3.