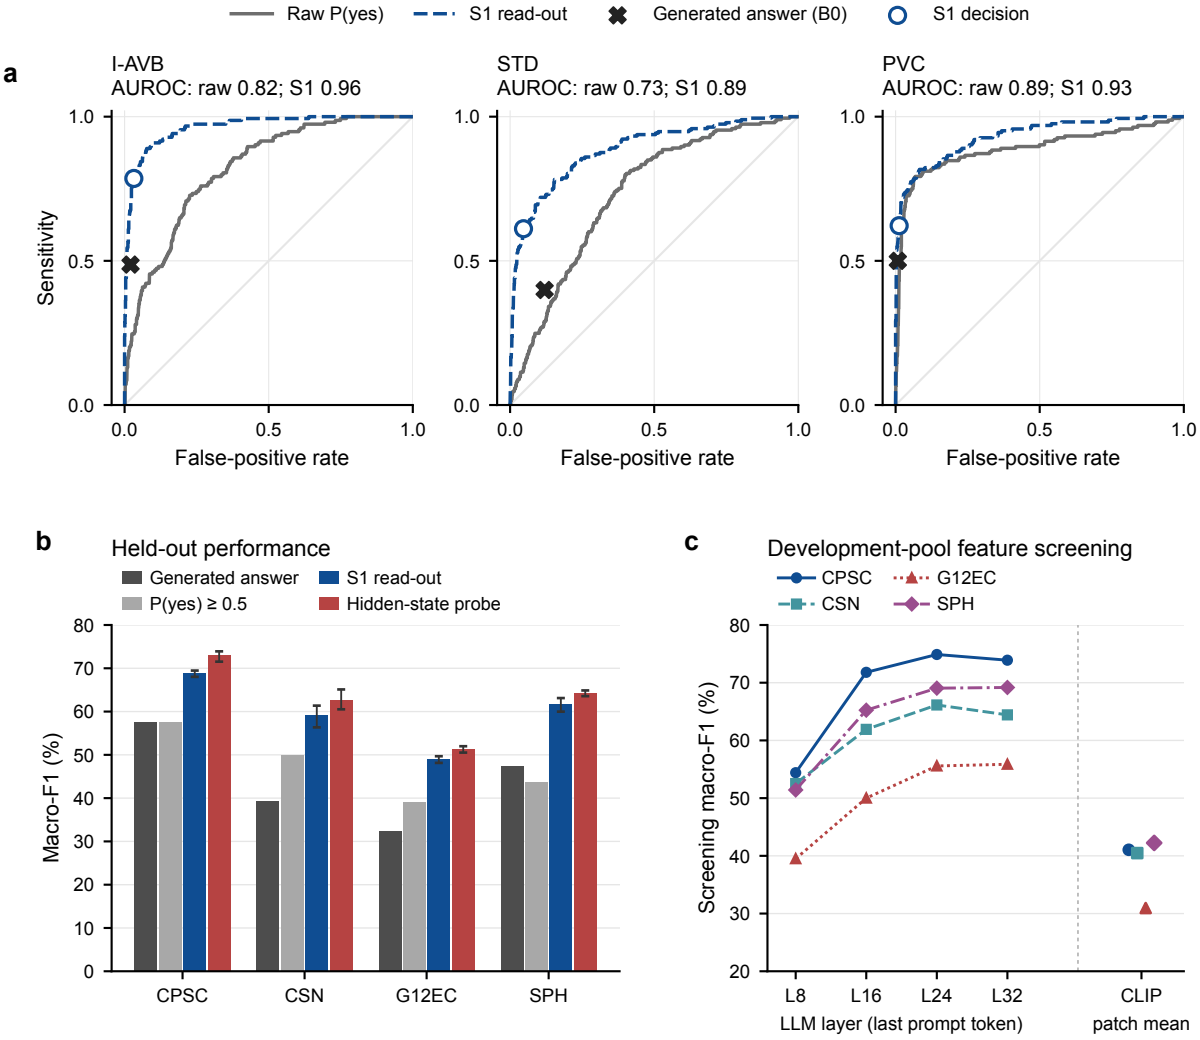
Raw P(yes)
S1 read-out
Generated answer (B0)
S1 decision
a
I-AVB
AUROC: raw 0.82; S1 0.96
STD
AUROC: raw 0.73; S1 0.89
PVC
AUROC: raw 0.89; S1 0.93
Sensitivity
False-positive rate
b
Held-out performance
Generated answer
S1 read-out
P(yes) ≥ 0.5
Hidden-state probe
Macro-F1 (%)
CPSC
CSN
G12EC
SPH
c
Development-pool feature screening
CPSC
G12EC
CSN
SPH
Screening macro-F1 (%)
L8
L16
L24
L32
CLIP
LLM layer (last prompt token)
patch mean