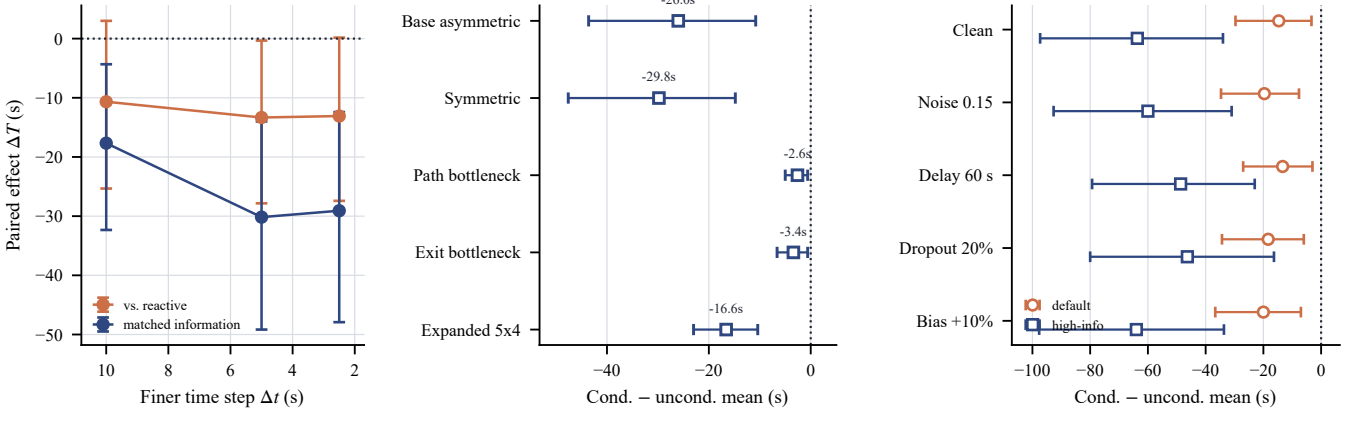

(a) Time-step robustness
Paired effect ΔT (s)
0
−10
−20
−30
−40
−50
vs. reactive
matched information
10
8
6
4
2
Finer time step Δt (s)
(b) Network-family transfer
Base asymmetric
-26.0s
Symmetric
-29.8s
Path bottleneck
-2.6s
Exit bottleneck
-3.4s
Expanded 5x4
-16.6s
−40
−20
0
Cond. − uncond. mean (s)
(c) Estimate faults
Clean
Noise 0.15
Delay 60 s
Dropout 20%
Bias +10%
default
high-info
−100
−80
−60
−40
−20
0
Cond. − uncond. mean (s)