TOL. GRADE	TOLERANCE		
B	f	m	c
6 < L ≤ 4	±0.1	±0.2	±0.3
4 < L ≤ 16	±0.2		
16 < L ≤ 63	±0.3	±0.3	±0.5
63 < L ≤ 250	±0.5	±0.5	±0.8
250 < L ≤ 1000	±0.8	±0.8	±1.2
1000 < L	±1.5	±1.5	±2.3

CHANGED CONTENTS	SYM	DATE	DES	CHE	APP

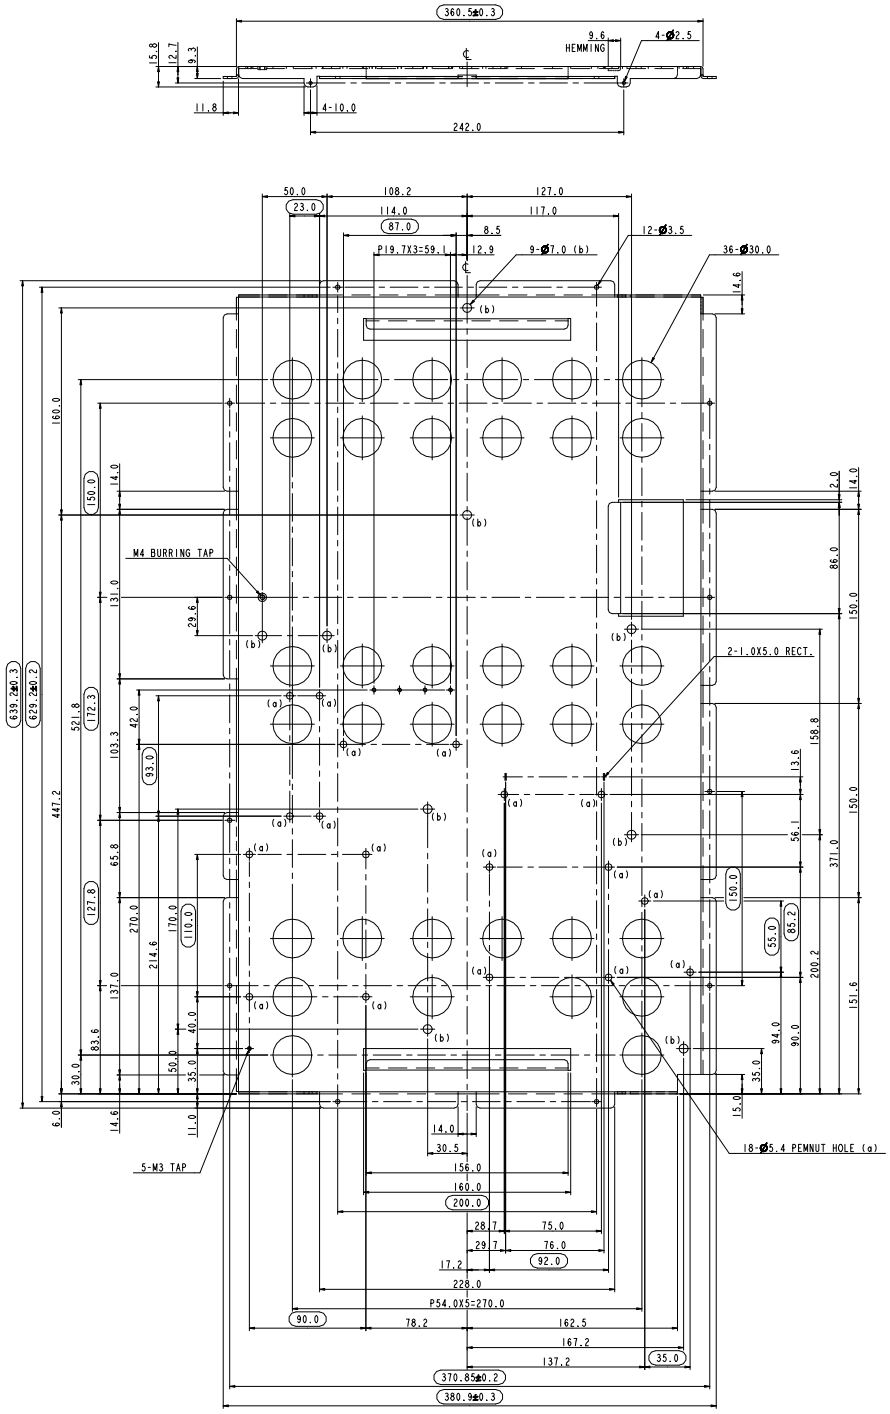

L»탭»헤밍»절곡»압입

연습용 +3



<3D VIEW>
SCALE 1/5

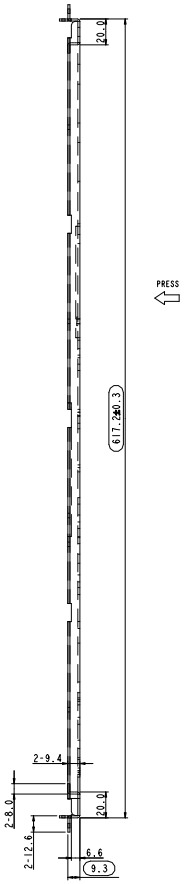

#참조도:중간공정,절곡
USEGI_1.6T R=0.6

P/N : 4000500642

SAMPLE

NOTES.
1. Specifications of material and post-processing: SECC,
   Post-processing should be AG(Anti-finger General) or AC(Anti-finger Conductivity)
2. In the same plane, tolerance between hole and hole is ±0.1 or less.
3. Press(=Punching), Pay attention to direction.
4. Unspecified R=3.0
5. Next Process :
   1) PEM NUT indenting
   2) Rust proofing treatment
6. ◯: This mark means the dimension to be inspected.

NOTES.
1. 재질 및 후처리 사양: SECC,
   후처리 사양은 AG(Anti-finger General) 또는 AC(Anti-finger Conductivity)일 것
2. 동일 평면상의 Hole간 거리공차는 ±0.1 이하일 것
3. Press(=Punching) 방향에 유의 할 것
4. 지시 없는 R=3.0
5. 후공정 :
   1) PEM NUT 압입
   2) 방청 작업
6. ◯ 표시부는 수검 관리 치수임.

▶MATERIAL	SECC1.6t		▶PART NAME	▶SCALE
▶SURFACE			STEEL; BASE:SECC:1.6	1/2
▶DESIGNED	▶CHECKED	▶APPROVED		▶SHEET
2026.03.25	2026.03.25	2026.03.25		1/1
김동현	남영준	문창환		
HYOSUNG TNS			▶PART No. 4000500642	▶SYM 00

본 도면은 효성TNS 자산으로 영업비밀로 엄격히 관리되며 무단 배포 및 불법적인 사용을 금합니다.
This drawing is property of Hyosung TNS INC. and strictly treated as a trade secret.
Therefore unauthorized distribution and illegal use are prohibited.