TOL.GRADE / R	TOLERANCE		
	Ⅰ	Ⅱ	Ⅲ
0 < L ≤ 4	±0.1	±0.2	±0.3
4 < L ≤ 16	±0.2		
16 < L ≤ 63	±0.3	±0.3	±0.5
63 < L ≤ 250	±0.5	±0.5	±0.8
250 < L ≤ 1000	±0.8	±0.8	±1.2
1000 < L	±1.5	±1.5	±2.3

CHANGED CONTENTS	SYM	DATE	DES	CHE	APP

»압입»도장

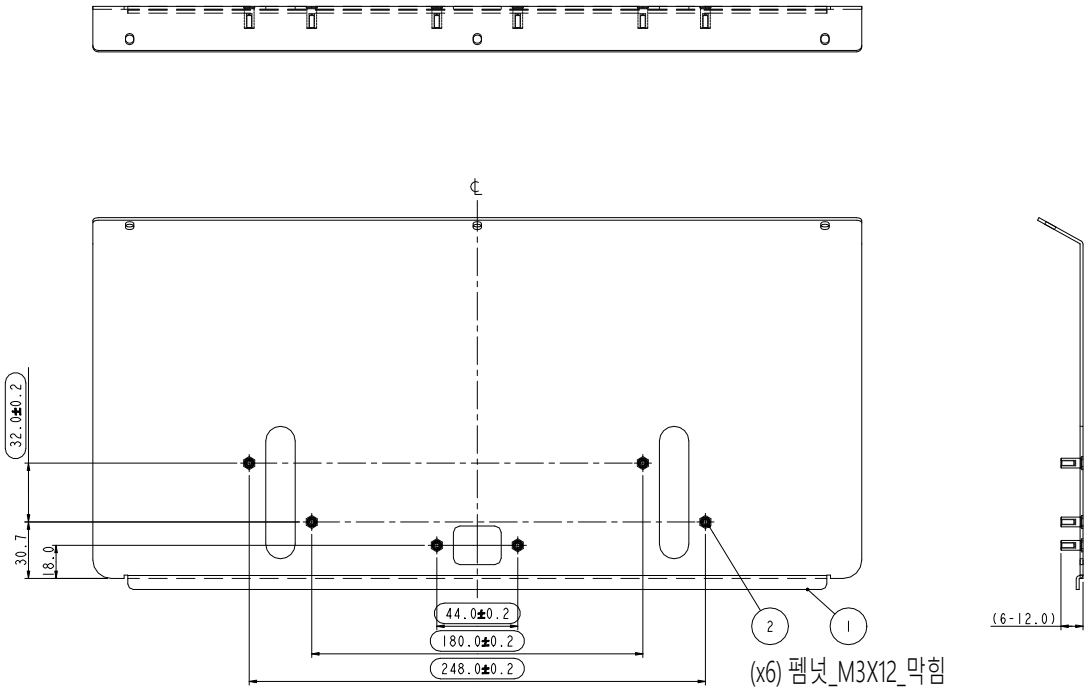



<3D VIEW>
SCALE 1/5

P/N : 4140500242

SAMPLE

NOTES.
1. This is a drawing for PEM NUT indentation and painting.
2. Make sure to maintain the perpendicularity after indentation.
3. Make sure to maintain torque-out strength as below.
   - M3 PEM NUT : 30Kgf.cm or more, M4/M5 PEM NUT : 60Kgf.cm or more
4. Torque-out test
   - Measure torque-out strength with a torque wrench after fastening a hexagonal head bolt made of SCM material.



<Torque-out test>

5. Painting Specifications
   - Hammertone powder coating (MN327K / AKZONOBEL) or our approved material
6. Paint Thickness
   - The whole: Make sure to maintain an average of 60 or more and 100 microns or less.
7. Apply Heat Treatment after painting .
8. Make sure there is no unpainted surface.
9. PEM Nut,Caulking screw,Pin & TAP should be masked when painting.
10. ◯: This mark means the dimension or notes item to be inspected.

NOTES.
1. 본 도면은 PEM NUT 압입 및 도장 도면임.
2. 압입 작업 후 직각도 유지 할 것.
3. 압입 작업 후 아래와 같이 Torque-out 강도를 유지 하도록 할 것.
   - M3 PEM NUT : 30Kgf.cm 이상, M4/M5 PEM NUT : 60Kgf.cm 이상
4. Torque-out 테스트
   - SCM 재질의 육각 머리 볼트를 체결후 토크 렌치로 Torque-out 강도를 측정 한다.



<Torque-out test>

5. 도장 사양
   - 함마튼 분체 도장 (MN327K / 악조노벨) 또는 당사 승인 재질
6. 도장 두께
   - 전체 : 평균 60 이상 100 미크론 이하 유지 할 것.
7. 도장후 열처리 할 것
8. 미도장이 없도록 할 것.
9. 도장시 PEM Nut,Caulking screw,Pin & TAP부는 마스킹 처리 할 것.
10. ◯ 표시부는 치수 또는 주석의 수검 관리 항목임.

No	PART No.	PART NAME	MATERIAL	QTY	REMARK
2	44966510	PEM_NUT :M3x12:N-THRU:W/ZN:T16-T30	SUM 22	6	
1		STEL :COVER:LOWER_FRONT_NCT	SECC 1.6t	1	

▶MATERIAL			▶PART NAME	▶SCALE
▶SURFACE	SPRAY		K_STEEL; COVER:LWR_FRONT_NCT	1/2
▶DESIGNED	▶CHECKED	▶APPROVED		▶SHEET
2026.03.25 김동현	2026.03.25 남영준	2026.03.25 문창환		1/1
HYOSUNG TNS			▶PART No. 4140500242	▶SYM 00

본 도면은 효성TNS 자산으로 영업비밀로 엄격히 관리되며 무단 배포 및 불법적인 사용을 금합니다.
This drawing is property of Hyosung TNS INC. and strictly treated as a trade secret.
Therefore unauthorized distribution and illegal use are prohibited.