EVT_SYS_CARRIER REV.A | BOARD OUTLINE AND DATUM

Dimensions in millimetres. Derived from the final native Altium PcbDoc mechanical inventory.

OUTLINE: R3.00 CORNERS, ROUTED PROFILE

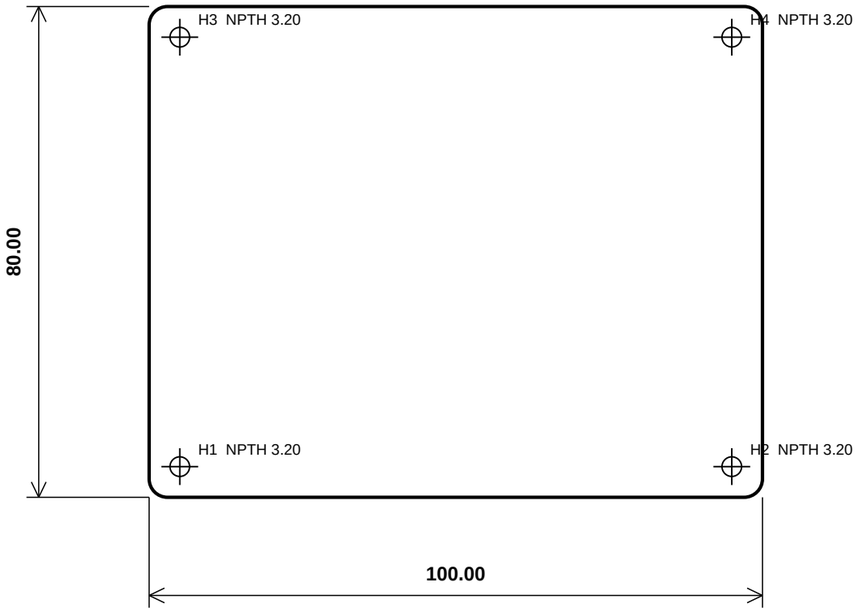

MOUNTING DATUM: H1 CENTRE AT X=5.00, Y=5.00 FROM LOWER-LEFT BOARD EXTENTS

FABRICATION NOTES

1. Finished board size: 100.00 x 80.00 mm.
2. Finished thickness target: 1.60 mm. Final Rezonit stack confirmation is open.
3. Four-layer FR-4, 35 um copper on all layers, lead-free process.
4. Profile source for CAM: EVT_SYS_CARRIER.GKO. X2 profile was not emitted by Altium 26.10.1.
5. Controlled impedance targets: GNSS_RF 50 ohm; ETH_MDI 100 ohm differential.
6. Order-specific field-solver geometries must be confirmed before release.
7. Use NC drill report for plated and non-plated tool definitions.
8. This drawing does not grant production authority.

EVT_SYS_CARRIER REV.A

PRELIMINARY PILOT FABRICATION DRAWING

Scale: 1:1 | Sheet 1/2

PRODUCTION AUTHORITY: NOT_AUTHORIZED

EVT_SYS_CARRIER REV.A | STACKUP, IMPEDANCE AND DRILL SUMMARY

Preliminary pilot data. Fabricator confirmation remains open.

Seq	Item	Layer / material	Thickness	Copper	Er	Status
1	Copper	L1 Top	0.035 mm	35 um		EVT provisional
2	Dielectric	L1-L2 FR-4 prepreg	0.180 mm		4.2	EVT provisional
3	Copper	L2 solid GND	0.035 mm	35 um		EVT provisional
4	Dielectric	L2-L3 FR-4 core	1.100 mm		4.2	EVT provisional
5	Copper	L3 power / slow signal	0.035 mm	35 um		EVT provisional
6	Dielectric	L3-L4 FR-4 prepreg	0.180 mm		4.2	EVT provisional
7	Copper	L4 Bottom	0.035 mm	35 um		EVT provisional

CONTROLLED IMPEDANCE START VALUES

Net class	Structure	L1-L2 dielectric	Geometry	Target	Calculated	Release state
GNSS_RF	Microstrip	0.180 mm, Er 4.2	W 0.360 mm	50 ohm	49.93 ohm	FAB SOLVER REQUIRED
ETH_MDI	Edge-coupled microstrip	0.180 mm, Er 4.2	W 0.260 / gap 0.200 mm	100 ohm diff	100.45 ohm	FAB SOLVER REQUIRED

NC DRILL TOOL SUMMARY

Tool	Finished hole	Type	Count
T1	0.20 mm	PTH	8
T2	0.25 mm	PTH	5
T3	0.30 mm	PTH	121
T4	0.40 mm	PTH	2
T5	0.90 mm	PTH	8
T6	0.991 mm	PTH	3
T7	1.02 mm	PTH	10
T8	1.10 mm	PTH	4
T9	1.60 mm	PTH	2
T10	3.00 mm	PTH	3
T11	3.25 mm	PTH	2
T12	3.20 mm	NPTH	4
	TOTAL		**172**

RELEASE HOLDS

1. IPC-2581: Altium exporter faulted; no file was produced.

2. STEP: Altium direct and OutJob exports failed; no file was produced.

3. Fabricator binding: Rezonit order-specific 1.60 mm stack and impedance solver data are pending.

4. Gerber X2: copper, mask, legend and paste files are present. Profile uses legacy RS-274X GKO.

5. Bottom assembly: no bottom population is present; the bottom drawing is intentionally empty.

6. Production authority remains NOT_AUTHORIZED.

SOURCE EVIDENCE

Native PCB SHA-256: d897f5d82fe2c8de05a4588e369d4ed5114733777bc5509122cba06c749082cc

Native DRC: 0 violations, 0 waived, generated by Altium 26.10.1 Trial on 2026-10-27.

Board inventory: 92 components, 529 pads, 1639 tracks, 132 vias, 67 fills.

NC drill report: 172 holes across 12 tools.

Candidate fabricator: Rezonit. Generic published process data is not an order binding.

EVT_SYS_CARRIER REV.A
PRELIMINARY PILOT FABRICATION DRAWING

Scale: 1:1 | Sheet 2/2
PRODUCTION AUTHORITY: NOT_AUTHORIZED