# COMPUTER NETWORKS

*SAKSHAM KUMAR*

COMPUTER SCIENCE AND ENGINEERING
ID - 2022UCP1700
SECTION- A4

# ASSIGNMENT – 4

## Task 1 : Create a Simple Network Topology

- Open Cisco Packet Tracer and create a new blank workspace.
- Place three routers, three switches, and six PCs on the workspace.
- Connect the devices to form a simple network topology.

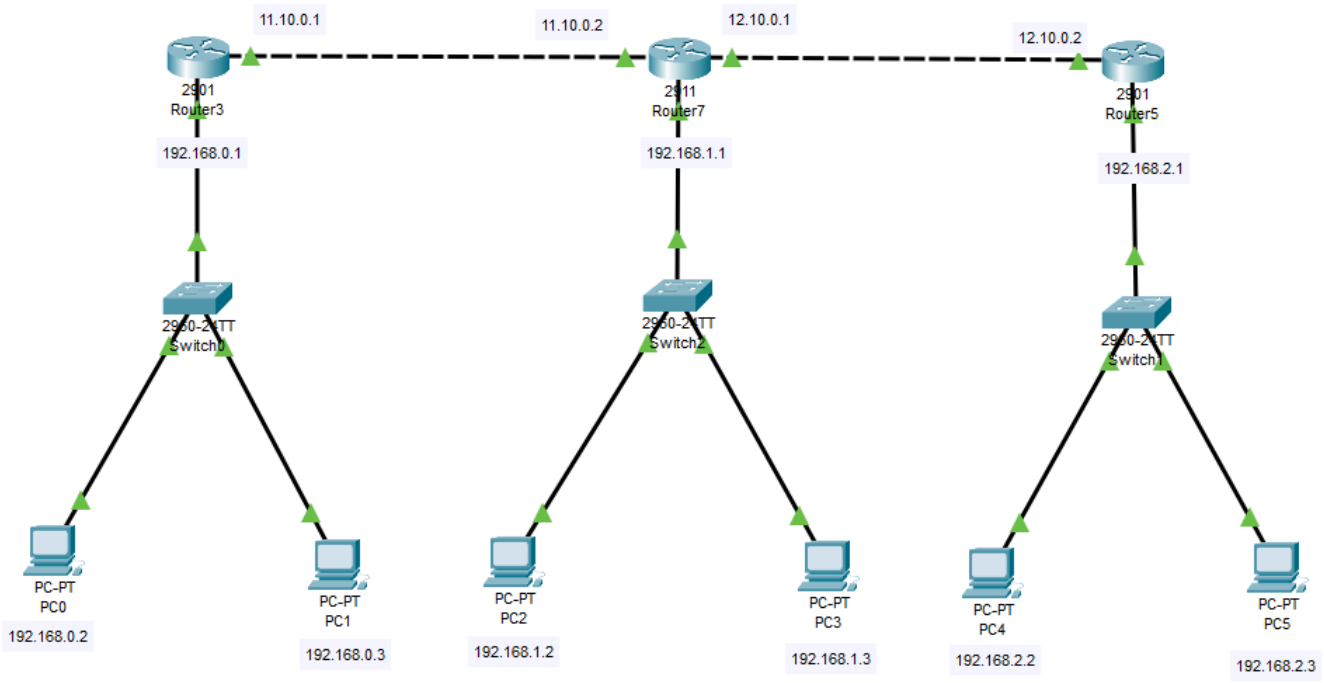


## Task 2: Basic Device Configuration

- Access the command-line interface (CLI) of each router and configure a unique hostname.
- Assign IP addresses to the router interfaces.
- Assign IP addresses to the PCs.

## First Router

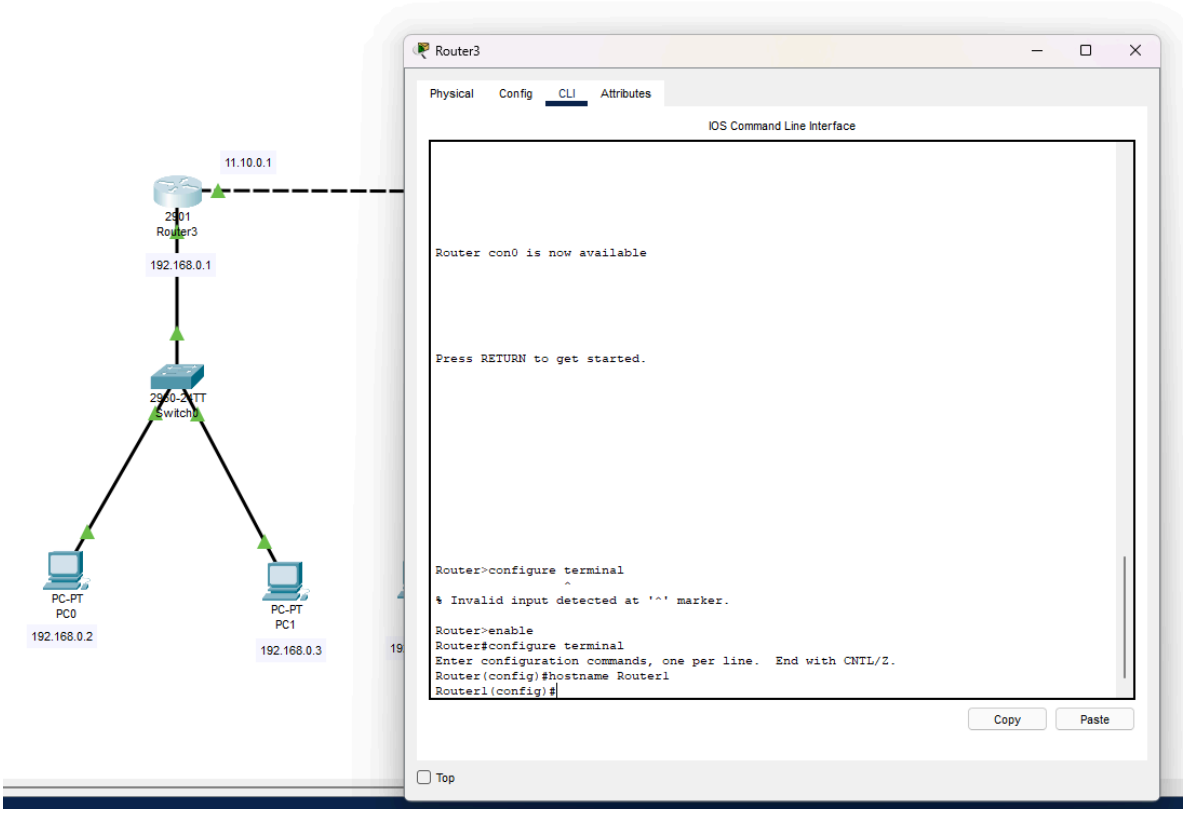


## Second Router

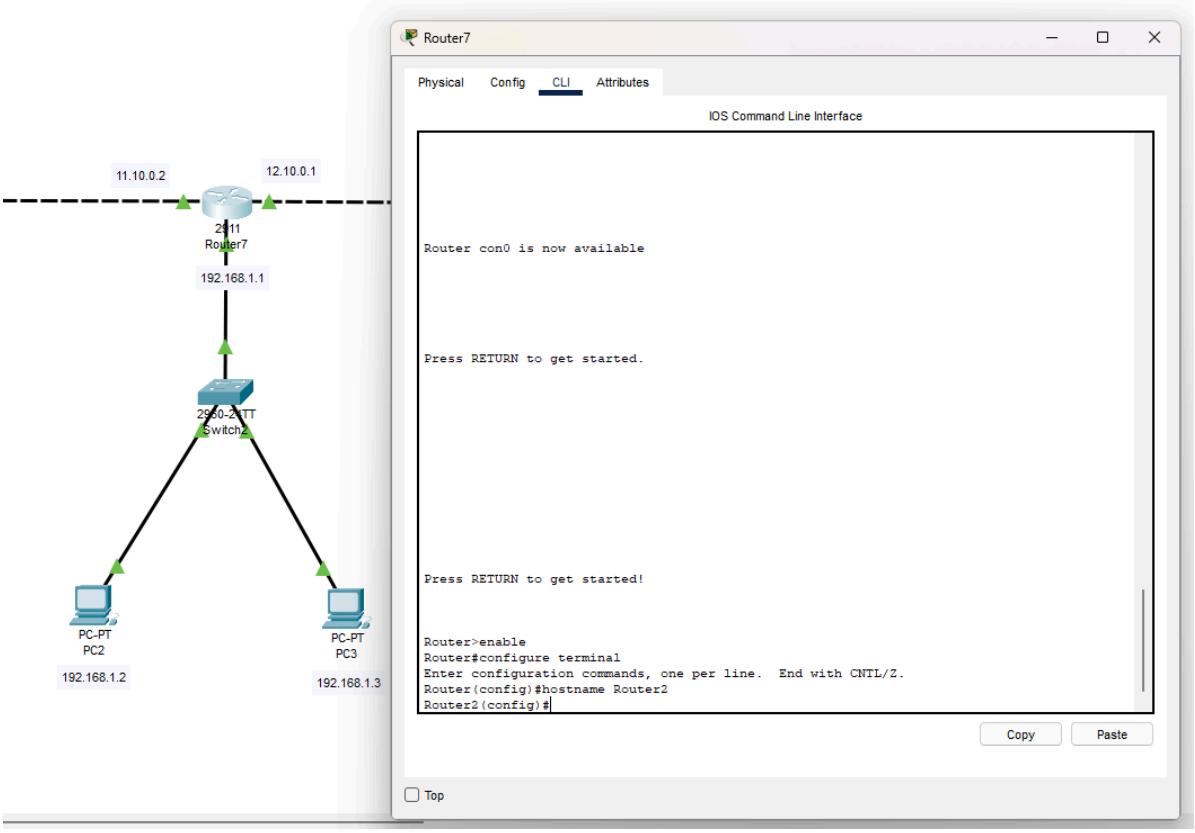

Third Router

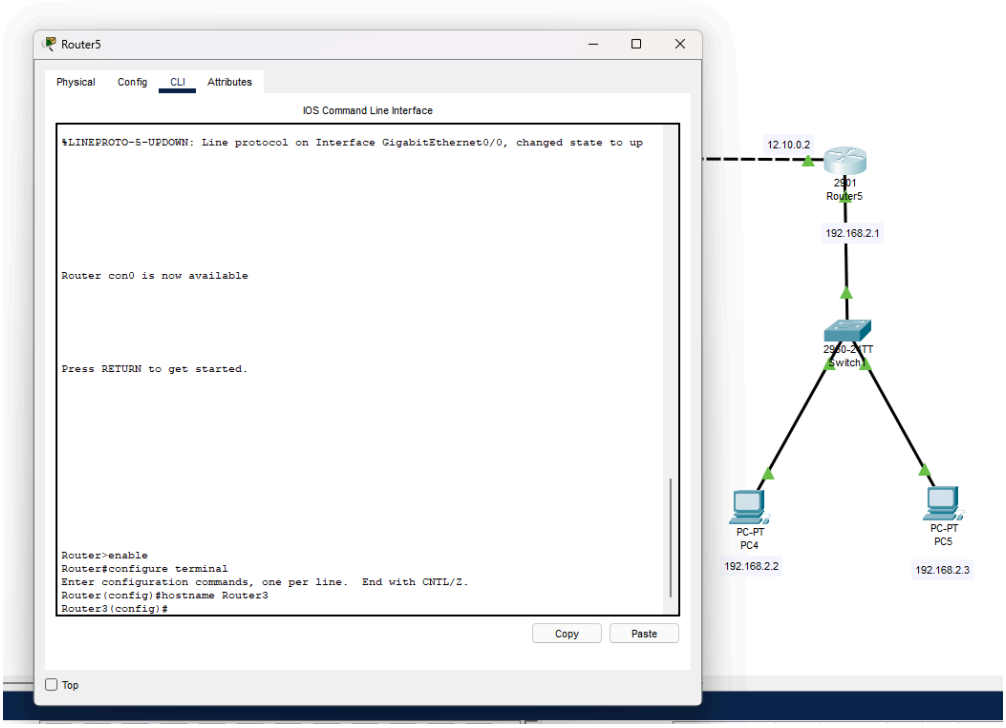


## Task 3: Test Connectivity

- Use the 'ping' command on PCs to test connectivity between devices.
- Troubleshoot and resolve any connectivity issues..

ping pc in the same network

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: FE80::260:47FF:FE7C:3B4D
   IPv6 Address.....: ::
   IPv4 Address.....: 192.168.0.2
   Subnet Mask.....: 255.255.255.0
   Default Gateway.....: ::
                                 192.168.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

ping pc in the other network

```
Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

```
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=126
Reply from 192.168.1.3: bytes=32 time<1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

```
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time<1ms TTL=125
Reply from 192.168.2.2: bytes=32 time<1ms TTL=125
Reply from 192.168.2.2: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.2.3: bytes=32 time<1ms TTL=125
Reply from 192.168.2.3: bytes=32 time<1ms TTL=125
Reply from 192.168.2.3: bytes=32 time<1ms TTL=125
Reply from 192.168.2.3: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

# THE END

*SAKSHAM KUMAR*
COMPUTER SCIENCE AND ENGINEERING
ID - 2022UCP1700
SECTION- D