COMPUTER NETWORKS

SAKSHAM KUMAR

COMPUTER SCIENCE AND ENGINEERING
ID - 2022UCP1700
SECTION- A4

ASSIGNMENT – 4.1

1. Set up a LAN using Cisco Packet Tracer:

- Place a hub (any model) on the workspace.
- Connect at least three PCs to the hub using straight-through Ethernet
- cables.
- Assign appropriate IP addresses to each PC in the LAN.

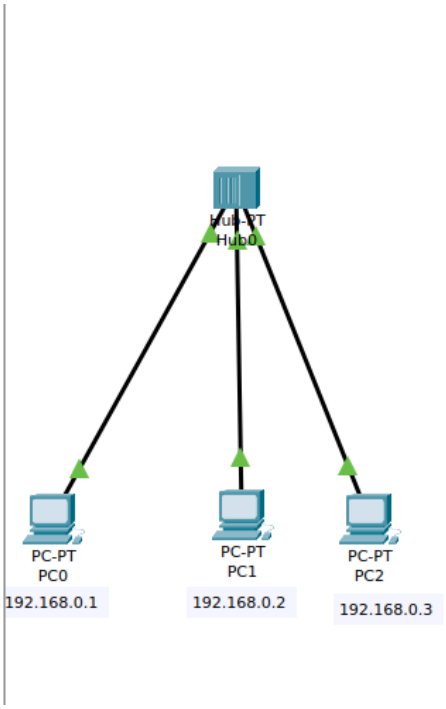

2. Configure a LAN using a switch:

- Replace the hub with a switch .
- Connect the PCs to the switch using straight-through Ethernet cables.
- Verify connectivity between the PCs within the LAN.

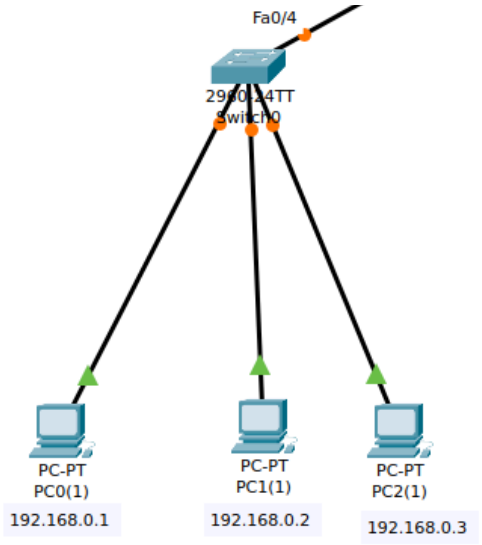

3. Create a second LAN and connect it to the first LAN using a router:

- Add a router to the workspace.
- Connect one of the router's Ethernet interfaces to the switch.
- Connect another switch to one of the remaining router interfaces.
- Connect At Least 4 PCs to the second switch.
- Configure IP addresses for the PCs in the second LAN
- Configure routing on the router to enable communication between the two LANs.
- Test connectivity between PCs in different LANs.

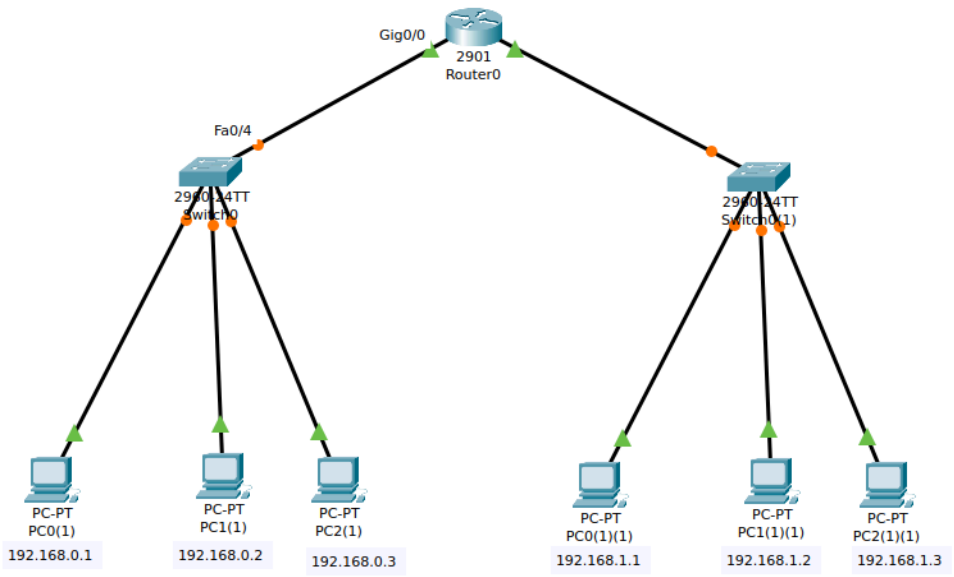


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: FE80::260:47FF:FE7C:3B4D
   IPv6 Address.....: ::
   IPv4 Address.....: 192.168.0.2
   Subnet Mask.....: 255.255.255.0
   Default Gateway.....: ::
                                 192.168.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

pc in the other networking p

```
Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

```
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=126
Reply from 192.168.1.3: bytes=32 time<1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

```
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time<1ms TTL=125
Reply from 192.168.2.2: bytes=32 time<1ms TTL=125
Reply from 192.168.2.2: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.2.3: bytes=32 time<1ms TTL=125
Reply from 192.168.2.3: bytes=32 time<1ms TTL=125
Reply from 192.168.2.3: bytes=32 time<1ms TTL=125
Reply from 192.168.2.3: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

THE END

SAKSHAM KUMAR
COMPUTER SCIENCE AND ENGINEERING
ID - 2022UCP1700
SECTION- D