


I2C commands for balancer
 0x0 = Discharge cell via P-channel FETs
 0x3 = charge positive connected cell
 0xA = all off
 0xB = Connect OUTN to GND
 0xC = charge negative connected cell
 0xE = Connect OUTP to GND
 0xF = Discharge cell via N-channel FETs
 0x1, 0x4, 0x5, 0x6, 0x7, 0x9, 0xD = illegal (shoot through)



muxes1
 Date: muxes1.kicad_sch

LV side
 Date: LV side.kicad_sch

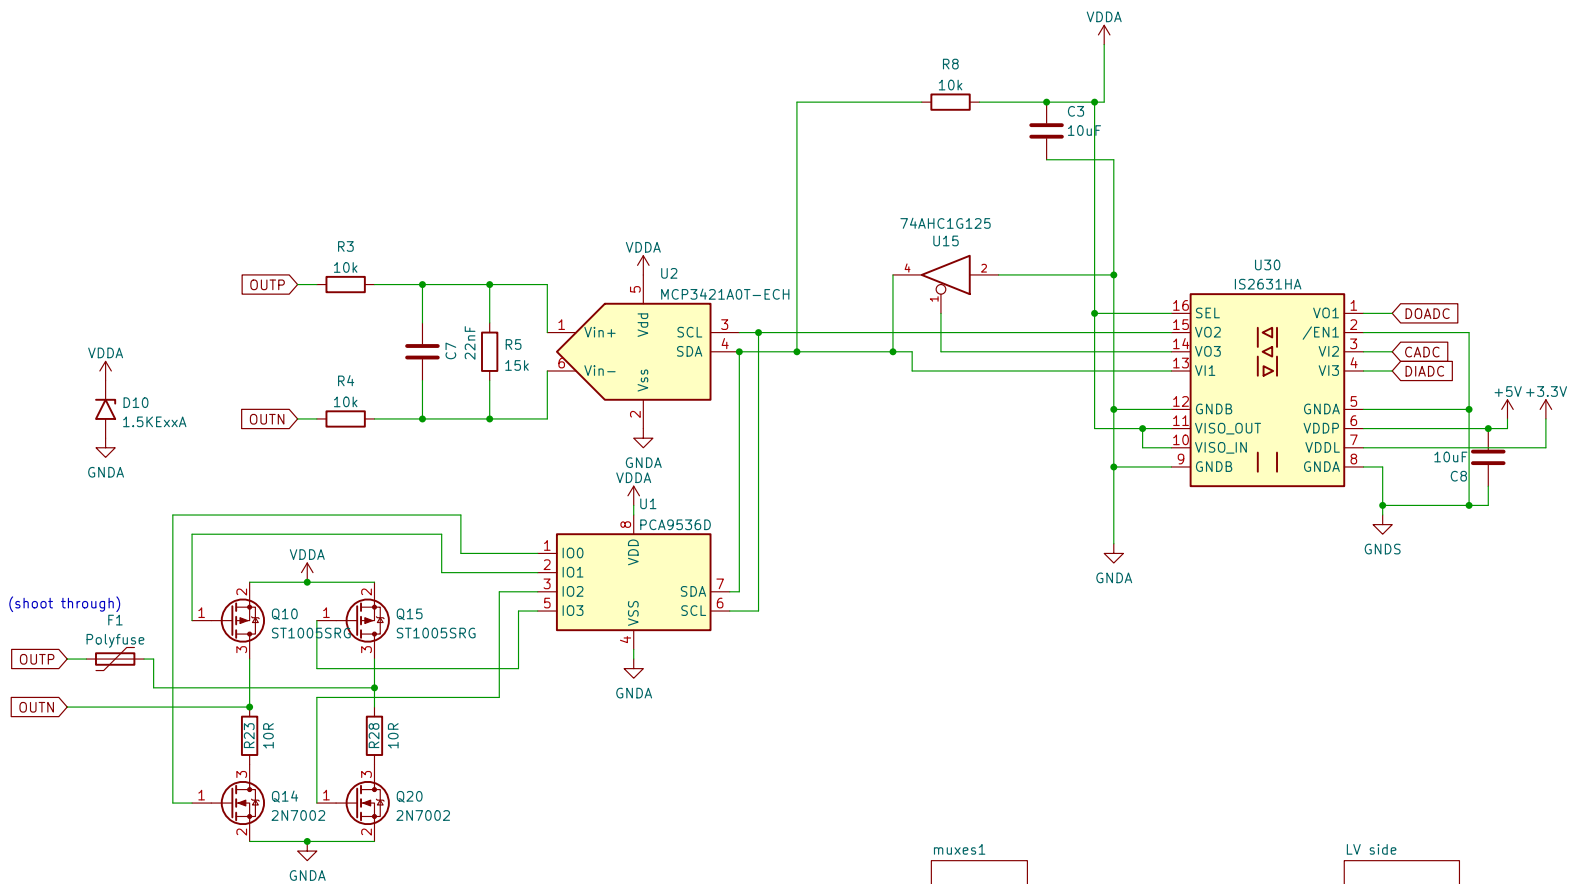