


I	2	I	1	I	0	9	8	7	6	5	4	3	2	I			
									REVISION HISTORY-ALL SHEETS ARE THE SAME STATUS								
									REV	ZONE	DESCRIPTON			DCN / ECN NO.		DATE	APPD
									01	-	Initial Release			-		06/20/2024	Kenneth_Hu
TABLE 1																	
F/G P/N	MODEL Description	REGULATORY	FIRMWARE P/N	FIRMWARE Ver.			FCI SPEC	FCI NO.	EAN/UPC	UNIT ASSY P/N	PRODUCT CODE	PCBA PRODUCT CODE	AABB	CCCC			
F120338674100	G20	FCC/UL	2491000000174 2491000000175	Bank1: FA01.01.007_111723_G2X.00.07.733.DAG Bank2: [ARM] AC01.01.018_032524_G2X.00.07.735.CT [ATOM][OTT] AC01.01.022_050324_G2X_00.02.735.CT.OTT BIOS: CGR2.86C.727888.R.2310061630			PS-G20-01-A	330	N/A	C120338674100	6288	5279	4442	0330			
Factory P/N		Customer Ordering no.															
91HCM410010		1001736															
BOM																	
Item	CBN Part NO.	Part Description					QTY.	CMT.									
Adapter	1311002440002	RA2 ADP 24W 100-240VAC 12V/2A US 2.5mm/5.5mm BLACK MS-V2000R120-024Q0-US MOSO (A33)					1	101									
	1311002440003	R02 ADP 24W 100-240VAC 12V/2A US 2.5mm/5.5mm BLACK 0146105D300R FRECOM (A33)															
	1311004240003	R04 ADP 42W 100-240VAC 12V/3.5A US 2.5/5.5mm No Y Black 01570614000R FRECOM															
	1311004240004	R1.1 ADP 42W 100-240V 12V/3.5A US 2.5/5.5mm Black AG63 NETBIT															
QIG & box label	1462000000133	R01 LABEL QIG & box 82x31&90x40mm G54 WARTON					1	102									
Carton label	1462000000135	R01 Carton LABEL 100x70mm SB8200v3 WARTON					0.34	103									
License label	1464000000024	R01 LICENSE LABEL ARRIS 89x47mm SB8200v3 WARTON					1	104									
Round Transparent Stickers	1462000000109	R01 LABEL Round Transparent Stickers 50.8x50.8mm SB8200v3 MING SHIN					1	105									
	1462000000134	R01 LABEL Round Transparent Stickers 50.8x50.8mm SB8200v3 WARTON															
PE bag	1470500000030	R01 PE BAG 350x315mm(T=0.04) TG6452 KING PACKING					1	106									
	1470500000042	R01 PE BAG (T=0.04) 283x280mm CH8674 WARTON															
Warning Tamper Proof Label	1464000000022	R01 WARNING TAMPER PROOF LABEL 12x12mm TG6452 WARTON					1	107									
Carton	1470000000165	R01 CARTON 347x251x210mm CH8674-033 G20 HIEP PHU					0.34	108									
Box	1470200000177	R01 COLOR BOX 236x185x109mm CH8674-033 G20 HIEP PHU					1	109									
Partition	1470400000095	R01 PARTITION 218x155x106mm CH8674-033 G20 HIEP PHU					1	110									
QIG	1500000000110	R01 QIG ARRIS ARSVD01808-h CH8674-033(G20) WARTON					1	111									
Pallet	1471500000010	R01 PALLET Vietnam 1200x1000x150mm EPM					0.008	112									
THIS DOCUMENT IS THE EXCLUSIVE PROPERTY OF COMPAL BROADBAND NETWORKS, INC. AND SHALL NOT BE REPRODUCED OR COPIED OR TRANSFORMED TO ANY OTHER FORMAT WITHOUT PRIOR PERMISSION OF COMPAL BROADBAND NETWORKS, INC.. 本資料為銘寶科技專有之財產，非經許可，不得複製，翻印或轉變成其他形式使用																	
I	2	COMPUTER GENERATED PRINT DO NOT SCALE DO NOT REVISE MANUALLY		I	0	9	8	7	6	5	4	3	2	I			

For material use illustration purposes only. Detailed assembly, please refer to the **SOP** document.

REV.
01


SHEET 2 of 13

PALLET ANALYSIS



US Pallet Ship by (1200x1000 mm)	Sea 20" Container Q'ty (Maximum High 2270 mm)		Sea 40" Container Q'ty (Maximum High 2270mm)		Air Container Q'ty (Maximum High 1500mm)
Q'ty per Carton	3				3
Carton Q'ty per Layer	11				11
Carton Layers	4				5
1 Pallet Q'ty	132				165
Pallet Layers	1	2	1	2	1
Pallets	10		21		-
Total Q'ty	1320	2640	2772	5544	-

For carton layers, illustration purposes only.
For detailed layers information, please refer to the table on the left.

40" Container (1200x1000 pallet)

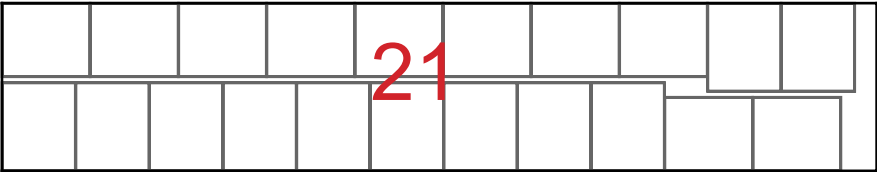

20" Container (1200x1000 pallet)

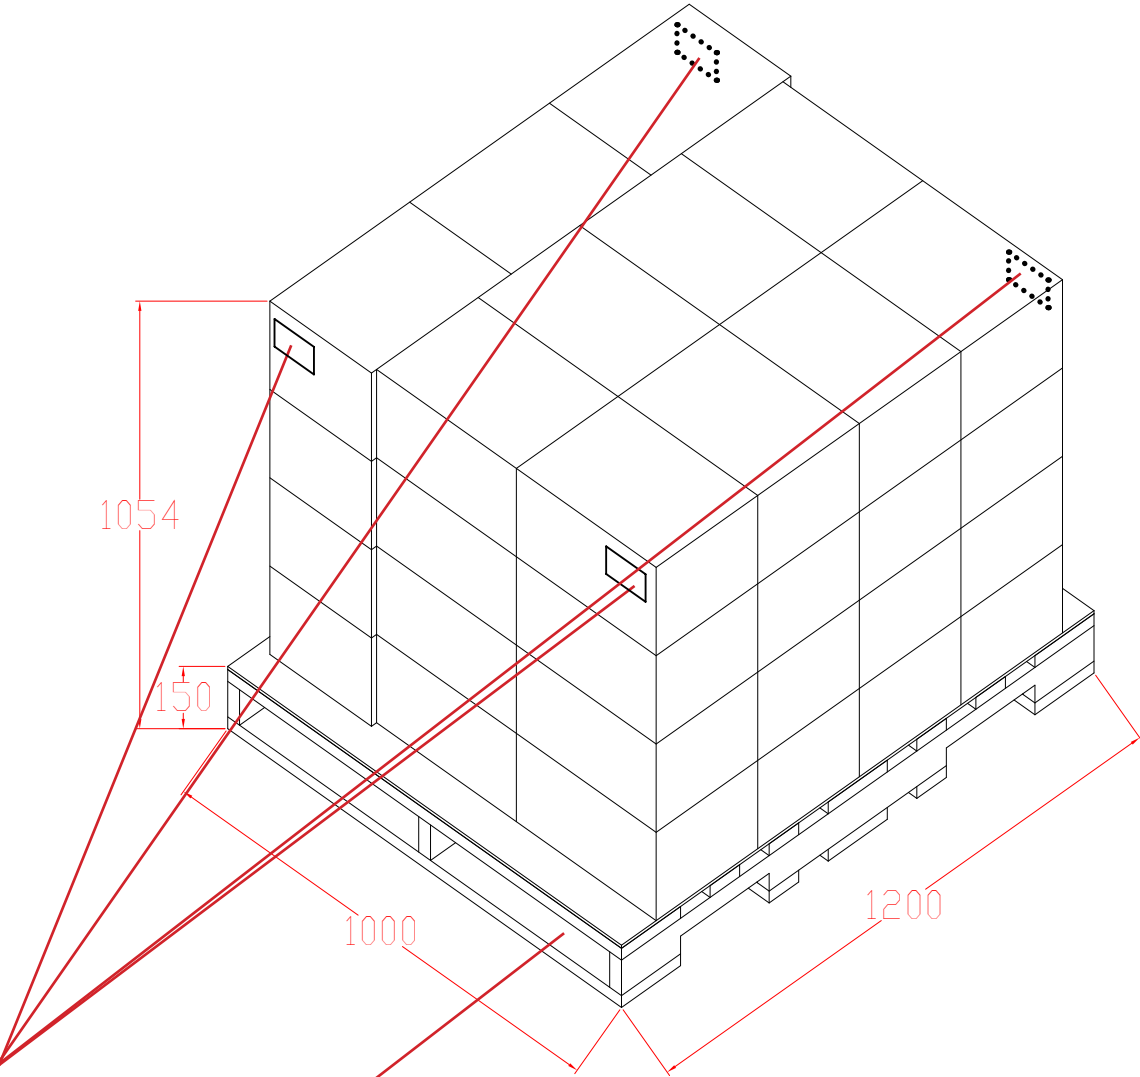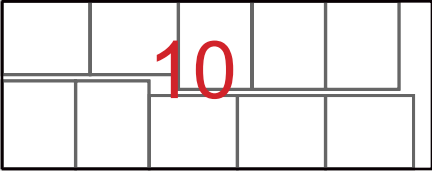

VIEW D
PALLET LABEL
Shared usage with the
carton label.

112

PALLET

103

The Pallet ID should be used with 4 pieces per
pallet, adhered to different sides of the pallet.

REFER TO SHEET 1 OF THIS PRINT FOR
REVISION HISTORY, COPYRIGHT NOTICE
AND FULL TITLE BLOCK INFORMATION

DWG NO. F120338674100


REV.
01

SHEET 3 of 13

VIEW A

Chassis Label 70 x 44 mm

The distance between printing and edge of label is 3.5mm (indicated by dotted lines)
印刷與貼紙離邊間距為 3mm

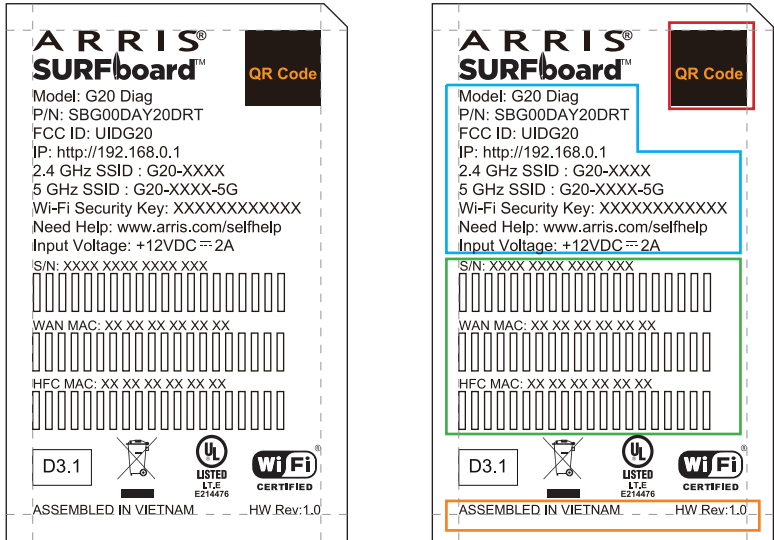

1) General Label items			
Print Type	Label Item	Description	Example
Arial Regular 6pt	Model	G20 Diag: for diag units	G20 Diag
	P/N	SBG00DAY20DRT: for diag units	SBG00DAY20DRT
	FCC ID	Fixed FCC ID	UIDG20
	IP	Fixed IP address	http://192.168.0.1
	2.4 GHz SSID	XXXX: Last four digital of HFC MAC	G20-XXXX
	5 GHz SSID	XXXX: Last four digital of HFC MAC	G20-XXXX-5G
	Wi-Fi Security Key	Manufaturing test program will defined, random, 12-character (base 10 numeric)	XXXXXXXXXXXX
	Need Help	Fixed web address	www.arris.com/selfhelp
	Input Voltage	Fixed voltage indication	+12VDC ⚡ 2A

REFERT TO SHEET 1 OF THIS PRINT FOR
REVISION HISTORY, COPYRIGHT NOTICE
AND FULL TITLE BLOCK INFORMATION

DWG NO. F120338674100




REV.
01

SHEET 4 of 13

VIEW B

QIG Label 82 x 31 mm
BOX Label 90 x 40 mm

The distance between printing and edge of label is 3mm (indicated by dotted lines)
印刷與貼紙離邊間距為 3 mm

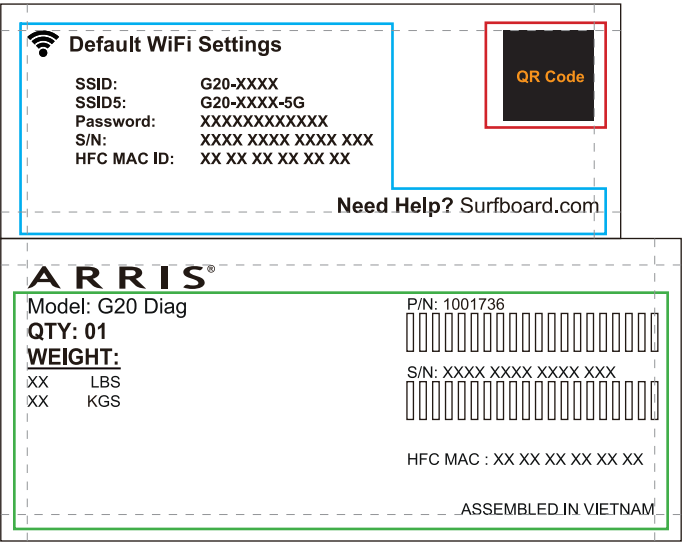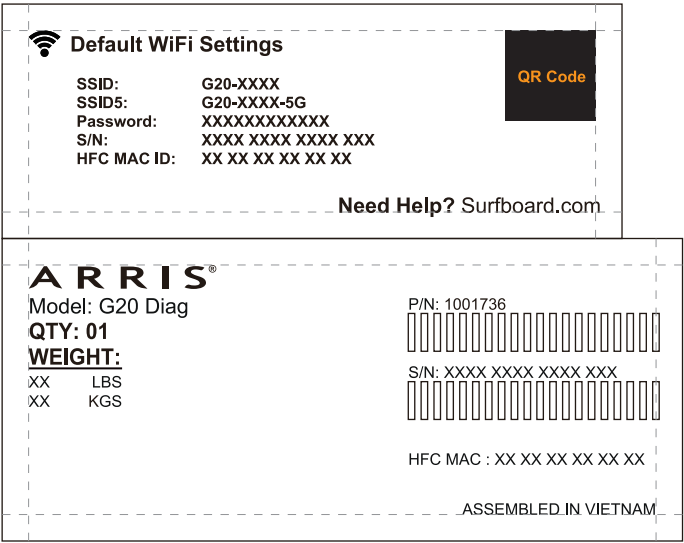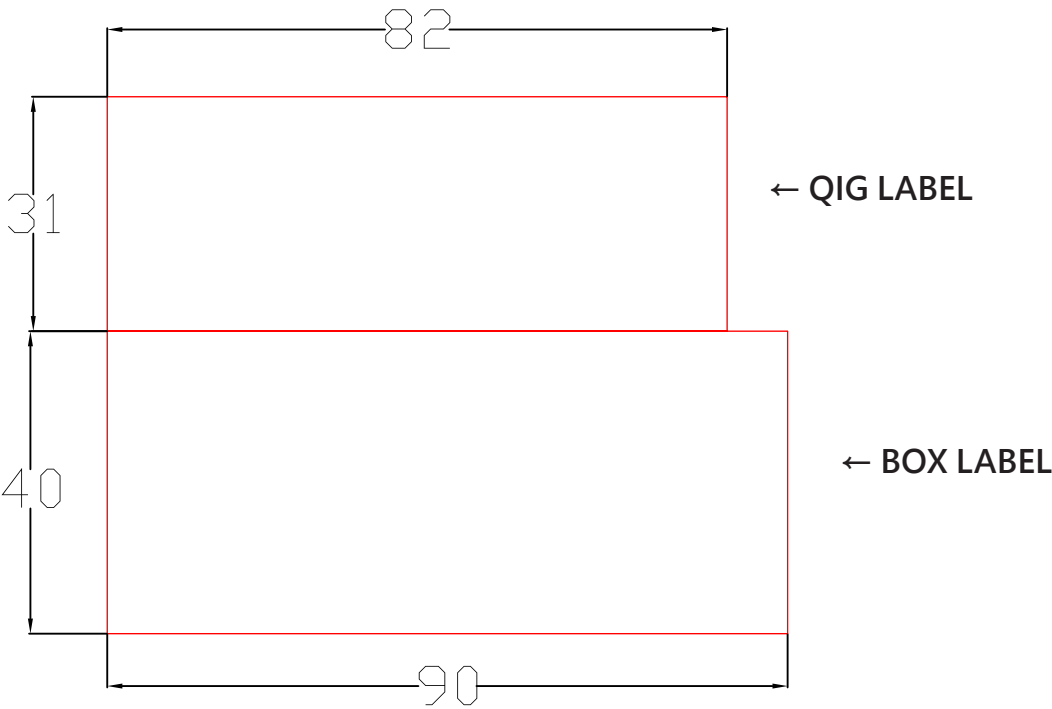

QIG Label

1) General items			
Print Type	Label Item	Description	Example
Arial bold 8pt	Default WiFi Settings	Fixed text: Default WiFi Settings	Default WiFi Settings
Arial bold 6pt	SSID	XXXX: Last four digital of HFC MAC	G20-XXXX
Arial bold 6pt	SSID5	XXXX: Last four digital of HFC MAC	G20-XXXX-5G
Arial bold 6pt	Password	Manufacturing test program will defined, random, 12-character (base 10 numeric)	XXXXXXXXXXXX
Arial bold 8pt	Need Help?	Fixed text: Need Help?	Need Help?
Arial Regular 8pt	Surfboard.com	Fixed text: Surfboard.com	Surfboard.com

I	2		I	1		I	0		9		8		7		6		5		4		3		2		I																																									
H	2) S/N (Serial Number) Generation Rule 2.1 S/N Digit definition 2.1.1 YMDmmmAABBSSSSS 2.1.2 S/N: XXXX XXXX XXXX XXX 15 digits. Include a space in the middle of every four digits in the plain code. (15 碼，為方便讀取，明碼每四位數據中間包含一位空格) 2.1.3 Arial Regular 6 pt																									H																																								
G	2.2 Digit Description Example <table><tr><th>Digit Number</th><th>Digit type</th><th>Description</th><th>Example</th></tr><tr><td>1</td><td>Y</td><td>Year</td><td>A=2020, 1=2021, 2=2022, 9=2029...2039</td></tr><tr><td>1</td><td>M</td><td>Month: Use character 1-9, A, B & C</td><td>1=January, 2=February...A=October, B=November, C=December</td></tr><tr><td>1</td><td>D</td><td>Day: Use character 1-9, A-Y but without character I, O & Q</td><td>1=1, 9=9, 10=A, 11=B, 31=Y</td></tr><tr><td>3</td><td>mmm</td><td>563, Manufacturing Site: Compal/VN VINH PHUC G20</td><td></td></tr><tr><td>1</td><td>A</td><td>PWB Revision. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>A</td><td>Main Board. Assembly Revision. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>B</td><td>FW Load Line-up Rev. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>B</td><td>Product Release. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>5</td><td>SSSSS</td><td>Sequential number, 00001-99999</td><td></td></tr></table>																									Digit Number	Digit type	Description	Example	1	Y	Year	A=2020, 1=2021, 2=2022, 9=2029...2039	1	M	Month: Use character 1-9, A, B & C	1=January, 2=February...A=October, B=November, C=December	1	D	Day: Use character 1-9, A-Y but without character I, O & Q	1=1, 9=9, 10=A, 11=B, 31=Y	3	mmm	563, Manufacturing Site: Compal/VN VINH PHUC G20		1	A	PWB Revision. Refer to Table 1 column "AABB"		1	A	Main Board. Assembly Revision. Refer to Table 1 column "AABB"		1	B	FW Load Line-up Rev. Refer to Table 1 column "AABB"		1	B	Product Release. Refer to Table 1 column "AABB"		5	SSSSS	Sequential number, 00001-99999		G
Digit Number	Digit type	Description	Example																																																															
1	Y	Year	A=2020, 1=2021, 2=2022, 9=2029...2039																																																															
1	M	Month: Use character 1-9, A, B & C	1=January, 2=February...A=October, B=November, C=December																																																															
1	D	Day: Use character 1-9, A-Y but without character I, O & Q	1=1, 9=9, 10=A, 11=B, 31=Y																																																															
3	mmm	563, Manufacturing Site: Compal/VN VINH PHUC G20																																																																
1	A	PWB Revision. Refer to Table 1 column "AABB"																																																																
1	A	Main Board. Assembly Revision. Refer to Table 1 column "AABB"																																																																
1	B	FW Load Line-up Rev. Refer to Table 1 column "AABB"																																																																
1	B	Product Release. Refer to Table 1 column "AABB"																																																																
5	SSSSS	Sequential number, 00001-99999																																																																
F																										F																																								
E	3) HFC MAC ID Generation Rule 3.1 HFC MAC ID Digit definition 3.1.1 The value assigned by Customer PKI server and setting by PKI station 3.1.2 HFC MAC ID: XX XX XX XX XX XX 12 digits. Include a space in the middle of every two digits in the plain code. (12 碼，為方便讀取，明碼每兩位數據中間包含一位空格) 3.1.3 Arial Regular 6 pt																									E																																								
D	4) QR Code Definition <table><tr><td>QR Code</td><td> The product SHALL provide a QR code on the rear or bottom panel that provides the following information: SSID:<ModelID>-<last four digital of HFCMAC>;SSID5:<ModelID>-<last four digital of HFCMAC>-5G;MODE:WPA2/WPA3 Mixed Personal (AES);PA:<manufaturing test program will defined>;FA:SURFboard;MO:G20;HFCMAC:XXXXXXXXXXXX;WANMAC:XXXXXXXXXXXX;SN:XXXXXXXXXXXXXXX Description: • SSID - for 2.4 GHz SSID • SSID5- for 5 GHz SSID • Mode - Security mode • PA - Passphrase • FA- Product Family • MO: Model • HFCMAC – HFC MAC Address • WANMAC – WAN MAC Address • SN: Serial number </td></tr></table>																									QR Code	The product SHALL provide a QR code on the rear or bottom panel that provides the following information: SSID:<ModelID>-<last four digital of HFCMAC>;SSID5:<ModelID>-<last four digital of HFCMAC>-5G;MODE:WPA2/WPA3 Mixed Personal (AES);PA:<manufaturing test program will defined>;FA:SURFboard;MO:G20;HFCMAC:XXXXXXXXXXXX;WANMAC:XXXXXXXXXXXX;SN:XXXXXXXXXXXXXXX Description: • SSID - for 2.4 GHz SSID • SSID5- for 5 GHz SSID • Mode - Security mode • PA - Passphrase • FA- Product Family • MO: Model • HFCMAC – HFC MAC Address • WANMAC – WAN MAC Address • SN: Serial number	D																																						
QR Code	The product SHALL provide a QR code on the rear or bottom panel that provides the following information: SSID:<ModelID>-<last four digital of HFCMAC>;SSID5:<ModelID>-<last four digital of HFCMAC>-5G;MODE:WPA2/WPA3 Mixed Personal (AES);PA:<manufaturing test program will defined>;FA:SURFboard;MO:G20;HFCMAC:XXXXXXXXXXXX;WANMAC:XXXXXXXXXXXX;SN:XXXXXXXXXXXXXXX Description: • SSID - for 2.4 GHz SSID • SSID5- for 5 GHz SSID • Mode - Security mode • PA - Passphrase • FA- Product Family • MO: Model • HFCMAC – HFC MAC Address • WANMAC – WAN MAC Address • SN: Serial number																																																																	
C																										C																																								
B																										B																																								
A																				REFERT TO SHEET 1 OF THIS PRINT FOR REVISION HISTORY, COPYRIGHT NOTICE AND FULL TITLE BLOCK INFORMATION			DWG NO. F120338674100		REV. 01	A																																								
																			SHEET 7 of 13																																															
I	2	COMPUTER GENERATED PRINT DO NOT SCALE DO NOT REVISE MANUALLY	I	0		9		8		7		6		5		4		3		2		I																																												

121110987654321

BOX Label

1) General items

Print Type	Label Item	Description	Example
Arial Regular 8 pt	Model	G20 Diag: for diag units	G20 Diag
Arial Bold 8 pt	QTY	Fixed text: 01	01
Arial Bold 8 pt	WEIGHT		WEIGHT:
Arial Regular 6 pt	XX LBS		
	XX KGS		
	ASSEMBLED IN VIETNAM		

2) PRODUCT UPC CODE Generation Rule

2.1 PRODUCT UPC CODE Digit definition

2.1.1 Refer to Table 1 column "EAN/UPC"

2.1.2 Arial Regular 5 pt

2.2 PRODUCT UPC CODE Bar code definition

2.2.1 Use the 'CODE 128' font and follow the 128 hex decimal encoded barcode protocol where specified.

2.2.2 Ensure that Barcodes can be scanned with mobile phones and scanners.
(條碼需保證手機和掃描槍均可掃描)

3) P/N Generation Rule

3.1 P/N Digit definition

3.1.1 Refer to Table 1 column "Customer Ordering no."

3.1.2 Arial Regular 6 pt

3.2 P/N Bar code definition

3.2.1 Use the 'CODE 128' font and follow the 128 hex decimal encoded barcode protocol where specified.

3.2.2 Ensure that Barcodes can be scanned with mobile phones and scanners.
(條碼需保證手機和掃描槍均可掃描)

4) S/N (Serial Number) Generation Rule

4.1 S/N Digit definition

4.1.1 YMDmmmAABBSSSSS

4.1.2 S/N: XXXX XXXX XXXX XXX 15 digits. Include a space in the middle of every four digits in the plain code.
(15 碼，為方便讀取，明碼每四位數據中間包含一位空格)

4.1.3 Arial Regular 5 pt

4.2 S/N Bar code definition

4.2.1 Use the 'CODE 128' font and follow the 128 hex decimal encoded barcode protocol where specified.

4.2.2 Avoid including spaces in the barcode content.
(條碼內容不需要空格)

4.2.3 Ensure that Barcodes can be scanned with mobile phones and scanners.
(條碼需保證手機和掃描槍均可掃描)

4.3 Digit Description Example

Print Type	Label Item	Description	Example
1	Y	Year	A=2020, 1=2021, 2=2022...9=2029, 2039
1	M	Month: Use character 1-9, A, B & C	1=January, 2=February...A=October, B=November, C=December
1	D	Day: Use character 1-9, A-Y but without character I, O & Q	1=1, 9=9, 10=A, 11=B, 31=Y
3	mmm	563, Manufacturing Site: Compal/VN VINH PHUC G20	
1	A	PWB Revision. Refer to Table 1 column "AABB"	
1	A	Main Board. Assembly Revision. Refer to Table 1 column "AABB"	
1	B	FW Load Line-up Rev. Refer to Table 1 column "AABB"	
1	B	Product Release. Refer to Table 1 column "AABB"	
5	SSSSS	Sequential number, 00001-99999	

5) HFC MAC Generation Rule

5.1 HFC MAC Digit definition

5.1.1 The value assigned by Customer PKI server and setting by PKI station

5.1.2 HFC MAC ID: XX XX XX XX XX XX 12 digits. Include a space in the middle of every two digits in the plain code.
(12 碼，為方便讀取，明碼每兩位數據中間包含一位空格)

5.1.3 Arial Regular 5 pt

REFERT TO SHEET 1 OF THIS PRINT FOR
REVISION HISTORY, COPYRIGHT NOTICE
AND FULL TITLE BLOCK INFORMATION

DWG NO. F120338674100

REV.
01


SHEET 8 of 13

12COMPUTER GENERATED PRINT
DO NOT SCALE
DO NOT REVISE MANUALLY10987654321

I	2	I	I	I	0	9	8	7	6	5	4	3	2	I																																																
H	5) Carton ID Generation Rule 5.1 Carton ID Digit definition 5.1.1 YMDmmmAABBCSSSS 5.1.2 Ensure that QR code can be scanned with mobile phones and scanners. (二維碼需保證手機和掃描槍均可掃描) <table><tr><th>Print Type</th><th>Label Item</th><th>Description</th><th>Example</th></tr><tr><th>Digit Number</th><th>Digit type</th><th>Description</th><th>Example</th></tr><tr><td>1</td><td>Y</td><td>Year; Time when pack units into a carton</td><td>A=2020, 1=2021, 2=2022, 9=2029, 2039</td></tr><tr><td>1</td><td>M</td><td>"Month; Time when pack units into a carton; Use character 1-9, A, B & C"</td><td>1=January, 2=February, A=October, B=November, C=December</td></tr><tr><td>1</td><td>D</td><td>"Day; Time when pack units into a carton; Use character 1-9, A-Y but without character I, O & Q"</td><td>1=1, 9=9, 10=A, 11=B, 31=Y</td></tr><tr><td>3</td><td>mmm</td><td>563, Manufacturing Site: Compal/VN VINH PHUC G20</td><td></td></tr><tr><td>1</td><td>A</td><td>PWB Revision. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>A</td><td>Main Board. Assembly Revision. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>B</td><td>FW Load Line-up Rev. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>B</td><td>Product Release. Refer to Table 1 column "AABB"</td><td></td></tr><tr><td>1</td><td>C</td><td>C, Carton</td><td></td></tr><tr><td>4</td><td>SSSS</td><td>Sequential number (Daily re-calculate), 0001-9999</td><td></td></tr></table>													Print Type	Label Item	Description	Example	Digit Number	Digit type	Description	Example	1	Y	Year; Time when pack units into a carton	A=2020, 1=2021, 2=2022, 9=2029, 2039	1	M	"Month; Time when pack units into a carton; Use character 1-9, A, B & C"	1=January, 2=February, A=October, B=November, C=December	1	D	"Day; Time when pack units into a carton; Use character 1-9, A-Y but without character I, O & Q"	1=1, 9=9, 10=A, 11=B, 31=Y	3	mmm	563, Manufacturing Site: Compal/VN VINH PHUC G20		1	A	PWB Revision. Refer to Table 1 column "AABB"		1	A	Main Board. Assembly Revision. Refer to Table 1 column "AABB"		1	B	FW Load Line-up Rev. Refer to Table 1 column "AABB"		1	B	Product Release. Refer to Table 1 column "AABB"		1	C	C, Carton		4	SSSS	Sequential number (Daily re-calculate), 0001-9999		H
Print Type	Label Item	Description	Example																																																											
Digit Number	Digit type	Description	Example																																																											
1	Y	Year; Time when pack units into a carton	A=2020, 1=2021, 2=2022, 9=2029, 2039																																																											
1	M	"Month; Time when pack units into a carton; Use character 1-9, A, B & C"	1=January, 2=February, A=October, B=November, C=December																																																											
1	D	"Day; Time when pack units into a carton; Use character 1-9, A-Y but without character I, O & Q"	1=1, 9=9, 10=A, 11=B, 31=Y																																																											
3	mmm	563, Manufacturing Site: Compal/VN VINH PHUC G20																																																												
1	A	PWB Revision. Refer to Table 1 column "AABB"																																																												
1	A	Main Board. Assembly Revision. Refer to Table 1 column "AABB"																																																												
1	B	FW Load Line-up Rev. Refer to Table 1 column "AABB"																																																												
1	B	Product Release. Refer to Table 1 column "AABB"																																																												
1	C	C, Carton																																																												
4	SSSS	Sequential number (Daily re-calculate), 0001-9999																																																												
G														G																																																
F														F																																																
E														E																																																
D														D																																																
C														C																																																
B														B																																																
A											REFERT TO SHEET 1 OF THIS PRINT FOR REVISION HISTORY, COPYRIGHT NOTICE AND FULL TITLE BLOCK INFORMATION			DWG NO. F120338674100	REV. 01	A																																														
										SHEET 10 of 13																																																				
I	2	COMPUTER GENERATED PRINT DO NOT SCALE DO NOT REVISE MANUALLY	I	0	9	8	7	6	5	4	3	2	I																																																	

VIEW D

Pallet Label 100 x 70 mm

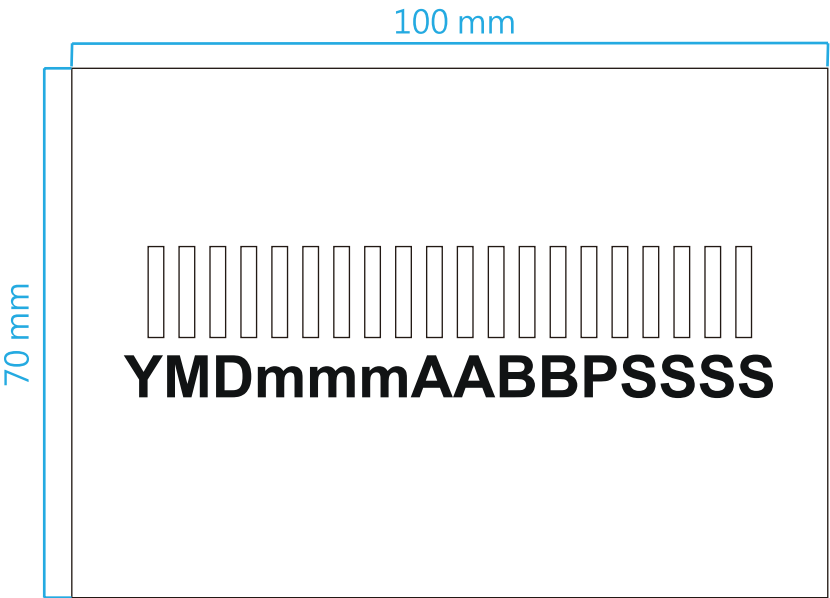

The Pallet ID should be used with 4 pieces per pallet, adhered to different sides of the pallet.

Pallet Serial Number Generation Rule

1 S/N Digit definition

- 1.1 YMDmmmAABBPSSSS
- 1.2 Arial bold 22 pt

2 S/N Bar code definition

- 2.2.1 Use the 'CODE 128' font and follow the 128 hex decimal encoded barcode protocol where specified.
- 2.2.2 Avoid including spaces in the barcode content.
(條碼內容不需要空格)
- 2.2.3 Ensure that Barcodes can be scanned with mobile phones and scanners.
(條碼需保證手機和掃描槍均可掃描)

3 Digit Description Example

Digit Number	Digit type	Description	Example
1	Y	Year	A=2020, 1=2021, 2=2022, 9=2029, 2039
1	M	Month: Use character 1-9, A, B & C	1=January, 2=February, A=October, B=November, C=December
1	D	Day: Use character 1-9, A-Y but without character I, O & Q	1=1, 9=9, 10=A, 11=B, 31=Y
3	mmm	563, Manufacturing Site: Compal/VN VINH PHUC G20	
4	AABB	Use digit 7,8,9,10 of chassis SN	
1	P	Pallet	
4	SSSS	Sequential number, 0001-9999	

REFER TO SHEET 1 OF THIS PRINT FOR REVISION HISTORY, COPYRIGHT NOTICE AND FULL TITLE BLOCK INFORMATION

DWG NO. F120338674100

REV. 01


SHEET 11 of 13

標籤資料 資料庫對應表

Index	DB Field Name
1	ChassisSN
2	HfcMac
3	ExtraMAC1
4	ExtraMAC5
5	ExtraMAC6
6	ExtraMAC7
7	ExtraMAC8
8	ExtraMAC9
9	ExtraMAC11
10	ExtraMAC12
11	SSID
12	SSID_5G
13	WPA_PSK
14	BOOT_ROM

Type	Name	No.	DB index
Chassis label	S/N	(a)	1
	HFC MAC	(b)	2
	2.4 GHz SSID	(c)	11
	5 GHz SSID	(d)	12
	Wi-Fi Security Key	(e)	13
	WAN MAC	(f)	5
QIG Label Box Label	S/N	(a)	1
	HFC MAC ID/HFC MAC	(b)	2
	SSID	(c)	11
	SSID5	(d)	12
	Password	(e)	13
	WAN MAC	(f)	5
Carton Label	S/N	(a)	1
Lot File	SERIAL_NUMBER		1
	EMAC		4
	CMAC		2
	WAN_MAC		5
	WAN2		6
	WLAN24		7
	WLAN50		8
	SSID		11
	NETWORK_KEY		13
	BOOT_ROM		14

! 製作出來的 QR code 必須可以用手機 SURFboard Central APP 掃描識別 Wi-Fi 連線資訊。
The generated QR code should be scannable by a mobile phone SURFboard Central APP to recognize Wi-Fi connection information.

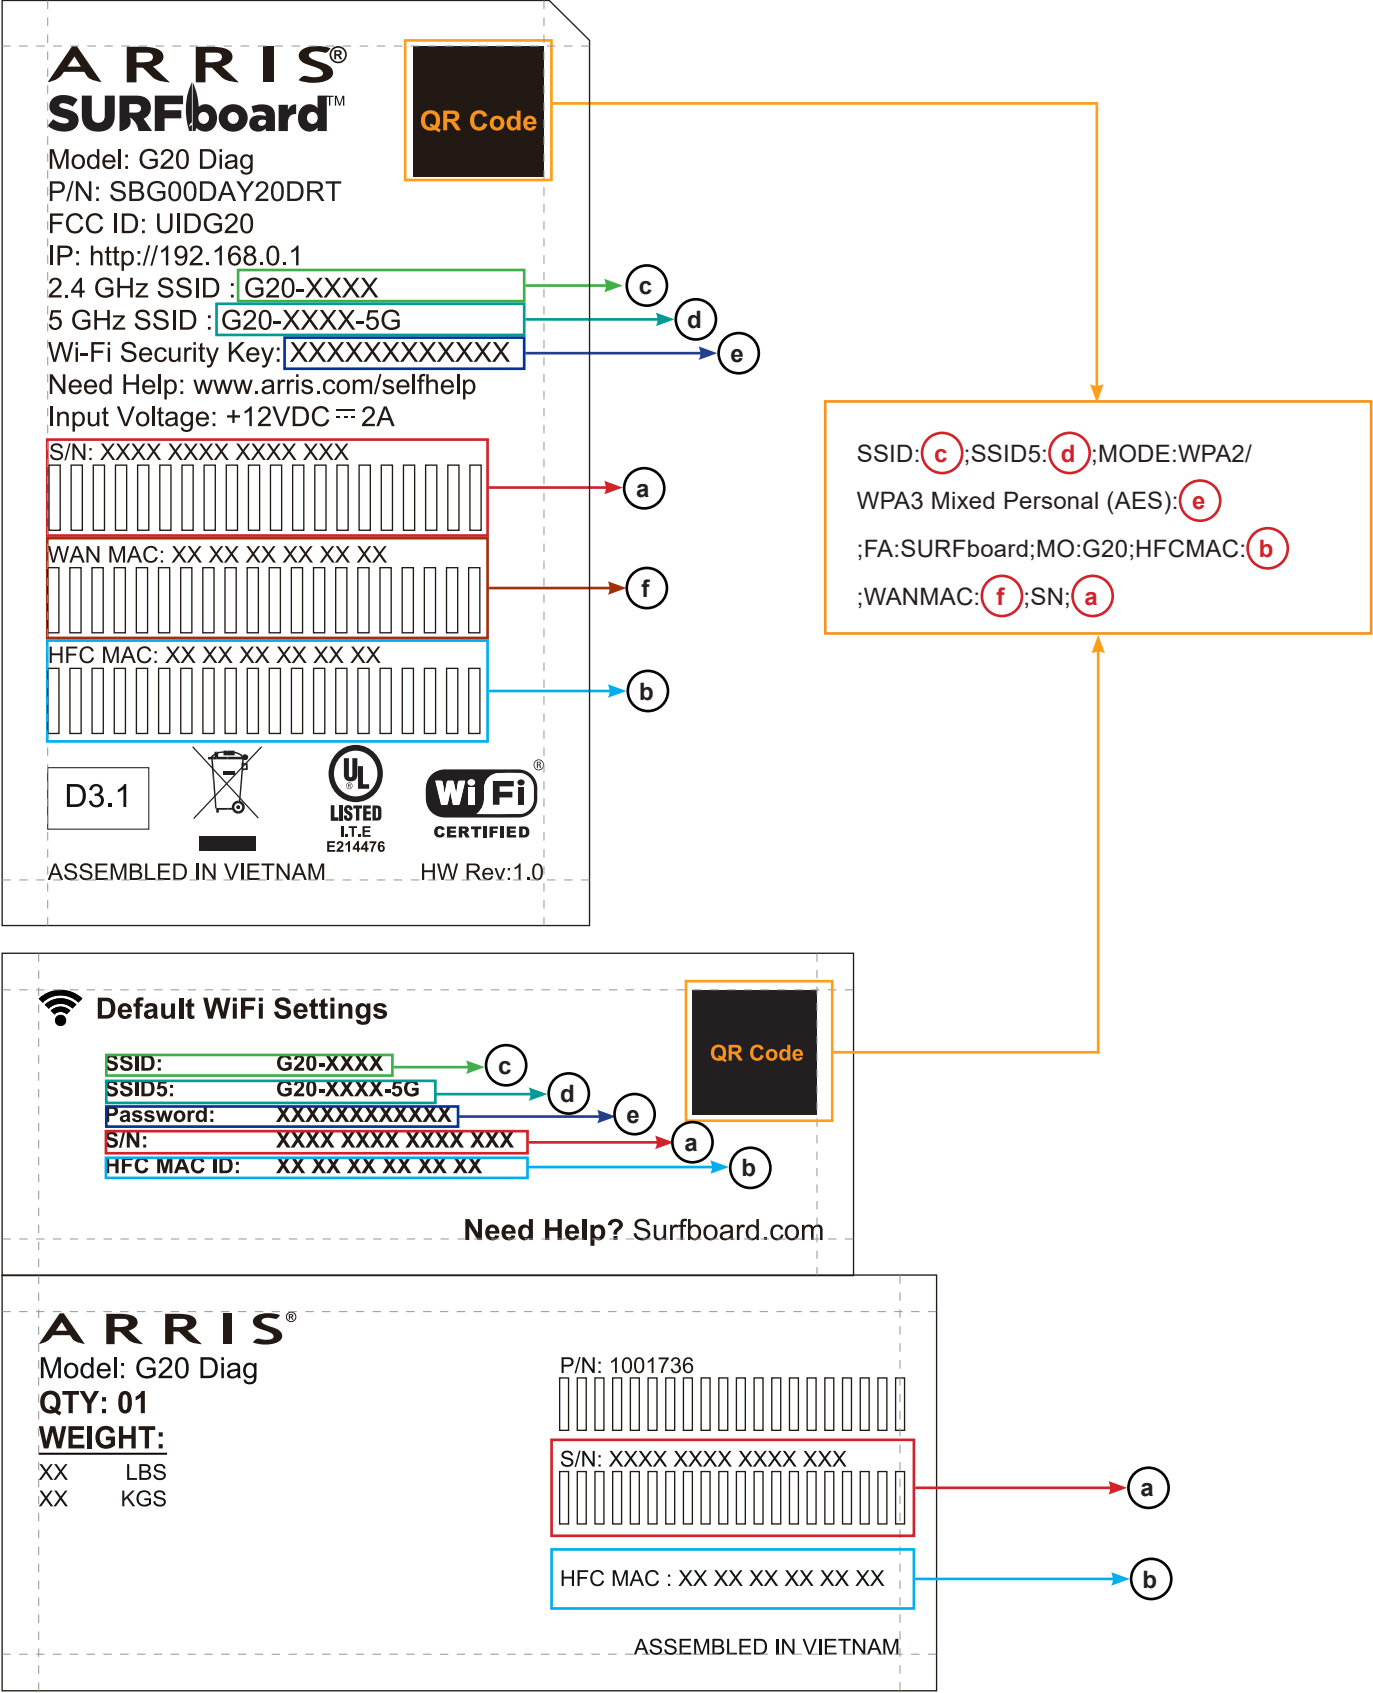

標籤資料 資料庫對應表



製作出來的 QR code 必須可以用手機 SURFboard Central APP
掃描識別 Wi-Fi 連線資訊。

The generated QR code should be scannable by a mobile
phone SURFboard Central APP to recognize Wi-Fi
connection information.

ARRIS

Model: G20 Diag QTY: 03

P/N: 1001736

1

XXXXXXXXXXXXXXXXXXXX

XXXX XXXX XXXX XXX

a

2

XXXXXXXXXXXXXXXXXXXX

XXXX XXXX XXXX XXX

3

XXXXXXXXXXXXXXXXXXXX

XXXX XXXX XXXX XXX

ASSEMBLED IN VIETNAM

WEIGHT

LBS: XX

KGS: XX

MPN: XXXXXXXXXXXXX

CARTON ID

QR Code

YJJJTTTTTXMM

REFER TO SHEET 1 OF THIS PRINT FOR
REVISION HISTORY, COPYRIGHT NOTICE
AND FULL TITLE BLOCK INFORMATION

DWG NO. F120338674100

REV.
01

SHEET 13 of 13