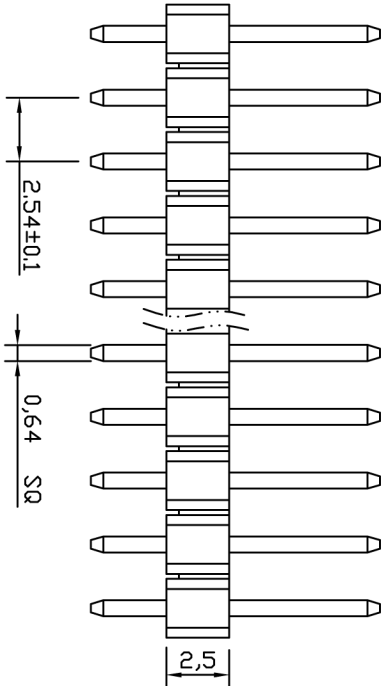
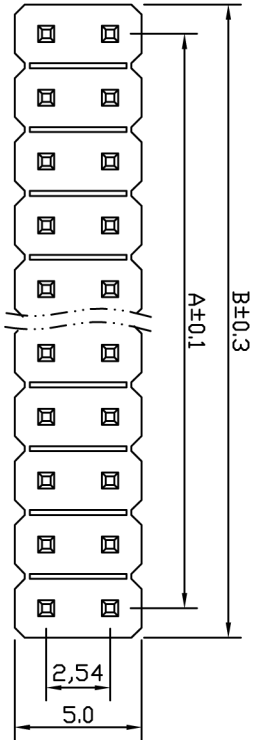


Recommended P.C.B Hole Layout

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40°to+ 105°
Contact Material: Brass
Insulator Material: Polyester(UL 94V-0)
Standard: PBT

No. of DIME NSIONS		Contacts	
		A	B
2	2.54	5.08	
3	5.08	7.62	
4	7.62	10.16	
5	10.16	12.70	
6	12.70	15.24	
7	15.24	17.78	
8	17.78	20.32	
9	20.32	22.86	
10	22.86	25.40	
11	25.40	27.94	
12	27.94	30.48	
13	30.48	33.02	
14	33.02	35.56	
15	35.56	38.10	
16	38.10	40.64	
17	40.64	43.18	
18	43.18	45.72	
19	45.72	48.26	
20	48.26	50.80	
21	50.80	53.34	
22	53.34	55.88	
23	55.88	58.42	
24	58.42	60.96	
25	60.96	63.50	
26	63.50	66.04	
27	66.04	68.58	
28	68.58	71.12	
29	71.12	73.66	
30	73.66	76.20	
31	76.20	78.74	
32	78.74	81.28	
33	81.28	83.82	
34	83.82	86.36	
35	86.36	88.90	
36	88.90	91.44	
37	91.44	93.98	
38	93.98	96.52	
39	96.52	99.06	
40	99.06	101.60	

检验以此为准!

UNLESS OTHEWIXE		SPECIFIED TOLERANCE	
ANG		±5°	
0		±0.3	
.00		±0.15	
SCALE		UNIT	
		mm	


DRAWN	李北林	17/01/08	DRAWN NAME	Pin header 2.54mm*2.5mm
-------	-----	----------	------------	-------------------------

CHECKED				
APPROVED	/	/	PRODUCT NO.	

SIZE	A4	REV	A	FILE NAME:
------	----	-----	---	------------

2.54PH 2*NPin H2.5 180° L11.5mm

JL-OK-723



深圳市锦凌电子有限公司
ShenZhen nestech Electronics Ltd
电话: 86-0755-2748-3253
传真: 86-0755-2997-5588