

QUICKSCREEN

Slat screening and gate systems

<VERSION 1>



What you'll find inside

Quickscreen side frame systems
Vertical slat systems
Quickscreen pedestrian and sliding gate systems
Gate hinges, latches & accessories
Posts, accessories & letterboxes

YOUR TRADE PARTNER / INNOVATION, QUALITY, SERVICE
WHOLESALE & TRADE ONLY

The essentials.

PAGE **4**

Quickscreen horizontal

PAGE **18**

Quickscreen vertical

PAGE **29**

Pedestrian gates

PAGE **40**

Sliding gates

PAGE **54**

Gate hinges

PAGE **59**

Gate latches

PAGE **68**

Equipment enclosure

PAGE **71**

Letterboxes

PAGE **78**

POSTA™ characters

PAGE **81**

Our depots

Quickscreen side frame system

QUICKSCREEN

- ✔ SUITS 65X16.5MM OR 90X16.5MM SLAT
- ✔ HORIZONTAL OR VERTICAL SLAT INSTALLATION
- ✔ SCREW FIX OFF EACH SLAT
- ✔ SNAP ON COVER HIDES FIXINGS
- ✔ ALLOWS VARIABLE SLAT SPACING
- ✔ AVAILABLE IN LONG LENGTH SUPPLY OR CUSTOM CUT TO SIZE & FLAT PACKED

EXTRUDED & POWDER COATED IN AUSTRALIA

HIGHEST QUALITY FINISHES —

Our range of genuine Interpon D1000 series powder coat finishes has been carefully selected to include the most sought after colours on offer.

All components are suitably pre-treated prior to powder coating and are applied by fully accredited coating facilities.



Note: Colours displayed are a guide only

The Quickscreen system is extremely cost effective. Each slot is screwed off once in position. The system allows for variable slot spacing so any gap is achievable. Once slots are screwed off, a snap on cover hides the fixings to provide a seamless finish.

For horizontal slat screening, generally the side frame is screwed directly to a post or wall without need of another U channel or angle.

In 'void' situations where slats cannot be fed in from top down, an F section is available. The F section can also be used where it is preferred to pre-make complete panels in a factory and simply install onsite.

For raking panels/angles, slats can be cut at an angle and screwed off making Quickscreen an ideal solution for difficult installations.

Available in long length supply or custom cut to size ready for assembly.



SYSTEM ADVANTAGES

CONCEALED FIXING: SCREWS ARE HIDDEN – CLEAN FINISH!



LOW MAINTENANCE – UNLIKE TIMBER SCREENING



COST EFFECTIVE SOLUTION



HINGED & SLIDING GATES ALSO AVAILABLE



ADJUSTABLE SLAT SPACING



QUICKSCREEN HORIZONTAL SLAT SYSTEM



1 Concealed fixing cover

QS-5800-CFC
Refer page 8



2 Side frame

QS-5800-SF
Refer page 8



3 Spacers

QS-SPACER
Refer page 10



4 Screws

QS-SCREWS-50PK
Refer page 10




5 Side frame top cap

QS-SFCAP
Refer page 10



6 65x16.5mm or 90x16mm slat

65mm: 6100mm or 6500mm long
90mm: 6100mm long
Refer page 7



7 F section

QS-5800-F
Refer page 8



POSTS & ACCESSORIES —

1 50x50mm post

4 Dress rings


2 65x65mm heavy duty post

5 Domical covers

3 Top caps

6 Base plates

For full range of posts & accessories, see pages 22 & 23

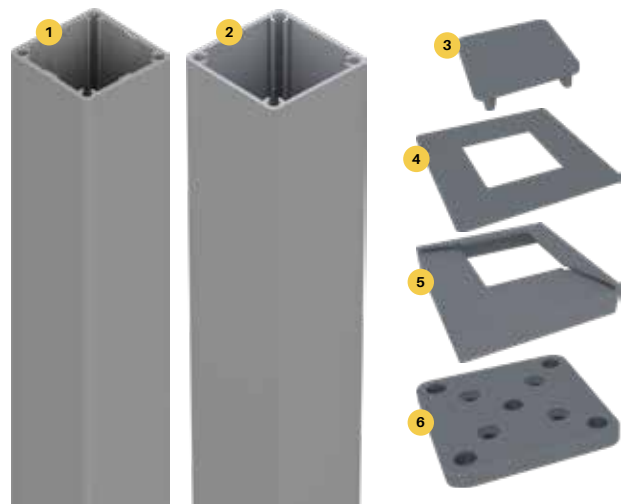

6 VOID SITUATIONS




F section required prior to site install

Fencing solution featuring
Quickscreen side frames,
50x50mm posts & horizontal slat



SLAT OPTIONS

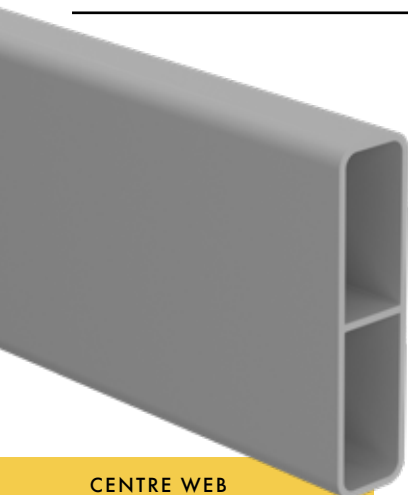


CENTRE WEB
ADDS STRENGTH &
RIGIDITY TO SLAT

65mm x 16.5mm slat with centre web

6100MM LONG

Order Code: XP-6100-S65

SOLD AS SINGLE LENGTHS,
BUNDLES OR PACK LOTS



Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)





MILL
(M)

Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

TECH SPECS

- PP 157 / AP 157
- Alloy 6063-T6
- 6100mm long
- 1.2mm wall thickness with centre web
- 3.5mm radius corners
- Genuine Australian Interpon powder coat
- lxx = 9.60 x 10E3 mmE4
- lyy = 83.09 x 10E3 mmE4

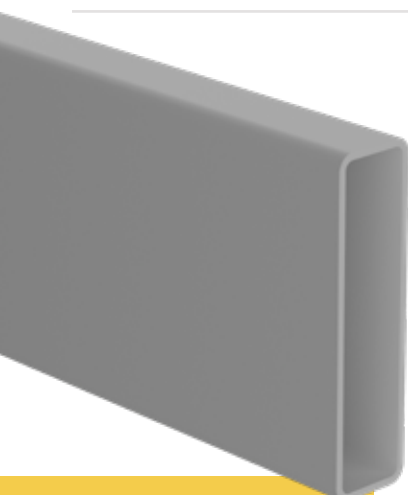


BUY IN PACK LOTS
FOR BEST PRICING!

65mm x 16.5mm slat

6500MM LONG

Order Code: XP-6500-E65

SOLD IN PACKS OF 96 ONLY
Not sold as single lengths



Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)




DUNE
(D)



MILL
(M)

TECH SPECS

- PP 157 / AP 157
- Alloy 6063-T6
- 6500mm long
- 1.2mm wall thickness
- 3.5mm radius corners
- Genuine Australian Interpon powder coat
- lxx = 9.31 x 10E3 mmE4
- lyy = 83.09 x 10E3 mmE4




CENTRE WEB
ADDS STRENGTH &
RIGIDITY TO SLAT

90mm x 16.5mm slat with centre web

6100MM LONG

Order Code: QS-6100-S90

SOLD AS SINGLE LENGTHS,
BUNDLES OR PACK LOTS



Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)




MILL
(M)

Primrose & Paperbark also available from Brisbane & Perth depots

TECH SPECS

- PP 208 / AP 208
- Alloy 6063-T6
- 6100mm long
- 1.2mm wall thickness with centre web
- 3mm radius corners
- Genuine Australian Interpon powder coat
- lxx = 13.28 x 10E3 mmE4
- lyy = 202.57 x 10E3 mmE4




EXTRUSIONS

Side frame


5800MM LONG

Order Code: **QS-5800-SF**



TECH SPECS

- PP 104 / AP 156
- Alloy 6063-T6 / 5800mm long
- Each slat must be screw fixed to side frame
- Affix side frame directly to post or wall or use with F-section
- Screw fixings are hidden when panel is assembled
- lxx = 9.58 x 10E3 mmE4
- lyy = 8.38 x 10E3 mmE4



Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)



MILL
(M)


Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Concealed fixing cover

5800MM LONG


Order Code: **QS-5800-CFC**

MATES WITH QS-5800-SF



TECH SPECS

- PP 100 / AP 116
- Alloy 6060-T5 / 5800mm long
- Snap-on cover for side frame
- Hides screws used to affix slats to side frame
- lxx = 0.71 x 10E3 mmE4
- lyy = 6.58 x 10E3 mmE4



Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)




MILL
(M)

Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

F section


5800MM LONG

Order Code: **QS-5800-F**



TECH SPECS

- PP 170 / AP 234
- Alloy 6063-T6
- 5800mm long
- Fix off to wall or post through 15mm offset leg
- Use in a void situation or if panels pre-assembled in factory for installation onsite
- 1.4mm wall thickness
- lxx = 20.76 x 10E3 mmE4
- lyy = 42.29 x 10E3 mmE4



Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)



MILL
(M)




Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

QUICKSCREEN 135 ANGLE ADAPTER

135 degree adapter

6000MM LONG

Order Code: XP-6000-135

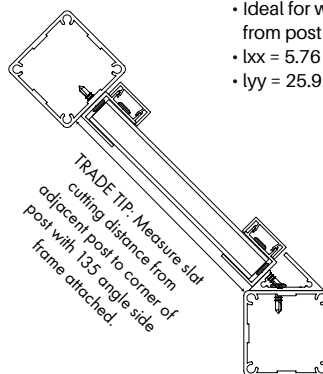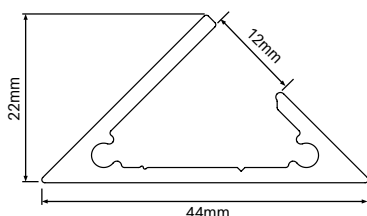


TECH SPECS

- PP 109 / AP 163
- Alloy 6060 - T5
- Simple 2 step process:
 - (1) Adapter fixes to post/wall.
 - (2) Quickscreen side frame then attaches to adapter into which slats insert
- Ideal for when screens to run at 135 degree angle from post or wall
- lxx = 5.76 x 10E3 mmE4
- lyy = 25.92 x 10E3 mmE4


Finishes




Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

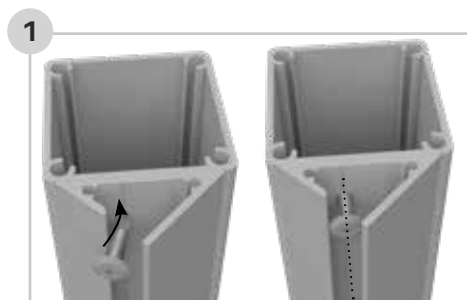

Place 135 adapter against post/wall. Insert screw into void opening. Screw fix adapter using V groove as a guide to fixing location.
TIP: pilot hole drill before screw fixing; max screw head size is 10mm.

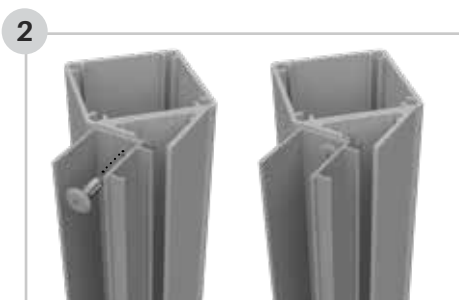


Screw fix Quickscreen Side Frame to 135 adapter fixing through adapter short leg.

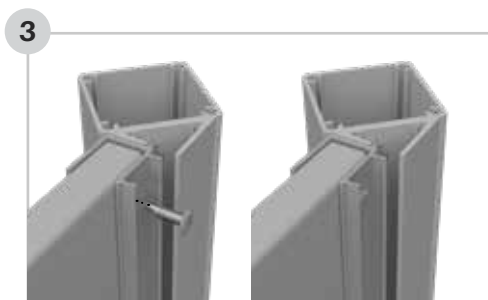

Insert slats into Quickscreen side frame and fix off slats.



Snap on concealed fixing cover. Lever into place with short leg going on first then levering on long leg to snap into position.

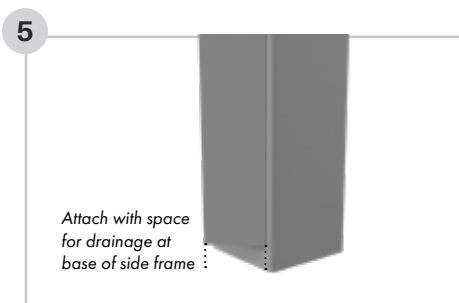

135 adapter should be cut so that it is elevated from floor and at the same length as Quickscreen Side Frame.


EXTRAS

Slat spacers

50 PACK

Order Code: **QS-SPACER-05MM-50PK**
QS-SPACER-09MM-50PK
QS-SPACER-12MM-50PK
QS-SPACER-15MM-50PK
QS-SPACER-20MM-50PK
QS-SPACER-30MM-50PK

- Nylon slat spacers
- Spacers enable 5mm, 9mm, 12mm, 15mm, 20mm or 30mm spacing between slats



Screws

50 PACK

Order Code: **QS-SCREWS-50PK**

- 50 screws: 10G x 16mm long
- Use screws to fix off slats



Side frame top cap

30mm x 26mm

3MM THICK

Order Code: **QS-SFCAP-B-2PK**
QS-SFCAP-MN-2PK
QS-SFCAP-G-2PK
QS-SFCAP-SM-2PK
QS-SFCAP-W-2PK
QS-SFCAP-BS-2PK
QS-SFCAP-D-2PK

- Nylon cap
- 2 pack
- Simply press into side frame
- Easy and fast fitting of cap

MATES WITH
QS-5800-SF
+
QS-5800-CFC



Louvre brackets

1x LEFT & 1x RIGHT


Black / Monument / Woodland Grey / Surfmist / White Basalt / Dune / Mill finish

Order Code: **QS-LB**

- 1x left and 1x right bracket per pack
- Die cast aluminium
- Suits 65x16.5mm slat - Press brackets onto end of slat then insert bracket into side frame
- Space brackets at nil, 5, 9, 20mm or any spacing desired
- Cost effective and fast way to achieve a fixed louvre finish



40° FINAL SLAT ANGLE

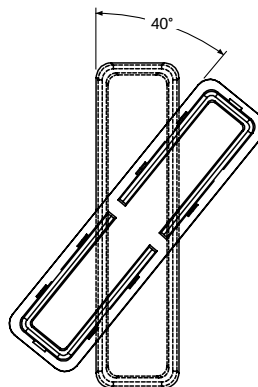

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Self drilling wafer screws

10Gx16mm – BAG OF 100

Black / Monument / Woodland Grey Surfmist / White / Basalt Dune / Mill finish

Order Code: **XP-SCREWS**

- Bags of 100 – 10G x 16mm self drilling wafer head zinc plated
- Powder coated heads for neat finish
- Ideal for fixing of side frames to U channel or F section



Touch up paint

150g SPRAY CAN

Black / Monument Woodland Grey / Surfmist White / Basalt / Dune

Order Code: **PAINT-B/G/MN/SM/W/BS/D**

- Colour match touch up paint
- Simply spray on for minor touch ups



EXTRAS



Centre support rail


5800MM LONG

Order Code: **XP-5800-CSR**

OPTIONAL EXTRA

Commonly used for screens 2000mm or wider to provide strength & rigidity to panel

Snap-on cover hides fixings – provides slimline sturdy support rail with no visible fixings





Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

TECH SPECS

- PP 126 / AP 188
- Alloy 6063-T5
- 5800mm long
- Screw fix off to each slat to provide support/rigidity
- Support rail is installed vertically to brace horizontal slats
- Includes 2x screw flutes for cap insertion
- lxx = 1.73 x 10E3 mmE4
- lyy = 26.34 x 10E3 mmE4



Centre support rail cap

40mm x 13mm

3MM THICK

Order Code: **XP-CSRC**

- Nylon cap
- Simply press into screw flutes in centre support rail
- Easy and fast fitting of cap

MATES WITH **QS-5800-CSR**

Finishes



Centre support rail top/bottom plate

Order Code: **XP-BTP**

- Optional extra to install as part of centre support rail
- Aluminium with countersunk hole machining
- 2x CSK screws included for fixing to CSR
- Use to brace top and/or bottom of centre support rail to structure above or below if desired
- Bracing centre support rail provides extra rigidity to panels - recommended for wide screens



MATES WITH **XP-5800-CSR**



Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

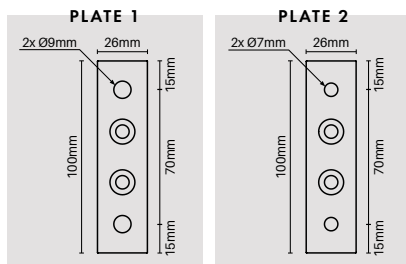


Side frame mounting arm

200MM WIDE

Black / Monument / Woodland Grey / Surfmist / Mill finish

Order Code: **XP-ARMSF**

- 2x welded fixing plates - 100mm L x 26mm W x 10mm D
- 2x Ø9mm fixing holes (plate 1) & 2x 7mm fixing holes (plate 2)





65mm slat spacing table

HORIZONTAL SLAT SYSTEM

Slat Qty

Total number of slats required for height shown in corresponding rows

Slat spacing

Height of gap between each slat

Height

The Quickscreen side frames allow for variable gap spacing as each slat is fixed off at desired position. Any gap is achievable. Shown are specifications for the popular spacings of 5mm, 9mm & 20mm spacing.

The formula to calculate variable gap screen height is:

$((65\text{mm (slat height)} + \text{desired gap}) \times \text{number of slats}) - \text{desired gap} + 3\text{mm}$ (for top cap).

For example, a 30mm desired gap with 14 slats: $(65 + 30) \times 14 - 30 + 3 = 1303\text{mm}$ high

QUICKSCREEN SYSTEM

Slat Qty	Slat spacing	Height
5	-	-
	5mm	348mm
	9mm	364mm
	20mm	408mm
6	-	-
	5mm	418mm
	9mm	438mm
	20mm	493mm
7	-	-
	5mm	488mm
	9mm	512mm
	20mm	578mm
8	-	-
	5mm	558mm
	9mm	586mm
	20mm	663mm
9	-	-
	5mm	628mm
	9mm	660mm
	20mm	748mm
10	-	-
	5mm	698mm
	9mm	734mm
	20mm	833mm
11	-	-
	5mm	768mm
	9mm	808mm
	20mm	918mm
12	-	-
	5mm	838mm
	9mm	882mm
	20mm	1003mm
13	-	-
	5mm	908mm
	9mm	956mm
	20mm	1088mm
14	-	-
	5mm	978mm
	9mm	1030mm
	20mm	1173mm
15	-	-
	5mm	1048mm
	9mm	1104mm
	20mm	1258mm
16	-	-
	5mm	1118mm
	9mm	1178mm
	20mm	1343mm
17	-	-
	5mm	1188mm
	9mm	1252mm
	20mm	1428mm
18	-	-
	5mm	1258mm
	9mm	1326mm
	20mm	1513mm
19	-	-
	5mm	1328mm
	9mm	1400mm
	20mm	1598mm
20	-	-
	5mm	1398mm
	9mm	1474mm
	20mm	1683mm
21	-	-
	5mm	1468mm
	9mm	1548mm
	20mm	1768mm
22	-	-
	5mm	1538mm
	9mm	1622mm
	20mm	1853mm

Slat Qty	Slat spacing	Height
23	-	-
	5mm	1608mm
	9mm	1696mm
	20mm	1938mm
24	-	-
	5mm	1678mm
	9mm	1770mm
	20mm	2023mm
25	-	-
	5mm	1748mm
	9mm	1844mm
	20mm	2108mm
26	-	-
	5mm	1818mm
	9mm	1918mm
	20mm	2193mm
27	-	-
	5mm	1888mm
	9mm	1992mm
	20mm	2278mm
28	-	-
	5mm	1958mm
	9mm	2066mm
	20mm	2363mm
29	-	-
	5mm	2028mm
	9mm	2140mm
	20mm	2448mm
30	-	-
	5mm	2098mm
	9mm	2214mm
	20mm	2533mm
31	-	-
	5mm	2168mm
	9mm	2288mm
	20mm	2618mm
32	-	-
	5mm	2238mm
	9mm	2362mm
	20mm	2703mm
33	-	-
	5mm	2308mm
	9mm	2436mm
	20mm	2788mm
34	-	-
	5mm	2378mm
	9mm	2510mm
	20mm	2873mm
35	-	-
	5mm	2448mm
	9mm	2584mm
	20mm	2958mm
36	-	-
	5mm	2518mm
	9mm	2658mm
	20mm	3043mm
37	-	-
	5mm	2588mm
	9mm	2732mm
	20mm	3128mm
38	-	-
	5mm	2658mm
	9mm	2806mm
	20mm	3213mm
39	-	-
	5mm	2728mm
	9mm	2880mm
	20mm	3298mm
40	-	-
	5mm	2798mm
	9mm	2954mm
	20mm	3383mm

QUICKSCREEN SYSTEM



90mm slat spacing table

HORIZONTAL SLAT SYSTEM

Slat Qty

Total number of slats required for height shown in corresponding rows

Slat spacing

Height of gap between each slat

Height

The Quickscreen side frames allow for variable gap spacing as each slat is fixed off at desired position. Any gap is achievable. Shown are specifications for the popular spacings of 5mm, 9mm & 20mm spacing.





The formula to calculate variable gap screen height is:

$((90\text{mm (slat height)} + \text{desired gap}) \times \text{number of slats}) - \text{desired gap} + 3\text{mm}$
(for top cap).

For example, a 30mm desired gap with 14 slats: $(90 + 30) \times 14 - 30 + 3 = 1653\text{mm}$ high


Slat Qty	Slat spacing	Height	Slat Qty	Slat spacing	Height
5	-	-	23	-	-
	5mm	473		5mm	2183
	9mm	489		9mm	2271
6	20mm	533	24	20mm	2513
	-	-		-	-
	5mm	568		5mm	2278
7	9mm	588	25	9mm	2370
	20mm	643		20mm	2623
8	-	-	26	-	-
	5mm	663		5mm	2373
	9mm	687		9mm	2469
9	20mm	753	27	20mm	2733
	-	-	28	-	-
	5mm	758		5mm	2468
10	9mm	786	29	9mm	2568
	20mm	863		20mm	2843
11	-	-	30	-	-
	5mm	853		5mm	2563
	9mm	885		9mm	2667
12	20mm	973	31	20mm	2953
	-	-	32	-	-
	5mm	948		5mm	2658
13	9mm	984	33	9mm	2766
	20mm	1083		20mm	3063
14	-	-	34	-	-
	5mm	1043		5mm	2753
	9mm	1083		9mm	2865
15	20mm	1193	35	20mm	3173
	-	-	36	-	-
	5mm	1138		5mm	2848
16	9mm	1182	37	9mm	2964
	20mm	1303		20mm	3283
17	-	-	38	-	-
	5mm	1233		5mm	2943
	9mm	1281		9mm	3063
18	20mm	1413	39	20mm	3393
	-	-	40	-	-
	5mm	1328		5mm	3038
19	9mm	1380		9mm	3162
	20mm	1523		20mm	3503
20	-	-	41	-	-
	5mm	1423		5mm	3133
	9mm	1479		9mm	3261
21	20mm	1633	42	20mm	3613
	-	-	43	-	-
	5mm	1518		5mm	3228
22	9mm	1578	44	9mm	3360
	20mm	1743		20mm	3360
23	-	-	45	-	-
	5mm	1613		5mm	3228
	9mm	1677		9mm	3360
24	20mm	1853	46	20mm	3723
	-	-	47	-	-
	5mm	1708		5mm	3323
25	9mm	1776	48	9mm	3459
	20mm	1963		20mm	3459
26	-	-	49	-	-
	5mm	1803		5mm	3513
	9mm	1875		9mm	3657
27	20mm	2073	50	20mm	4053
	-	-	51	-	-
	5mm	1898		5mm	3608
28	9mm	1974	52	9mm	3756
	20mm	2183		20mm	4163
29	-	-	53	-	-
	5mm	1993		5mm	3703
	9mm	2073		9mm	3855
30	20mm	2293	54	20mm	4273
	-	-	55	-	-
	5mm	2088		5mm	3798
31	9mm	2172	56	9mm	3954
	20mm	2403		20mm	4383

HORIZONTAL SLAT INSTALL GUIDE

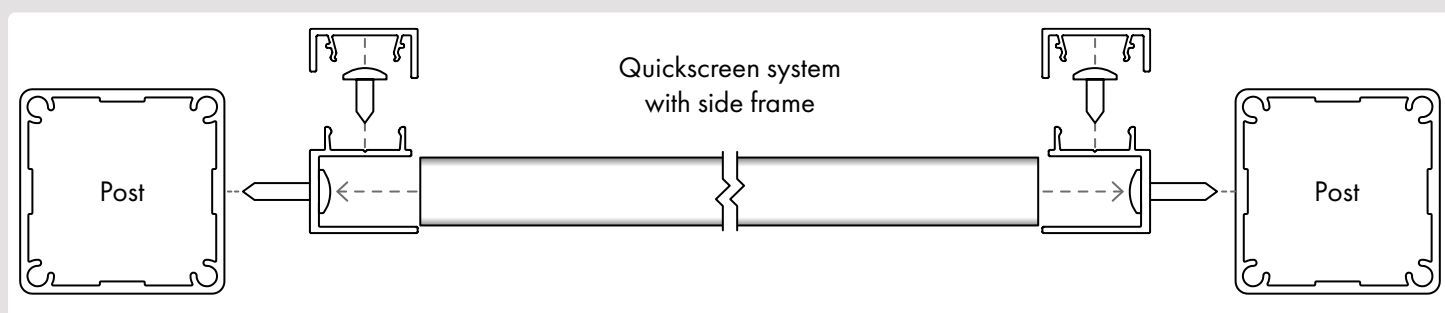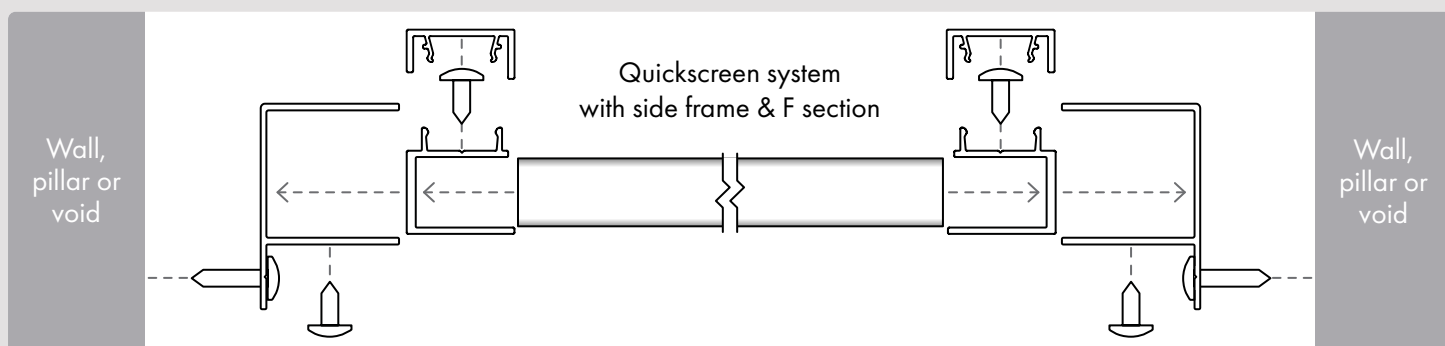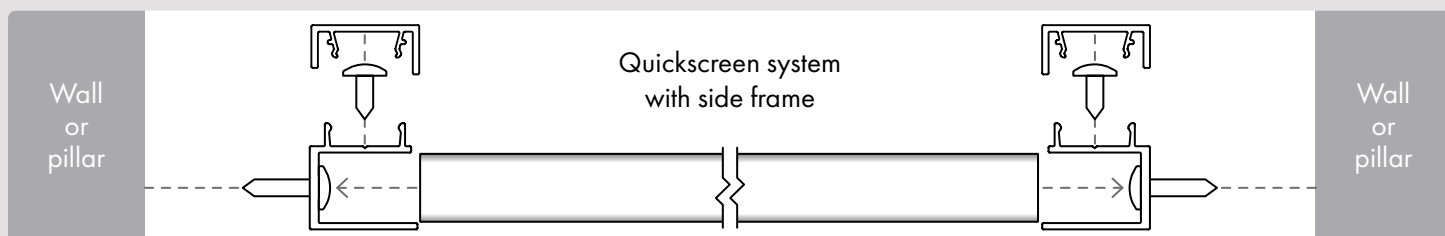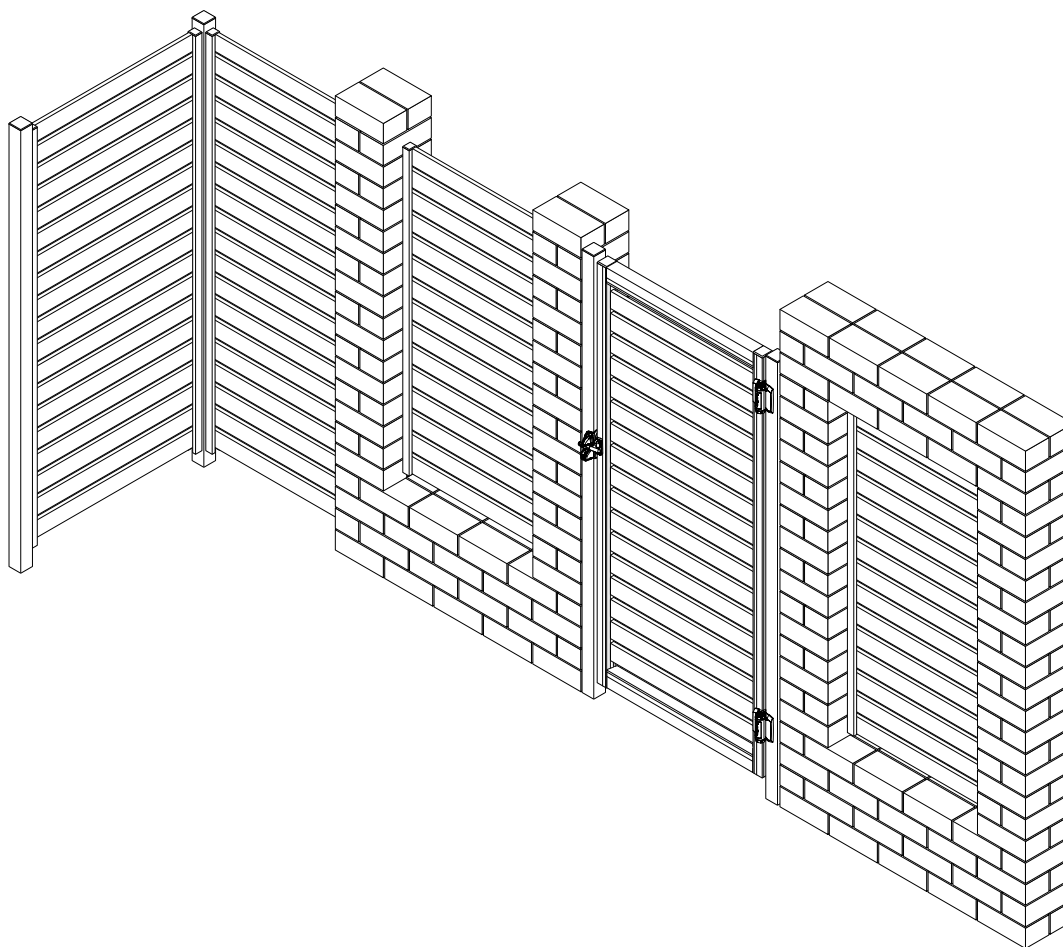


HORIZONTAL SLAT INSTALL GUIDE

1

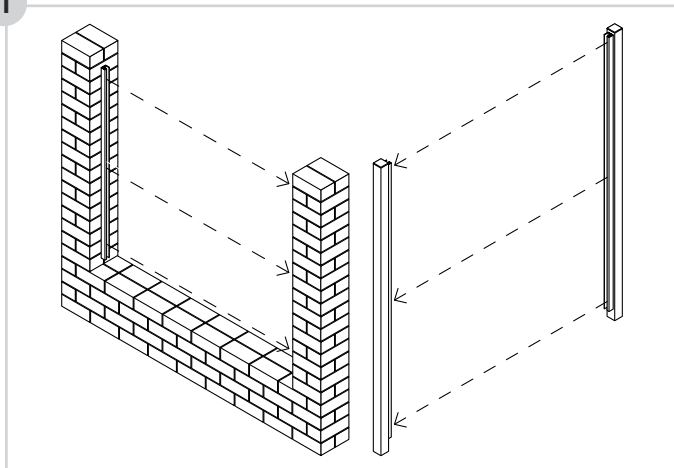


Take measurement between walls or posts at 3 points: top, middle and bottom (Take note of the smallest measurement)

2

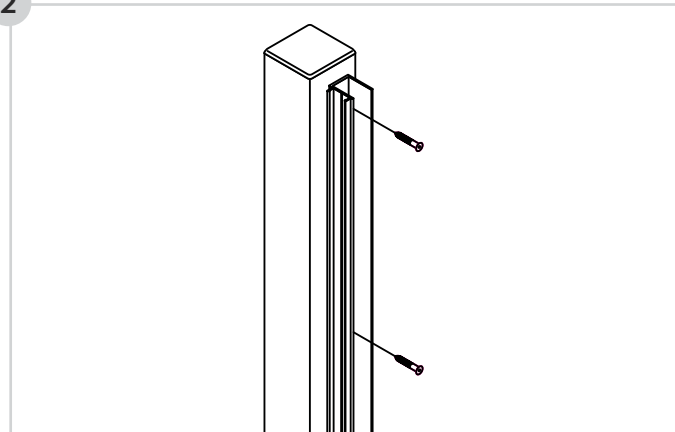

Cut side frames 3mm less than desired height (3mm allows for the top cap)
Affix side frames to wall or post with appropriate fixings

3

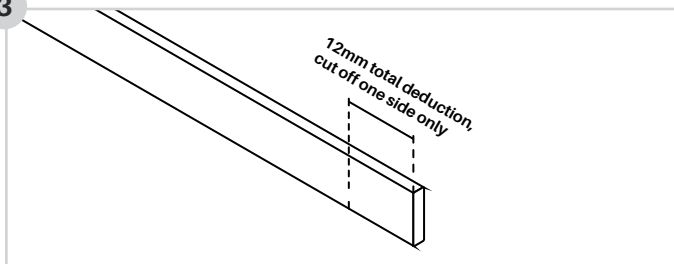


Cut aluminium slats 12mm less than total width of opening (Refer to measurement in step 1)

The 12mm deduction takes into account thickness of side frame on both sides of the screen and head of fixings.

Ensure fixings holding side frame do not obstruct slats when dropping in. If so, you may need to trim slats further.

4

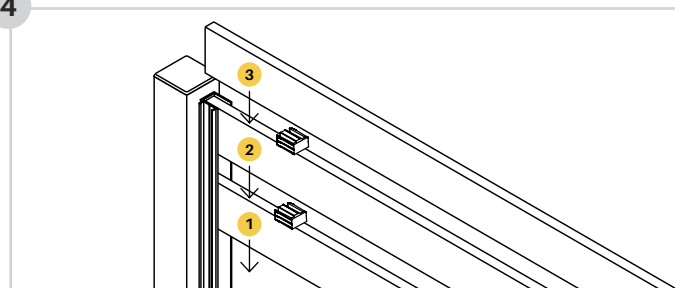


Drop in aluminium slats

Tip: Ensure bottom slat is level and screw off at both sides


Optional slat spacers can be rotated to achieve a 5, 9, 12, 15, 20 or 30mm slat gap. Any gap can be achieved by leaving a desired space. Consider using timber block spacers to achieve other gaps.

5

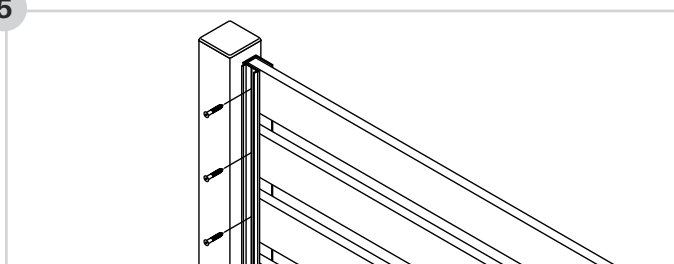

Screw off each slat as it is dropped in (ensuring each slat is level)

6

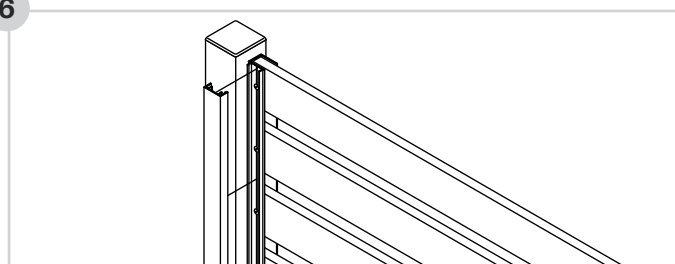


Cut snap on fixing cover to appropriate height

Attach snap on fixing cover to hide screws

Tip: If screen is wider than 1800mm, it is recommended to attach the centre support rail vertically at the centre of the screen. Cut centre support rail to appropriate height of screen and screw off to each slat at back side of screen

7

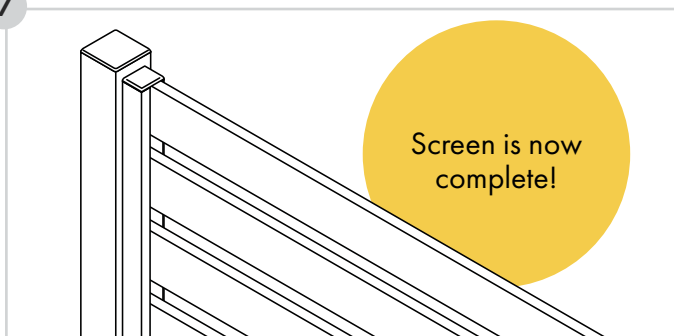


Snap on fixing cover install tip

Engage shorter leg of snap-on cover first.


At this point, the snap-on cover will be sitting off the side frame on an angle.

The longer leg must be at open side of side frame.



Starting from the top and working your way down, use a wood block and a hammer/mallet to tap the longer leg into place.

A short, sharp tap may be required to engage the long leg.



WE CAN CUSTOM
CUT TO SIZE

Quickscreen system order forms

CONTACT US
FOR YOUR COPY OF
OUR EASY TO USE
ORDER FORMS

Order forms available for long
lengths or cut to size.

For cut to size orders, simply enter required
height and width – our handy order form will
then generate instant pricing for your order

We will then take your order, cut to size and flat pack for
delivery Australia wide.

QuickScreen Horizontal Slat Screens Order Form - V8.1

Screens - Cut to Size 65 or 90mm Slats available with any spacing		Slat Type:		Slat Spacing:		Colour:		Louvre Brackets:		Louvres only available with 65mm slats		
Installation Type	Height (mm)	Width (mm)	Fixing Type	Qty of Screens the same size	Qty of Louvre Brackets Required	Lineal Meters of Slat	Lineal Meters of Side Frame	Total Amount Ex GST				
A FENCE PANEL - (Overall Opening Size)	1844	2100	Not Required	1	0							
B Select Installation Type	Select Height		Not Required									
C Select Installation Type	Select Height		Not Required									
D Select Installation Type	Select Height		Not Required									
E Select Installation Type	Select Height		Not Required									
F Select Installation Type	Select Height		Not Required									
G Select Installation Type	Select Height		Not Required									
H Select Installation Type	Select Height		Not Required									
I Select Installation Type	Select Height		Not Required									
J Select Installation Type	Select Height		Not Required									
K Select Installation Type	Select Height		Not Required									
L Select Installation Type	Select Height		Not Required									
M Select Installation Type	Select Height		Not Required									
N Select Installation Type	Select Height		Not Required									
O Select Installation Type	Select Height		Not Required									
P Select Installation Type	Select Height		Not Required									
Totals				1	0			\$				
Approx Wt				33	kg	Total Area		Sqm				

Free delivery (P/R) to Business Premises** for Cut to Size orders over \$600 + GST to Metro areas only.
Brisbane, Gold Coast, Newcastle, Sydney, Canberra, Melbourne & Adelaide.
Price on application for other areas.

If installation is FENCE PANEL, we automatically make a deduction of 10mm to the slat length to allow for the side frame to fit inside the daylight opening.

If installation is WINDOW SCREEN, we automatically make a deduction of 10mm to the slat length to allow for the side frame to fit inside the daylight opening.

Deductions vary for louvre brackets. Please see catalogue for details.

Customer Signature: _____ Date: _____

By signing this document, I confirm that the information provided is correct.
Once confirmed, the screen will be custom made and no cancellations or further changes are allowed.

CONTACT US TO GET YOUR COPY OF THE ORDER FORMS

We can custom cut to size & flat pack for easy assembly onsite or in a factory

1

DETERMINE SIZES OF SCREENS REQUIRED

2

INPUT SIZES INTO OUR EASY TO USE
FREE EXCEL ORDER FORM

- > Instant pricing given so you can quickly quote to your customers
- > Contact us and we can provide you a link to access all Excel order forms instantly

3

EMAIL US EXCEL SHEET ORDER FORM

4

WE WILL CUT ALUMINIUM TO SIZE AND
FLAT PACK FOR EASY ASSEMBLY. WE
CAN CUSTOM CUT TO SIZE SLAT SCREENS,
PEDESTRIAN GATES & SLIDING GATES

- > Save time and money
- > No welding required
- > Accessories such as caps and assembly screws included

5

PICK UP FROM ONE OF OUR 8 DEPOTS
OR WE CAN SEND NATIONALLY

- > FREE freight for metro capitals (excl Darwin & Hobart)

VERTICAL SLAT SYSTEM

Vertical slat is a stylish screening solution that continues to increase in popularity. The Quickscreen System allows 65x16.5mm or 90x16.5mm slats to be installed using a cost effective top/bottom rail system. Each slat requires screwing off at top and bottom. Screws are hidden by a heavy duty "U" section at top and bottom. An "F" section is installed vertically on both sides which allows easy installation between posts or pillars. A complete system is available – panels, pedestrian gates and sliding gates.

Ideal for installations between pillars and existing posts!


Available long length supply or custom made to size & flat packed.

ASSEMBLE ON-SITE OR IN YOUR WORKSHOP –

Panels fit into F section on both sides for easy installation. Problems with out of square pillars or posts can be easily overcome with F section fitting.




- 1 F section
- 2 U channel top/bottom rail
- 3 Quickscreen frame
- 4 65mm x 16.5mm slats (90mm x 16.5mm slats also available)

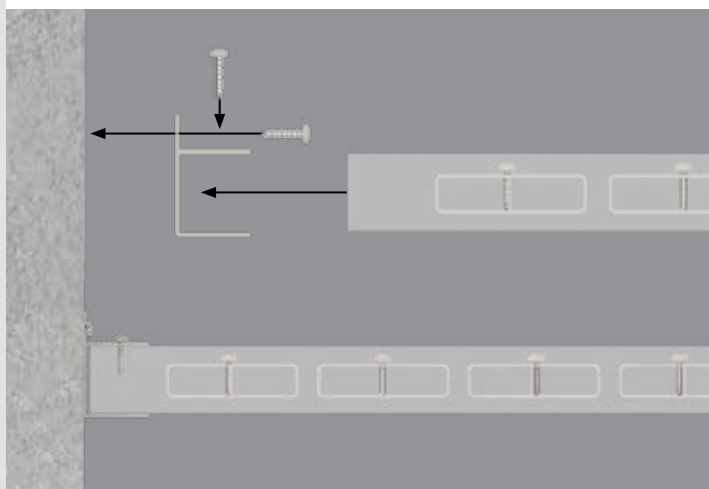

SLAT OPTIONS –

For full slat specification, see page 7


- 1 65x16.5mm slat with centre web
- 2 65x16.5mm econo slat
- 3 90x16.5mm slat with centre web

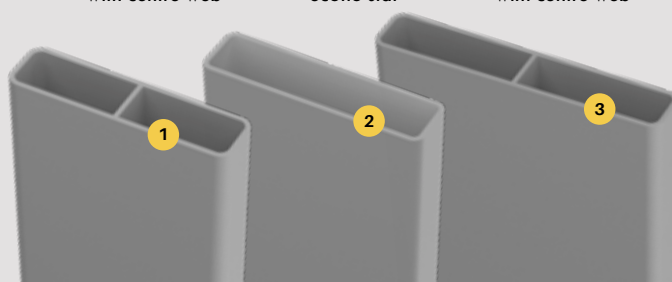

POSTS & ACCESSORIES –

- 1 50x50mm post
- 2 65x65mm heavy duty post
- 3 Top caps
- 4 Dress rings
- 5 Domical covers
- 6 Base plates

For full range of posts & accessories, see pages 22 & 23

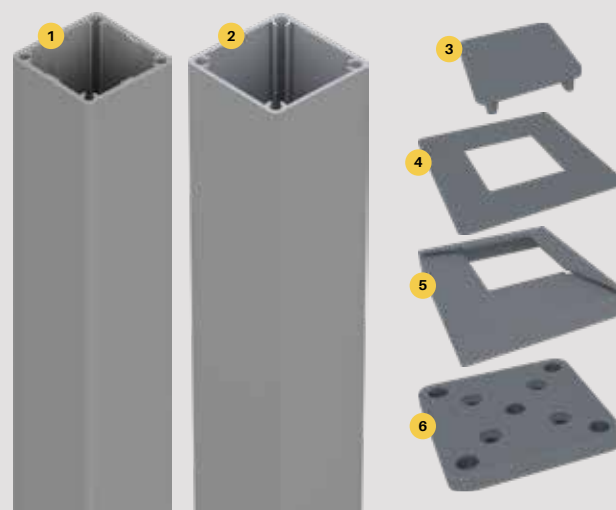

Quick and easy cut to size quoting & ordering process

Get instant pricing with our easy to use excel order form

2 ways to purchase – choose between cut to size or long length supply




VERTICAL SLAT COMPONENTS

Quickscreen frame


5800MM LONG

Order Code: **QS-5800-SF**



TECH SPECS

- PP 104 / AP 156
- Alloy 6063-T6 / 5800mm long
- Used as horizontal top & bottom rail
- Each slat must be screw fixed to frame
- Screw fixings are hidden when panel is assembled
- lxx = 9.58 x 10E3 mmE4
- lyy = 8.38 x 10E3 mmE4



Finishes




Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Heavy duty U channel

top/bottom frame


5000MM LONG

Order Code: **QS-5000-HORIZ**



TECH SPECS

- PP 184 / AP 184
- Alloy 6060-T5
- Quickscreen frame fits neatly inside heavy duty U channel
- 5000mm long
- 2.5mm wall thickness
- lxx = 23.97 x 10E3 mmE4
- lyy = 38.92 x 10E3 mmE4



Finishes




Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Quickscreen F section


5800MM LONG

Order Code: **QS-5800-F**



TECH SPECS

- PP 170 / AP 234
- Alloy 6063-T6
- 5800mm long
- Installed vertically at each side of screen into which heavy duty U channel placed horizontally
- 1.4mm wall thickness
- lxx = 20.76 x 10E3 mmE4
- lyy = 42.29 x 10E3 mmE4



Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

ACCESSORIES





100mm support foot

HEIGHT ADJUSTABLE
SS316 / POLISH FINISH

Order Code: XP-FOOT-ADJ

- Height adjustable support foot for wider or larger screens
- Screw fix to midpoint of underside of bottom rail U channel
- Easily height adjustable (from 25mm up to 100mm) - stainless steel stem can be cut down and bottom flange reattached with grub screw

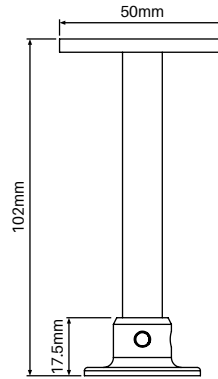

Slat spacers

50 PACK

Order Code: QS-SPACER-05MM-50PK
QS-SPACER-09MM-50PK
QS-SPACER-12MM-50PK
QS-SPACER-15MM-50PK
QS-SPACER-20MM-50PK
QS-SPACER-30MM-50PK

- Nylon slat spacers
- Spacers enable 5mm, 9mm, 12mm, 15mm, 20mm or 30mm spacing between slats



Self drilling wafer screws

10Gx16mm – BAG OF 100
Black / Monument / Woodland Grey
Surfmist / White / Basalt

Dune / Mill finish

Order Code: XP-SCREWS

- Bags of 100 - 10G x 16mm self drilling wafer head zinc plated
- Powder coated heads for neat finish
- Ideal for fixing top/bottom frame to F section
- Can also be used for fixing slats to top/bottom frame



Touch up paint

150g SPRAY CAN
Black / Monument / Woodland Grey
Surfmist / White / Basalt / Dune

Order Code:

PAINT-B/G/MN/SM/W/BS/D

- Colour match touch up paint
- Simply spray on for minor touch ups



Screws


50 PACK

Order Code: QS-SCREWS-50PK


- 50 screws: 10G x 16mm long
- Use screws to fix off slats




VERTICAL SLAT INSTALL GUIDE

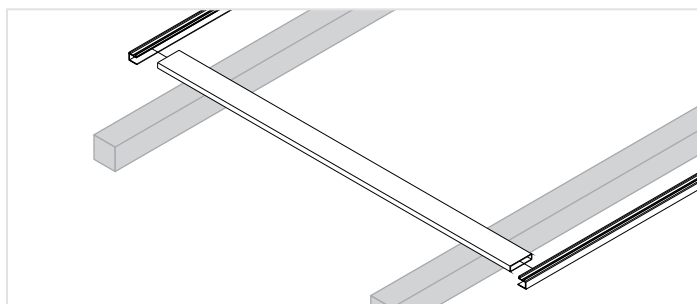


- 1 Place first slat on padded bearers, then place the top and bottom frames onto the slat.

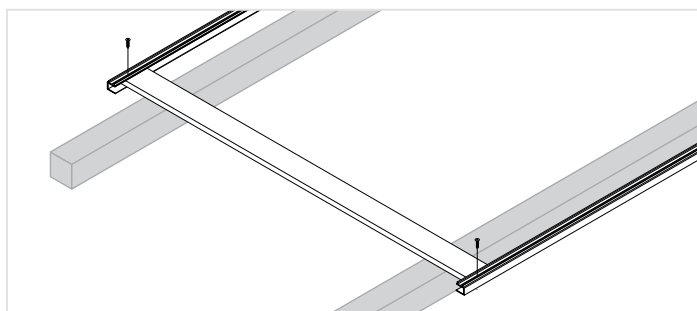

- 2 Position front edge of slat required distance from the edge of the top and bottom frame and screw through frame to affix at both end of the slat with 1x screw per end.

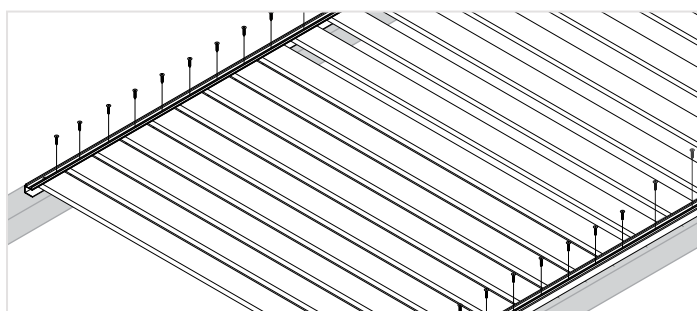



- 3 Slide remaining slats and slat spacers into the top and bottom frame and attach with single screw through top and bottom frames to affix, then check measure diagonals. Double screw fix first and last slats. **Keep slat spacing in mind!**

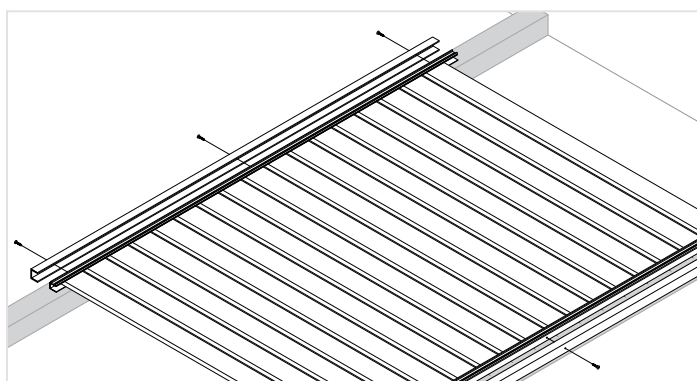


- 4 Place U channel over top and bottom frame, pre-drill 3mm holes and screw off in three points on top and bottom of the U channel – Measure in 50mm from the left and right edges, then one in the centre. **Ensure sufficient pilot holes are drilled before affixing, making sure they won't hit other screws.**
Note: Before installation, drill drainage holes on the underside of the bottom rail as required.




For panels over 1800mm wide, we suggest using a height adjustable foot underneath screen to prevent sagging of panel. Pre-drill 3mm holes and affix with screws. If using the height adjustable foot there is no need for a screw in the middle of the bottom rail.

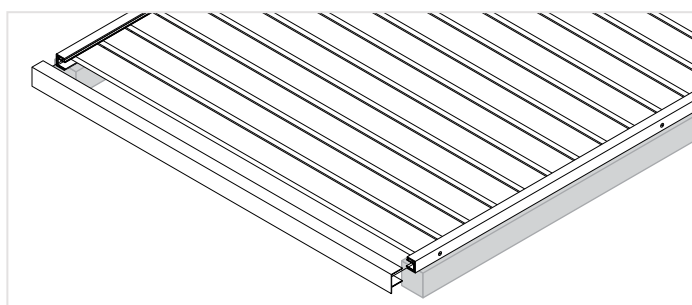

- 5 Place F section over each side of panel – F section will stay in place without screws until the last step.

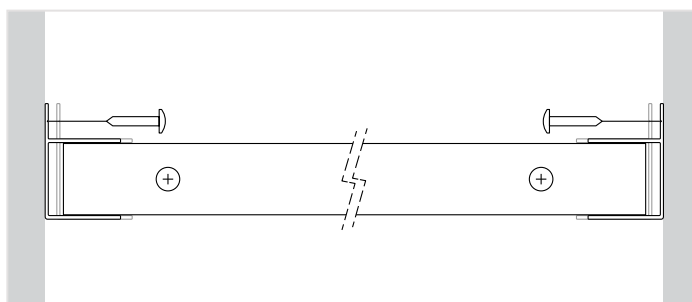

- 6 Lift panel into opening and push F section out to sit flush to wall then affix F section to wall (fixings not included). **Ensure sufficient pilot holes are drilled before affixing.**

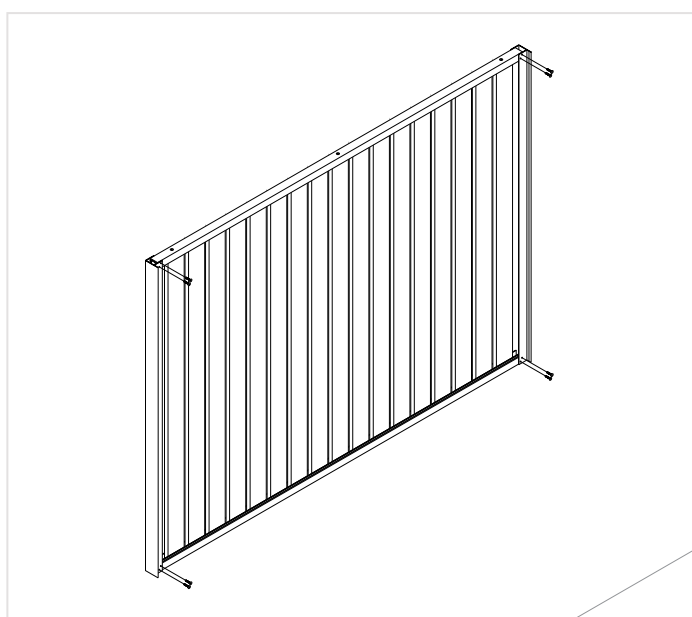

- 6 Affix panel to F section by pre-drilling 3mm holes and screwing through F section in corner positions – we suggest using 2 screws in each corner

POSTS & ACCESSORIES


APPLICABLE TO QUICKSCREEN SIDE FRAME & VERTICAL SLAT SYSTEMS



50x50mm full post

2400MM or 6000MM LONG

Order Code: XP-2400/6000-FP



Finishes



TECH SPECS

- Alloy 6063 - T6
- 1.8mm wall thickness with 3mm ribs
- Screw flutes to screw on base plate if required
- Aluminium powder coated press-in top plate included with 2400mm posts
- lxx = 170.44 x 10E3 mmE4
- lyy = 170.44 x 10E3 mmE4

4x screw flutes in post allow tight fit of press in flat aluminium top plate.


Optional base plate can be attached using screw flutes for base plated post installations.



65x65mm heavy duty post

2400MM or 6000MM LONG

Order Code: XP-2400/6000-65HD



Finishes



TECH SPECS

- 65x65mm larger profile, heavy duty post
- Alloy 6063 - T6
- 3mm wall thickness
- Screw flutes to screw on base plate if required
- Aluminium powder coated press-in top plate included with 2400mm posts
- lxx = 464.62 x 10E3 mmE4
- lyy = 464.62 x 10E3 mmE4

4x screw flutes in post allow tight fit of press in flat aluminium top plate.

Optional base plate can be attached using screw flutes for base plated post installations.



50x50mm post flat top plate

POWDER COATED ALUMINIUM

Black / Monument / Woodland Grey / Surfmist White / Basalt / Dune / Mill finish

Order Code: XP-TP

- Alloy ADC12 aluminium plate
- Press into post screw flutes for secure fixing
- 2400mm posts come with free top plate included - only purchase if extra top plates are required
- Top plates required for 6000mm posts - sold separately



65x65mm post flat top plate

POWDER COATED ALUMINIUM

Black / Monument / Woodland Grey / Surfmist White / Basalt / Dune / Mill finish


Order Code: XP-65TP

- Alloy ADC12 aluminium plate
- Press into post screw flutes for secure fixing
- 2400mm posts come with free top plate included - only purchase if extra top plates are required
- Top plates required for 6000mm posts - sold separately

POSTS & ACCESSORIES

APPLICABLE TO QUICKSCREEN SIDE FRAME & VERTICAL SLAT SYSTEMS

SUITS 50x50MM POSTS

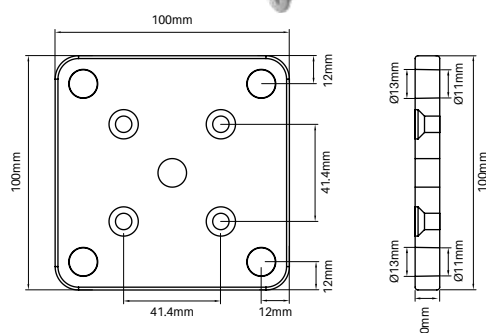


50x50mm post base plate set

POWDER COATED ALUMINIUM
**Black / Monument / Woodland Grey
Surfmist / White / Basalt
Dune / Mill finish**

Order Code: **XP-BP-SET**

- Simply screw base plate onto core drill post
- 4x 12G x 50mm long CSK screws included in set



Powder coat colours



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)




DUNE
(D)



MILL
(M)

SUITS 65x65MM POSTS

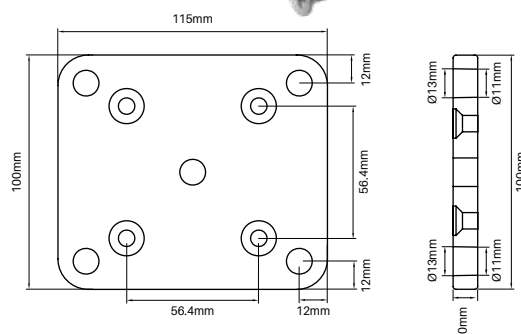


65x65mm post base plate set

POWDER COATED ALUMINIUM
**Black / Monument / Woodland Grey
Surfmist / White / Basalt
Dune / Mill finish**

Order Code: **XP-65BP-SET**

- Simply screw base plate onto core drill post
- 4x 12G x 50mm long CSK screws included in set



Powder coat colours



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)




BASALT
(BS)



DUNE
(D)



MILL
(M)

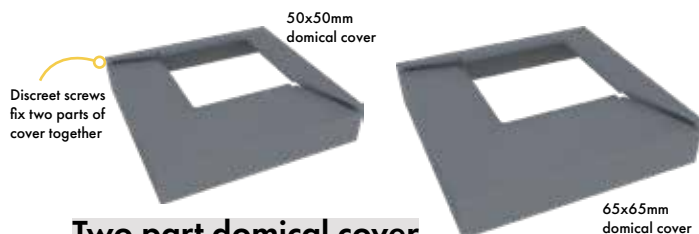

Two part domical cover

POWDER COATED ALUMINIUM
**Black / Monument / Woodland Grey /
Surfmist / White / Basalt / Dune / Mill finish**

Order Code: **XP-DC-2P (suits 50mm post)**

XP-65DC-2P (suits 65mm post)

50mm domical cover:

- Suits 50x50mm post with screw fixed base plate
- 106x106mm outer - 52x52mm inner - Alloy ADC12
- Cover can be fitted to posts after fence is installed

65mm domical cover:

- Suits 65x65mm post with screw fixed base plate
- 122x106mm outer - 67x67mm inner - Alloy ADC12
- Cover can be fitted to posts after fence is installed



Post dress rings

POWDER COATED ALUMINIUM
**Black / Monument / Woodland Grey /
Surfmist / White / Basalt / Dune / Mill finish**

Order Code: **XP-DR (suits 50mm post)**

XP-65DR (suits 65mm post)

50mm dress rings:

- Suits 50x50mm core drill posts
- 100mm x 100mm outer - 52mm x 52mm inner

65mm dress rings:

- Suits 65x65mm heavy duty post
- 115mm x 115mm outer - 67mm x 67mm inner

POSTS & ACCESSORIES



Rapid set concrete

20KG BAG

Order Code: **GROUT-RSC**

- Specially formulated to harden rapidly
- Not available Perth depot – Use 20kg Kwik Set concrete (Code: GROUT-KWIKSET)

Concrete mix

20KG BAG

Order Code: **GROUT-CONCRETE**

- Quality blend of GP cement, aggregate & sand - just add water
 - Ideal for high strength concreting of posts
- Set concrete (Code: GROUT-KWIKSET)

Polaris grout

10KG BAG

Order Code: **GROUT-POL-10KG**

- Non shrink grout – rapid setting
- Aggregate free



Bostik HES grout

20KG BAG

Order Code: **GROUT-BOS**

- Non shrink structural grout
- High performance, high early strength




Sika HES grout

20KG BAG

Order Code: **GROUT-SIKA**

- Non shrink structural grout
- Ready mixed, high quality grout
- Sets with high early strength

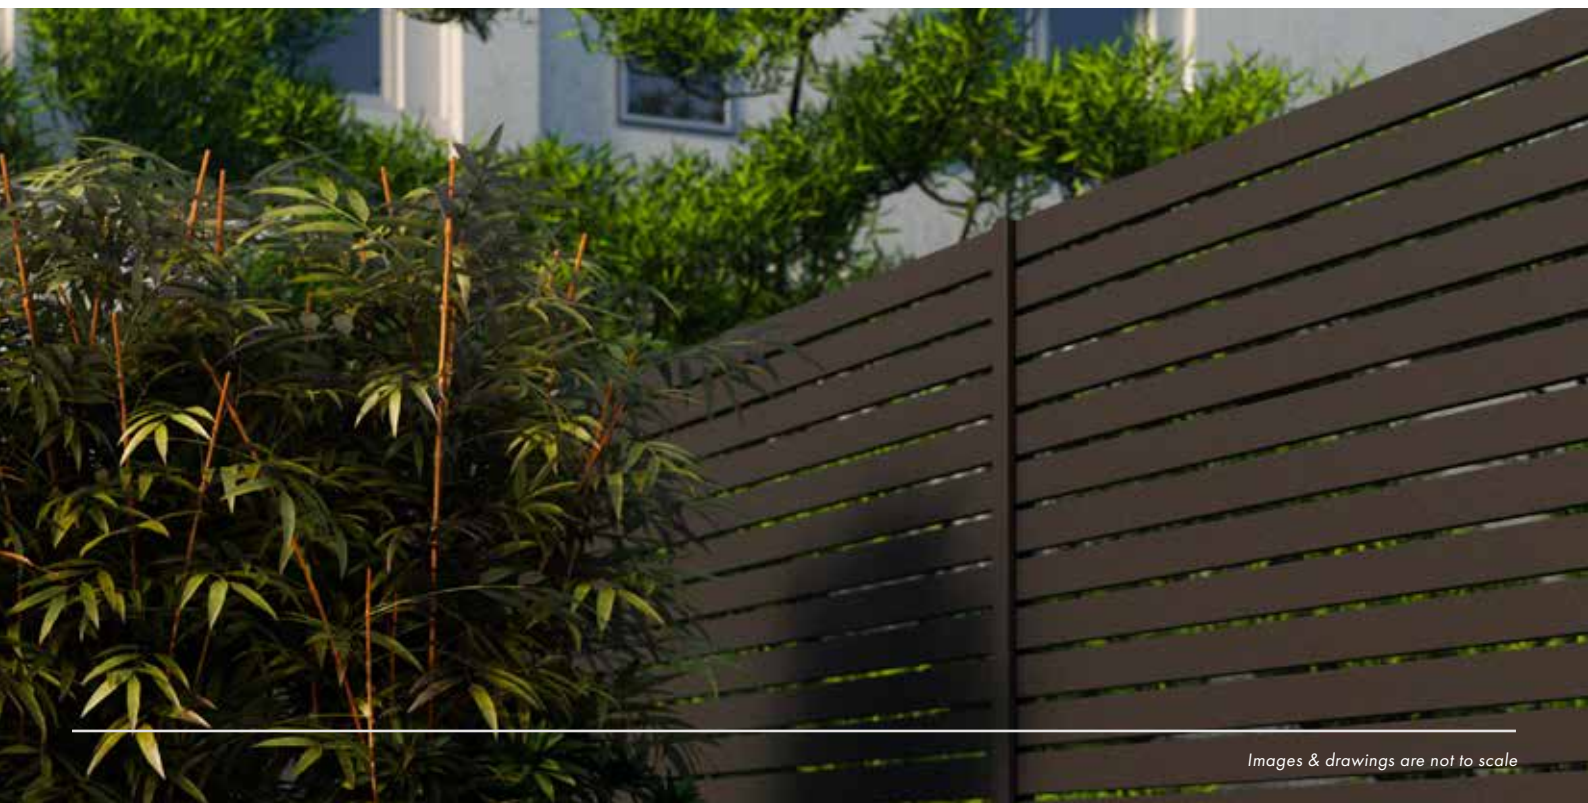


TRADE TIP: CENTRE SUPPORT RAIL

The centre support rail is commonly used to brace off slats in wider screens. If you need to add extra rigidity to the screen, the centre support rail can also be screw fixed at top and/or bottom with our centre support rail **top/bottom plate**. This is ideal for use on wide slat screen panels or panels installed in high wind areas.

The specially designed **top/bottom plate** seamlessly attaches to the centre support rail extrusion providing a hidden screw fixed bracing system.

Centre support rail top/bottom plate

See pages 11 for more details





Specially machined plate screw fixes to screw flutes in centre support rail extrusion. Fix to top and/or bottom of centre support rail. Top/bottom plate is now mechanically attached to centre support rail.



Fix off centre support rail to horizontal beam, ceiling or floor via sturdy single fixing. Snap on centre support rail cover hides fixings for a clean finish.

Ideal for wider screen panels used in patios

Centre support rail can extend past top and bottom slats for screw fix bracing into top beam and floor. Adds significant rigidity to screen panels.

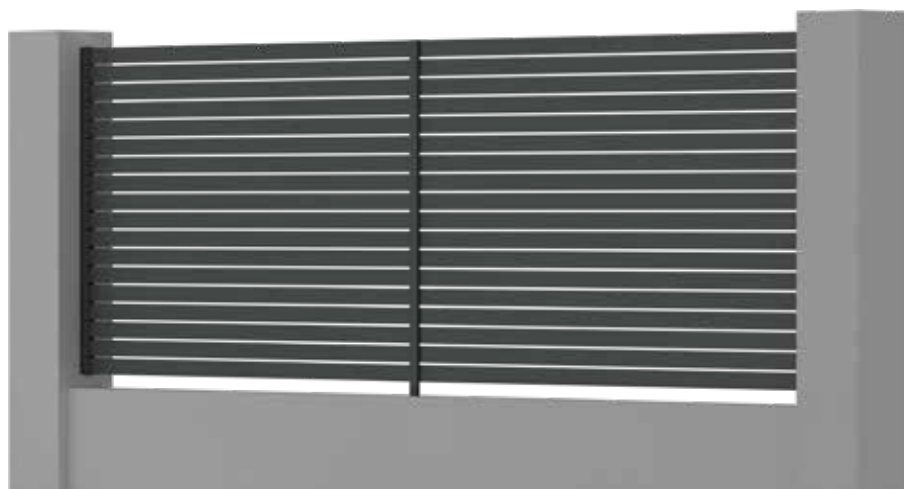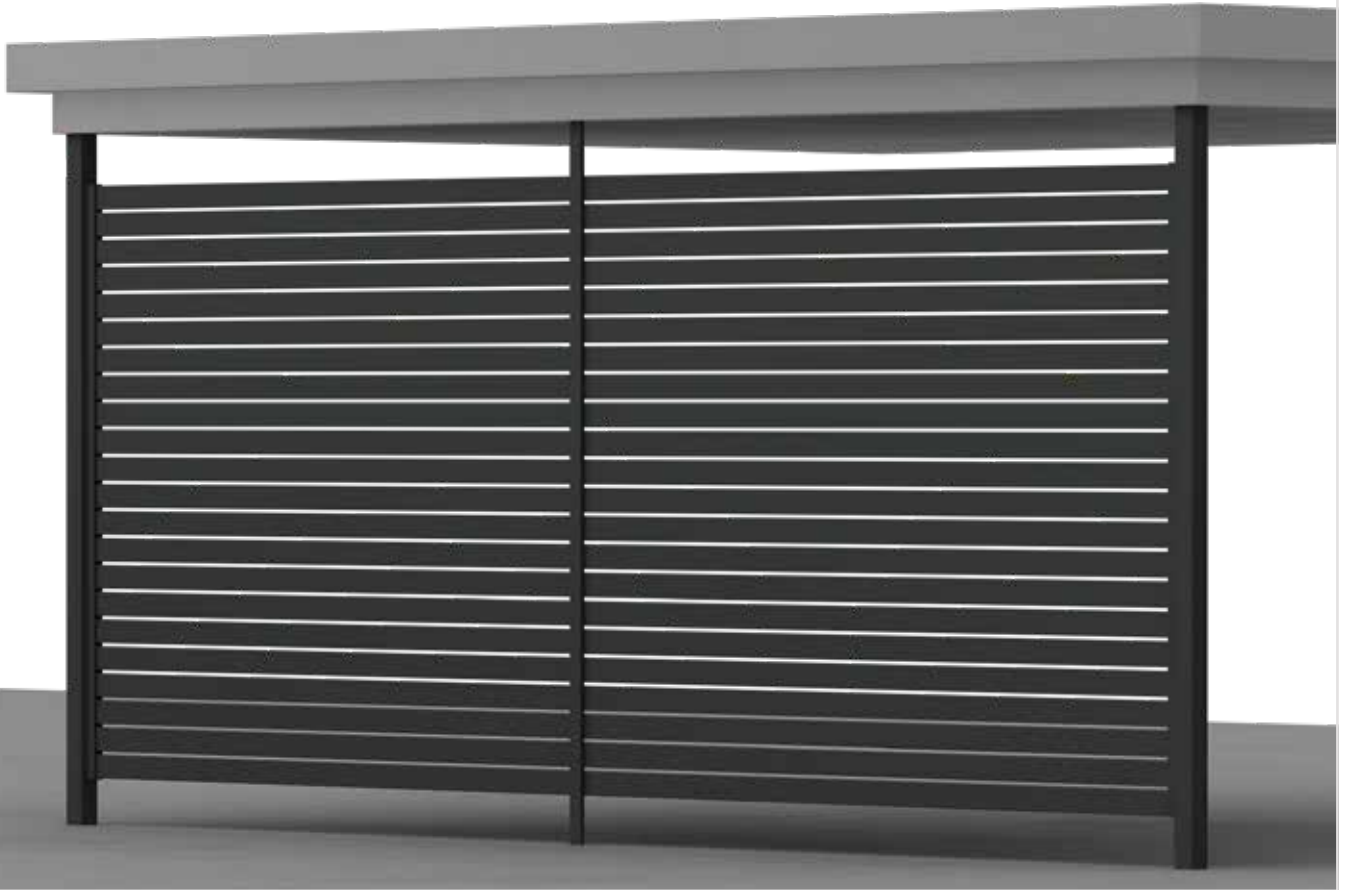

Ideal for screw fix bracing at bottom for wide screen panels between pillars

FENCING ACCESSORIES



Timber fixing kit

4 PACK – SS316

Order Code: **S-110LAG-4PK**

- M10 x 110mm timber lag screws x4 with nuts and washers
- Suits fixing holes in both the 50x50mm and 65x65mm base plate sets



Concrete fixing kit

4 PACK – SS316

Order Code: **S-120ROD-4PK**

- M10 x 120mm concrete threaded rods x4 with nuts and washers
- Suits fixing holes in both the 50x50mm and 65x65mm base plate sets



Ultraloc Threadlocker 3242 compound

10ML BOTTLE

Order Code: **ULTRALOC-3242**

- Medium strength removable grade threadlocking compound for metal screws, nuts and fasteners from Ø6mm to Ø20mm

STAINLESS STEEL FASTENERS




M12 dome nut

PACK OF 4 – SS316

Order Code:

GS-DN-4PK

- 4x dome nuts & 4x split washers
- Suits M12 thread



50mm CSK batten screw

SS316

14 gauge

Order Code:

CSK-050




75mm CSK batten screw

SS316

14 gauge

Order Code:

CSK-075




100mm CSK timber screw

4 PACK – SS316

M12 thread

Order Code:

CSK-100-4PK




93mm lag screw

SS304

M12 thread

Order Code:

GS093LAG



115mm lag screw

SS304

M12 thread

Order Code:

GS115LAG




160mm lag screw

SS304

M12 thread

Order Code:

GS160LAG




120mm threaded rod

SS304

M12 thread

Order Code:

GS120ROD



1000mm threaded rod


SS304

M12 thread

Order Code:

GS1000ROD

DIAMOND REVOLUTION DRILL

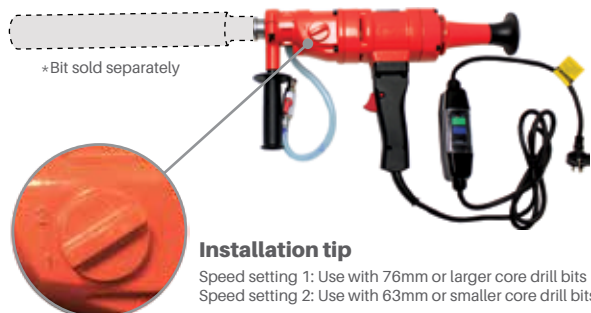

Installation tip

Speed setting 1: Use with 76mm or larger core drill bits
Speed setting 2: Use with 63mm or smaller core drill bits

Diamond revolution drill

Core drill

Order Code: REV-CD-2S

- 2 speed core drill - 1500W
- Comes with case, allen key, spare set of brushes and manual
- Safety switch
- Uses common size 1 1/4" UNC male thread for diamond core bits

Technical data

Voltage: 240V

Rated frequency: 50-60Hz

Rated input power: 1500W

No load speed r/min: 2100/950

Weight: 8.8kg



Diamond revolution stand

Suits diamond revolution core drill

Order Code: REV-STAND

- Steel and aluminium construction
- Height: 800mm
- Base: 330mm x 380mm
- Weight: 12.6kg



Core drill template

Order Code: REV-TEMPLATE

- Assists with starting to core drill hole
- Stabilises the drill bit from jumping



Spirit level for core drill

Order Code: REV-LEVEL

- Screws into core drill machine
- Assists with drilling accurate holes



Splash guard/ water trap

Order Code: REV-GUARD



Base for stand

Order Code: REV-BASE

- 550mm x 550mm overall dimensions

Core drill bits

Mild steel body & diamond impregnated crown tip



8mm mini core drill bit

Order Code: REV-BIT-08



10mm mini core drill bit

Order Code: REV-BIT-10



12mm mini core drill bit

Order Code: REV-BIT-12



14mm mini core drill bit

Order Code: REV-BIT-14



20mm mini core drill bit

Order Code: REV-BIT-20



53mm core drill bit

53mm x 450mm long
Order Code: REV-BIT-53



63mm core drill bit

63mm x 450mm long
Order Code: REV-BIT-63



76mm core drill bit

76mm x 450mm long
Order Code: REV-BIT-76



83mm core drill bit

83mm x 450mm long
Order Code: REV-BIT-83



89mm core drill bit

89mm x 450mm long
Order Code: REV-BIT-89

innovative, non-weld Pedestrian gates

AVAILABLE IN 2 CONVENIENT SUPPLY OPTIONS

1

Long length supply

Buy long length extrusions then cut to size and assemble on-site or at your premises

2

Cut to size service

Simply provide gate size required – we will cut to size and flat pack for easy assembly

Pedestrian gate options

SELECT FROM THE PEDESTRIAN GATE OPTIONS

We can cut to size, flat pack and send Australia wide or you can purchase long length extrusions and cut to size yourself.

Assemble pre-powder coated gates with no welding or riveting required.

Save time and money without requirement of fully fabricating and welding gates.

Contact us for detailed assembly instructions



1 Horizontal slat pedestrian gate

Fitted with D&D Lokk
Latch Deluxe

65mm x 16.5mm or
90mm x 16.5mm slats

Variable slat spacing



2 Vertical slat pedestrian gate

Fitted with D&D Lokk
Latch Deluxe

65mm x 16.5mm or
90mm x 16.5mm slats

Variable slat spacing



Scan the QR code for an
instructional Horizontal slat
pedestrian gate install video



Scan the QR code for an
instructional Vertical slat
pedestrian gate install video




PEDESTRIAN GATE OPTIONS

Option 1 - Horizontal

Horizontal slot gate with 65mm or 90mm x 16.5mm slats
Variable slat spacing including nil spacing
Fitted with the D&D Lokk Latch Deluxe
Maximum 2100mm wide

SEE PAGES 34-37 FOR FULL
SPECIFICATIONS ON ALL
PRODUCTS LISTED BELOW

- 1 Gate side frame**
50mm x 50mm
QSG-4200-GSF50
- 2 65mm or 90mm Horizontal gate rail**
Top and bottom rail
QSG-4800-RAIL65 / QSG-4800-RAIL90
- 3 65x16.5mm or 90x16.5mm slat**
Slats secured with fixing screws
XP-6100-S65 / QS-6100-S90
- 4 Gate Infill**
Fills gate side frame or rail void
QSG-4800-INF
- 5 Gate screw cover**
Mates to gate side frame or gate rails to
conceal slat screws
QSG-4200-COVER
- 6 65mm or 90mm joiner block**
Joins the 65mm or 90mm gate rails to
gate side frames
Fixing screws included
QSG-JOINER65-4PK / QSG-JOINER90-4PK
- 7 Slat spacers**
Snap-in spacer blocks fit between slats
5mm, 9mm, 12mm, 15mm, 20mm, and 30mm
QS-SPACER-05MM / 09MM / 12MM /
15MM / 20MM / 30MM-50PK
- 8 Rail screws**
Secures joiner blocks to gate side frame
AR-SCR-BR-50PK
- 9 16mm wafer screws**
Secures slats to gate side frames
QS-SCREWS-50PK
- 10 Gate top cap**
Flat cap suits 50mm x 50mm gate side frame
QSG-GFC-50X50
- 11 Gate hinges**
See pages 40-44 and 50-52 for hinge options
- 12 Gate latches**
See pages 45-48 and 52 for latch options

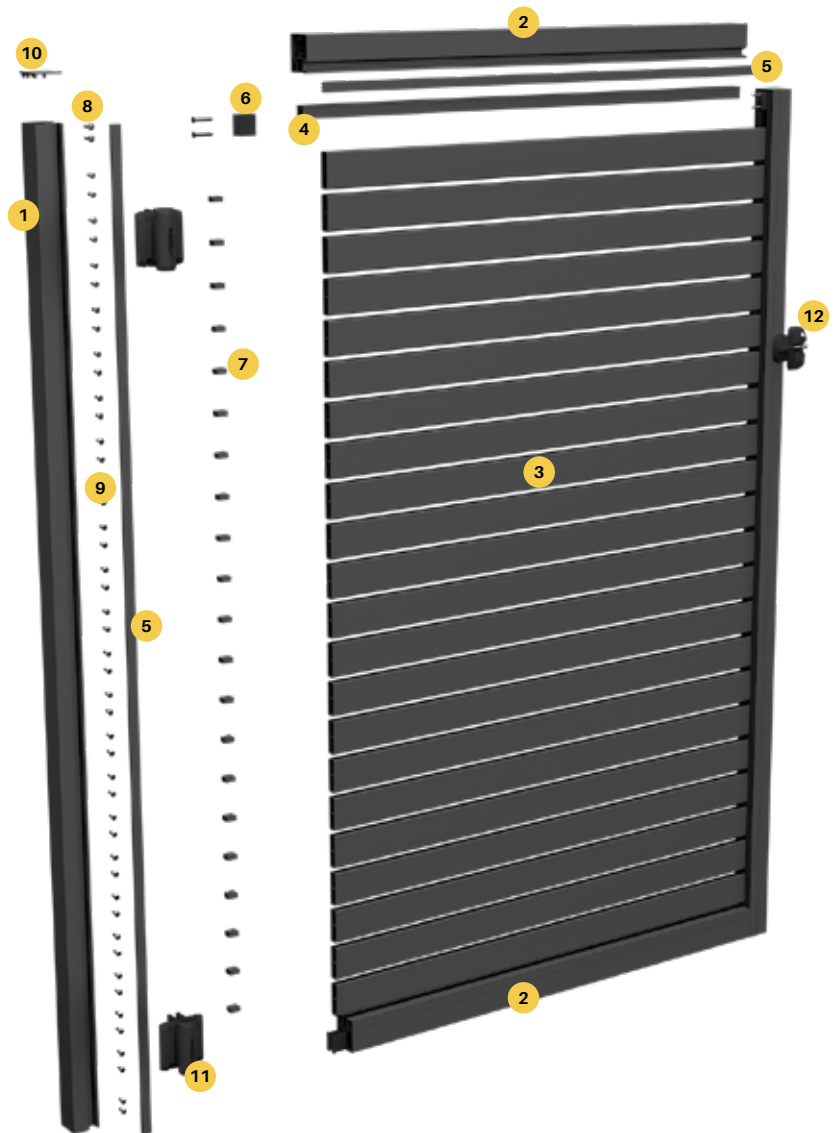



PEDESTRIAN GATE OPTIONS

Option 2- Vertical

Vertical slat gate with 65mm or 90mm x 16.5mm slats
Variable slat spacing including nil spacing
Fitted with the D&D Lokk Latch Deluxe
Maximum 1200mm wide

SEE PAGES 34-37 FOR FULL
SPECIFICATIONS ON ALL
PRODUCTS LISTED BELOW

- 1 Gate side frame**
50mm x 50mm
QSG-4200-GSF50
- 2 65mm Horizontal gate rail**
Top and bottom rail
QSG-4800-RAIL65
- 3 65x16.5mm or 90x16.5mm slat**
Slats secured with fixing screws
XP-6100-S65 / QS-6100-S90
- 4 Gate Infill or Channel Infill**
Fills gate side frame void
QSG-4800-INF / QSG-4200-CINF
- 5 Gate screw cover**
Mates to gate side frame or gate rails to
conceal slat screws
QSG-4200-COVER
- 6 65mm joiner block**
Joins the 65mm gate rails to
gate side frames
Fixing screws included
QSG-JOINER65-4PK
- 7 Slat spacers**
Snap-in spacer blocks fit between slats
5mm, 9mm, 12mm, 15mm, 20mm, and 30mm
QS-SPACER-05MM / 09MM / 12MM /
15MM / 20MM / 30MM-50PK
- 8 Rail screws**
Secures joiner blocks to gate side frame
AR-SCR-BR-50PK
- 9 16mm wafer screws**
Secures slats to gate horizontal rails
QS-SCREWS-50PK
- 10 Gate top cap**
Flat cap suits 50mm x 50mm gate side frame
QSG-GFC-50X50
- 11 Gate hinges**
See pages 40-44 and 50-52 for hinge options
- 12 Gate latches**
See pages 45-48 and 52 for latch options



When calculating even spacing between vertical slats, overall gate width should be carefully considered to ensure first and last gap (between gate side frames and first/last slat) are kept uniform with other slat spacing

GATE EXTRUSIONS



50MMx50MM Gate side frame

4200MM LONG

Order Code: **QSG-4200-GSF50**


TECH SPECS

- PP 200 / AP 300
- Alloy 6060-T5 / 4200mm long
- 2.5mm wall thickness with a 3mm centre crossmember
- Gate side frame allows for 65x16.5mm or 90x16.5mm slats fabricated horizontally and vertically
- lxx = 208.04 x 10E3 mmE4
- lyy = 172.99 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

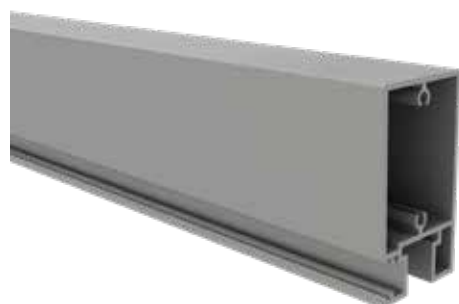

65MMx50MM Horizontal gate rail

4800MM LONG

Order Code: **QSG-4800-RAIL65**

TECH SPECS

- PP 220 / AP 330
- Alloy 6060-T5 / 4800mm long
- 2.5mm wall thickness
- Gate top/bottom rail allows for 65x16.5mm or 90x16.5mm slats fabricated horizontally and vertically
- Non weld assembly using joiner blocks affixed with 12-gauge screws into screw flutes
- lxx = 234.98 x 10E3 mmE4
- lyy = 355.44 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots



90MMx50MM Horizontal gate rail

4800MM LONG

Order Code: **QSG-4800-RAIL90**

TECH SPECS

- PP 254 / AP 380
- Alloy 6060-T5 / 4800mm long
- 2.5mm wall thickness
- Gate top/bottom rail allows for 90x16.5mm slats fabricated horizontally
- Non weld assembly using joiner blocks affixed with 12-gauge screws into screw flutes
- lxx = 305.39 x 10E3 mmE4
- lyy = 837.11 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

GATE EXTRUSIONS

Gate screw cover

4200MM LONG

Order Code: **QSG-4200-COVER**

**MATES WITH QUICKSCREEN
GATE SIDE FRAME AND
TOP/BOTTOM RAILS**



TECH SPECS

- PP 100 / AP 80
- Alloy 6060-T5 / 4200mm long
- Snap-in screw cover mates with gate side frame and top/bottom rail
- Hides screws required for affixing slats
- lxx = 0.36 x 10E3 mmE4
- lyy = 1.26 x 10E3 mmE4

Finishes




Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Gate infill

4800MM LONG

Order Code: **QSG-4800-INF**

**MATES WITH QUICKSCREEN
GATE SIDE FRAME AND
TOP/BOTTOM RAILS**

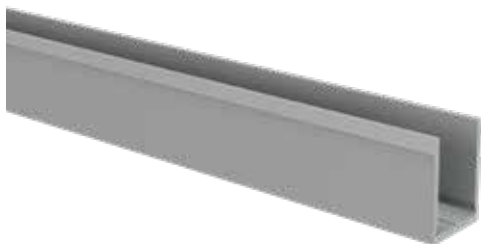

TECH SPECS

- PP 123 / AP 122
- Alloy 6060-T5 / 4800mm long
- Snap-in infill mates with gate side frame and top/bottom rail
- Hides gate side frame channels or top/bottom channels not used for slats
- lxx = 3.90 x 10E3 mmE4
- lyy = 4.75 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Gate channel infill

4200MM LONG


Order Code: **QSG-4200-CINF**



TECH SPECS

- PP 219 / AP 328
- Alloy 6060-T5 / 4200mm long
- Snap-in infill mates with gate side frame for vertical slat fabrications
- 50mm extended channel allows for slat edge coverage to equally set slat spacing as required
- lxx = 17.51 x 10E3 mmE4
- lyy = 99.18 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

GATE EXTRUSIONS



65mm joiner block

4 PACK

Order Code: QSG-JOINER65-4PK

TECH SPECS

- Anodised satin extruded aluminium
- Suits 65mm x 50mm horizontal gate rail
- includes 8 x CSK 50mm long screws



90mm joiner block

4 PACK

Order Code: QSG-JOINER90-4PK

TECH SPECS

- Anodised satin extruded aluminium
- Suits 90mm x 50mm horizontal gate rail
- includes 8 x CSK 50mm long screws

10x16mm screws

50 PACK

Order Code: QS-SCREWS-50PK

- Self drilling screws with zinc-aluminum flake coating
- Wafer head screws with philips drive head
- Suits screw fixing of slats to Quickscreen side frame & gate frame



12gx25mm rail screw

50 PACK

Mill finish

Order Code: AR-SCR-BR-50PK

- 12gx25mm panhead screw with square drive
- SS304HC
- Mill/silver (original SS304 finish)



Driver bit

Order Code: DB-PH3

- Driver bit to suit Phillips#3 screw head
- Suits QSG-JOINER screws




Square head driver bit

Order Code: DB-SQ3.4

- Driver bit to suit 3.4mm square screw head hole
- Suits AR-SCR-BR-50PK screws



GATE EXTRUSIONS




5mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-05MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame




9mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-09MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame




12mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-12MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame




15mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-15MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame



20mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-20MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame



30mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-30MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame

Gate flat top cap

50x50MM

Extruded aluminium

Order Code: **QSG-GFC-50X50**



TECH SPECS

- Alloy 6063-T6
- 50mm x 50mm extruded aluminium profile
- CNC machined to suit 50mm x 50mm gate side frame
- Press-in flat cap to gate side frame screw flutes

Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)



MILL
(M)

industry first, trade quality Sliding gates

AVAILABLE IN 2 CONVENIENT SUPPLY OPTIONS

AVAILABLE IN 2 CONVENIENT SUPPLY OPTIONS

1

Long length supply

Buy long length extrusions then cut to size and assemble on-site or at your premises

2

Cut to size service

Simply provide gate size required – we will cut to size and flat pack for easy assembly

Sliding gate options

SELECT FROM THE SLIDING GATE OPTIONS

We can cut to size, flat pack and send Australia wide or you can purchase long length extrusions and cut to size yourself.

Assemble pre-powder coated gates with no welding or riveting required.

Save time and money without requirement of fully fabricating and welding gates.


Contact us for detailed assembly instructions



Scan the QR code for an instructional Horizontal slat sliding gate install video




Scan the QR code for an instructional Vertical slat sliding gate install video

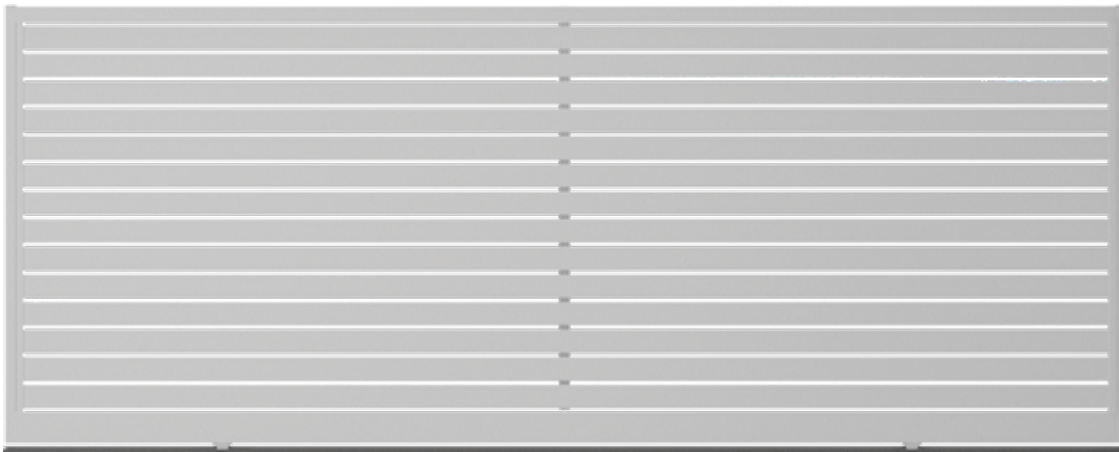

1 Horizontal slat sliding gate

65mm x 16.5mm or
90mm x 16.5mm slats

Variable slat spacing

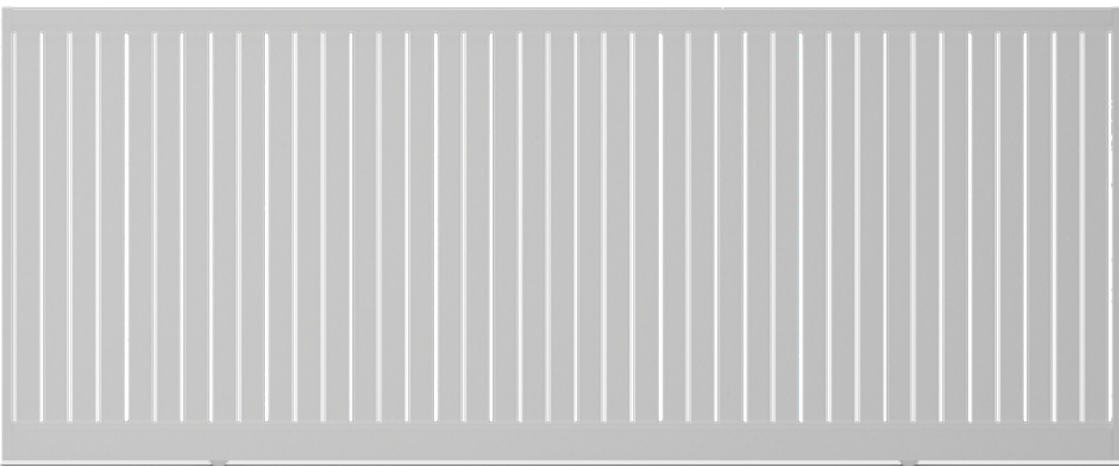

2 Vertical slat sliding gate

65mm x 16.5mm or
90mm x 16.5mm slats

Variable slat spacing




SLIDING GATE OPTIONS

SEE PAGES 44-49 FOR FULL
SPECIFICATIONS ON ALL
PRODUCTS LISTED BELOW

Option 1 - Horizontal

Horizontal slot gate with 65mm or 90mm x 16.5mm slats
Variable slat spacing including nil spacing
Maximum 6150mm wide

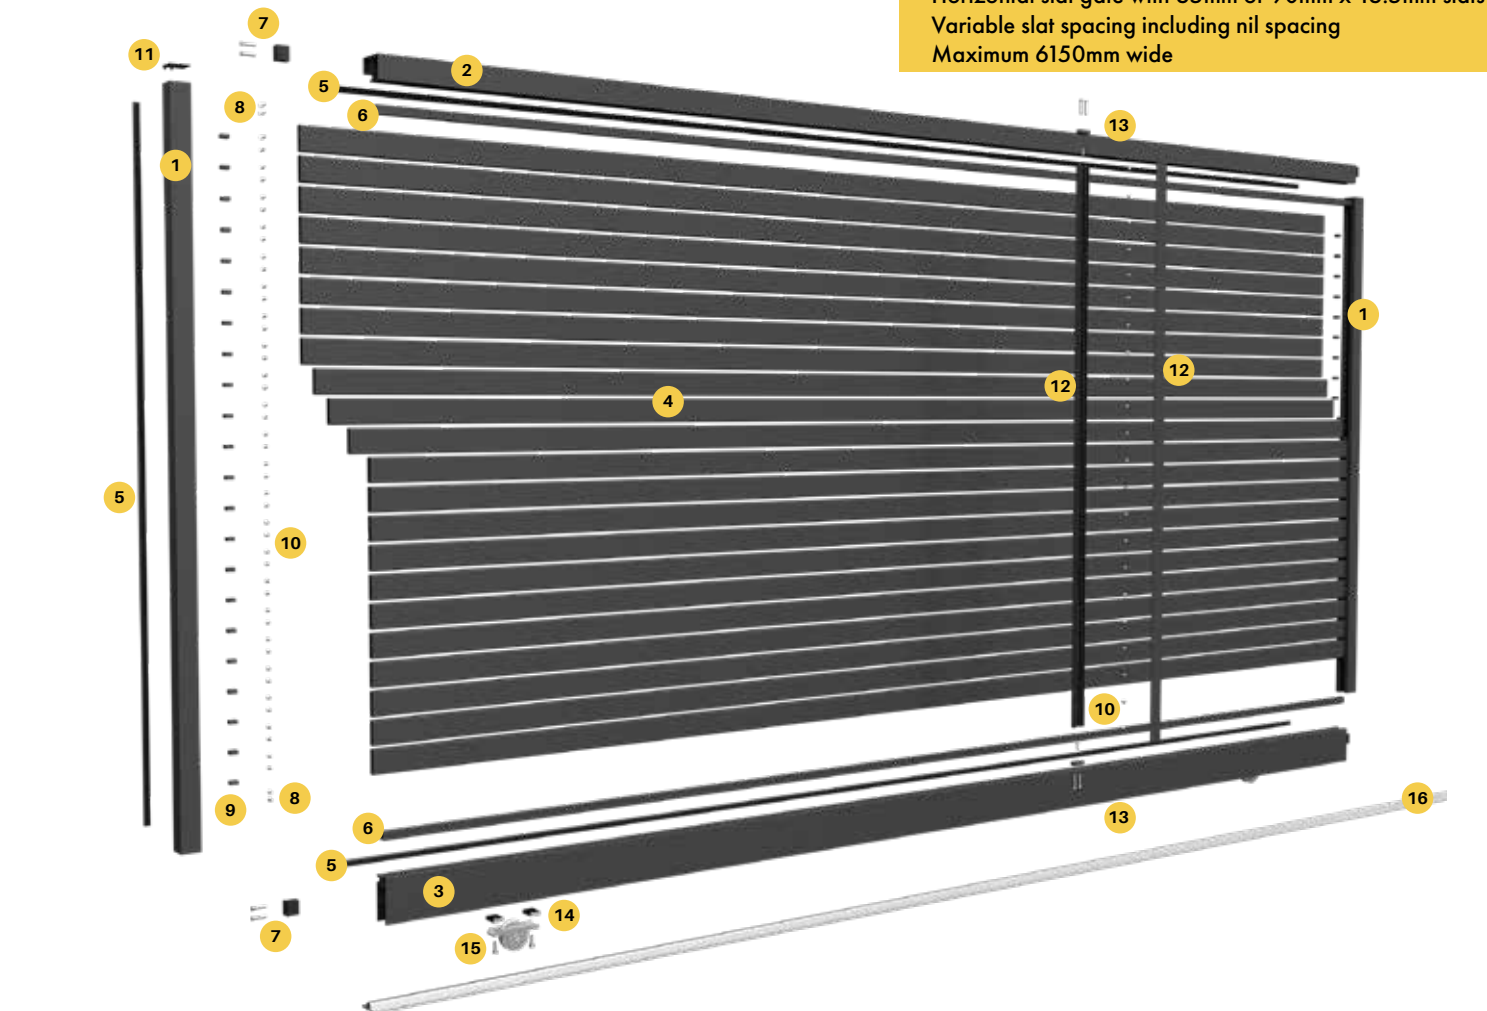

- | | | |
|--|--|---|
| <p>1 Gate side frame
50mm x 50mm
QSG-4200-GSF50</p> <p>2 65mm or 90mm Sliding Gate top rail
Top rail
QSG-S-6100-TR65 / QSG-S-6100-TR90</p> <p>3 Sliding Gate bottom rail
Bottom Rail
QSG-S-6100-BR</p> <p>4 65x16.5mm or 90x16.5mm slat
Slats secured with fixing screws
XP-6100-S65 / QS-6100-S90</p> <p>5 Gate screw cover
Mates to gate side frame or gate rails to conceal slat screws
QSG-4200-COVER</p> <p>6 Gate Infill
Fills gate side frame or rail void
QSG-4800-INF</p> | <p>7 65mm or 90mm joiner block
Joins the 65mm or 90mm gate rails to gate side frames
Fixing screws included
QSG-JOINER65-4PK / QSG-JOINER90-4PK</p> <p>8 Rail screws
Secures joiner blocks to gate side frame
AR-SCR-BR-50PK</p> <p>9 Slat spacers
Snap-in spacer blocks fit between slats
5mm, 9mm, 12mm, 15mm, 20mm, and 30mm
QS-SPACER-05MM / 09MM / 12MM / 15MM / 20MM / 30MM-50PK</p> <p>10 16mm wafer screws
Secures slats to gate side frames
QS-SCREWS-50PK</p> <p>11 Gate top cap
Flat cap suits 50mm x 50mm gate side frame
QSG-GFC-50X50</p> | <p>12 Centre support rail
Screw fix to each slat for extra support, includes snap on cover to hide all screws
XP-5800-CSR</p> <p>13 Top/bottom plate for centre support rail
Connects the centre support rail to top and bottom rail
XP-BTP</p> <p>14 Wheel clamping set
Clamps gate wheels to bottom rail
QSG-S-WHEEL-CS-2PK</p> <p>15 Sliding gate wheel
80mm diameter wheel with 20mm diameter groove
XPSG-WHEEL</p> <p>16 Gate track
Bolt down track with 20mm running surface -steel or aluminium.
Consider anchor pins to secure track
XPSG-3000/6000-TRACK-ST or XPSG-6000-TRACK-AL</p> |
|--|--|---|




SLIDING GATE OPTIONS

SEE PAGES 44-49 FOR FULL
SPECIFICATIONS ON ALL
PRODUCTS LISTED BELOW

Option 2- Vertical

Vertical slot gate with 65mm or 90mm x 16.5mm slats
Variable slat spacing including nil spacing
Maximum 6166mm wide

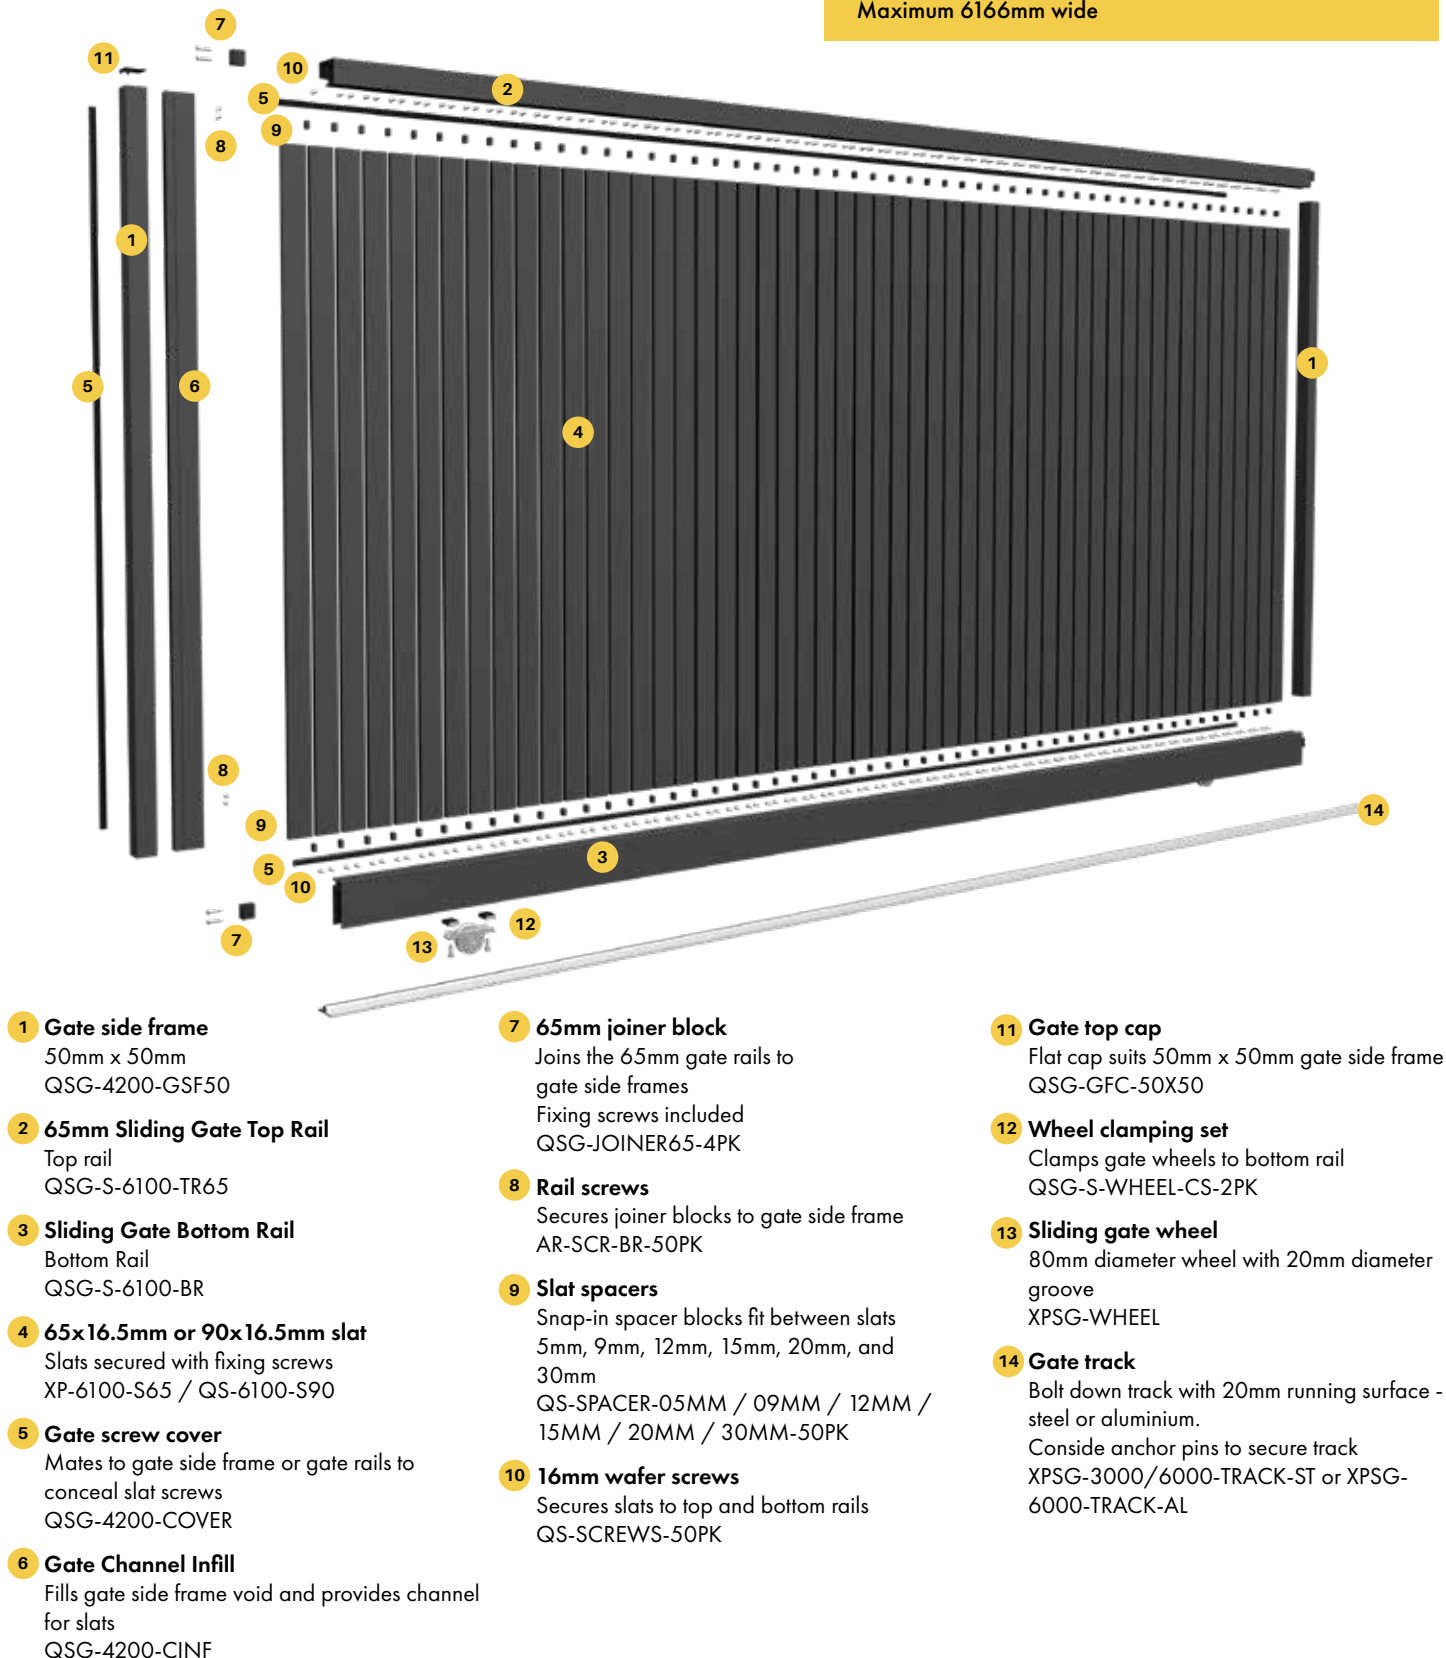

GATE EXTRUSIONS



50MMx50MM Gate side frame

4200MM LONG

Order Code: **QSG-4200-GSF50**


TECH SPECS

- PP 200 / AP 300
- Alloy 6060-T5 / 4200mm long
- 2.5mm wall thickness with a 3mm centre crossmember
- Gate side frame allows for 65x16.5mm or 90x16.5mm slats fabricated horizontally and vertically
- lxx = 208.04 x 10E3 mmE4
- lyy = 172.99 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

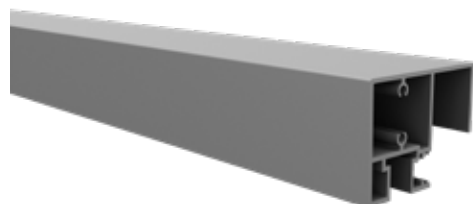

65MMx50MM Sliding gate top rail


6100MM LONG

Order Code: **QSG-S-6100-TR65**


TECH SPECS

- PP 320 / AP 479
- Alloy 6060-T5 / 6100mm long
- 2.5mm wall thickness
- Top rail with innovative side channel for slide guide or roller guide integration
- Screw flutes incorporated for non-weld assembly
- lxx = 674.83 x 10E3 mmE4
- lyy = 450.53 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

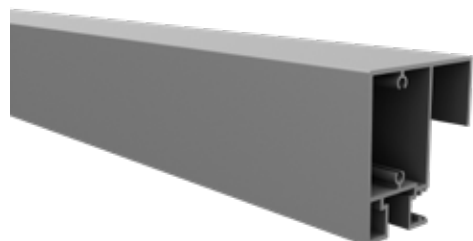

90MMx50MM Sliding gate top rail

6100MM LONG

Order Code: **QSG-S-6100-TR90**

TECH SPECS

- PP 422 / AP 529
- Alloy 6060-T5 / 6100mm long
- 2.5mm wall thickness
- Top rail with innovative side channel for slide guide or roller guide integration
- Screw flutes incorporated for non-weld assembly
- lxx = 754.80 x 10E3 mmE4
- lyy = 1059.07 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

GATE EXTRUSIONS

Gate screw cover

4200MM LONG

Order Code: **QSG-4200-COVER**

**MATES WITH QUICKSCREEN
GATE SIDE FRAME AND
TOP/BOTTOM RAILS**



TECH SPECS

- PP 100 / AP 80
- Alloy 6060-T5 / 4200mm long
- Snap-in screw cover mates with gate side frame and top/bottom rail
- Hides screws required for affixing slats
- lxx = 0.36 x 10E3 mmE4
- lyy = 1.26 x 10E3 mmE4

Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)



MILL
(M)

Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Gate infill

4800MM LONG

Order Code: **QSG-4800-INF**

**MATES WITH QUICKSCREEN
GATE SIDE FRAME AND
TOP/BOTTOM RAILS**



TECH SPECS

- PP 123 / AP 122
- Alloy 6060-T5 / 4800mm long
- Snap-in infill mates with gate side frame and top/bottom rail
- Hides gate side frame channels or top/bottom channels not used for slats
- lxx = 3.90 x 10E3 mmE4
- lyy = 4.75 x 10E3 mmE4

Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)



MILL
(M)

Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

Gate channel infill

4200MM LONG

Order Code: **QSG-4200-CINF**



TECH SPECS

- PP 219 / AP 328
- Alloy 6060-T5 / 4200mm long
- Snap-in infill mates with gate side frame for vertical slat fabrications
- 50mm extended channel allows for slat edge coverage to equally set slat spacing as required
- lxx = 17.51 x 10E3 mmE4
- lyy = 99.18 x 10E3 mmE4

Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)



DUNE
(D)



MILL
(M)

Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

GATE EXTRUSIONS

65MMx50MM Sliding gate bottom rail

6100MM LONG


Order Code: QSG-S-6100-BR



TECH SPECS

- PP 395 / AP 592
- Alloy 6060-T5 / 6100mm long
- 2.5mm wall thickness
- Bottom rail with underside cavity for wheel recess fitting
- Screw flutes incorporated for non-weld assembly
- lxx = 410.73 x 10E3 mmE4
- lyy = 1241.18 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots

65MMx50MM Centre support rail

5800MM LONG

Order Code: XP-5800-CSR




TECH SPECS

- PP 106 / AP 188
- Alloy 6060-T5 / 5800mm long
- 1.5mm wall thickness (midrail)
- Includes snap-on cover to hide fixings
- Includes 2x screw flutes for cap insertion
- lxx = 1.73 x 10E3 mmE4
- lyy = 26.34 x 10E3 mmE4

Finishes



Primrose & Paperbark also available from Brisbane, Adelaide & Perth depots



MATES WITH XP-5800-CSR

Top/bottom plate for centre support rail

Order Code: XP-BTP

- Aluminium with countersunk hole machining
- Use to brace off top and/or bottom of centre support rail to top and bottom rails
- Bracing centre support rail provides extra rigidity





GATE EXTRUSIONS



65mm joiner block

4 PACK

Order Code: **QSG-JOINER65-4PK**

TECH SPECS

- Anodised satin extruded aluminium
- Suits 65mm x 50mm horizontal gate rail
- includes 8 x CSK 50mm long screws



90mm joiner block

4 PACK

Order Code: **QSG-JOINER90-4PK**

TECH SPECS

- Anodised satin extruded aluminium
- Suits 90mm x 50mm horizontal gate rail
- includes 8 x CSK 50mm long screws

10x16mm wafer screws

50 PACK

Order Code: **QS-SCREWS-50PK**

- Self drilling screws with zinc-aluminum flake coating
- Wafer head screws with philips drive head
- Suits screw fixing of slats to Quickscreen side frame & gate frame



12gx25mm rail screw

50 PACK

Mill finish

Order Code: **AR-SCR-BR-50PK**

- 12gx25mm panhead screw with square drive
- SS304HC
- Mill/silver (original SS304 finish)



Driver bit

Order Code: **DB-PH3**

- Driver bit to suit Phillips#3 screw head
- Suits QSG-JOINER screws




Square head driver bit

Order Code: **DB-SQ3.4**

- Driver bit to suit 3.4mm square screw head hole
- Suits AR-SCR-BR-50PK screws



GATE EXTRUSIONS




5mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-05MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame




9mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-09MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame




12mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-12MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame




15mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-15MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame



20mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-20MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame



30mm slat spacer

50 PACK

Nylon

Order Code: **QS-SPACER-30MM-50PK**

- Suits Quickscreen side frame & Quickscreen gate side frame

Gate flat top cap

50x50MM

Extruded aluminium

Order Code: **QSG-GFC-50X50**



TECH SPECS

- Alloy 6063-T6
- 50mm x 50mm extruded aluminium profile
- CNC machined to suit 50mm x 50mm gate side frame
- Press-in flat cap to gate side frame screw flutes

Finishes



BLACK
(B)



MONUMENT
(MN)



WOODLAND
GREY
(G)



SURFMIST
(SM)



WHITE
(W)



BASALT
(BS)




DUNE
(D)



MILL
(M)

GATE ACCESSORIES



Steel sliding gate track


3000MM LONG OR
6000MM LONG

Order Codes:

XPSG-3000-TRACK-ST (3000mm)

XPSG-6000-TRACK-ST (6000mm)

- Available 3000mm or 6000mm long
- Made from 3mm galvanised steel for durability
- Bolt down sliding gate track with a Ø20mm running surface
- Easy to install with predrilled fixing holes (22 holes for 3000mm track and 42 holes for 6000mm track)



Aluminium sliding gate track

6000MM LONG

Order Code:

XPSG-6000-TRACK-AL (6000mm)


- Available 6000mm long
- Mill finish aluminium - 6063-T5
- Bolt down sliding gate track with a Ø20mm running surface
- No drill holes - drill fixing holes as needed



Sliding gate track pins

Order Code: **XPSG-ANCHOR**

- Mushroom head galvanised steel track anchor pins
- 6.5mm x 38mm
- Pre-expanded expansion anchor. Once hammered in, unique kinked shaft provides a spring action for vibration proof anchoring. Use 6.5mm masonry bit into concrete



Sliding gate wheel

Order Code: **XPSG-WHEEL**

- 80mm diameter with 20mm diameter groove
- Zinc plated steel
- Load rating 180kg
- Use with 1 x XPSG-WHEEL-CS clamping set to fix to sliding gate bottom rail
- Made in Italy



Sliding gate wheel clamping set

Order Code: **QSG-S-WHEEL-CS-2PK**


- Use to clamp sliding gate wheel to bottom rail
- Aluminium M8 threaded block
- Includes 2 x zinc plated screws
- Sold as a pack of 2 (suits 1 x wheel)



Slide guide

Order Code: **XPSG-GUIDE**

- Self-adjusting slide guide attaches to sliding gate top rail
- Keeps gate in vertical position and travelling true while opening/closing
- As gate travels along track and shifts up or down, slide guide adjusts automatically. Up to 280mm vertical adjustment.
- Guide channel is anodised black with sturdy nylon block




Sliding gate guide rollers

2 PACK

Order Code: **XPSG-TOPROLL-2PK**

- Alternative to SlideGuide
- Rollers guide top rail while gate opens and closes
- Can only be used if vertical deviation of gate while travelling is 15mm or less
- White nylon rollers - made in Italy
- Kit includes 1 x left and 1 x right zinc plated steel mounting bracket (fixings not included) - 30mm hole centers

2 installation methods —

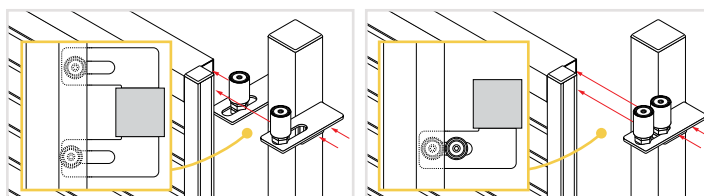

GATE ACCESSORIES



Gate U catch

Order Code: **XPSG-CATCH-U**

- Suits up to 50mm gate frames
- Gate catch supplied with 5 pre-drilled holes for easy installation and adjustment
- Rubber stop provided for noise reduction
- Steel zinc plated



Gate F catch

Order Code: **XPSG-CATCH-F**

- Suits up to 50mm gate frames
- Affix bracket to wall/post via "F" leg
- U catch attaches to F section – includes rubber stop for noise reduction
- U catch horizontally adjustable for ease of lining up to gate frame
- Steel zinc plated



Gate stop

Order Code: **XPSG-STOP**

- Stops the gate in the option position
- Forged steel zinc plated gate stop with nylon bumper
- Bolts to concrete at end of gate track
- 4x Ø11mm fixing holes
- Made in Italy



Self drilling wafer screws

10Gx16MM – BAG OF 100

Black / Monument / Woodland Grey

Silver / Surfmist / White / Basalt

Dune / Mill finish

Order Code: **XP-SCREWS**

- 10G x 16mm self drilling wafer head zinc plated
- Powder coated heads for neat finish
- Use to: (1) Screw fix centre support rail to slats
(2) Screw fix & brace off centre support rail top/bottom plate to top/bottom rail
(3) Screw fix slats to side frames if required
(4) Attach Quickscreen side frame to outer gate frame for gate options 2 & 3
(see pages 91-92)

Sliding gate motors

Your
Smart
Nice Home

LONG TERM RELIABILITY

NiceHome automation and accessories are tested every day in the Nice laboratories according to strict criteria. To ensure compliance with the strictest safety requirements on the market, NiceHome guarantees the highest possible technological and quality standards.

PROFESSIONAL QUALITY

Designed and manufactured in Italy, NiceHome automation benefits from unique Italian know-how combining top performance with an essential style to adapt perfectly to the needs of your home.

To complement horizontal slat and vertical slat sliding gates, Glass Outlet can supply the highest quality Italian made gate automation and accessories. NiceHome automation is a new upgrade to the well-known Mhouse range.



Filo 400 Pro Kit

Order Code: XPSG-FILO-400

KIT INCLUDES:

- 1x Motor
- 2x Remotes
- 1x Pair of Photocells (safety device which prevents the gate from closing on pedestrians or vehicles)

- Sliding gate opener suits gates up to 6000mm wide and weighing up to 400kg
- Easy to install and simple programming steps
- Flexible short power cord pre-wired to motor
- Plugs into standard power point with 10 amp flat 3 pin plug
- Includes pinion (cog) that integrates with rack on gate

Low voltage cable option

FILO 400 Pro Kit with split pack Features external transformer

Order Code: XPSG-FILO-400PRO-SP

- Same motor and accessories as FILO 400 except transformer is separated from motor
- External transformer converts 240V mains power to low voltage 24V
- Use 2 core x 2.5mm (double insulated) electrical cable to run from transformer to motor. CABLE SOLD SEPARATELY - can be purchased from electrical wholesaler or reputable hardware store
- Motor can be installed a maximum of 50 meters away from transformer 10 amp flat 3 pin plug
- Ideal where getting 240V mains power to gate motor is different. Simply run low voltage cable from transformer to gate motor.
- Refer www.easysgate.com.au for technical assistance/manuals



External transformer

KIT INCLUDES:

- 1x Motor
- 2x Remotes
- 1x Pair of Photocells (safety device which prevents the gate from closing on pedestrians or vehicles)
- 1x External transformer in weatherproof enclosure

MOTOR ACCESSORIES



Remote control

Order Code: XPSG-FILO-REMOTE

- Optional extra remote control to replace remotes in kit if broken or more remotes required (2x remotes included as standard with each motor kit)
- 5 channel remote able to control various gate functions (eg open only, close only, partial open etc)



Wireless keypad

Order Code: XPSG-FILO-WKP

- Optional wireless keypad for gate motor opening/closing
- PIN number control access
- Easy to affix to wall or post
- Runs on 2 x CR2430 lithium batteries



Solar power kit

Order Code: XPSG-FILO-SOLAR

- Solar power system designed for use with NiceHome motors
- System uses exclusively solar power to run automation without use of electrical mains power
- Provides continuous electrical energy. Ideal for sites where mains power is unavailable
- Includes photovoltaic panel (converts solar energy into electrical energy) and electric battery (for stored power, able to operate gate night and day)
- Attention must be paid to ensure panel positioned to receive full sunshine



Backup battery

Order Code: XPSG-FILO-BATTERY

- Optional battery provides backup power in the event of mains power failure
- Gate can be cycled multiple times under battery power (no. of cycles may vary due to gate size and site conditions)
- Backup battery is recharged under mains power



Rack

Order Code: XPSG-FILO-RACK

- Tough & durable nylon rack (with steel core)
- Affix to bottom rail of sliding gate
- 1 meter long sections; 6 fixing points
- Quieter than steel racks
- Made in Italy

TECHNICAL ASSISTANCE/MANUALS AND SUPPORT VIDEOS

www.easysgate.com.au

Our range of gate hinges

D&D hinges available as single items or buy in carton lots for large bulk buy discounts on selected lines



TRUClose®

TruClose® hinge pair
NO ALIGNMENT LEGS

Order Code: TC-H-AT-B
D&D Code: TCA1S3BT



TRUClose®

TruClose® hinge pair
2 ALIGNMENT LEGS

Order Code: TC-H-AT-2L-B
D&D Code: TCA1L23BT



TRUClose® HEAVY DUTY

TruClose® hinge pair
Heavy duty

1 ALIGNMENT LEG
Order Code: TC-H-AT-HD-B
D&D Code: TCHD1AL1S3BT



TRUClose® HEAVY DUTY

TruClose® hinge pair
Heavy duty

2 ALIGNMENT LEGS
Order Code: TC-H-AT-HD-2L-B
D&D Code: TCHD1AL2S3BT



KWIKFit®

Kwik Fit® hinge pair
FIXED TENSION

Order Code: KF-H-FT
D&D Code: KF3S



KWIKFit®

Kwik Fit® hinge pair

NO TENSION
Order Code: KF-H-NT
D&D Code: KF3P



KWIKFit® ALUMINIUM

Kwik Fit® Aluminium
hinge pair

ADJUSTABLE TENSION
Order Code: KF-AH-AT
D&D Code: KF3ABL



SureClose® Readyfit
hydraulic hinge closer

2 ALIGNMENT LEGS
Order Code: SURECLOSE-HH
D&D Code: 74108313



SureClose®
Readyfit hinge
non self closing
closer

2 ALIGNMENT LEGS
Order Code: SURECLOSE-NSC
D&D Code: 74001313

GATE HINGES

19mm
gap spacing

No
alignment legs

(variable spacing achievable)



TruClose® hinge pair

NO ALIGNMENT LEGS


Order Code: **TC-H-AT-B (Pair)**
BB-TC-H-AT-B (*Bulk buy)

D&D code: TCA153BT

- D&D patented tension adjustment
- Strong, moulded polymer and stainless steel
- Adjust tension from both ends of the hinge
- No visible fixings
- Decorative trim covers available in black finish
- Super strong engineering polymers and stainless steel components
- Won't rust, bind, sag or stain
- Limited lifetime warranty
- Pool fencing compliant – Rated for **gates up to 30kg**

No alignment legs on hinge allows for flexibility when positioning gate onto post

*BULK BUY CARTON QTY: 20 PAIRS

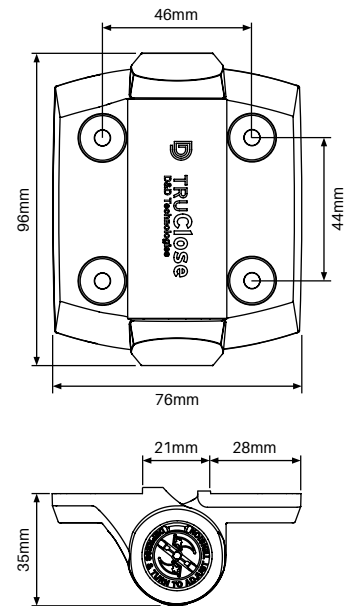

Certi cap – Series 3

Order Code: **TC-CAPS3**

D&D code: TCACAPS3

- Prevents toe hold on hinge
- Durable polymer material



Reinforcing ribs
Moulded ribs provide super strength

Concealed fasteners
Trim covers hide the fasteners to improve the appearance of the gate



Patented adjuster
Easy tension adjustment

Internal stainless steel spring
Won't rust or corrode

Moulded hinge body
Engineering polymers with glass fibre reinforcement are UV stabilised



*Black trim covers only

21mm
gap spacing

2
alignment legs



TruClose® hinge pair

2 ALIGNMENT LEGS


Order Code: **TC-H-AT-2L-B (Pair)**
BB-TC-H-AT-2L-B (*Bulk buy)

D&D code: TCA1L2S3BT

- D&D patented tension adjustment
- Strong, moulded polymer and stainless steel
- Adjust tension from both ends of the hinge
- No visible fixings
- Decorative trim covers available in black finish
- Super strong engineering polymers and stainless steel components
- Won't rust, bind, sag or stain
- Limited lifetime warranty
- Pool fencing compliant – Rated for **gates up to 30kg**

Two alignment legs on hinge allows for quick, easy and accurate positioning of gate onto post

*BULK BUY CARTON QTY: 20 PAIRS

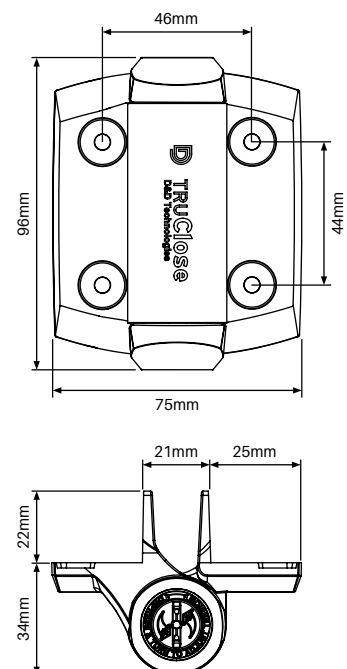

Certi cap – Series 3

Order Code: **TC-CAPS3**

D&D code: TCACAPS3

- Prevents toe hold on hinge
- Durable polymer material



GATE HINGES

19mm
gap spacing

1
alignment leg



TRUClose® HEAVY DUTY

TruClose® hinge pair Heavy duty

1 ALIGNMENT LEG


Order Code: **TC-H-AT-HD-B (Pair)**
BB-TC-H-AT-HD-B (*Bulk buy)

D&D code: TCHD1AL1S3BT

- D&D patented tension adjustment
- Strong, moulded polymer and stainless steel
- Adjust tension from both ends of the hinge
- No visible fixings
- Decorative trim covers available in black finish
- Super strong engineering polymers and stainless steel components
- Won't rust, bind, sag or stain
- Limited lifetime warranty
- Pool fencing compliant – Rated for **gates up to 70kg**

One alignment leg on hinge allows for quick and sturdy fixing on one side with flexible positioning on the other side

*BULK BUY CARTON QTY: 20 PAIRS

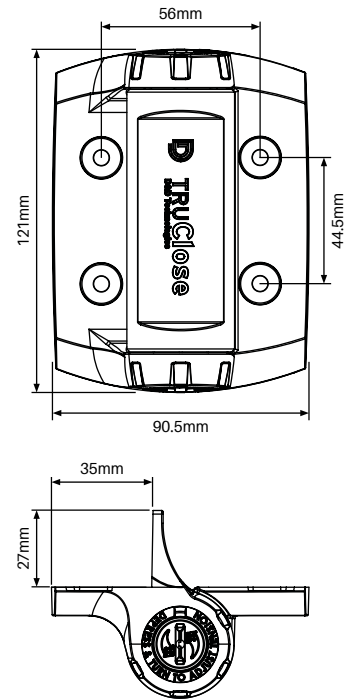

21mm
gap spacing

2
alignment legs



TRUClose® HEAVY DUTY

TruClose® hinge pair Heavy duty

2 ALIGNMENT LEGS


Order Code: **TC-H-AT-HD-2L-B (Pair)**
BB-TC-H-AT-HD-2L-B (*Bulk buy)

D&D code: TCHD1AL2S3BT

- D&D patented tension adjustment
- Strong, moulded polymer and stainless steel
- Adjust tension from both ends of the hinge
- No visible fixings
- Decorative trim covers available in black finish
- Super strong engineering polymers and stainless steel components
- Stylish and contemporary design
- Won't rust, bind, sag or stain!
- Limited lifetime warranty
- Pool fencing compliant – Rated for **gates up to 70kg**

Two alignment legs on hinge allows for quick, easy and accurate positioning of gate onto post

*BULK BUY CARTON QTY: 20 PAIRS

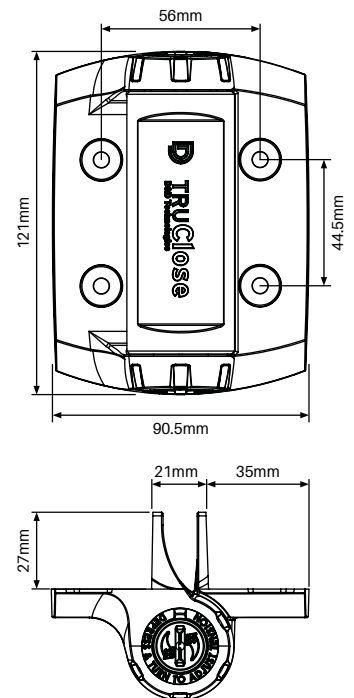

GATE HINGES

20mm
gap spacing

Fixed tension



Kwik Fit® hinge pair

FIXED TENSION


Order Code: **KF-H-FT (Pair)**

BB-KF-H-FT (*Bulk buy)

D&D code: KF35

- Self closing fixed tension hinges
- Rated to 20kg self close (D&D)
- Alignment legs for ease of fitting
- Strong polymer and stainless steel
- Torsion spring construction
- Pool fencing compliant

*BULK BUY CARTON QTY: 50 PAIRS

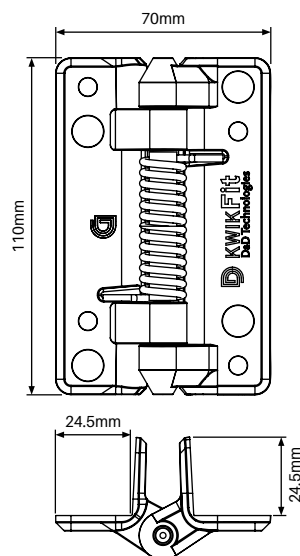

20mm
gap spacing

No tension



Kwik Fit® hinge pair

NO TENSION



Order Code: **KF-H-NT (Pair)**

BB-KF-H-NT (*Bulk buy)

D&D code: KF3P

- Standard pivot hinges (No self close)
- Rated to 25kg gates (D&D)
- Alignment legs for ease of fitting
- Strong polymer construction
- Ideal for boundary gates

*BULK BUY CARTON QTY: 50 PAIRS

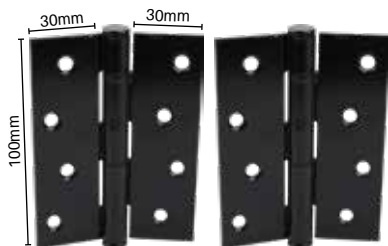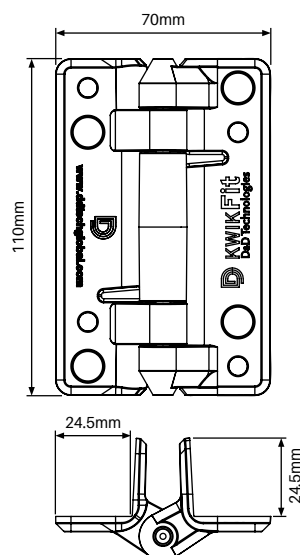


Butt hinge pair

100MM H x 75MM W

Order Code: **SS-BH10075-B**

- Cost effective where self closing hinge is not required
- Zinc plated steel
- Powder coated black
- Multiple fixing points - Ø6mm holes
- Not self closing



Butt Hinge Pair

PAIR OF 2


(includes 17 x matching colour tek screws)

17 x tek screws

Order Code: **CB-HINGE-B-2PK**

- Made from galvanised steel & powder coated
- 6.5mm diameter fixing holes
- 2.5mm thick hinge leaf

Finishes

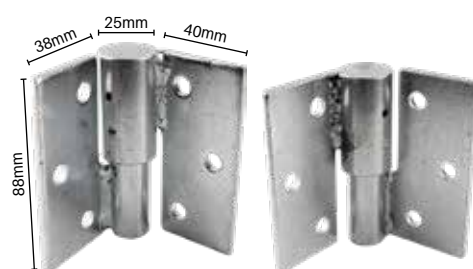

Zeus hinges

Order Code: **ZF-BBH-L/R (Left/Right)**

- Bolt on ball bearing hinge pair
- Left and right hinges available
- Galvanised steel construction
- Sturdy, long lasting hinges
- Suits heavy/wide hinge gates
- Not self closing

GATE HINGES

19mm
gap spacing

Adjustable
tension

POST TO GATE
INSTALLATION



OR

WALL TO GATE
INSTALLATION



D® KWIKFit® ALUMINIUM

Kwik Fit® Aluminium hinge pair

ADJUSTABLE TENSION

Order Code: **KF-AH-AT (Pair)**

BB-KF-AH-AT (*Bulk buy)

D&D code: **KF3ABL**

- Powder coated black aluminium hinges
- D&D patented tension adjustment - 6 tension settings, adjustable from both ends
- Self closing hinge - closes gates up to 20kg
- Internal stainless steel spring
- Wall and post mounting hinges
- Tested to over 300,000 cycles
- Pool fencing compliant

*BULK BUY CARTON QTY: 16 PAIRS




Wall to gate installation


Fit to posts or walls

Adjustable fixing plate

POST TO GATE INSTALLATION



WALL TO GATE INSTALLATION



12-35mm
gap spacing



FIXING SCREWS SUPPLIED
MIN POST SIZE: 50MM


Sureclose – Readyfit hinge

HYDRAULIC HINGE CLOSER
2 ALIGNMENT LEGS

Order Code: **SURECLOSE-HH**

D&D Order Code: **74108313**

- Ideal for commercial/industrial applications
- Easy install - screw on externally mounted
- Self close gates up to 120kg
- Heavy duty, 50 micron black anodised aluminium
- Sold as **SINGLE** hinge
- **SELF CLOSING FROM 83 degrees**
- **HOLES OPEN AT 90 deg** to 180 deg
- **MAX GATE OPENING 178 deg**

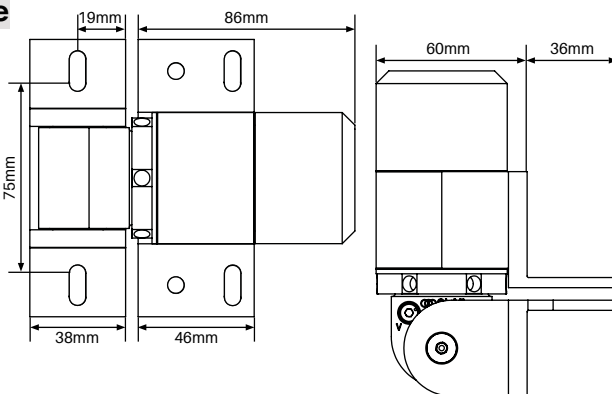

TRADE TIP: Commonly a hydraulic closer hinge is installed on the bottom of the gate (SURECLOSE-HH) with the non self closing hinge at top of gate (SURECLOSE-NSC). For very heavy gates, 2 x closer hinges may be considered.

12-35mm
gap spacing



FIXING SCREWS SUPPLIED
MIN POST SIZE: 50MM


Sureclose – Readyfit hinge

NON SELF CLOSING CLOSER
2 ALIGNMENT LEGS

Order Code: **SURECLOSE-NSC**

D&D Order Code: **74001313**

- Ideal for commercial/industrial applications
- Easy install - screw on externally mounted
- **NON SELF CLOSING** hinge
- Heavy duty, 50 micron black anodised aluminium
- Sold as **SINGLE** hinge
- **LOAD BEARING** non self closing hinge
- **MAX GATE OPENING 178 deg**

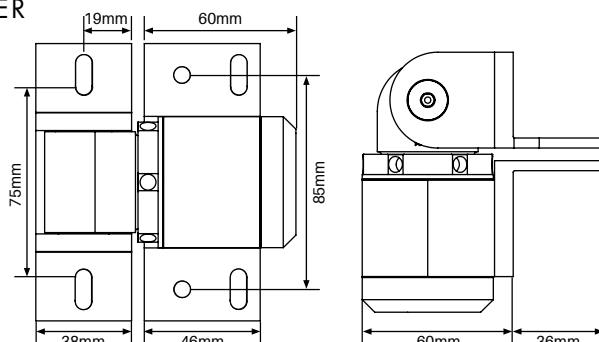

Our range of gate latches

D&D latches available as single items or buy in carton lots for large bulk buy discounts



D® LOKKLatch® DELUXE

Lokk Latch® deluxe

KEYED ALIKE

Order Code: LL-DL-KA

D&D Code: LLDABS2LA



D® LOKKLatch® DELUXE

Lokk Latch® deluxe

KEYED TO DIFFER

Order Code: LL-DL

D&D Code: LLDABS2-L



D® LOKKLatch®

Lokk Latch®

KEYED TO DIFFER

Order Code: LLAA

D&D Code: LLAA



D® LOKKLatch®

**Lokk Latch® external
access kit**

KEYED TO DIFFER

Order Code: LLB

D&D Code: LLB



D® MAGNALatch®

Top pull lockable latch

Order Code: ML-TL

D&D Code: ML3TPLA



D® D&D Technologies
Hi-Performance Hardware

**Face mount
lockable latch**

Order Code: MR-FMLS

D&D Code: MLSPS2L



D® D&D Technologies
Hi-Performance Hardware

T latch

Order Code: T-L

D&D Code: TL01



D latch

Order Code: SS-DL-B

GATE LATCHES

15-40mm
gap spacing

KEYED ALIKE



LOKKLatch® DELUXE


LokkLatch® deluxe

Order Code: LL-DL-KA (Single)
BB-LL-DL-KA (*Bulk buy)

D&D code: LLDABS2LA

- Lockable from both sides of gate
- Locks are keyed alike
- Rekeyable, 6-pin security lock
- Fits up to 150mm deep posts
- Black polymer

*BULK BUY CARTON QTY: 20PCS

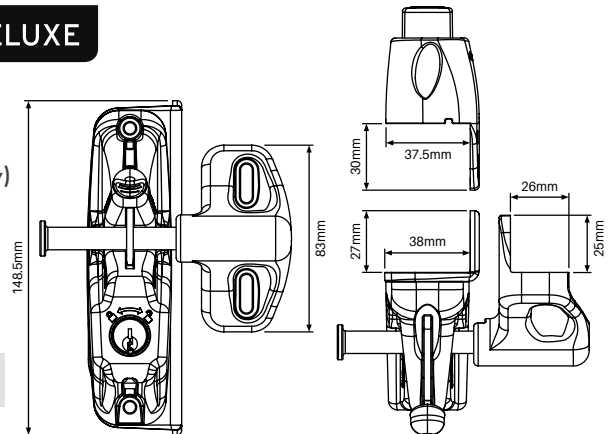

15-40mm
gap spacing

KEYED TO DIFFER



LOKKLatch® DELUXE


LokkLatch® deluxe

Order Code: LL-DL (Single)
BB-LL-DL (*Bulk buy)

D&D code: LLDABS2-L

- Lockable from both sides of gate
- Locks are keyed to differ
- Rekeyable, 6-pin security lock
- Fits up to 150mm deep posts
- Black polymer

*BULK BUY CARTON QTY: 20PCS

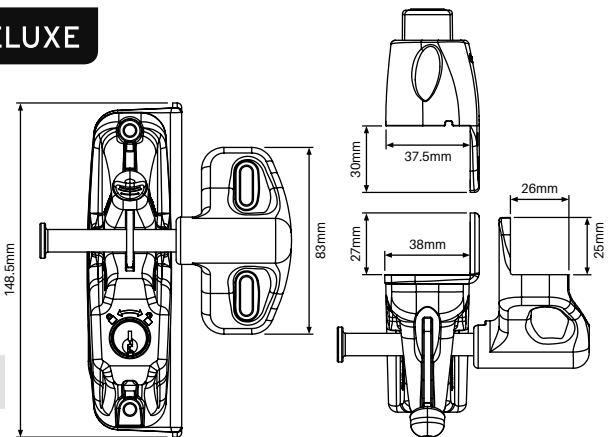

15-40mm
gap spacing

KEYED TO DIFFER



LOKKLatch®


LokkLatch®

Order Code: LLAA (Single)
BB-LLAA (*Bulk buy)

D&D code: LLAA

- Ideal latch for home and garden gates
- Key lockable – no need for padlocks or chains
- Fit with or without External Access Kit (LLB)
- Quick and easy to install on all gate materials
- Strong polymer design will not rust or stain
- Minimum post size for fitting – 25mm

*BULK BUY CARTON QTY: 20PCS

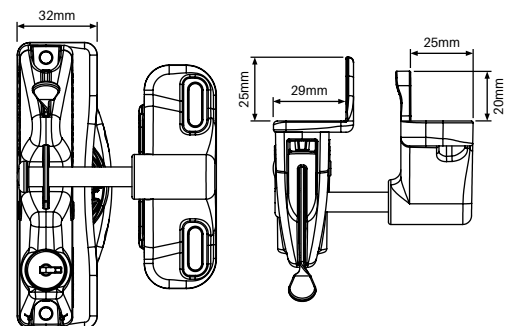


LOKKLatch®

LokkLatch® external access kit

Order Code: LLB (Single)
BB-LLB (*Bulk buy)

D&D code: LLB

- Optional extra external access kit
- Matches with LLAA
- Allows opening of LLAA from other side of gate
- NOTE: locking external access button does not lock the main latch



*BULK BUY CARTON QTY: 10PCS

GATE LATCHES

13-38mm
gap spacing



D[®] MAGNALatch[®]


Top pull lockable latch

Order Code: **ML-TL (Single)**
BB-ML-TL (*Bulk buy)

D&D code: ML3TPLA

- Magnetically triggered lockable latch
- Improved stylish "Series 3" design
- Adjusts horizontally and vertically
- Includes adjustable striker plate
- D&D Limited lifetime warranty
- Quick and easy installation
- Tested to over 400,000 cycles

*BULK BUY CARTON QTY: 20PCS

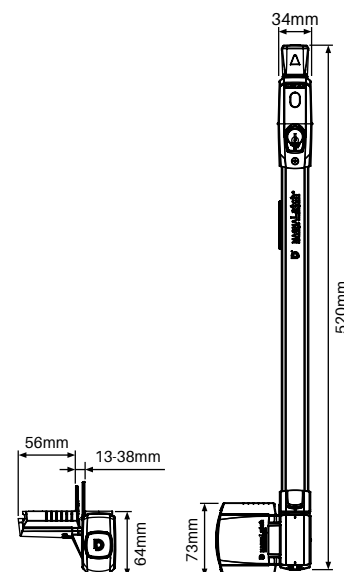

8-10mm
gap spacing



D[®] D&D Technologies
Hi-Performance Hardware


Face mount lockable latch

Order Code: **MR-FMLS (Single)**
BB-MR-FMLS (*Bulk buy)

D&D code: MLSPS2L

- Suits retrofitting to previously fitted standard side pull latch installations
- Key lockable
- Adjusts horizontally and vertically
- Limited lifetime warranty
- Black polymer

*BULK BUY CARTON QTY: 10PCS

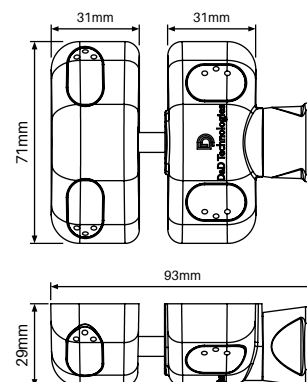

10-45mm
gap spacing



*Padlock not included

D[®] D&D Technologies
Hi-Performance Hardware


T latch

Order Code: **T-L (Single)**
BB-T-L (*Bulk buy)

D&D code: TL01

- Padlockable toggle latch
- Lockable from one side only

*BULK BUY CARTON QTY: 20PCS

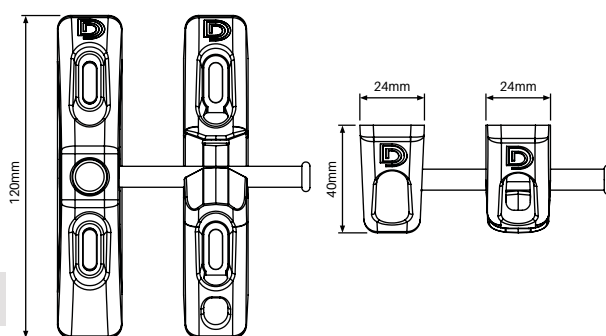


10-35mm
gap spacing



D latch

Order Code: **SS-DL-B**

- Easy to install D latch and striker
- Includes 4x tek screws
- Cost effective latching solution

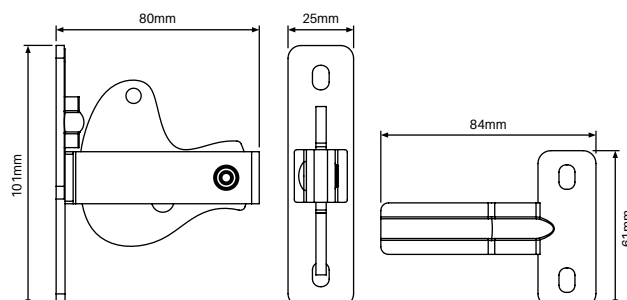

GATE LATCH & HINGE KITS



Magna Latch® with Kwik Fit® hinge pair


FIXED TENSION

Order Code: **ML-TL-KF-H-FT (Single)**
BB-ML-TL-KF-H-FT (*Bulk buy)

D&D code: ML3KFSK

- Kit includes D&D top pull Magna latch and 2x KWIK fit hinges (KF3S model)
- Self closing fixed tension hinges (20mm gap for hinges)
- Pool fencing compliant - Rated for gates up to 20kg
- Magnetically triggered lockable latch

*BULK BUY CARTON QTY: 20PCS

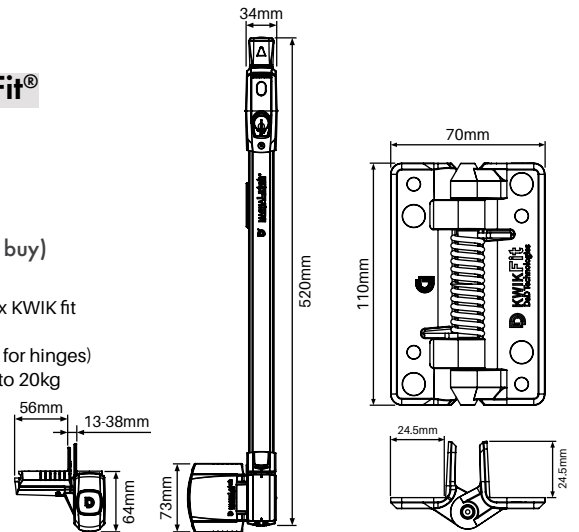

Magna Latch® with Tru Close® hinge pair


ADJUSTABLE TENSION

Order Code: **ML-TL-TC-H-AT (Single)**
BB-ML-TL-TC-H-AT (Bulk buy)

D&D code: MTSTDKS3LA

- Kit includes D&D top pull Magna latch and 2x TRU close hinges
- Patented tension adjustable hinges (TC-H-A-B version hinges - no alignment legs on hinges provides for flexible installation)
- Pool fencing compliant - Rated to 25kg self close
- Magnetically triggered lockable latch

*BULK BUY CARTON QTY: 20PCS

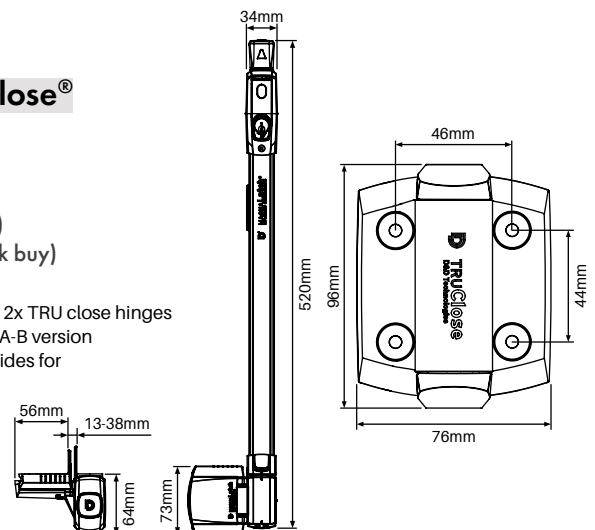

Self drilling tek screws

12Gx20mm – BAG OF 100

Black, Woodland Grey, Monument, Primrose, Paperbark, Surfmist & White

Order Code: SS-TS-100

- Self drilling tek screw featuring integrated thread and drill/cutting tip
- 12G x 20mm tek screw with hex head
- Packed in convenient bags of 100 screws




Soudafix CA1400 Chemical anchor

280mL

Order Code: **Soud-CA1400**

- High performance, two-component chemical anchoring resin for the pressure-free securing of anchoring rods, studs, threaded collars etc
- Fast cure
- Vinyl ester styrene free
- Can be used in damp concrete
- Apply with standard caulking gun

FENCING ACCESSORIES

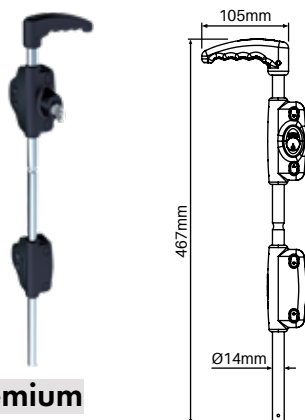

D&D Premium lockable drop bolt

Black finish

Order Code: **LB-PL** (Single)

BB-LB-PL (*Bulk buy)

D&D code: LL118BX-LA

- 316 marine-grade stainless steel drop-rod
- Tough polymer-housing mounting system
- 6-pin lock (rekeyable to match doors & gate locks)

*BULK
BUY QTY:
10PCS



D&D Padlockable drop bolt

Black finish

Order Code: **QB124** (Single)

BB-QB124 (*Bulk buy)

D&D code: QB124

- Powder coated black, stainless steel drop-bolt
- Padlockable (*Padlock not included)
- Tough, moulded polymer mounting system

*BULK
BUY QTY:
10PCS




300mm drop bolt

Black or zinc plated finish

Order Code: **SS-0300DB-B/ZP**

- Ideal for driveway gates
- Cost effective drop bolt
- Easy to install

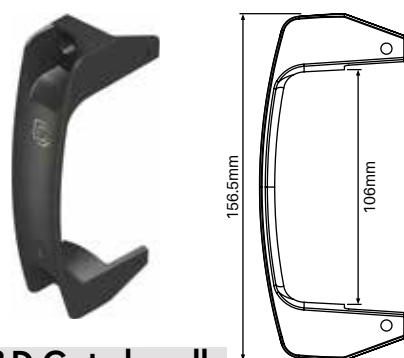

D&D Gate handle

Black polymer finish


Order Code: **LL-GH** (Single)

BB-LL-GH (*Bulk buy)

D&D code: LL3GH

- Side-fixing legs for quick alignment
- Fits left-hand or right-hand opening gates
- Won't rust or stain: strong polymer construction

*BULK
BUY QTY:
20PCS

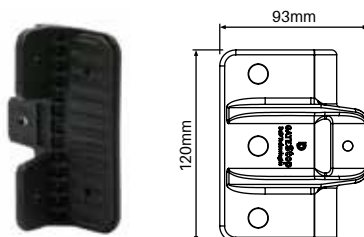

D&D Gate stop

Black polymer finish


Order Code: **SS-GS** (Single)

BB-SS-GS (*Bulk buy)

D&D code: TCG53

- Ideal gate alignment device
- Prevents damage to latches & hinges
- Greatly reduces gate-slam noise
- Tough, durable polymer + rubber bumper

*BULK
BUY QTY:
10PCS

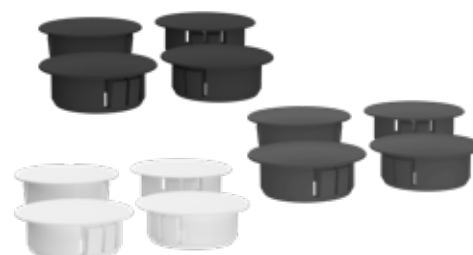

Post plugs – 4 pack

Black, Monument or White finish

Order Code: **SS-POSTPLUG-4PK**

SS-POSTPLUG-4PK-MN

SS-POSTPLUG-4PK-W

- Ø32mm outer top suits 25mm hole
- Suits post wall thickness 1.5mm - 3.2mm
- Cap holes in posts when fixing posts to structures



Bostik V60

Clear glazing silicone

300g

Order Code: **FB-V60**

- Architectural grade high performance glazing silicone
- Neutral cure sealant specially formulated - skins quickly and provides long term performance
- Seals water tight - UV and weather resistant
- Compatible substrates glass, steel, timber, concrete, ceramic, fiberglass, aluminium (powder coated surfaces are limited)



Soudal heavy duty cartridge gun

Order Code: **SOUD-GUN**

- Heavy duty, steel trade quality cartridge gun
- Geared ratio 18:1 for smooth operation and easy application
- Dripless system feature automatically releases pressure to reduce mess/waste
- Suits 300ml silicone cartridges and 280ml chemical anchor



Soudal Epofix

82A

300g

Order Code:

SOUD-EPOFIX

- 24ml bottle
- Translucent fast curing 2 part epoxy
- Very strong bonding of many types of materials including metal, wood, glass and plastics

Our range of white



AUSTRALIAN INDUSTRY FIRST



GENUINE D&D WHITE HARDWARE



D® TRUClose®

TruClose® hinge pair

2 ALIGNMENT LEGS

Order Code: TC-H-AT-2L-W



D® TRUClose® HEAVY DUTY

TruClose® hinge pair

Heavy duty

2 ALIGNMENT LEGS

Order Code: TC-H-AT-HD-2L-W



D® KWIKFit® ALUMINIUM

Kwik Fit® Aluminium

hinge pair

ADJUSTABLE TENSION

Order Code: KF-AH-AT-W



D® LOKKLatch®

Lokk Latch®

KEYED TO DIFFER

Order Code: LLAA-W



D® LOKKLatch® DELUXE

Lokk Latch® deluxe

KEYED TO DIFFER

Order Code: LL-DL-W



D® TRUClose® HEAVY DUTY

D® LOKKLatch® DELUXE

**Lokk latch deluxe &
TruClose heavy duty
hinge pair**

HINGE & LATCH KIT

Order Code: LLDL-TCHD-W

21 mm
gap spacing

2
alignment legs



Two alignment legs on hinge allows for quick, easy and accurate positioning of gate onto post

TRUClose®


TruClose® hinge pair

2 ALIGNMENT LEGS

Order Code: TC-H-AT-2L-W (Pair)

BB-TC-H-AT-2L-W (Bulk Buy)

- D&D patented tension adjustment
- Strong, moulded polymer and stainless steel
- Adjust tension from both ends of the hinge
- No visible fixings
- Super strong engineering polymers and stainless steel components
- Won't rust, bind, sag or stain
- Limited lifetime warranty
- White polymer
- Pool fencing compliant - Rated for gates up to 30kg

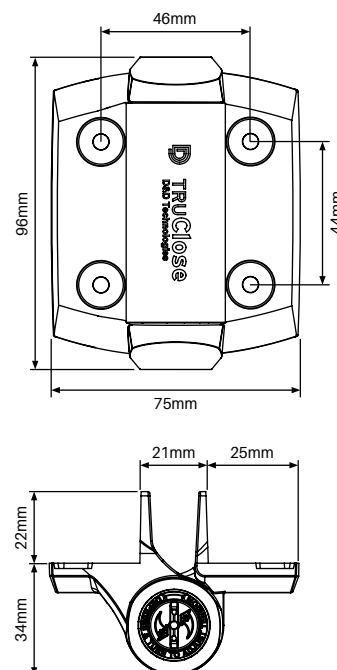

21 mm
gap spacing

2
alignment legs



Two alignment legs on hinge allows for quick, easy and accurate positioning of gate onto post

TRUClose® HEAVY DUTY

TruClose® hinge pair


Heavy duty

2 ALIGNMENT LEGS

Order Code: TC-H-AT-HD-2L-W (Pair)

BB-TC-H-AT-HD-2L-W (Bulk Buy)

- D&D patented tension adjustment
- Strong, moulded polymer and stainless steel
- Adjust tension from both ends of the hinge
- No visible fixings
- Super strong engineering polymers and stainless steel components
- Stylish and contemporary design
- Won't rust, bind, sag or stain!
- Limited lifetime warranty
- White polymer
- Pool fencing compliant - Rated for gates up to 70kg

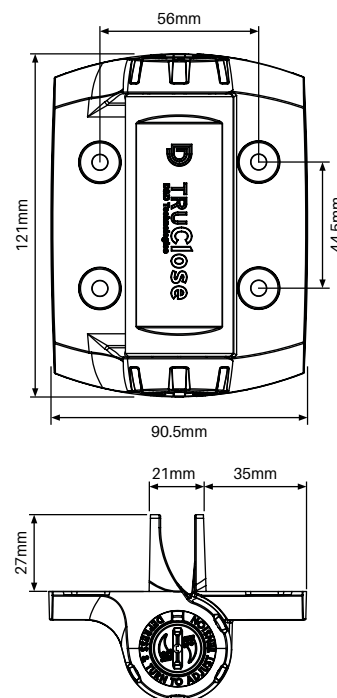

19 mm
gap spacing

Adjustable
tension

POST TO GATE
INSTALLATION



KWIKFit® ALUMINIUM

Kwik Fit® Aluminium hinge pair

ADJUSTABLE TENSION

Order Code: KF-AH-AT-W (Pair)


BB-KF-AH-AT-W (Bulk Buy)

- Powder coated white aluminium hinges
- D&D patented tension adjustment - 6 tension settings, adjustable from both ends
- Self closing hinge - closes gates up to 20kg
- Internal stainless steel spring
- Wall or post mounting hinges
- Tested to over 300,000 cycles
- Pool fencing compliant


Fit to posts or walls

Adjustable fixing plate

POST TO GATE INSTALLATION



WALL TO GATE INSTALLATION



15-40mm
gap spacing

KEYED TO DIFFER




LOKKLatch®

Lokk Latch®

Order Code: **LLAA-W**

BB-LLAA-W (Bulk Buy)

- Ideal latch for home and garden gates
- Key lockable - no need for padlocks or chains
- Quick and easy to install on all gate materials
- Strong polymer design will not rust or stain
- Minimum post size for fitting - 25mm
- White polymer

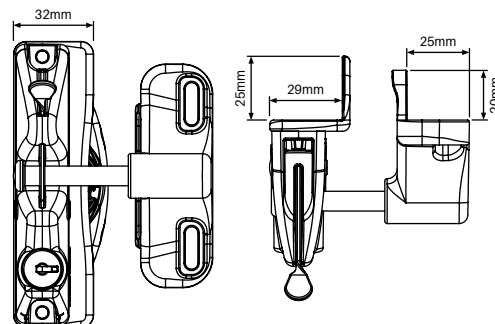

15-40mm
gap spacing

KEYED TO DIFFER




LOKKLatch® DELUXE

Lokk Latch® deluxe

Order Code: **LL-DL-W**

BB-LL-DL-W (Bulk Buy)

- Lockable from both sides of gate
- Locks are keyed to differ
- Rekeyable, 6-pin security lock
- Fits up to 150mm deep posts
- White polymer

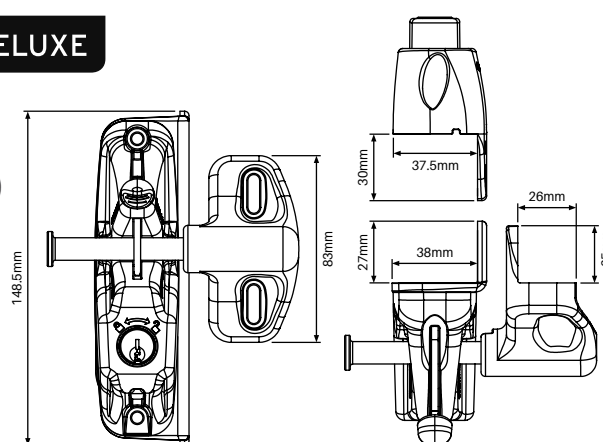

GATE LATCH & HINGE KIT

21mm
hinge gap spacing

2
alignment legs



TRUClose® HEAVY DUTY

LOKKLatch® DELUXE




Lokk latch deluxe & TruClose hinge pair Heavy duty

HINGE & LATCH KIT

Order Code: **LLDL-TCHD-W**

BB-LLDL-TCHD-W (Bulk Buy)

- Kit includes D&D Lokk Latch Deluxe and 2x TRU close hinges heavy duty
- Rated to 70kg self close
- Latch is lockable from both sides of gate
- Ideal for aluminium screening & Hamptons gates
- White polymer

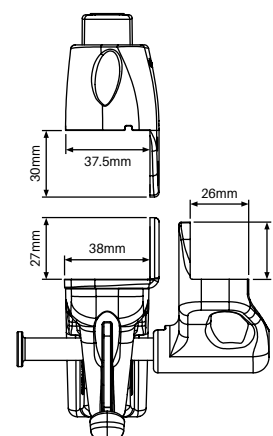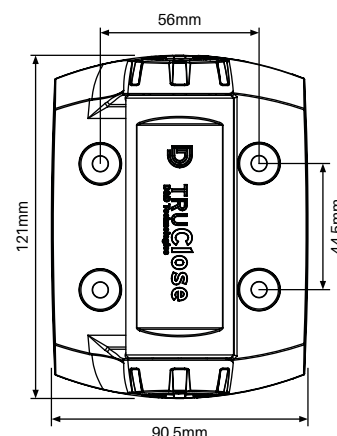

15-40mm
latch gap spacing

+
keyed to differ



Our product videos are here to help.

WITH AN EVER GROWING RANGE OF PRODUCTS ON OFFER,
OUR VIDEOS ARE DESIGNED TO GIVE YOU A HEAD START WHEN
WORKING WITH MANY OF OUR RANGES



glassoutlet.com.au/product-videos

EQUIPMENT ENCLOSURE

CUSTOM CUT
TO SIZE WITH EASY
ONSITE ASSEMBLY!
NO WELDING
NEEDED.

A SOPHISTICATED & STYLISH EQUIPMENT CLOSURE!
IDEAL FOR SCREENING OF POOL FILTERS,
RUBBISH BINS & AIR CONDITIONERS

65mm aluminium horizontal slat available in 10 finishes. A complete solution including door, hardware & lid with gas struts. Custom cut to size & flat packed for easy assembly. Simple to assemble without the need of welding!

AVAILABLE
IN 10
FINISHES!



EQUIPMENT ENCLOSURE



CUSTOM CUT TO SIZE
– SIMPLY PROVIDE
REQUIRED SIZES



FLAT PACKED –
EASILY TRANSPORTED
READY FOR ASSEMBLY



AVAILABLE
IN 10 FINISHES



HUGE SAVINGS VS
TRADITIONALLY FULLY
WELDED SYSTEM



AUSTRALIA WIDE
DELIVERY – FREE DELIVERY
TO METRO CAPITALS*
*Excludes Darwin & Hobart


With lid



AVAILABLE
WITH OPEN
OR CLOSED
BACK!


AVAILABLE
WITH OR
WITHOUT LID!
PERFECT FOR
STORING BINS.

Without lid

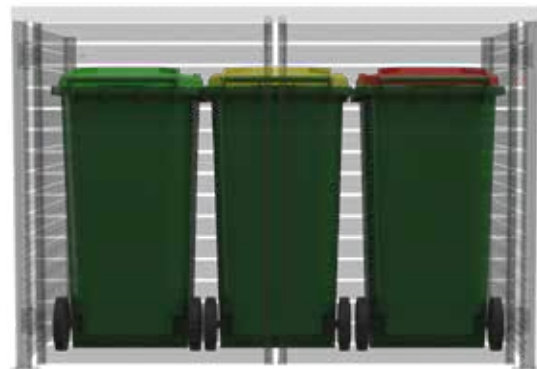

SYSTEM OVERVIEW

LID CAN BE OPENED AND CLOSED.
IN THE CLOSED POSITION, LID TILTS FORWARD FOR
RAIN/WATER TO DRAIN AWAY.
ALSO AVAILABLE WITHOUT LID.

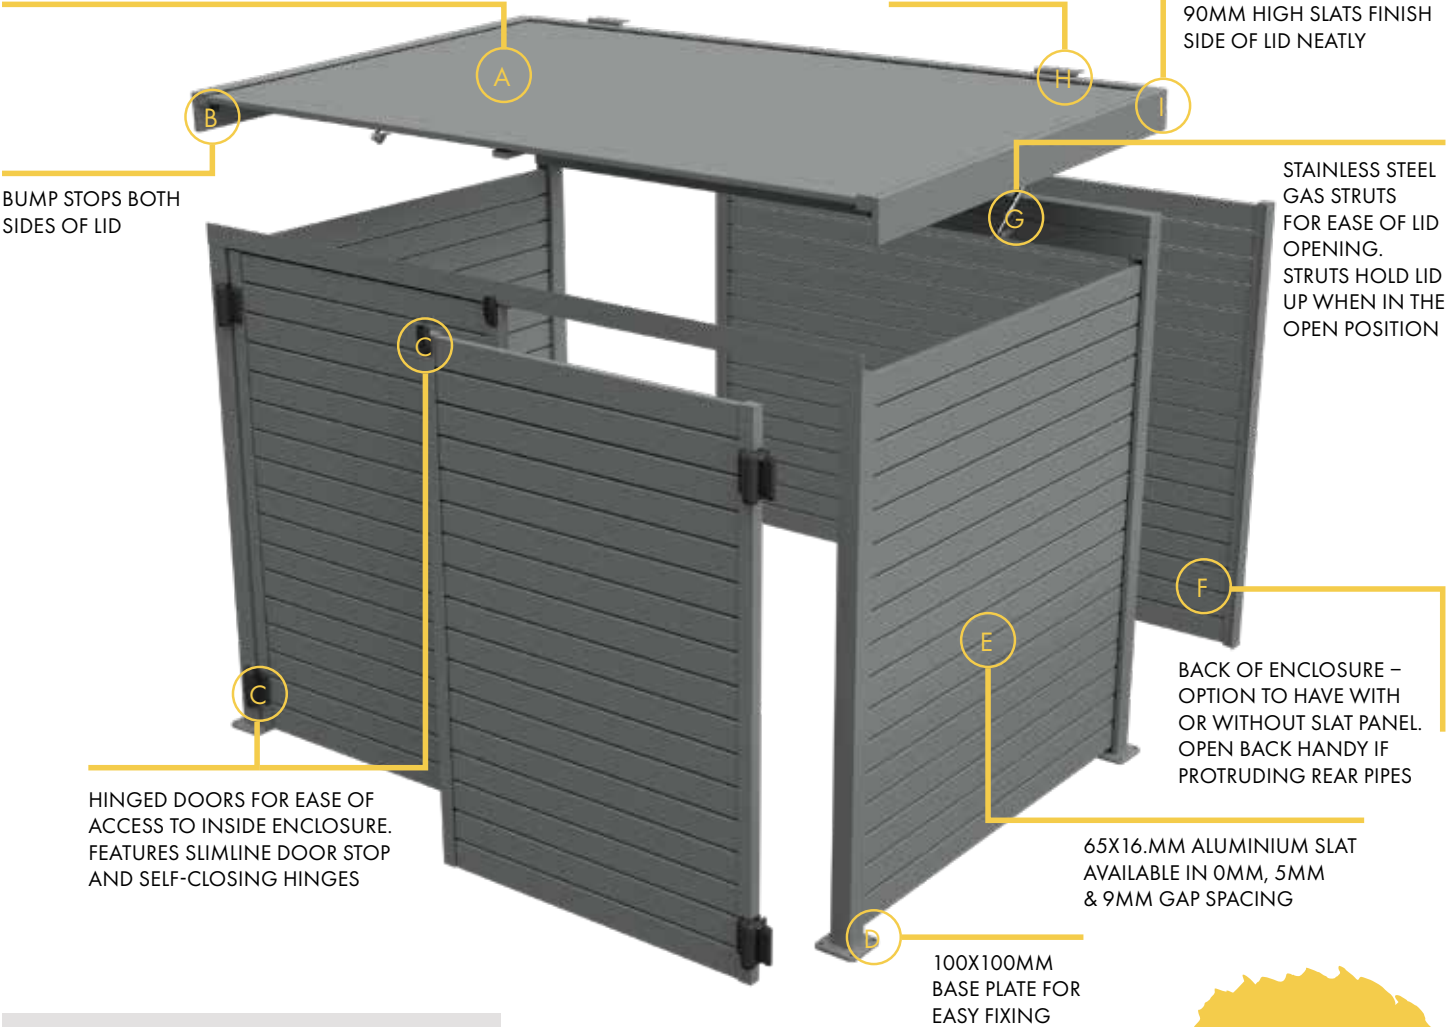

WATCH THE VIDEO

glassoutlet.com.au/product-videos



Purch Order No: Customer 123

Equipment Enclosure With Lid. Order For

Colour Finish	Satin Black
Slat Spacing (mm)	5
Slat Size (mm)	65x16.5

Item	Width mm 600 Min 1850 Max	Back Height mm 600 Min 1810 Max	Depth mm 500 Min 1150 Max	Qty	Back Panel	Front Doors	Lid Option	Amount incl GST
A	1200	835	800	1	Slatted	Double	With Lid	
B	Select	Select	Select	Select	Select	Select	With Lid	
C	Select	Select	Select	Select	Select	Select	With Lid	
D	Select	Select	Select	Select	Select	Select	With Lid	
E	Select	Select	Select	Select	Select	Select	With Lid	

Total Ex GST


Total Qty: 1
Total Approx Wt (kg): 42

NOTES:

- ** Includes hinges, gate stop and gas struts
- ** Width - measured from outer edge to outer edge of posts
- ** Back Height - measured from floor to lid at rear highest point
- ** Depth - measured from front post outer edge to rear post outer edge
- ** For more detailed specifications, refer next page
- ** For Width and Depth, base plates protrude an extra 25mm each side
- Please check for obstructions having regard to base plate protrusion

EASY TO ORDER!
FREE INSTANT PRICE
CALCULATOR
AVAILABLE.
CONTACT US!

POSTA™

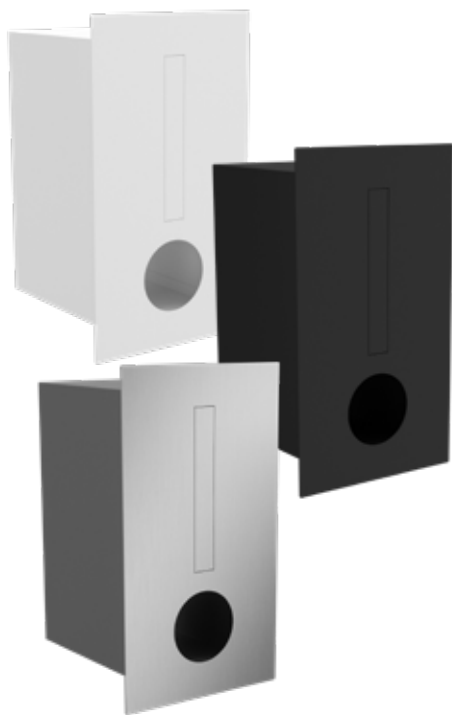


POSTA™ fence mount letterbox

White, Black powder coat
or SS316 finishes


410mm H x 230mm W

Order Code: **POSTA-FML-W**
POSTA-FML-B
POSTA-FML-SS316

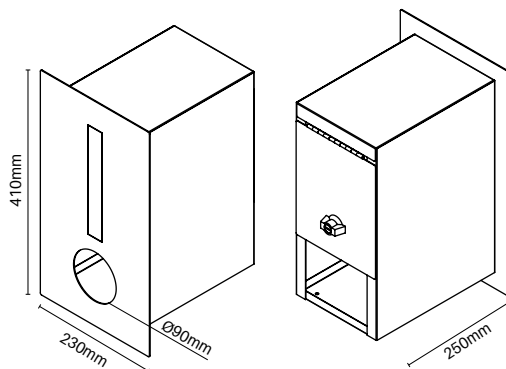

TECH SPECS

- Modern design
- Powder-coated galvanised steel letterbox in black or white finish. Also available in Stainless Steel satin finish 316 marine grade front panel with powder-coated grey galvanised box.
- Newspaper holder built in
- Rain resistant flap
- Includes key lock & keys
- Includes all mounting fittings & assembly instructions
- Posts, slat & sideframes sold separately



NOTE: Features a sleeve
for easy fixing to fence.

SCAN QR CODE FOR
DETAILED INSTALL
INSTRUCTIONS
PWD - Posta1



CONTACT US FOR EXCEL ORDER FORM

WE CAN CUSTOM CUT TO SIZE POST & SLATS TO MIX-&-MATCH WITH POSTA™ LETTERBOX




TYPICAL CONFIGURATION

POSTA™ SLAT LETTERBOX INSTALL GUIDE

1


Remove and discard sleeve

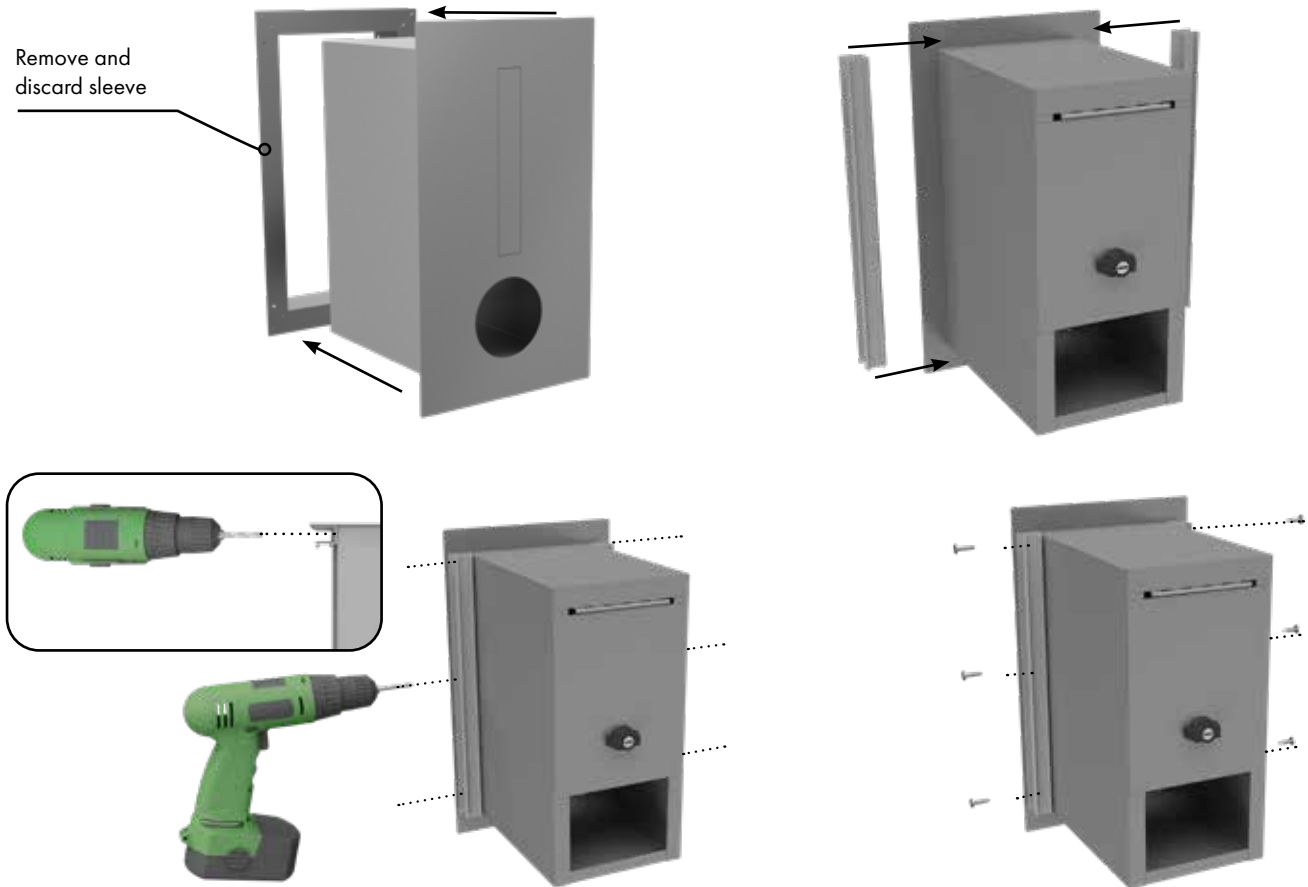

Remove and discard sleeve.

Attach Quickscreen Side Frame to either side of the Letterbox box, directly behind the face-plate using 3.5mm pilot holes and 6 x 10Gx18mm screws (from Quickscreen kit).

2

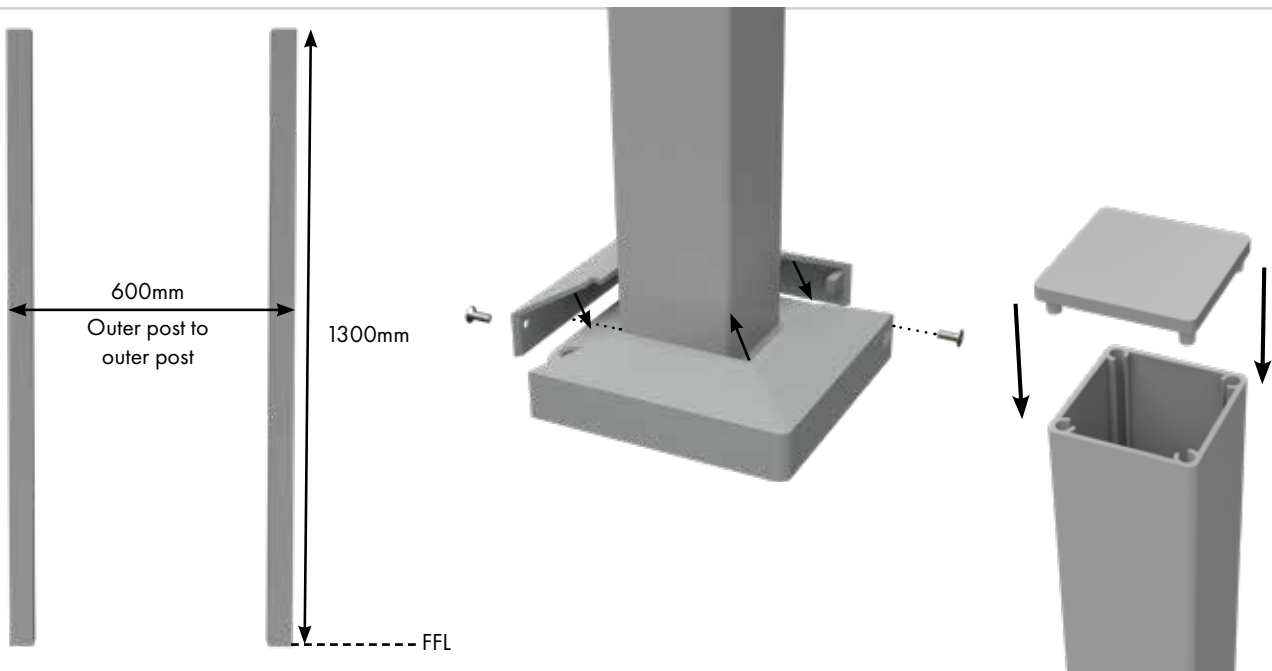

Install 50x50mm posts level at 600mm apart (post outer to post outer) at 1300mm high above finished floor level (FFL).


If posts are installed in-ground, ensure they are embedded appropriately. A minimum of 300mm wide x 300mm deep concrete footing for each post is recommended.
Fit 2 x Domical Covers (if base-plate posts are used).

Insert caps into tops of posts.

TYPICAL CONFIGURATION


POSTA™ SLAT LETTERBOX INSTALL GUIDE

3

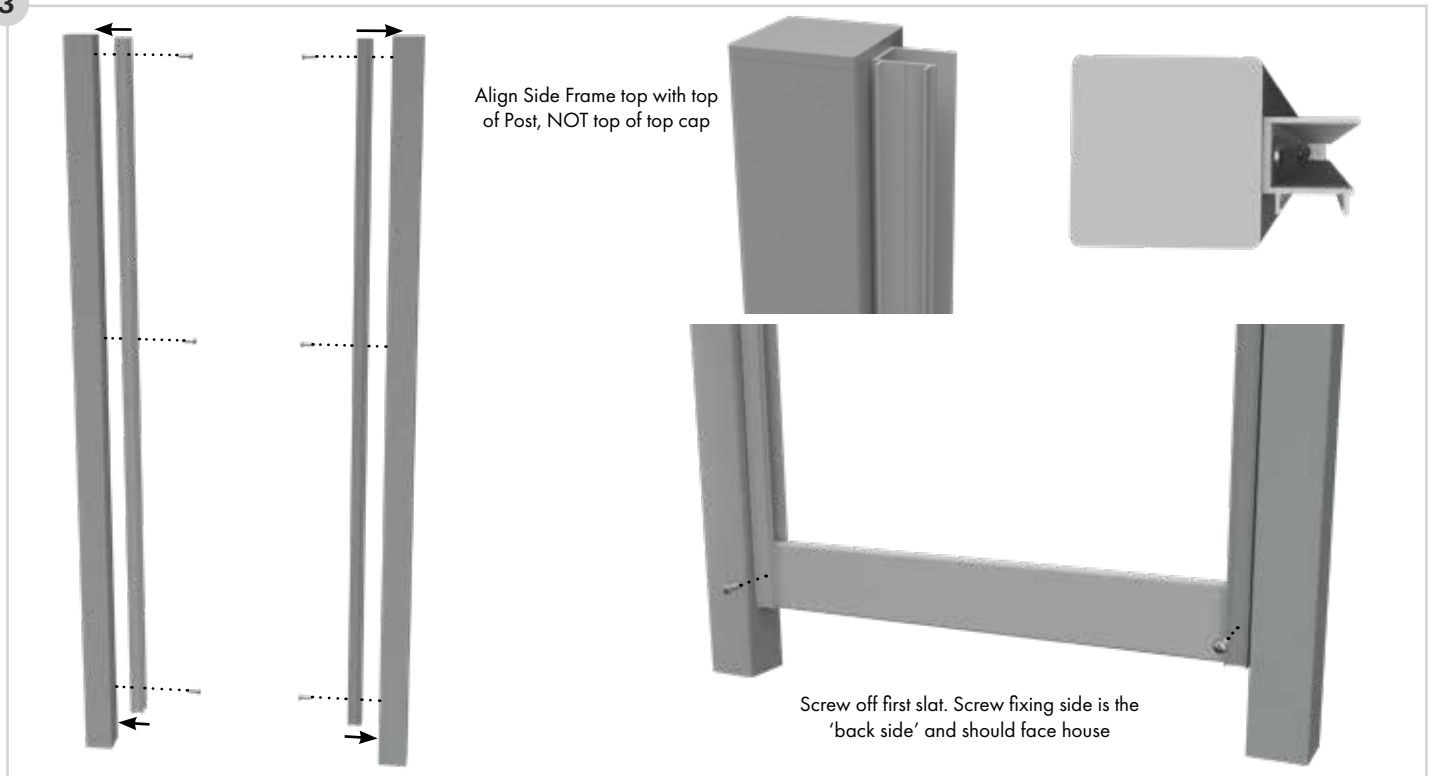

Attach side frame inline with the top of the post (not top of post cap). Fix off sideways through side frame into post at 3 places – top, middle and bottom of side frame. Install the bottom slat ensuring level and screw fix both sides using 10Gx18mm screws.

4

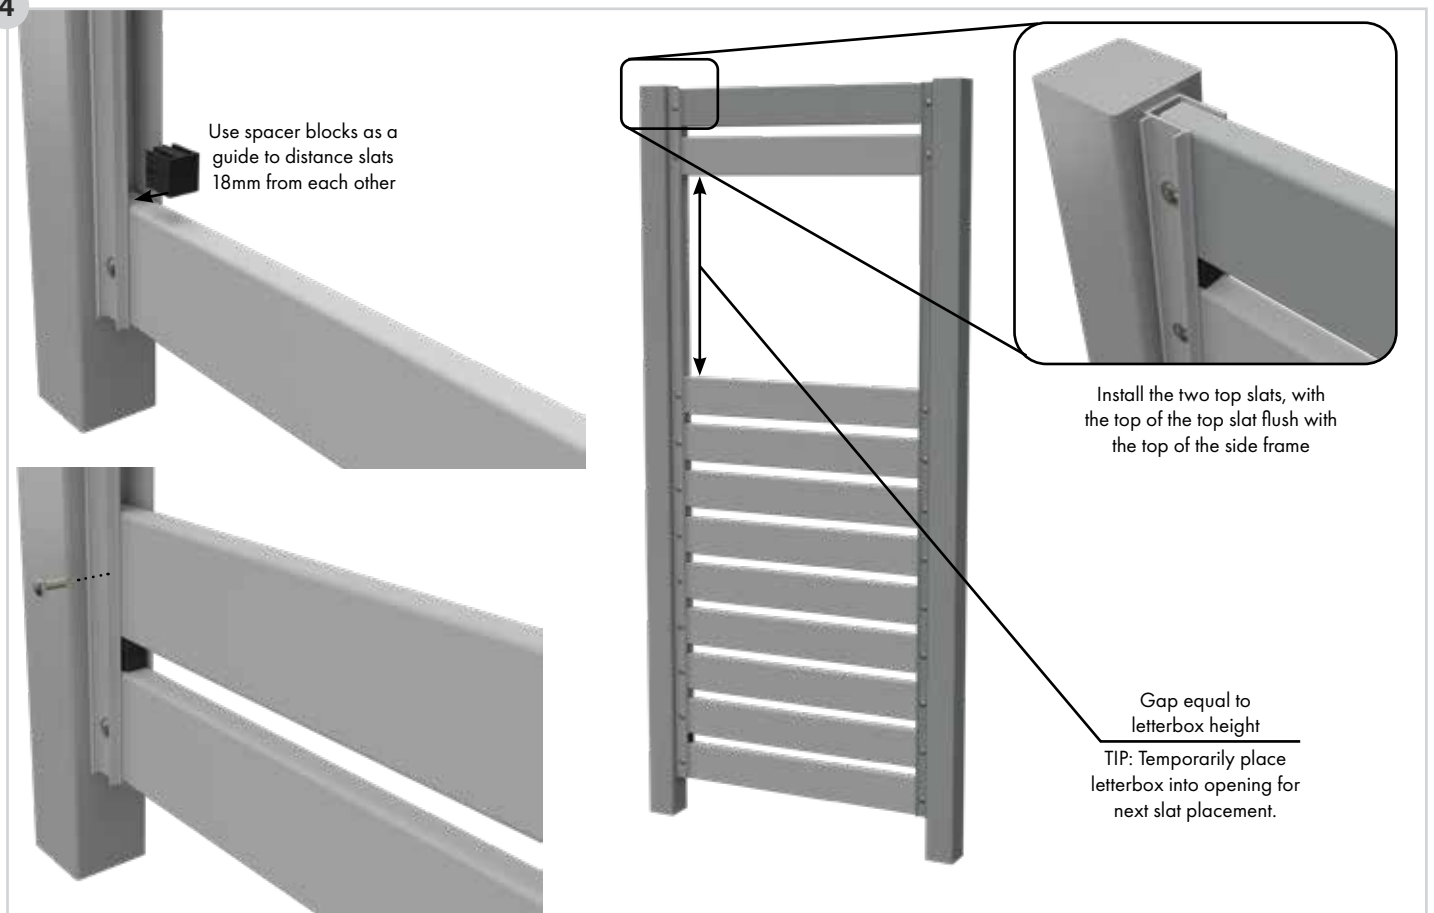


Using 18mm spacer (2x9mm spacers), install each slat one at a time for the first 9 slats. Use 1 x 10Gx18mm screw each side of slat.

Using the letterbox to temporarily set the void, install the two top slats with an 18mm space between them and the top slat flush against the top of the side frame.

Spacer blocks may be removed once slats are screw-fixed to position.

POSTA™ SLAT LETTERBOX INSTALL GUIDE

5

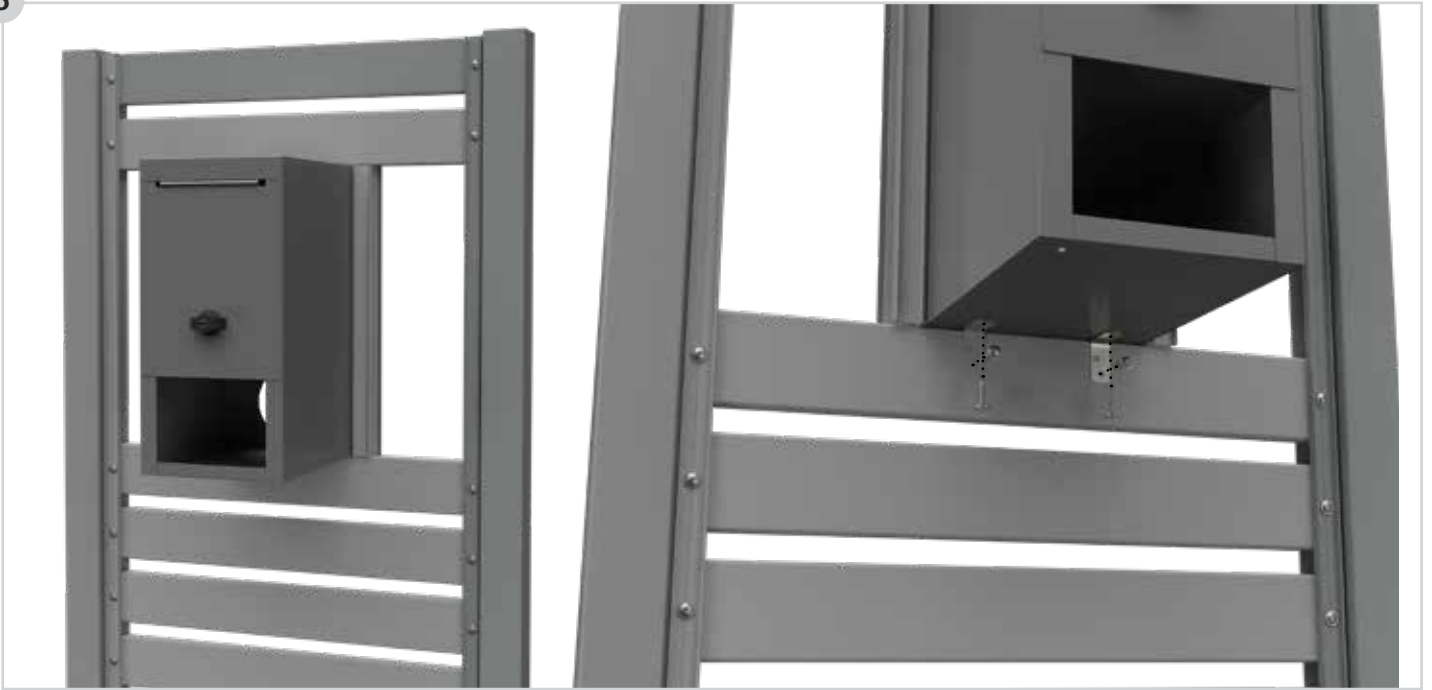

Resting the letterbox in the slat opening and centring the letterbox equally between the two posts, screw the two supplied angle brackets to the underneath of the letterbox body using the 10Gx18mm screws, ensuring the face of the letterbox is firm against the slat at the front.

NOTE: Do not cover drain holes in the letterbox body

6




Loosely fit the next 3 short slats each side of the letterbox, then screw-fix ensuring an 18mm gap between each.

TIP: to fit into void gap, tilt the slats at an angle and then straighten out to level.


POSTA™ SLAT LETTERBOX INSTALL GUIDE

7

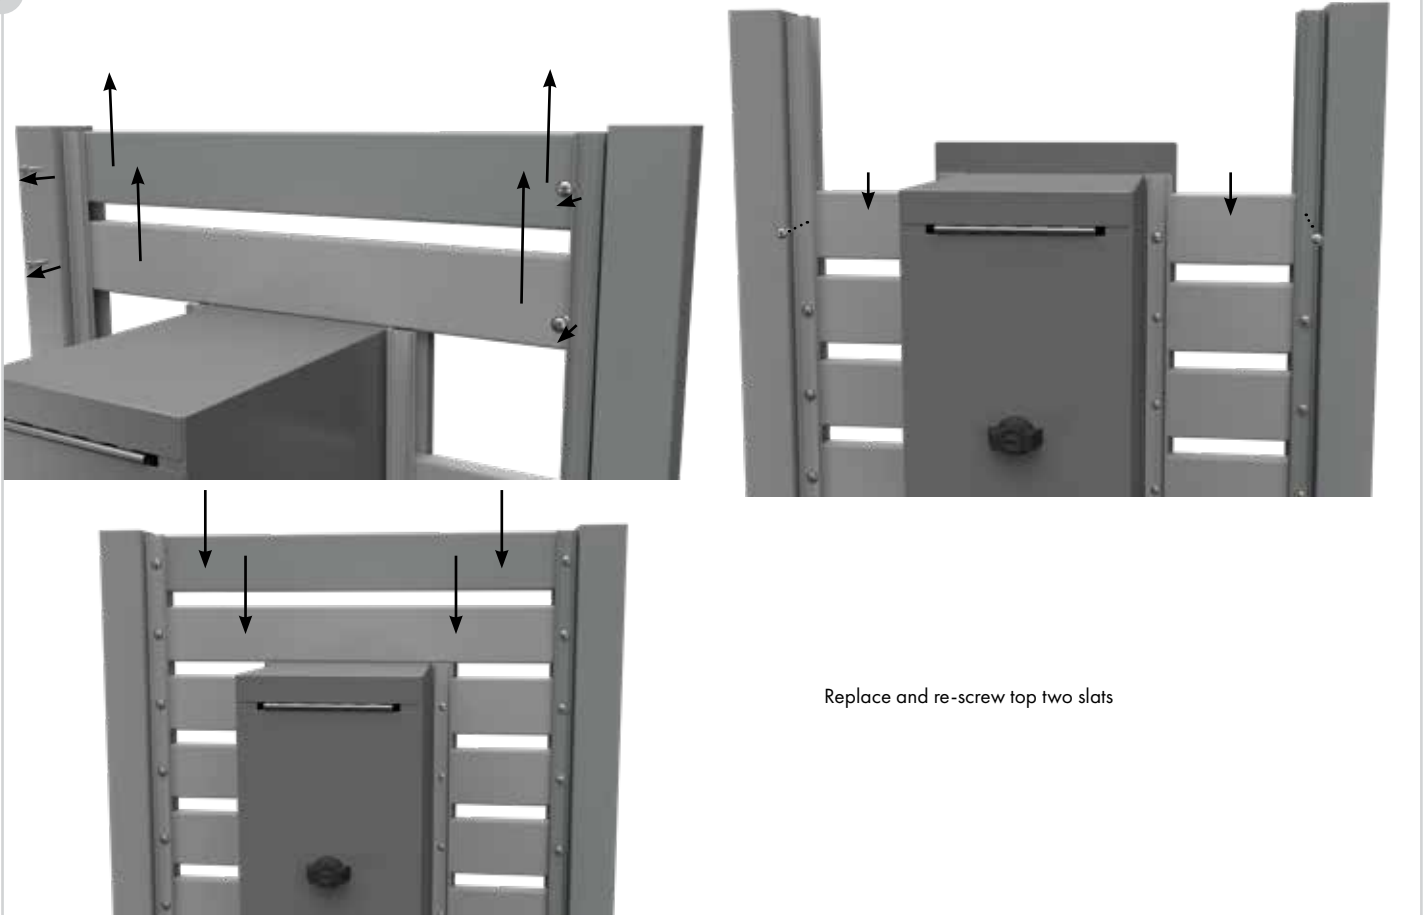

Unscrew and remove the top two slats temporarily and position the final two short slats each side of the letterbox. Replace the top two full slats and re-screw. Screw-fix the final short slats with an 18mm space.

8

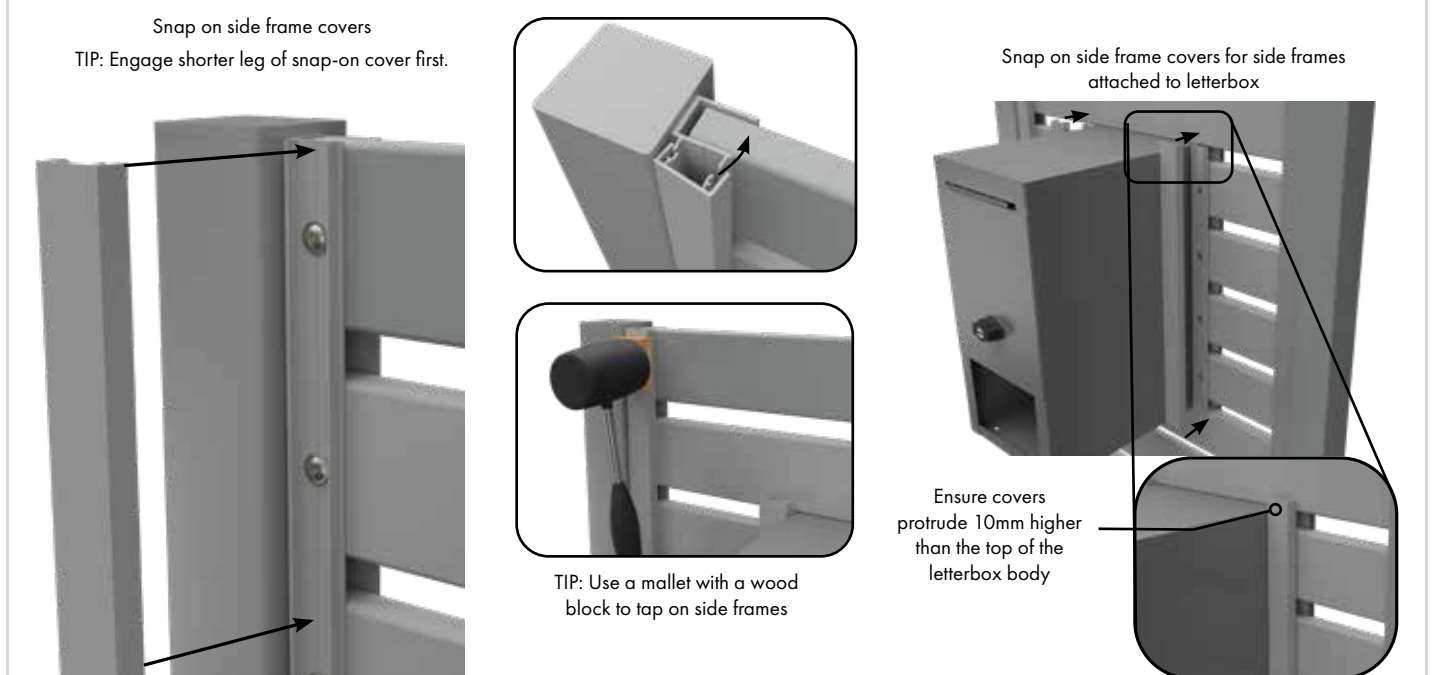

Fit concealing fixing covers to each post side frame to hide slat screws.

TIP: Engage shorter leg of snap-on cover first. At this point the snap-on cover will be sitting off the frame on an angle, the longer leg must be at open side of frame.


Starting from one side and working your way along, use a wood block and a hammer/mallet to tap the longer leg in place. A short, sharp tap may be required to engage the long leg.

Fit concealing fixing covers to each side frame attached to the letterbox body, ensuring the covers protrude 10mm higher than the top of the letterbox body.

TYPICAL CONFIGURATION

POSTA™ SLAT LETTERBOX INSTALL GUIDE

9

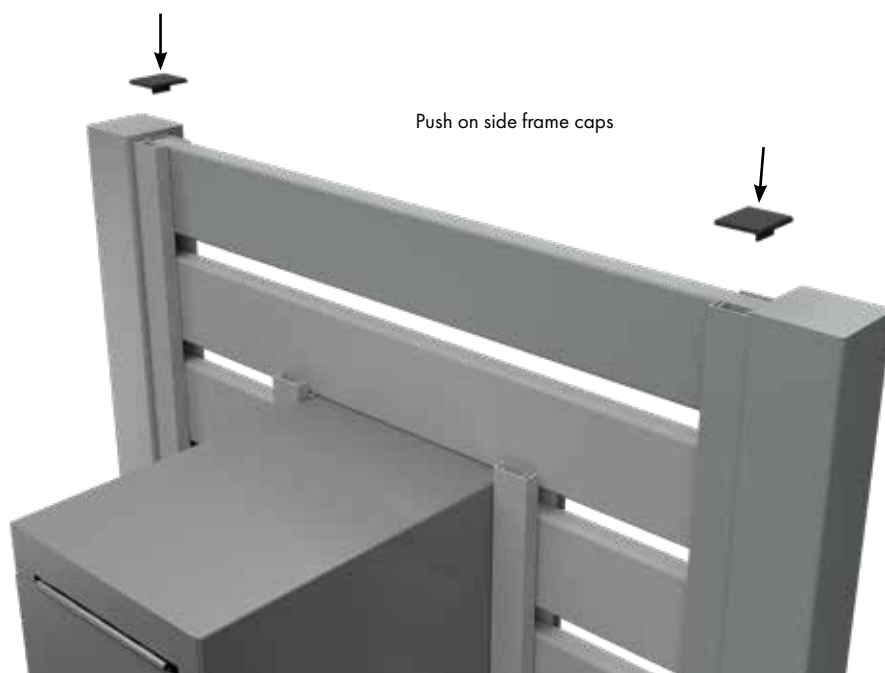

Fit 2x side frame caps.

COMPLETED



Australia's largest range to the trade only

CONTACT US TO GET YOUR
COPY OF THE CATALOGUES



Visit the website and follow us on Instagram

New releases, catalogues and
special deals, all at your fingertips.

 glassoutlet.com.au

 [@aluminium.outlet](https://www.instagram.com/aluminium.outlet)

 [@glass.outlet](https://www.instagram.com/glass.outlet)





POSTA™ CHARACTERS

POSTA™ Letters & Characters

Order Code: See table on page 169
Each number/letter sold separately

Finishes –



1 2 3 4 5 6 7 8 9 0 / A B C
1 2 3 4 5 6 7 8 9 0 / A B C

5 FINISHES AVAILABLE

- 1 50mm – Black powder coat with stick on 3M adhesive
- 2 50mm – SS316 Satin with stick on 3M adhesive
- 3 120mm – Black powder coat with stick on 3M adhesive
- 4 120mm – SS316 Satin with stick on 3M adhesive
- 5 120mm – SS316 Satin with stud fixing**

TECH SPECS

- Numbers & letters available in 50mm or 120mm high
- Available in stainless steel 316 or black powder coated aluminium
- Simple solution – simply stick onto letterbox, post or wall with 3M adhesive or use 'stud' option (SS316 POSTA™ only) with rods
- Stylish modern font

**EASY STUD INSTALLATION (SS316 POSTA™ ONLY)



Timber frame

- 1 Mark holes using studs as a guide. Drill two 4mm holes. (Drill two 6mm holes for flush mount).




- 2 Attach character using threaded rods, washers and nuts provided.



Brick

- 1 Mark holes using studs as a guide.



- 2 Drill two 5.5mm holes, 40mm deep and insert wall plugs.



- 3 Screw threaded pins to character and push character into wall.

CHARACTER ORDER CODES

1
50mm
A

Order Code	Description
POSTA™ 50MM HIGH – ALUMINIUM BLACK Powder coat 3mm thick with 3M adhesive tape	
POSTA-BLK-H050-0	Number "0"
POSTA-BLK-H050-1	Number "1"
POSTA-BLK-H050-2	Number "2"
POSTA-BLK-H050-3	Number "3"
POSTA-BLK-H050-4	Number "4"
POSTA-BLK-H050-5	Number "5"
POSTA-BLK-H050-6	Number "6"
POSTA-BLK-H050-7	Number "7"
POSTA-BLK-H050-8	Number "8"
POSTA-BLK-H050-9	Number "9"
POSTA-BLK-H050-/	Character "/"
POSTA-BLK-H050-A	Letter "A"
POSTA-BLK-H050-B	Letter "B"
POSTA-BLK-H050-C	Letter "C"

2
50mm
A

Order Code	Description
POSTA™ 50MM HIGH – SS316 SATIN 1.5mm thick with 3M adhesive tape	
POSTA-SS-H050-0	Number "0"
POSTA-SS-H050-1	Number "1"
POSTA-SS-H050-2	Number "2"
POSTA-SS-H050-3	Number "3"
POSTA-SS-H050-4	Number "4"
POSTA-SS-H050-5	Number "5"
POSTA-SS-H050-6	Number "6"
POSTA-SS-H050-7	Number "7"
POSTA-SS-H050-8	Number "8"
POSTA-SS-H050-9	Number "9"
POSTA-SS-H050-/	Character "/"
POSTA-SS-H050-A	Letter "A"
POSTA-SS-H050-B	Letter "B"
POSTA-SS-H050-C	Letter "C"

3
120mm
A

Order Code	Description
POSTA™ 120MM HIGH – ALUMINIUM BLACK Powder coat 3mm thick with 3M adhesive tape	
POSTA-BLK-H120-0	Number "0"
POSTA-BLK-H120-1	Number "1"
POSTA-BLK-H120-2	Number "2"
POSTA-BLK-H120-3	Number "3"
POSTA-BLK-H120-4	Number "4"
POSTA-BLK-H120-5	Number "5"
POSTA-BLK-H120-6	Number "6"
POSTA-BLK-H120-7	Number "7"
POSTA-BLK-H120-8	Number "8"
POSTA-BLK-H120-9	Number "9"
POSTA-BLK-H120-/	Character "/"
POSTA-BLK-H120-A	Letter "A"
POSTA-BLK-H120-B	Letter "B"
POSTA-BLK-H120-C	Letter "C"

4
120mm
A

Order Code	Description
POSTA™ 120MM HIGH – SS316 SATIN 1.5mm thick with 3M adhesive tape	
POSTA-SS-H120-0	Number "0"
POSTA-SS-H120-1	Number "1"
POSTA-SS-H120-2	Number "2"
POSTA-SS-H120-3	Number "3"
POSTA-SS-H120-4	Number "4"
POSTA-SS-H120-5	Number "5"
POSTA-SS-H120-6	Number "6"
POSTA-SS-H120-7	Number "7"
POSTA-SS-H120-8	Number "8"
POSTA-SS-H120-9	Number "9"
POSTA-SS-H120-/	Character "/"
POSTA-SS-H120-A	Letter "A"
POSTA-SS-H120-B	Letter "B"
POSTA-SS-H120-C	Letter "C"

SCAN QR CODE FOR
DETAILED INSTALL
INSTRUCTIONS
PWD – Posta1



5

Order Code	Description
POSTA™ – 120MM High WITH STUD MOUNT – SS316 SATIN 1.5mm thick with 2 x M4 SS304 threaded rod + nuts/ washers and 2 x M4 pointed SS304 threaded rod	
POSTA-STUD-H120-0	Number "0"
POSTA-STUD-H120-1	Number "1"
POSTA-STUD-H120-2	Number "2"
POSTA-STUD-H120-3	Number "3"
POSTA-STUD-H120-4	Number "4"
POSTA-STUD-H120-5	Number "5"
POSTA-STUD-H120-6	Number "6"
POSTA-STUD-H120-7	Number "7"
POSTA-STUD-H120-8	Number "8"
POSTA-STUD-H120-9	Number "9"
POSTA-STUD-H120-/	Character "/"
POSTA-STUD-H120-A	Letter "A"
POSTA-STUD-H120-B	Letter "B"
POSTA-STUD-H120-C	Letter "C"



FROM US TO YOU, REAL QUICK. AUSTRALIA WIDE DELIVERY OPTIONS



Online ordering is now available across our in stock ranges. Open 24/7 – Save your favourites, view your invoices and jump straight to our latest catalogues and the best part it's all at your fingertips with your trade/wholesale pricing. Login or register now for your secure username & password
glassoutletonline.com.au



Pick up is available from all 8 of our depots in Queensland, Melbourne, Newcastle, Adelaide and Perth.

We also offer a preorder + collect system for when you are tight on time. Contact us for more info.



We aim to provide fast delivery every time by utilising multiple distribution centres across the country with dedicated delivery trucks.

With depots in Brisbane, Yatala, Gold Coast, Derrimut, Dandenong, Adelaide, Newcastle and Perth.



Palletised freight & smaller courier orders can be organised for a huge range of our products. Contact us to discuss quick & cost effective options.

OUR DEPOTS

Queensland

BRISBANE

☎ **07 3267 7968**

✉ salesbris@glassoutlet.com.au

📍 Building 9, 153 St Vincents Rd
Virginia, QLD 4014

Office opening hours:
Mon-Fri: 7am-3:30pm

Warehouse opening hours:
Mon-Fri: 7am-3pm

GOLD COAST

☎ **07 5594 0343**

✉ salesgc@glassoutlet.com.au

📍 28 Barnett Place
Molendinar, QLD 4214

Office & warehouse opening hours:
Mon-Fri: 7am-3pm

YATALA

☎ **07 3445 4004**

✉ sales@aluminiumoutlet.com.au

📍 4 Binary Street
Yatala, QLD 4207

Office & warehouse opening hours:
Mon-Fri: 7am-3pm

South Australia

ADELAIDE

☎ **08 8359 4048**

✉ salesadl@glassoutlet.com.au

📍 490 Churchill Rd
Kilburn, SA 5084

Office & warehouse opening hours:
Mon-Fri: 7:30am-3:30pm

Western Australia

PERTH

☎ **08 6499 2868**

✉ saleswa@glassoutlet.com.au

📍 10A Marriott Rd
Jandakot, WA 6164

Office & warehouse opening hours:
Mon-Fri: 7:30am-3:30pm

New South Wales

NEWCASTLE

☎ **02 4069 0833**

✉ salesnc@glassoutlet.com.au

📍 9B Pennant Street
Cardiff, NSW 2285

Office & warehouse opening hours:
Mon-Fri: 7:30am-3:30pm

Victoria

MELBOURNE WEST

☎ **03 9363 7744**

✉ salesder@glassoutlet.com.au

📍 1/139 Studley Crt
Derrimut, VIC 3026

Office & warehouse opening hours:
Mon-Fri: 7:30am-3:30pm


MELBOURNE SOUTH EAST

☎ **03 9706 9886**

✉ salesdan@glassoutlet.com.au

📍 15 Stephen Rd
Dandenong South, VIC 3175

Office & warehouse opening hours:
Mon-Fri: 7:30am-3:30pm

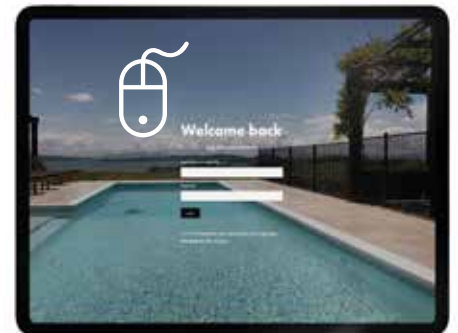

LOVE TO SEE
YOU AT OUR
ONLINE STORE

glassoutletonline.com.au

LET'S GET SOCIAL

📷 @glass.outlet

Errors and omissions excepted. Measurements and drawings are provided as a guide only and should not be relied upon solely for installation purposes. Product codes, products and prices may change at Glass Outlet's discretion as systems are constantly reviewed and updated. Please contact Glass Outlet if you require clarification of product codes, pricing or product stocking. Due to each installation situation being different, it is the installer's responsibility to seek engineering compliance and/or certification should it be required as part of a project, regulatory or statutory requirement. As each installation site is different, it is the installer's responsibility to consider the impact of wind loads on the design of a fence. Please consult your engineer for site specific matters relating to wind loads. Colours displayed in PDF's or printed documents are indicative only and should not be relied on as a true representation of actual powder coat colour. All products should adhere to a suitable care and maintenance schedule. ©Copyright 2025. This catalogue is the copyright of Glass Outlet and cannot be reproduced, copied or replicated without the prior written consent of Glass Outlet. Such consent applies to images as well as text. Glass Outlet Quickscreen Slat Screening Systems V4

