


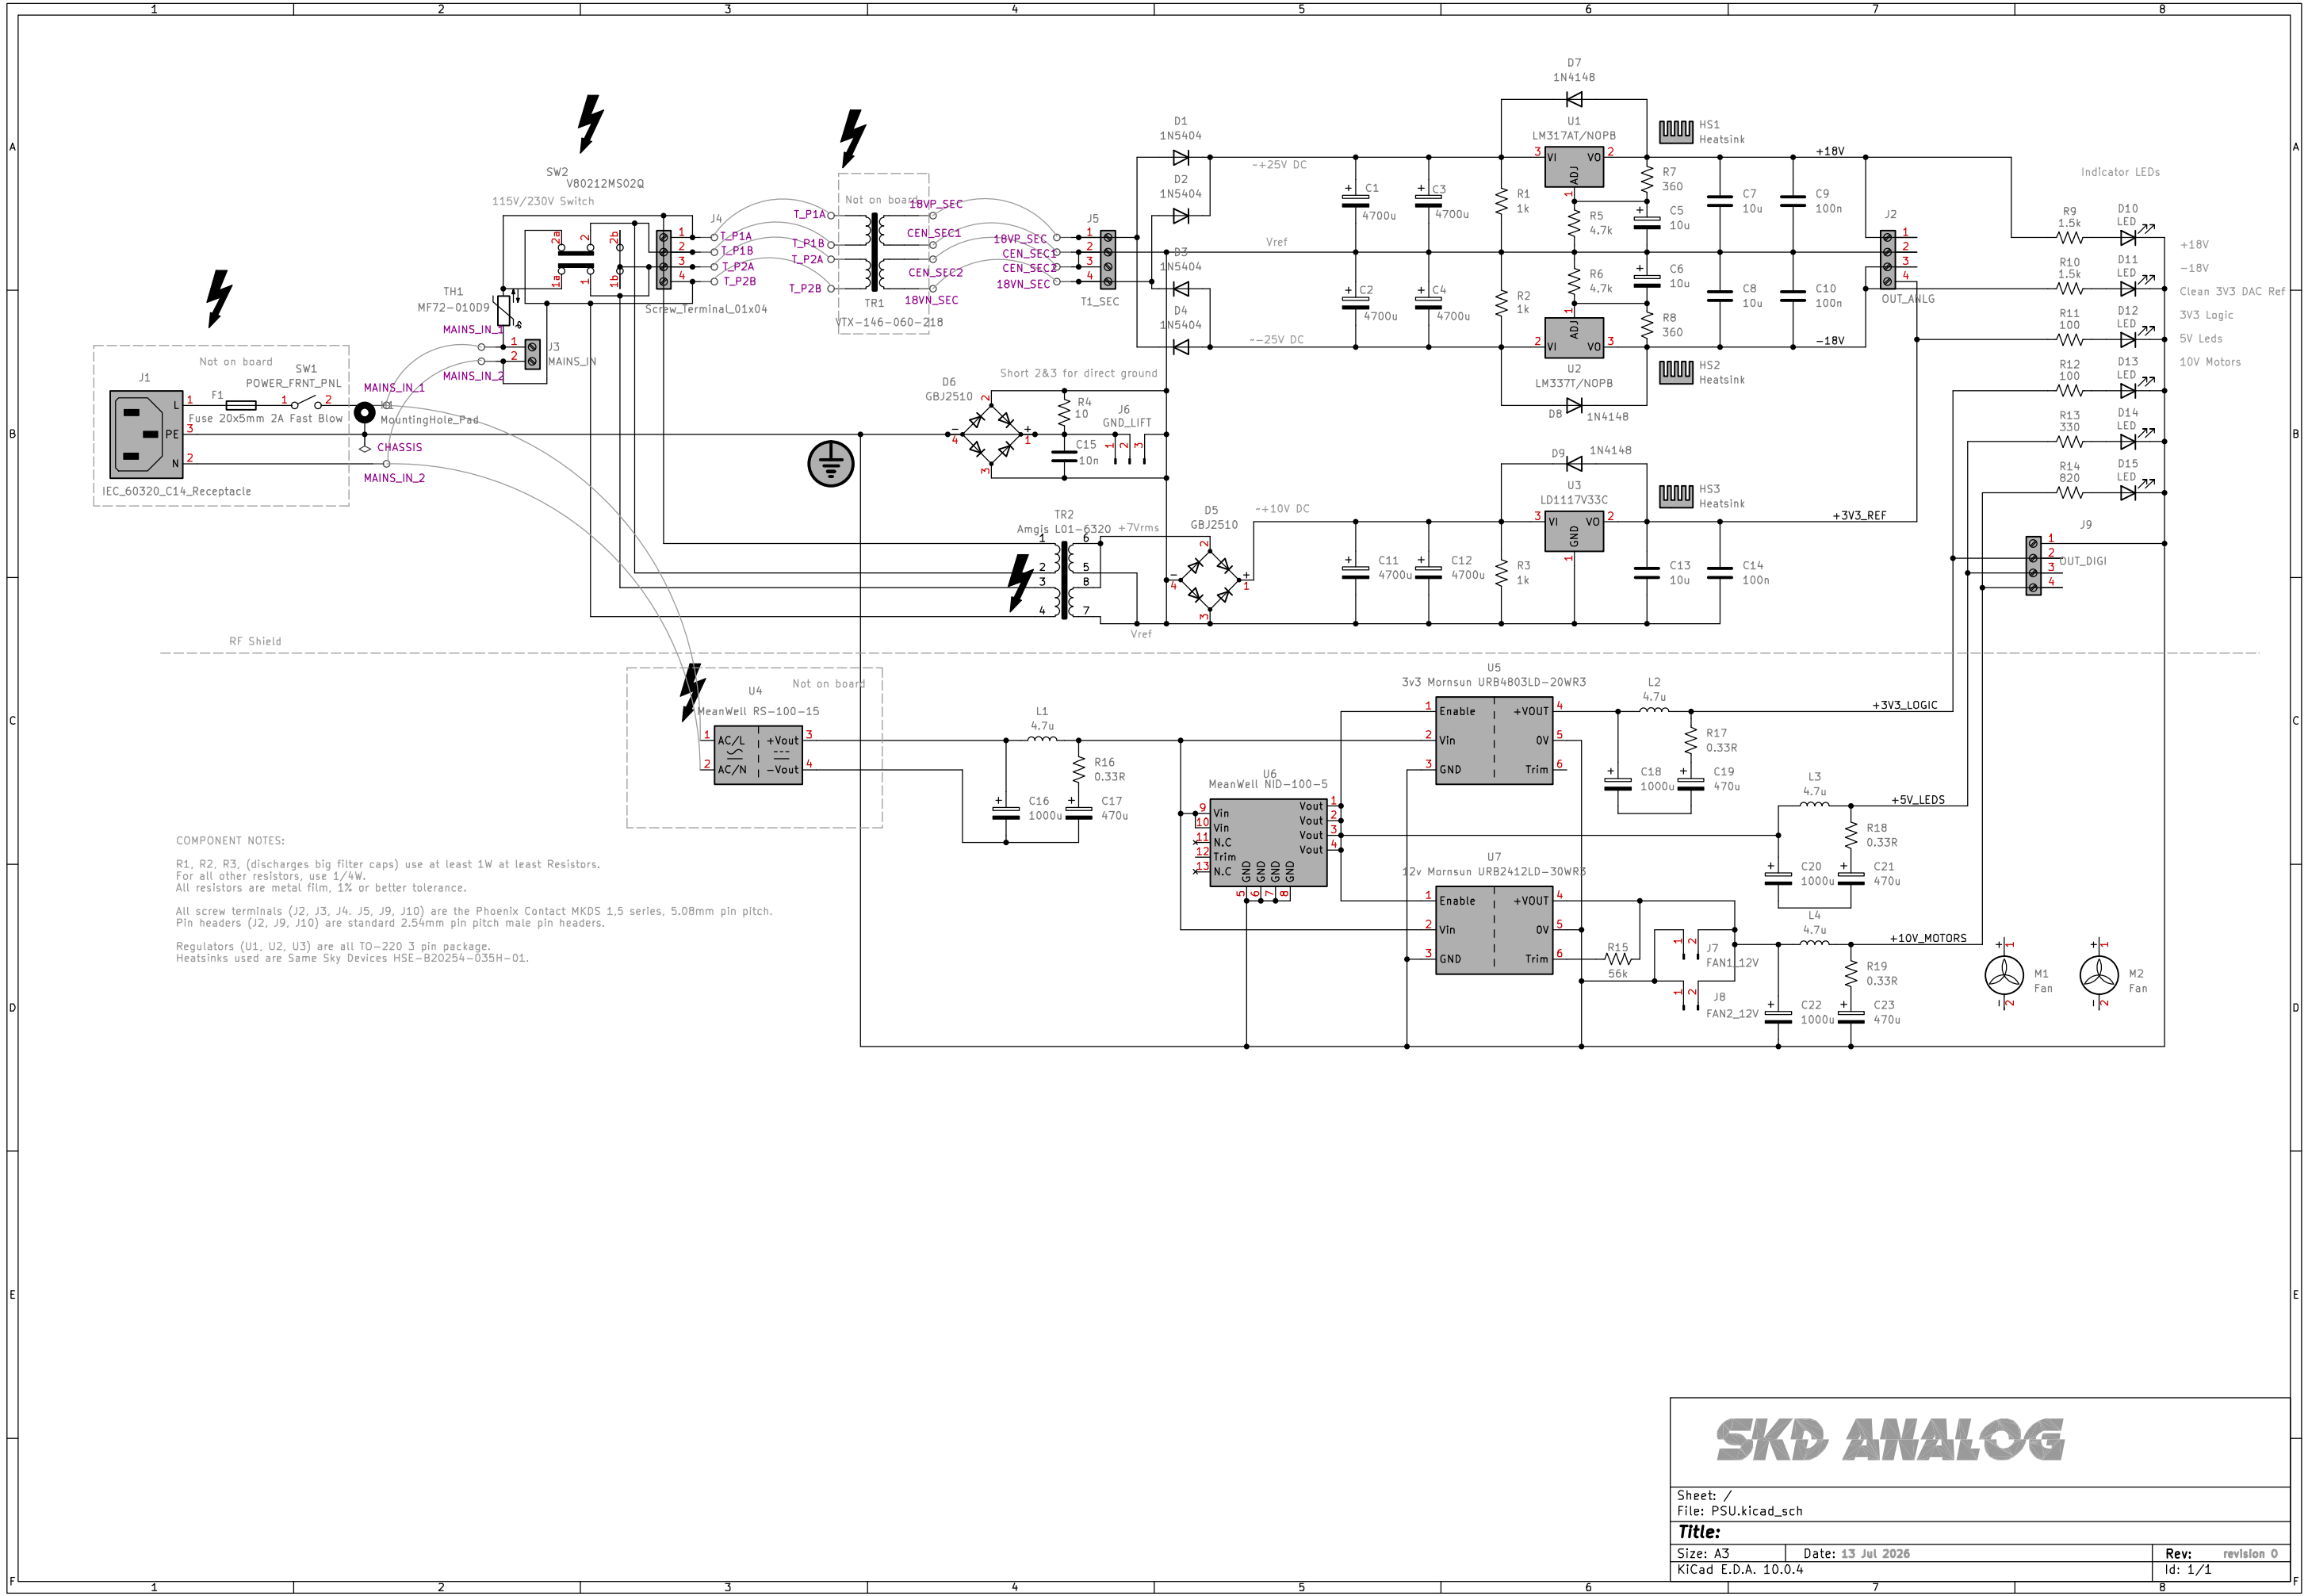

COMPONENT NOTES:

R1, R2, R3, (discharges big filter caps) use at least 1W at least Resistors.
For all other resistors, use 1/4W.
All resistors are metal film, 1% or better tolerance.

All screw terminals (J2, J3, J4, J5, J9, J10) are the Phoenix Contact MKDS 1,5 series, 5,08mm pin pitch.
Pin headers (J2, J9, J10) are standard 2,54mm pin pitch male pin headers.

Regulators (U1, U2, U3) are all TO-220 3 pin package.
Heatsinks used are Same Sky Devices HSE-B20254-035H-01.

SKD ANALOG

Sheet: /
File: PSU.kicad_sch

Title:

Size: A3

Date: 13 Jul 2026

KiCad E.D.A. 10.0.4

Rev: revision 0

Id: 1/1