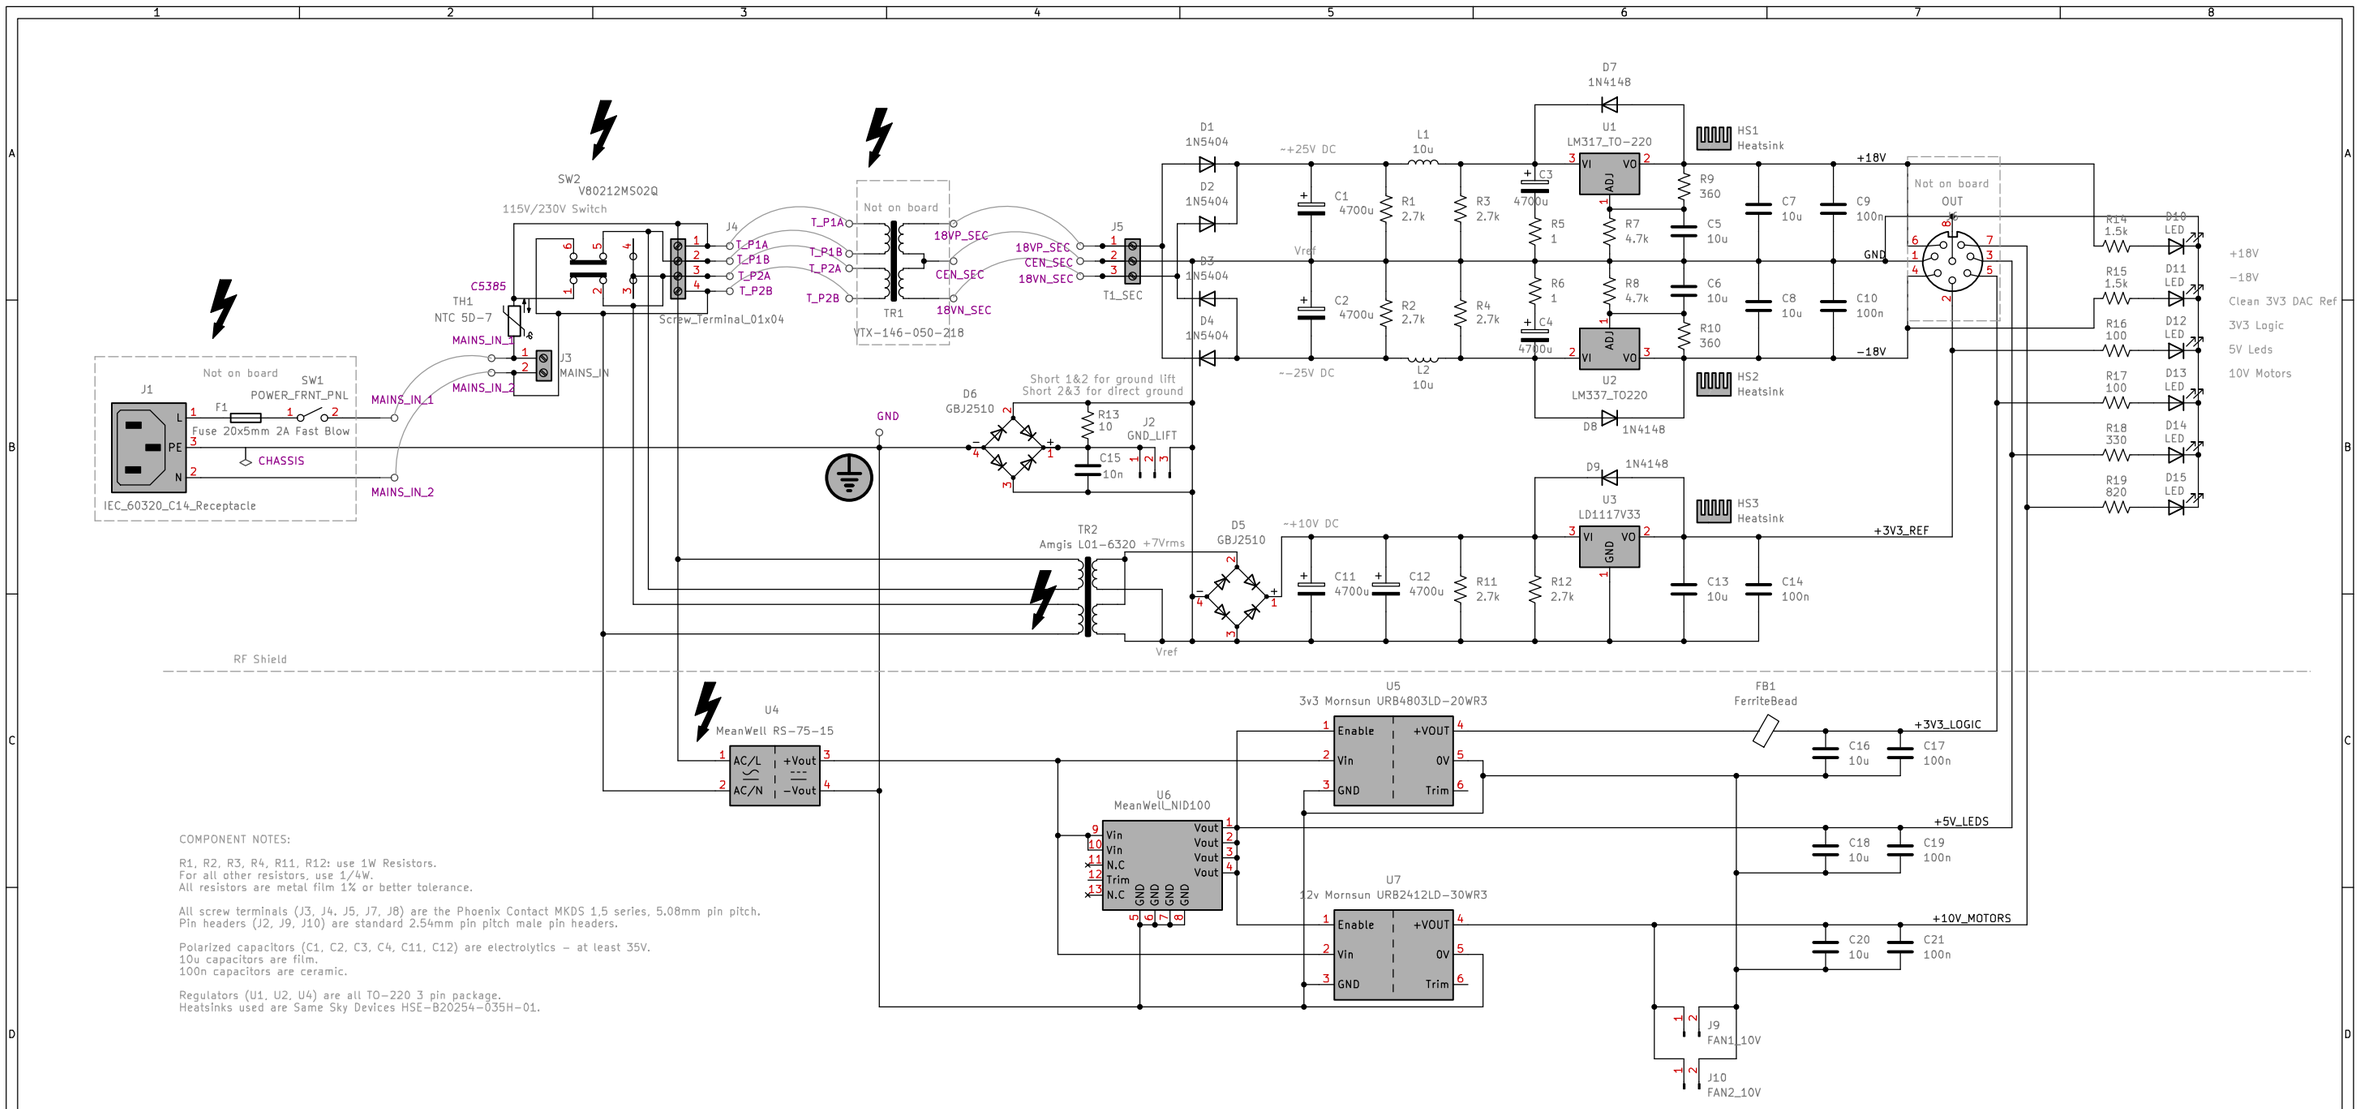


COMPONENT NOTES:

R1, R2, R3, R4, R11, R12: use 1W Resistors.
For all other resistors, use 1/4W.
All resistors are metal film 1% or better tolerance.

All screw terminals (J3, J4, J5, J7, J8) are the Phoenix Contact MKDS 1.5 series, 5.08mm pin pitch.
Pin headers (J2, J9, J10) are standard 2.54mm pin pitch male pin headers.

Polarized capacitors (C1, C2, C3, C4, C11, C12) are electrolytics – at least 35V.
10u capacitors are film.
100n capacitors are ceramic.

Regulators (U1, U2, U4) are all TO-220 3 pin package.
Heatsinks used are Same Sky Devices HSE-B20254-035H-01.

SKD ANALOG

| | | |
|---|---|---|
| Sheet: / | | |
| File: PSU.kicad_sch | | |
| **Title:** | | |
| Size: A3 | Date: 13 Jul 2026 | **Rev:** revision 0 |
| KiCad E.D.A. 10.0.4 | | Id: 1/1 |