
STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE 7000

APP 123.925 TWR 118.300 SOLWEZI/Solwezi (FLSW) RNAV STAR RWY 26

ENKOT 1B, GENUG 1B, IBGOX 1B, ITLOR 1B, NIDOS 1B

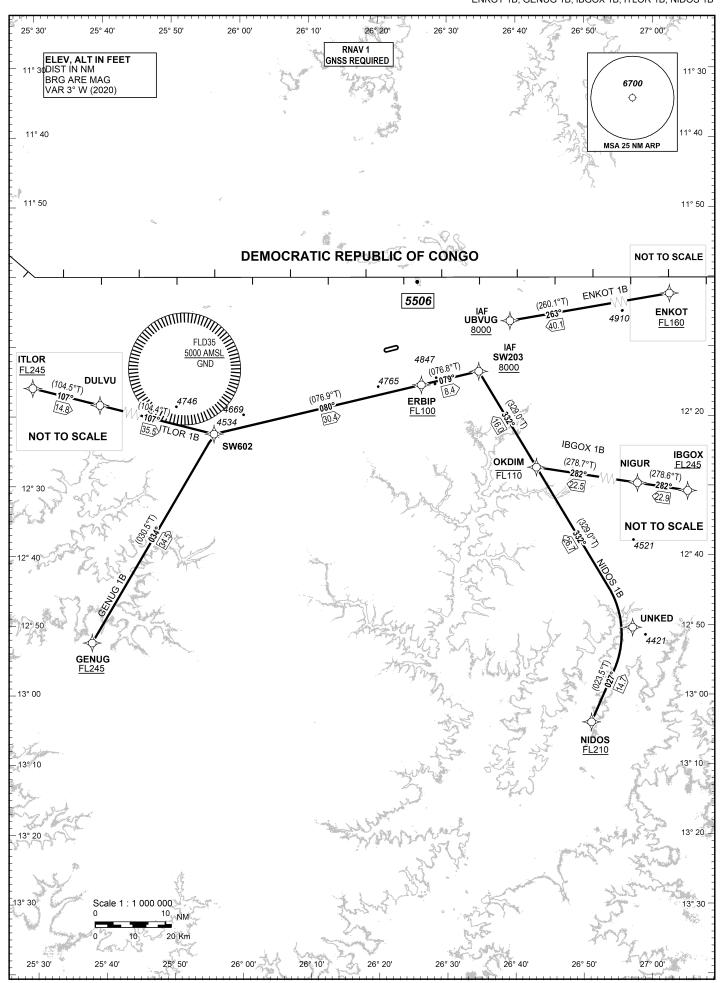

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

SOLWEZI/Solwezi (FLSW)

RNAV STAR RWY 26 ENKOT 1B, GENUG 1B, IBGOX 1B, ITLOR 1B, NIDOS 1B

TABULAR DESCRIPTION

RNAV STAR RWY 26

ENKOT 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course M°(T°)	Magnetic Variation (°)	Distance (NM) / Duration	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA (%)	Rec Navaids	Navigation Specification
010	IF	ENKOT	-	-	-	-	-	+FL160	-	-	-	RNAV 1
020	TF	UBVUG	-	263 (260.1)	-	40.1	-	+8000	-	-	-	RNAV 1

GENUG 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course M°(T°)	Magnetic Variation (°)	Distance (NM) / Duration	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA (%)	Rec Navaids	Navigation Specification
010	IF	GENUG	-	-	-	-	-	+FL245	-	-	-	RNAV 1
020	TF	SW602	-	034 (030.5)	-	34.5	-	-	-	-	-	RNAV 1
030	TF	ERBIP	-	080 (076.9)	-	30.4	-	+FL100	-	-	-	RNAV 1
040	TF	SW203	-	079 (076.8)	-	8.4	-	+8000	-	-	-	RNAV 1

IBGOX 1B

	Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course M°(T°)	Magnetic Variation (°)	Distance (NM) / Duration	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA (%)	Rec Navaids	Navigation Specification
	010	IF	IBGOX	-	-	-	-	-	+FL245	-	-	-	RNAV 1
	020	TF	NIGUR	-	282 (278.6)	1	22.9	1	•	-	-	-	RNAV 1
	030	TF	OKDIM	-	282 (278.7)	1	22.5	1	-FL110	-	-	-	RNAV 1
Π	040	TF	SW203	-	332 (329.0)	-	16.0	-	+8000	-	-	-	RNAV 1

ITLOR 1B

 Serial umber	Path Descriptor	Waypoint Identifier	Fly- over	Course M°(T°)	Magnetic Variation (°)	Distance (NM) / Duration	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA (%)	Rec Navaids	Navigation Specification
010	IF	ITLOR	-	-	-	-	-	+FL245	-	-	-	RNAV 1
020	TF	DULVU	-	107 (104.5)	-	14.8	-	-	-	-	-	RNAV 1
030	TF	SW602	-	107 (104.4)	-	35.5	-	-	-	-	-	RNAV 1
040	TF	ERBIP	-	080 (076.9)	=	30.4	-	+FL100	-	-	1	RNAV 1
050	TF	SW203	-	079 (076.8)	-	8.4	-	+8000	-	-	1	RNAV 1

NIDOS 1B

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course M°(T°)	Magnetic Variation (°)	Distance (NM) / Duration	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA (%)	Rec Navaids	Navigation Specification
010	IF	NIDOS	-	-	-	-	-	+FL210	-	-	-	RNAV 1
020	TF	UNKED	-	027 (023.5)	-	14.7	-	-	-	-	-	RNAV 1
030	TF	OKDIM	-	332 (329.0)	-	26.7	-	-FL110	-	-	-	RNAV 1
040	TF	SW203	-	332 (329.0)	-	16.0	-	+8000	-	-	-	RNAV 1

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

SOLWEZI/Solwezi (FLSW) RNAV STAR RWY 26

ENKOT 1B, GENUG 1B, IBGOX 1B, ITLOR 1B, NIDOS 1B

WAYPOINT LIST RNAV STAR RWY 26

WaypointIdentifier	Coor	dinates	WaypointIdentifier	Coo	rdinates
ENKOT	S 11 59 32.0	E 027 19 33.0	NIGUR	S 12 30 52.6	E 027 05 45.0
GENUG	S 12 52 28.9	E 025 38 04.6			
IBGOX	S 12 34 21.0	E 027 28 56.0			
ITLOR	S 12 10 00.2	E 025 06 13.4			
NIDOS	S 13 03 60.0	E 026 51 06.0			
UBVUG	S 12 06 25.7	E 026 39 13.5			
SW203	S 12 13 40.6	E 026 34 40.1			
DULVU	S 12 13 42.9	E 025 20 50.6			
SW602	S 12 22 35.1	E 025 56 00.7			
ERBIP	S 12 15 37.0	E 026 26 17.4			
UNKED	S 12 50 25.1	E 026 57 07.0			
OKDIM	S 12 27 26.7	E 026 43 04.0			

ROUTING

NAME	TEXT
ENKOT 1B	From ENKOT track 263° to UBVUG.
	MEL/MEA: ENKOT AT or ABOVE FL160, UBVUG AT or ABOVE 8000'.
GENUG 1B	From GENUG track 034° to SW602, track 080° to ERBIP, track 079° to SW203.
	MEL/MEA: GENUG AT or ABOVE FL245, ERBIP AT or above FL100, SW203 AT or ABOVE 8000'.
IBGOX 1B	From IBGOX track 282° to NIGUR, track 282° to OKDIM, track 332° to SW203.
	MEL/MEA: IBGOX AT or ABOVE FL245, OKDIM AT or BELOW FL110, SW203 AT or ABOVE 8000'.
ITLOR 1B	From ITLOR track 107° to DULVU, track 107° to SW602, track 080° to ERBIP, track 079° to SW203.
	MEL/MEA: ITLOR AT or ABOVE FL245, ERBIP AT or ABOVE FL100, SW203 AT or ABOVE 8000'.
NIDOS 1B	From NIDOS track 027° to UNKED, track 332° to OKDIM, track 332° to SW203.
	MEL/MEA: NIDOS AT or ABOVE FL210, SW605 AT or BELOW FL110 SW203 AT or ABOVE 8000'.