

# A semi-mechanistic model for predicting the moisture content of fine litter



Víctor Resco de Dios<sup>a,b,\*</sup>, Aaron W. Fellows<sup>c</sup>, Rachael H. Nolan<sup>a,d</sup>, Matthias M. Boer<sup>a</sup>, Ross A. Bradstock<sup>d</sup>, Francisco Domingo<sup>e</sup>, Michael L. Goulden<sup>c</sup>

<sup>a</sup> Hawkesbury Institute for the Environment, University of Western Sydney, Richmond, NSW 2753, Australia

<sup>b</sup> Department of Crop and Forest Sciences-AGROTECNIO Center, Universitat de Lleida, E 25198 Lleida, Spain

<sup>c</sup> Department of Earth System Science, University of California, Irvine, CA 92697, USA

<sup>d</sup> Centre for Environmental Risk Management of Bushfires, Institute for Conservation Biology and Law, University of Wollongong, Wollongong, NSW, Australia

<sup>e</sup> Estación Experimental de Zonas Áridas, Consejo Superior de Investigaciones Científicas, Almería 04001, Spain

## ARTICLE INFO

### Article history:

Received 5 September 2014

Received in revised form

17 December 2014

Accepted 5 January 2015

Available online 14 January 2015

### Keywords:

Dead fine fuel moisture content

Model development

Micrometeorology

Vapor pressure deficit

Temperate woodlands

Mediterranean ecosystems

## ABSTRACT

The moisture content of vegetation and litter (fuel moisture) is an important determinant of fire risk, and predictions of dead fine fuel moisture content (fuel with a diameter <25.4 mm) are particularly important. A variety of indices, as well as empirical and mechanistic models, have been proposed to predict fuel moisture, but these approaches have seldom been validated across temporally extensive datasets, or widely contrasting vegetation types. Here, we describe a semi-mechanistic model, based on the exponential decline of fuel moisture content with atmospheric vapor pressure deficit, that predicts daily minimum fuel moisture content. We calibrated the model at one site in New South Wales, Australia, and validated it at three contrasting ecosystem types in California, USA, where 10-h fuel moisture content was continuously measured every 30 min over a year. We found that existing drought indices did not accurately predict fuel moisture, and that empirical and equilibrium models provided biased estimates. The mean absolute error (MAE) of the fuel moisture content predicted by our model across sites and years was 3.7%, which was substantially lower than for other, commonly used models. Our model's MAE dropped to 2.9% when fuel moisture was below 20%, and to 1.8% when fuel moisture was below 10%. Our model's MAE was comparable to instrumental MAE (3.1–2.5%), indicating that further improvement may be limited by measurement error. The simplicity, accuracy and precision of our model makes it suitable for a range of applications, such as operational fire management and the prediction of fire risk in vegetation models, without the need for site-specific calibrations.

© 2015 Elsevier B.V. All rights reserved.

## 1. Introduction

Wildfires require four factors: (1) an ignition source; (2) 'fire weather' (favorable temperature, wind and relative humidity), (3) fuel load (sufficient combustible material to sustain fire); and (4) low fuel moisture (Bradstock, 2010). The moisture content of fine fuel, which is generally defined as litter and woody debris with a diameter less than 25.4 mm (Scott et al., 2014; Viney, 1991), is a particularly critical consideration in fire danger rating systems (Bradshaw and Deeming, 1983; McArthur, 1966; van Wagner, 1987). In turn, fire danger ratings are often used to make short-term

decisions on staffing, movement of resources (from low to high risk areas) and restriction of activities (e.g. barbecues in wildland areas or operation of machinery). Dead fine fuel moisture is also an important component of basic fire science and ecological research, which require estimates that can be readily applied at large temporal and spatial scales using remote sensing or other techniques for scaling and, preferably, independent of site-specific calibrations.

A model of dead fine fuel moisture needs to provide accurate and precise estimates across ecosystem types, while maintaining simplicity with respect to input data and computation. Current methods for predicting fine fuel moisture can be broadly classified as drought indices, empirical models and mechanistic models. It is important to note that drought indices were not necessarily developed as dead fine fuel moisture models *per se*, though they are nonetheless used by agencies worldwide as indicators of fuel moisture. Dead fine fuel moisture is an important aspect for fire

\* Corresponding author at: Department of Crop and Forest Sciences-Agrotecnio Center, Universitat de Lleida Rovira Roure 191, 25198 Lleida, Spain. Tel.: +34 973702668; fax: +34 973 70 26 90.



( $H$ ) and the product of heat conductance ( $g_H$ ) and the volumetric heat capacity of dry air ( $\rho_a$  and  $C_p$ )

$$T_f - T_a = \frac{H}{(g_H \rho_a C_p)} \quad (3)$$

$g_H$  is readily available from the wood science literature (Glass and Zelinka, 2010) and  $H$  can be obtained from the energy balance of the fuel which, assuming negligible heat storage, is defined as:

$$H = Rn - LE \quad (4)$$

where  $Rn$  indicates the fuel's net radiation, and  $LE$  the latent heat lost from the fuel.

Combining Eqs. (3) and (4) with Eq. (2) leads to:

$$D_f = D + s \left( \frac{Rn - LE}{g_H \rho_a C_p} \right) \quad (5)$$

and combining Eq. (5) with Eq. (1) we obtain:

$$FM_{Df} = FM_0 + FM_1 e^{(-m(D + \frac{s(Rn - LE)}{g_H \rho_a C_p}))} \quad (6)$$

Section 2.4 describes how  $Rn$  and  $LE$  were obtained. A practical limitation to this approach is that it requires knowledge of  $Rn$  and  $LE$ , which may limit the applicability of the model. Given the short-time lag of dead fine fuels, we expect  $D$  and  $D_f$  are coupled or, at least, correlated within the time-frame of interest. Thus, we also tested whether fuel moisture could be approximated by:

$$FM_D = FM_0 + FM_1 e^{(-mD)} \quad (7)$$

where  $FM_D$  indicates fuel moisture is modelled from air  $D$ .

We ignored the effect of hysteresis in the relationship between  $FM$  and relative humidity, which has been reported in drying-wetting cycles (van Wagner, 1972), as will be described in more detail below.


$FM_D$  implicitly incorporates the effects of new precipitation, as we discuss below. This model also assumes that seasonal changes in processes that affect the time lag of fuel moisture, such as litter depth, are negligible. Even if the relationship between dead fuel and time lag is considered as solely dependent on the thickness of the individual components of the fuel complex, the effective time-lag of the litter layer may change if, for instance, the depth of the litter layer increases with leaf fall in autumn. The model thus assumes that changes in litter depth, or other processes that affect the time to reach equilibrium, do not increase the time-lag of  $FM$  to the point where minimum daily  $FM$  is decoupled from maximum daily  $D$ . Unless otherwise noted,  $FM$  refers to daily minimum fuel moisture,  $D$  refers to daily maximum air  $D$ , and  $D_f$  refers to daily maximum fuel-to-atmosphere  $D$ .

## 2.2. Study sites

Initial model calibration and initial validation were performed at a site in the Cumberland Plain woodland in Eastern New South Wales, Australia (25 m above sea level, Table 1). The study was then expanded to include three sites across an altitudinal gradient (275–1300 m above sea level, Table 1) in Southern California, USA (Goulden et al., 2012). Each site was equipped with eddy covariance instrumentation to continuously measure meteorology and energy exchange. The instruments were mounted near the tops of towers that extended 5–10 m above the canopy. Temperature and relative humidity were measured with HMP probes (Vaisala, Helsinki, FI).

## 2.3. Fuel moisture measurements

Fuel moisture measurements were logged every 30–60 min (CR 1000 or 3000 or 5000, Campbell Sci Logan, UT, USA) with 19-mm diameter dowels connected to sensors (CS505, Campbell Sci Logan,

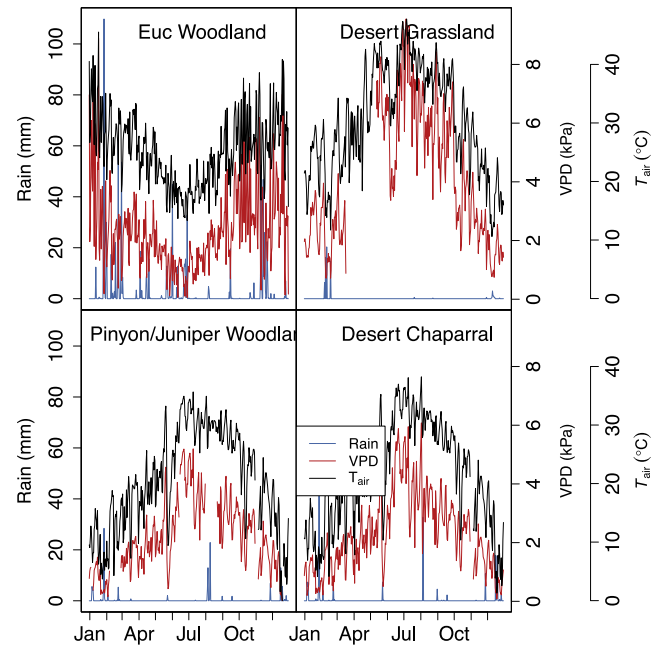

**Fig. 1.** Temperature, vapor pressure deficit ( $D$ ) and rain during the study years and across sites. Intra-annual variation in these parameters was large enough to allow us to assess fuel moisture models under a broad range of ecosystem types and environmental conditions.

UT, USA). We refer to these observations as  $FM_{CS505}$ . Each California site had 1 or 2 dowels placed at ground level. At the Australian site, we had 3 dowels that were placed 0.30 m above the ground facing North. There was always a very strong correlation between the different sensors within a site ( $R^2 = 0.97–0.99$ , data not shown), indicating that low replication within a site was not problematic. Our fuel moisture model should be relatively insensitive of sensor location provided the sensor is not buried under a deep litter layer, which might decouple its moisture from atmospheric conditions over 24-h period.

Data were continuously collected for one year at each site. The time series provided a diverse set of intra-annual environmental conditions, from 'very dry' to 'very wet', which allowed testing the model under a broad range of environmental conditions (Table 1, Fig. 1). All sites experienced prolonged dry periods: between 38 and 295 days without rain depending on the site, accompanied by occasional very hot days (as high as 47.7 °C). All sites experienced wet periods ( $>20.3–109.8 \text{ mm d}^{-1}$ ) that should have saturated the  $FM$ . Even small water inputs can saturate  $FM$  (Viney, 1991), and we conservatively defined rainy periods as days with 2 mm or more precipitation.

We performed an *a posteriori* cross-calibration of the sensors, using the Australian data as a benchmark, to ensure comparability across sites. We quantified instrument error by comparing the  $FM_{CS505}$  at the Cumberland Plain site with manual measurements of moisture content in 25.4–6.35 mm ('10-h') suspended fuel particles (theoretically equivalent to  $FM_{CS505}$ ), <6.35 mm ('1-h') suspended fuel particles and 1-h ground fuel particles (profile) at fortnightly to monthly intervals. Fifteen samples of each fuel type were collected on each sampling date, and the fresh and oven dry (105 °C for 48 h) weights recorded.

## 2.4. Model parameterization and validation

Model calibration (parameter  $m$ , Table 2) was performed using only 25% of the Australian dataset (the first 90 days of the year). The remaining 75% of the Australian data, and 100% of the Californian

**Table 2**

Initial model calibration and validation at the Cumberland Woodland Plains. The validation dataset is independent from the calibration dataset and includes 75% of the collected data (the parameterization dataset is comprised of the remaining 25%).  $FM_0$  and  $FM_1$  are the measured minimum fuel moisture and the maximum minus minimum fuel moisture, respectively. The only estimated parameter was the slope in the relationship between fuel moisture and  $D$ . Error intervals, when present, indicate 95% CI.

Model	Measured parameters		Estimated parameter	Validation					
	$FM_0$	$FM_1$		AIC	MBE	MAE	$R^2$	$\beta_1$	$\beta_0$
Eq. (1)	5.43	52.91	0.85 ( $\pm 0.14$ )	480	5.35	5.93	0.69	0.90 ( $\pm 0.08$ )	6.79 ( $\pm 1.22$ )
Eq. (6)	5.43	52.91	1.14 ( $\pm 0.14$ )	475	2.85	4.92	0.56	0.90 ( $\pm 0.09$ )	4.28 ( $\pm 1.60$ )
Eq. (7)	5.43	52.91	0.64 ( $\pm 0.04$ )	461	2.39	4.53	0.59	0.91 ( $\pm 0.09$ )	3.65 ( $\pm 1.56$ )

data, were used for model validation. Model calibration was conducted by non-linear squares fitting using the base packages within the R software environment (R Development Core Team, 2013).

Rn in Eqs. (5) and (6) (Rn below canopy,  $Rn_{bc}$ ) was calculated as:

$$Rn_{bc} = Rn_{ac} \times (1 - FAPAR) \quad (8)$$

where  $Rn_{ac}$  is above canopy Rn (NR01, Huskeflux, The Netherlands) and FAPAR the fraction of absorbed Photosynthetically Active Radiation (from MODIS). LE in Eqs. (5) and (6) was obtained from the evaporation rate (daily changes in fuel moisture content measured with the CS505).

The model was then validated by calculating mean absolute error (MAE), mean biased error (MBE, with positive and negative values indicating tendencies towards over- and under-prediction, respectively), the intercept ( $\beta_0$ ), slope ( $\beta_1$ ) and  $R^2$  of the regression between predicted and observed values, as well as the Akaike Information Criterion (AIC):

$$AIC = n \log \left( \frac{RSS}{n} \right) + 2(p + 1) \quad (9)$$

where  $n$  is the sample size, RSS the residual sum of squares and  $p$  the number of parameters. The model with the smallest AIC is considered the most parsimonious, with absolute differences of 8 indicating a significantly better model (Akaike, 1974; Burnham and Anderson, 2002). These metrics of model performance were computed over the entire dataset, and then additionally when  $FM_{CS505}$  was below 20% and 10%, as these are the critical ranges of fuel moisture for fire occurrence.

## 2.5. Model comparison

### 2.5.1. Comparison with drought indices

We compared our model with a suite of previously published models that were selected to represent a range of possible approaches. We compared the performance of our model against the drought index proposed by Keetch and Byram (1968; KBDI), and the drought factor (DF) in McArthur's Forest Fire Danger Index (McArthur, 1966; McArthur, 1967). These two indices, along with the Canadian Forest Fire Weather Index (van Wagner, 1987), are broadly used by agencies worldwide, with the latter providing very similar results to DF (Dowdy et al., 2009).

Additionally, we compared our results against the Fuel Dryness Index ( $F_d$ , Snyder et al., 2006).  $F_d$  was additionally chosen as it provides an approach that is independent from other drought indices, empirical and mechanistic models, and because we are unaware of previous published studies that have validated it against field data.  $F_d$  was originally developed for grasslands, and depends on the ratio between sensible heat ( $H$ ) and available energy ( $A$ ):

$$F_d = \left( \frac{H}{A} \right) \times 100 \quad (10)$$

$A$  was calculated as the sum of  $H + LE$  (latent heat flux) to minimise problems associated with energy balance closure. The flux data used in this study were processed and screened to ensure only

high-quality data were used in this analysis (Coulden et al., 2012; Coulden et al., 2006).

### 2.5.2. Comparison with empirical models

As Matthews (2013) points out, all empirical models use a multiple linear regression of the form:

$$FM_{\text{empirical}} = a_0 + \sum a_i X_i \quad (11)$$

where  $a_i$  are fitting parameters,  $X$  weather variables, and the subscript empirical denotes that this is the value of FM derived from an empirical model. Empirical models typically use 2 to 4 weather variables. We built an empirical model that contained a relatively large number of weather variables for model comparison (maximum temperature, maximum wind speed, minimum relative humidity and days since last rain). Additionally, we compared our model against the fuel moisture index (FMI), an empirical model that has minimal computational and data demands (Sharples et al., 2009):

$$FMI = 10 - 0.25(T - RH) \quad (12)$$

where  $T$  and  $RH$  represent temperature and relative humidity. FMI was designed to provide a general 'rule of thumb' of the fuel moisture for operational purposes, although it was envisioned to be used with site-specific tables that relate FMI to actual FM. Despite its simplicity, the model performs well relative to comparatively advanced and mechanistic models of fuel moisture (Sharples and McRae, 2011; Sharples et al., 2009).

There are also a broad variety of mechanistic models of fuel moisture. Many of these models are difficult to implement as they require as many as 26 different parameters (Matthews, 2013). Most mechanistic models rely on Nelson's equilibrium moisture equation (e.g.: Matthews, 2006), based on Gibbs energy (Nelson, 1984b):

$$FM_{\text{Nelson}} = a + b \ln \left( \frac{-RT}{M \ln(RH/100)} \right) \quad (13)$$


where  $a$  and  $b$  are fitting parameters,  $R$  and  $M$  the universal gas constant and the molar mass of water, respectively. We calibrated all of these models with 25% of the Cumberland Plain dataset, and validated with the remaining 75% of the Australian dataset and 100% of the Californian dataset, following a parallel approach to the one we used for  $FM_D$ .

We also compared our model with two additional equilibrium moisture models that are broadly used in the literature. We used the model of Simard (1968) which, although originally developed for curing timber (Viney, 1991) has subsequently been applied within the US National Fire Danger Rating System (Bradshaw and Deeming, 1983):

$$\begin{aligned} RH < 10\%; FM_{\text{Simard}} &= 0.03 + 0.2626RH - 0.00104RH^2 \\ RH \geq 10\% \&lt; 50\%; FM_{\text{Simard}} &= 1.76 + 0.1601RH - 0.02660RH^2 \\ RH \geq 50\%; FM_{\text{Simard}} &= 21.06 - 0.4944RH + 0.00565RH^2 - 0.00063RH^3 \end{aligned} \quad (14)$$

Finally, we compared our model with the equilibrium fuel moisture model of van Wagner (1972), currently implemented in the Canadian Forest Fire Weather Index (van Wagner, 1987). This



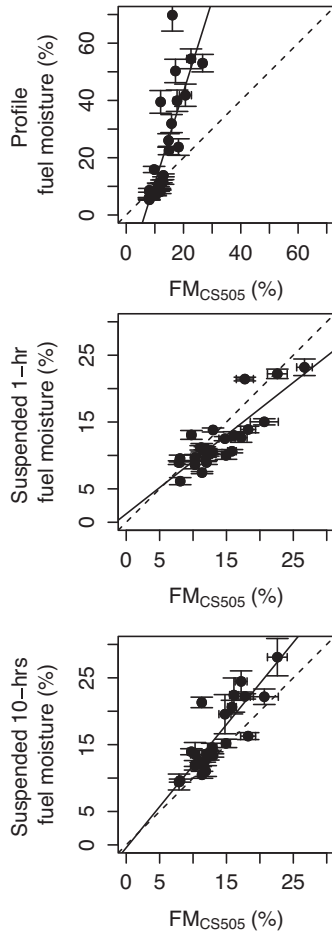

**Fig. 2.** Comparison between manual measurements of moisture in profile fuel particles (<6.35 mm ground fuel particles), '1-h' (<6.35 mm) suspended fuel particles and '10-h' (25.4–6.35 mm) suspended fuel particles (theoretically equivalent to FM<sub>CS505</sub>), against FM<sub>CS505</sub> measurements. The data validate the use of CS505 sensors as an unbiased measurement of suspended 1-h and 10-h fuel.

model takes into account the hysteresis in drying (*d*) and wetting (*w*) cycles:


$$\begin{aligned} FM_{\text{vanWagner},d} &= 0.942RH^{0.679} + 0.000499e^{0.1RH} + 0.18(21.1 - T)(1 - e^{-0.115RH}) \\ FM_{\text{vanWagner},s} &= 0.618RH^{0.753} + 0.000454e^{0.1RH} + 0.18(21.1 - T)(1 - e^{-0.115RH}) \end{aligned} \quad (15)$$

FM<sub>Simard</sub>, FM<sub>vanWagner</sub> and FM<sub>Nelson</sub> models are so well established in the literature, that they are often used as the benchmark against which other models are compared (Nieto et al., 2010; Sharples et al., 2009).


### 3. Results

#### 3.1. Field validation of FM<sub>CS505</sub> data

We found good agreement between both the 10- and 1-h suspended fuel moisture contents and the automated sensors at the Cumberland Plain site ( $R^2 = 0.80$  and  $0.71$ , respectively; MAE = 3.1% and 2.5%, respectively,  $\beta_0$  was not different from 0 and  $\beta_1$  was not different from 1 at  $P < 0.05$  for both cases, Fig. 2). The 1-h fuel moisture measurements at the ground surface (profile) fuel were reasonably correlated with FM<sub>CS505</sub> ( $R^2 = 0.63$ ), though FM<sub>CS505</sub> was consistently lower than profile moisture, especially when profile moisture was above 20% ( $\beta_1 > 1$  at  $P < 0.05$ ).

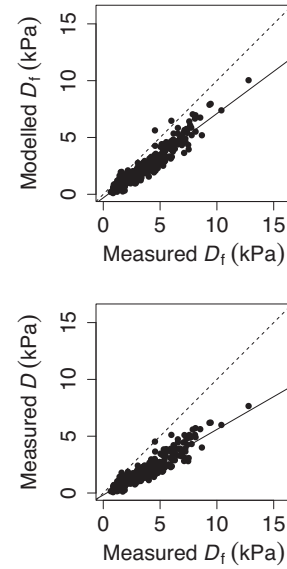

**Fig. 3.** Relationships between measured fuel-to-atmosphere  $D$  ( $D_f$ ) and modelled  $D_f$  (Eq. (5), upper panel) and measured air  $D$  (lower panel).  $D_f$  was highly correlated with modelled  $D_f$  ( $R^2 = 0.88$ ) and with measured  $D$  ( $R^2 = 0.85$ ).

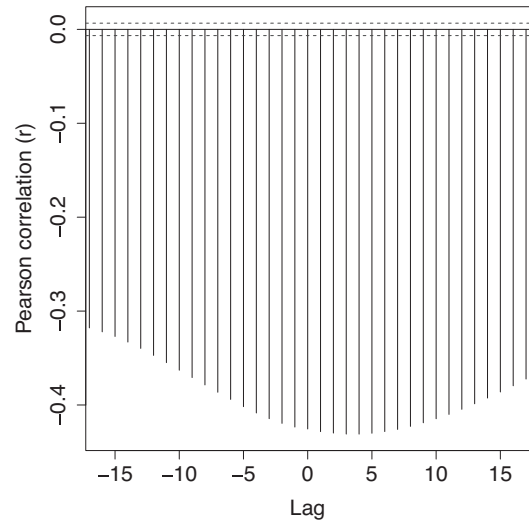

**Fig. 4.** Results of the lagged correlation (Pearson's  $r$ ) between half-hourly  $D$  and FM<sub>CS505</sub>. Maximum correlation occurred at lag 4 (that is, 2 h).

#### 3.2. Testing model assumptions

$D_f$  was reliably estimated from Eq. (5) (Fig. 3,  $R^2 = 0.88$ ,  $\beta_0 = -0.31 \pm 0.01$  mean  $\pm$  95% CI,  $\beta_1 = 0.74 \pm 0.02$ ), and was highly correlated with (albeit significantly lower than)  $D$  (Fig. 3,  $R^2 = 0.85$ ,  $\beta_0 = -0.17 \pm 0.16$ ,  $\beta_1 = 0.58 \pm 0.03$ ). Moreover, the assumption that the time lag between half-hourly  $D$  and FM<sub>CS505</sub> is less than a day was corroborated experimentally. Across sites, the maximum absolute lagged correlation occurred at 2 h (four 30-min observations, Fig. 4).

We observed a similar performance for Eqs. (1), (6) and (7), though Eq. (7) had significantly lower AIC than predictions from Eqs. (1) ( $\Delta AIC = 19$ ) and (6) ( $\Delta AIC = 14$ ) at the Cumberland Plains site (Table 2). Eq. (7) also had a lower MBE and MAE, though the  $R^2$  of the predicted vs observed relationship was lower for Eq. (7) than Eq. (1). We compared the fit of Eq. (7) independently for the adsorption and desorption phases with the combined fit for both phases to test

whether hysteresis affected model performance. We observed no hysteresis effect on model performance ( $\Delta AIC = 4$ , data not shown). Additionally, we observed no effect of rain on model performance over the entire validation dataset, and no further correction was deemed necessary (Appendix A). This lack of a rain effect is surprising as the model only accounts for a steady-state equilibrium with the atmosphere, and ignores the effect of water inputs. A partial explanation may be that, during rains, fuel moisture will reach the saturation point (25–30%) after as little as 2 mm of rain (Vinney, 1991) and, concomitantly,  $D$  will sharply drop as relative humidity approaches 100%. Therefore, under rain, the range of possible  $D$ -FM spaces is very limited (of low  $D$  and high FM). At any rate, all these results support the use of the simplified model in Eq. (7), which is the model that will be used from here on.

### 3.3. Model validation

$FM_D$  had an MAE of 3.67% over the entire validation dataset (Table 3). The performance of  $FM_D$  increased over the range of critical fuel moisture for fire occurrence; MAE decreased to 2.91% when  $FM_{CS505}$  was below 20%, and 1.77% when  $FM_{CS505}$  was below 10%. MAE was similar to or even lower than the reported instrument error (MAE between 2.5 and 3.1%). Moreover, model predictions showed little bias as indicated by low values of MBE (0.73%, to 1.01%, depending on fuel moisture data range), and  $\beta_1$  was not significantly different from 1 when  $FM_{CS505}$  was below 20% or 10% (Table 1).

### 3.4. Model comparison

$FM_D$  showed superior performance across all conditions and sites relative to the other models.  $FM_D$  always had the lowest MAE, MBE and AIC, and  $\beta_1$  always approached unity. FMI showed a lower AIC than  $FM_D$  in the low  $FM_{CS505}$  values (<20% and <10%), but higher MAE and MBE, and a  $\beta_1$  significantly different from 1. Consequently, FMI systematically underpredicted  $FM_{CS505}$  at any moisture range, and always showed higher MAE and MBE than  $FM_D$ .

$FM_{\text{empirical}}$  predicted negative  $FM_{CS505}$  at the Desert Grassland site. This was driven by the effect of time since last rain. The model was calibrated with data from the Eucalypt woodland, where the maximum time since last rain was 38 days, whereas time since rain approached 300 days at the Desert Grassland (Table 1). This is a well-recognized problem for empirical models (extrapolation beyond the range of calibration), which require caution when applied at other sites without re-parameterization.

$FM_{\text{Nelson}}$  provided the best fits among the other equilibrium models (i.e., in comparison with  $FM_{\text{vanWagner}}$  and  $FM_{\text{Simard}}$ ), though it had larger errors than  $FM_D$  (Table 3, Figs. 5 and 6).  $FM_{\text{Nelson}}$  reproduced the  $FM_{CS505}$  temporal pattern at some, but not all, sites.


The drought indices of KBDI and DF showed comparatively poor performance; they failed to capture the temporal dynamics of  $FM_{CS505}$  (Table 3, Figs. 5 and 6) and showed comparatively high errors and biases.  $F_d$  usually had the largest errors after KBDI and DF, though it captured the  $FM_{CS505}$  temporal patterns at some of the sites, such as the Desert Grassland and the Pinyon Juniper woodland (Fig. 6c).

## 4. Discussion

We developed and validated a semi-mechanistic model to predict fine fuel moisture based on atmospheric evaporative demand. Our model provides accurate and precise estimates of daily minimum fine fuel moisture across a range of environmental conditions and sites. Our model (Eq. (7)) outperformed existing models and it

**Table 3**  
Final model validation of  $FM_D$  (Eq. (7)) across sites. The validation dataset (independent from parameterization dataset) includes 100% of the Californian dataset (at 3 site-years), and 75% of the Australian dataset (at 1 site-year, the parameterization dataset is comprised of only the 25% remaining Australian dataset). Error intervals, when present, indicate 95% CI.

Model	Full dataset							FM <sub>CS505</sub> <20%							FM <sub>CS505</sub> <10%						
	AIC	MBE	MAE	R <sup>2</sup>	β <sub>1</sub>	β <sub>0</sub>		AIC	MBE	MAE	R <sup>2</sup>	β <sub>1</sub>	β <sub>0</sub>		AIC	MBE	MAE	R <sup>2</sup>	β <sub>1</sub>	β <sub>0</sub>	
FM <sub>0</sub>	1797	0.73	3.67	0.67	0.86(±0.03)	2.55(±0.56)		1281	0.94	2.91	0.48	1.02(±0.06)	0.67(±0.74)		505	1.01	1.77	0.19	1.02(±0.18)	0.88(±1.32)	
KBDI	4454	75.42	75.41	0.05	-0.21(±0.05)	91.35(±0.84)		3811	78.75	78.75	0.09	-0.63(±0.20)	95.57(±1.40)		1980	84.01	84.01	0.17	-2.33(±0.44)	107.24(±3.34)	
DF	4396	71.04	69.02	0.05	-0.22(±0.06)	87.16(±0.92)		3763	74.39	74.39	0.09	-0.69(±0.14)	91.73(±1.52)		1958	79.81	79.81	0.17	-2.51(±0.50)	104.24(±3.50)	
F <sub>d</sub>	2637	-1.02	9.74	0.20	0.73(±0.04)	2.55(±1.34)		2089	-0.16	8.33	0.19	1.36(±0.17)	-3.90(±1.98)		870	-1.16	5.53	0.19	2.31(±0.42)	-10.24(±3.00)	
FM <sub>empirical</sub>	3002	-12.33	14.71	0.33	1.03(±0.08)	-12.69(±1.34)		2470	-12.1	13.91	0.27	1.75(±0.18)	-19.83(±2.0)		1310	-14.51	15.76	0.26	4.66(±0.70)	-39.96(±4.96)	
FMI	2024	-3.43	4.58	0.56	0.47(±0.02)	3.62(±0.38)		1178	-1.78	3.11	0.45	0.74(±0.05)	0.86(±0.56)		474	-0.97	2.40	0.26	1.17(±0.16)	-2.16(±1.24)	
FM <sub>Nelson</sub>	2481	-8.08	8.69	0.42	0.59(±0.04)	-2.71(±0.66)		1888	-6.82	7.31	0.27	0.81(±0.08)	-4.91(±0.92)		921	-6.24	6.55	0.11	1.18(±0.30)	-7.50(±2.16)	
FM <sub>vanWagner</sub>	2308	-6.49	6.63	0.54	0.36(±0.02)	2.07(±0.31)		1491	-4.49	4.67	0.41	0.55(±0.04)	0.17(±0.44)		581	-3.02	3.26	0.23	0.82(±0.12)	-1.75(±0.92)	
FM <sub>Simard</sub>	2476	-7.80	8.04	0.34	0.24(±0.02)	2.38(±0.32)		1652	-5.39	5.67	0.19	0.35(±0.04)	1.31(±0.50)		622	-3.2	3.7	0.15	0.73(±0.14)	-1.33(±1.08)	

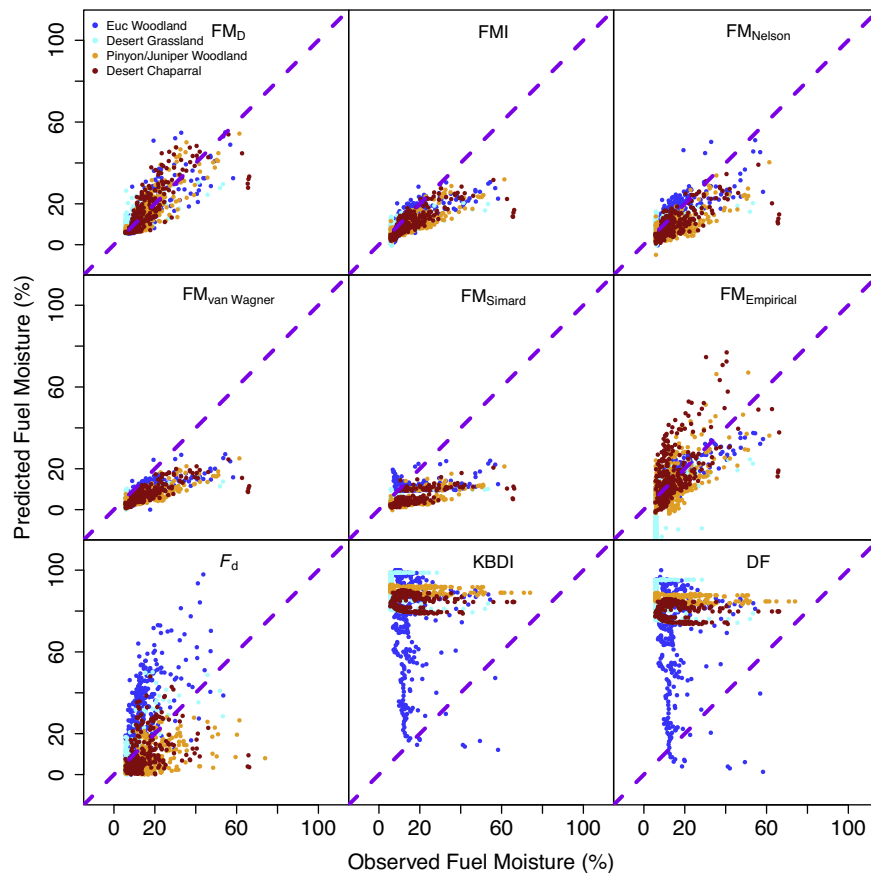

**Fig. 5.** Predicted vs observed dead fine fuel moisture across models. The dashed line indicates the 1:1 relationship. Different colors indicate different sites. To keep consistency in the scale of the y-axis, some negative values predicted by  $FM_{\text{empirical}}$  are hidden (but can be viewed in Fig. 6a), and KBDI and DF were linearly rescaled such that they would vary between 0 and 100%. The actual values of these 2 drought indices is shown in Fig. 6c.  $FM_D$  was the model that best fitted the data over the entire moisture range.

requires just an estimation of the slope of the fuel moisture relationship with  $D$ , along with knowledge of the range of fuel moistures. The MAE we observed with  $FM_D$  was comparable to our instrument error, indicating that further model improvement may be hindered by measurement precision. The model was validated with data collected in a different biome and continent from the data used for parameterization, indicating that the results are generalizable and not site-specific. Our results indicate that fuel moisture ( $FM_{CS505}$ ) drops below 20% when maximum daily  $D$  reaches  $1.17 (\pm 0.13)$  kPa, and below 10% at  $2.22 (\pm 0.24)$  kPa; these fuel moistures correspond to increasing combustion probability.

#### 4.1. Implications for fire management

$FM_D$  can be readily calculated for operational purposes. Once the microclimatic parameter,  $D$ , has been determined, fuel moisture can then be easily calculated (Eq. (7)) with parameters from Table 2.


Many previous studies of fuel models emphasized moistures below 30% to 20% (Nelson, 1984a; Sharples and McRae, 2011; Slijepcevic et al., 2013), which is the range below the fibre saturation point, and at which fuel typically becomes available for burning. It is thus not surprising that  $FMI$ ,  $FM_{\text{Nelson}}$ ,  $FM_{\text{Simard}}$  or  $FM_{\text{vanWagner}}$  showed a bias toward underprediction over the entire data range, with MBE ranging from  $-3.43$  to  $-8.08\%$ , depending on model. We suspect that this type of underprediction leads to a large number of ‘false positives’ (underestimating high FM), and that the tendency toward ‘false positives’ may limit the utility of fuel models for operational purposes. Accurate estimates of fuel moisture when the fuel

bed is relatively dry are obviously important, but the ability of a model to predict high bed moisture should not be neglected.  $FM_D$ , with an MBE of 0.73% and an MAE of 3.67%, was the only model that was able to predict fuel moisture under both wet and dry conditions (Table 2).

Under low moistures ( $FM_{CS505} < 20\%$  and  $FM_{CS505} < 10\%$ )  $FMI$  showed lower AIC than  $FM_D$ , indicating higher model parsimony. This can be explained, at least partly, because  $FMI$  did not require any parameter estimate. However,  $FM_D$  showed lower MAE, MBE and  $\beta_1$  not different from 1.

Our study cautions against the use of drought indices as proxies for FM. This is not surprising, as Keetch and Byram (1968) noted ‘We emphasize that the drought index described in this report is not in any way a substitute for ... moisture parameters’. Nonetheless, KBDI and McArthur’s drought factor (which is based on KBDI) are widely used for both operational and research purposes.

New models are often either compared against other models rather than field data (Sharples et al., 2009; Snyder et al., 2006), or are compared against only brief time series of field data (Matthews, 2013; Viney, 1991). This approach assumes that ‘benchmark models’ such as  $FM_{\text{Nelson}}$ ,  $FM_{\text{vanWagner}}$  or  $FM_{\text{Simard}}$  provide accurate estimates of field FM (Table 3). In turn, this implies that progress toward a universal model of fuel moisture may be hampered by a lack of field data. Our strategy focused on both the development of a semi-mechanistic model of dead fine fuel moisture, and the validation of the model against observations that were collected in contrasting ecosystem types.

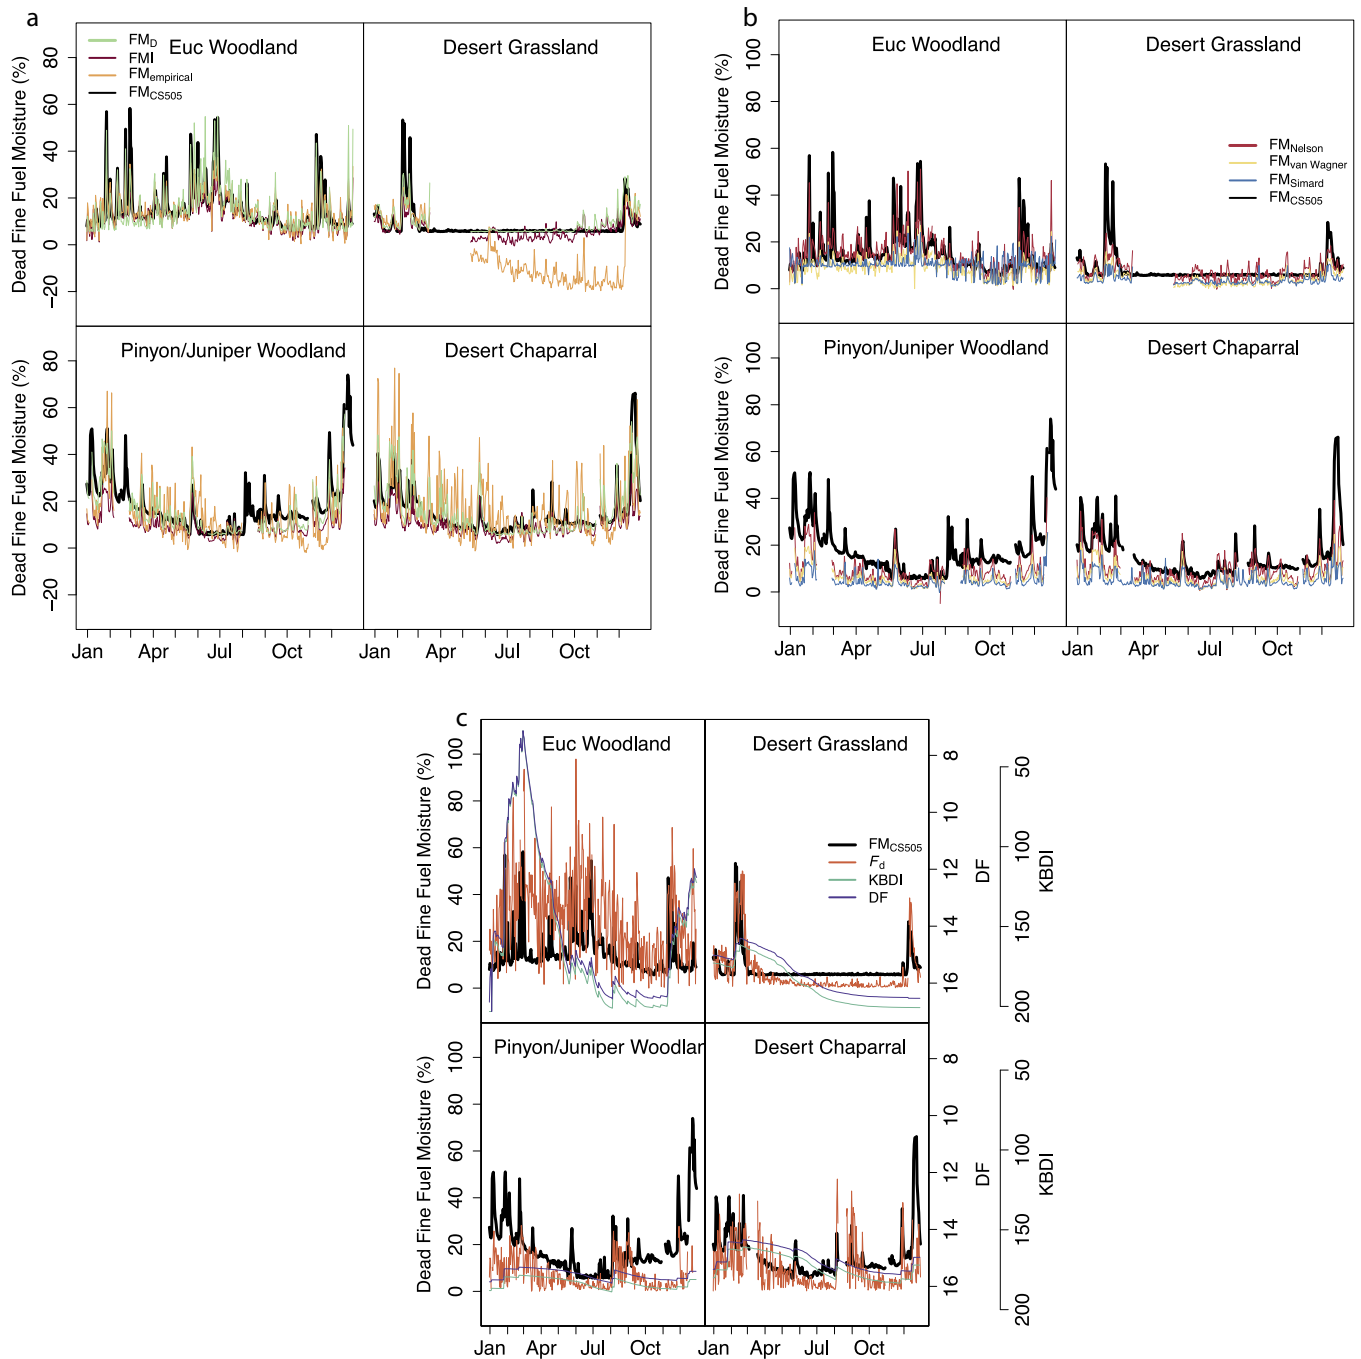

**Fig. 6.** Temporal pattern of (a) observed fuel moisture ( $FM_{CS505}$ ) and fuel moisture modelled from  $FM_D$  and the empirical models of  $FMI$  and  $FM_{empirical}$ ; (b) observed fuel moisture ( $FM_{CS505}$ ), and fuel moisture modelled from the equilibrium models ( $FM_{Nelson}$ ,  $FM_{vanWagner}$ ,  $FM_{Simard}$ ); (c) observed fuel moisture ( $FM_{CS505}$ ), and predictions from the drought indices (KBDI, DF and  $F_d$ ).  $FM_D$  was the model that best described temporal patterns in  $FM_{CS505}$ . Note that the scale of the y-axis in (a) is different from (b) and (c).

#### 4.2. Large-scale estimates of fuel moisture

The need to understand dead fuel moisture goes beyond fire science. As an example, ecosystem ecologists and biogeochemists require litter moisture to understand the controls on decomposition (Cornwell et al., 2009). Studies of litter decomposition often rely on soil water content as an indicator of moisture limitation, whereas our model may provide a direct estimate of litter moisture content.

Our proposed model provides an avenue for using remotely sensed imagery to predict fuel moisture at large spatial scales. While the literature on remote sensing estimations of live fuel (e.g.

canopy foliage) moisture content is rich, and important advancements have been made in recent years to understand how live fuel moisture influences fire activity (Caccamo et al., 2012; Yebra et al., 2013), we are unaware of published studies on remote sensing of dead fine fuel moisture. Our model opens the door to such studies.

Several approaches are available to estimate  $D$  at regional scales; this information can be used for regional estimates of  $FM_D$ . MODIS and other satellite sensors provide thermal imagery that can be used to estimate regional  $D$  (García et al., 2013; Hashimoto et al., 2008; Nieto et al., 2010; Zhu et al., 2013). Likewise, meteorological agencies provide gridded records of  $D$ , which can be used for regional estimates of fuel moisture.



Model parameterization and performance could have been improved if  $T$  and  $RH$  were measured under the canopy instead of 5–10 m above the canopy. However, it is unlikely this issue explains the performance of the other models relative to  $FM_D$ , since the associated error would be expected to affect all models equally. Our approach of using above-canopy data is advantageous since weather stations are often placed above the vegetation layer. Moreover, remote-sensing estimates of regional  $D$  that rely on land surface temperature are often more similar to above- than below- canopy conditions. However, closed-canopy forests with high leaf area indices and a decoupling between above-canopy and below-canopy  $D$  may present a challenge to this approach, and the assumption that above canopy measurements can be used to predict under-canopy fuel moisture. An improved understanding of the use of thermal imagery and gridded meteorological data to quantify below-canopy conditions in closed forest is an important topic for future studies.

#### 4.3. Application to thicker fuel beds


Our model is designed to operate with dead fine fuel, meaning that the time to equilibrate with the atmosphere is 24-h or less. Although fuel diameter and time lag are often equated, Viney (1991) noted that particle thickness does not necessarily imply a given time-lag. For instance, we observed a generally higher FM in profile '1-h' fuel (<6.35 mm) than suspended '10-h'  $FM_{CS505}$  data (19.1 mm, Fig. 2). This likely indicates the profile fuel had a longer effective time lag despite its smaller diameter relative to the suspended '10-h' fuel. It was beyond the scope of our study to investigate how size class is related to time lag, but one could speculate this is driven by positioning of profile fuel on the ground in the litter bed, which could decouple it from the atmosphere relative to the suspended fuel. The fuel moisture sensors were placed on the ground at the California sites, and 30 cm above ground at the Australian site. The model accurately predicted fuel moisture regardless of sensor position, and independently of potential changes in litter depth with time at the California sites. This indicates that the model is robust to predict fuel moisture at different locations within the ecosystem, provided the time-lag does not exceed 24-h. We did not test our model in deep fuel beds, where effective time-lags may be larger than 24-h. We anticipate the model will not work at 24-h scales in those conditions, but may work at longer time scales.

#### Acknowledgments

We remain indebted to G. Caccamo and J. Bishton for invaluable field assistance and useful comments in the early stages of this study. This project was funded by the Victorian Department of Environment and Primary Industries via the Bushfire Cooperative Research Centre, grants from the US Department of Energy and the National Aeronautics and Space Administration to MLG, a Research Exchange Program grant from the Hawkesbury Institute for the Environment at the University of Western Sydney to FD, the Education Investment Fund, the Australian SuperSite Network, part of the Australian Terrestrial Ecosystem Research Network and a Ramón y Cajal Fellowship to VRD (RYC-2012-10970). We acknowledge assistance from the Ozflux network to process the Australian eddy covariance data.

#### Appendix A.

See Fig. A1.

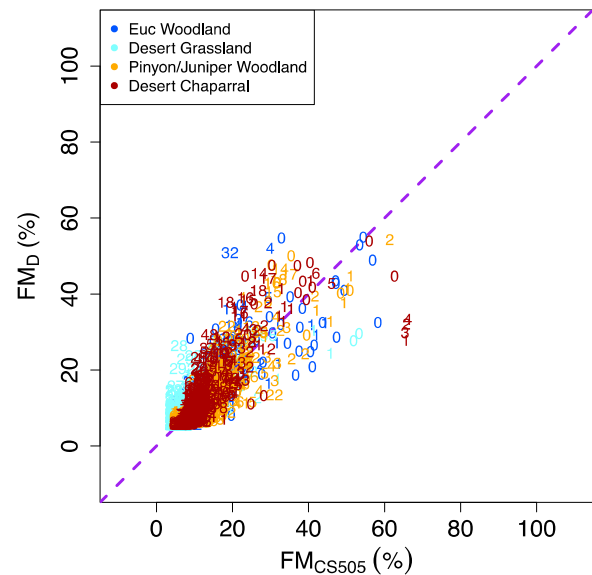

**Fig. A1.** Predicted ( $FM_D$ ) vs Observed ( $FM_{CS505}$ ) dead fine fuel moisture. Numbers indicate days since last rain. The dashed line indicates the 1:1 relationship. We observed no bias in model prediction even after precipitation inputs.

#### References

- Akaike, H., 1974. A new look at the statistical model identification. *IEEE Trans. Autom. Control* 19, 716–723.
- Bradshaw, B.S., Deeming, J.E., 1983. The National Fire Danger Rating System. Technical documentation. Technical Report. USDA, Forest Service, Ogden, Utah 1983.
- Bradstock, R.A., 2010. A biogeographic model of fire regimes in Australia: current and future implications. *Global Ecol. Biogeogr.* 19 (2), 145–158.
- Burnham, K.P., Anderson, D.R., 2002. *Model Selection and Multi/Model Inference: A Practical Information-Theoretic Approach*. Springer-Verlag, New York.
- Caccamo, G., Chisholm, L.A., Bradstock, R.A., Puotinen, M.L., 2012. Using remotely-sensed fuel connectivity patterns as a tool for fire danger monitoring. *Geophys. Res. Lett.* 39, L01302.
- Cornwell, W.K., et al., 2009. Plant traits and wood fates across the globe: rotted, burned, or consumed? *Global Change Biol.* 15 (10), 2431–2449.
- Dowdy, A.J., Mills, G.A., Finkel, K., de Groot, W., 2009. Australian fire weather as represented by the McArthur Forest Fire Danger Index and the Canadian Forest Fire Weather Index, Technical Report. The Centre for Australian Weather and Climate Research, Melbourne, VIC10.
- García, M., et al., 2013. Actual evapotranspiration in drylands derived from in-situ and satellite data: assessing biophysical constraints. *Remote Sens. Environ.* 131, 103–118.
- Glass, S.V., Zelinka, S.L., 2010. Moisture relations and physical properties of wood. *Wood handbook: wood as an engineering material*. Centennial ed. General technical report FPL; GTR-190. Madison, WI: U.S. Dept. of Agriculture, Forest Service, Forest Products Laboratory (chapter 4).
- Goulden, M.L., et al., 2012. Evapotranspiration along an elevation gradient in California's Sierra Nevada. *J. Geophys. Res.* 117 (G3).
- Goulden, M.L., et al., 2006. An eddy covariance mesonet to measure the effect of forest age on land-atmosphere exchange. *Global Change Biol.* 12 (11), 2146–2162.
- Hashimoto, H., et al., 2008. Satellite-based estimation of surface vapor pressure deficits using MODIS land surface temperature data. *Remote Sens. Environ.* 112 (1), 142–155.
- Keetch, J.J., Byram, G., 1968. A drought index for forest fire control. In: Res. Paper SE-38. U.S. Department of Agriculture, Forest Service, Southeastern Forest Experiment Station, Asheville, NC, pp. 32.
- Matthews, S., 2006. A process-based model of fine fuel moisture. *Int. J. Wildland Fire* 15, 155–168.
- Matthews, S., 2013. Dead fuel moisture research: 1991–2012. *Int. J. Wildland Fire* 23, 78–92.
- McArthur, A.G., 1966. Weather and grassland fire behaviour. *Comm. Aust. For. Timb. Bur. Leaflet* 100, 23pp.
- McArthur, A.G., 1967. Fire behaviour in eucalypt forest. *Comm. Aust. For. Timb. Bur. Leaflet* 107, 25.
- Monteith, J.L., 1965. Evaporation and the environment. *Proc. Soc. Exp. Biol.* 19, 205–234.
- Motulsky, H.J., Christopoulos, A., 2003. Fitting models to biological data using linear and nonlinear regression. In: *A Practical Guide to Curve Fitting*. GraphPad Software Inc., San Diego, CA, pp. 351.
- Motulsky, H.J., Ransnas, L.A., 1987. Fitting curves to data using nonlinear regression: a practical and nonmathematical review. *FASEB J.* 1, 365–374.

- Nelson, R., 1984a. A method for describing equilibrium moisture content. *Can. J. For. Res.* 14, 597–600.
- Nelson, R.J., 1984b. A method for describing equilibrium moisture content. *Can. J. For. Res.* 14, 597–600.
- Nieto, H., Aguado, I., Chuvieco, E., Sandholt, I., 2010. Dead fuel moisture estimation with MSG–SEVIRI data: retrieval of meteorological data for the calculation of the equilibrium moisture content. *Agric. For. Meteorol.* 150, 861–870.
- Development Core Team, R., 2013. A Language and Environment for Statistical Computing. R Foundation for Statistical Computing, Vienna, Austria <http://www.R-project.org/>
- Scott, A.C., Bowman, D.M.J.S., Bond, W.J., Pyne, S.J., Alexander, M.E., 2014. *Fire on Earth: An Introduction*. Wiley-Blackwell.
- Sharples, J.J., McRae, R.H.D., 2011. Evaluation of a very simple model for predicting the moisture content of eucalypt litter. *Int. J. Wildland Fire* 20, 1000–1005.
- Sharples, J.J., McRae, R.H.D., Weber, R.O., Gill, A.M., 2009. A simple index for assessing fuel moisture content. *Environ. Model. Software* 24 (5), 637–646.
- Simard, A., 1968. The moisture content of forest fuels – a review of the basic concepts. In: Technical Report. USDA, Forest Service, Ottawa, Ontario.
- Slijepcevic, A., Anderson, W.R., Matthews, S., 2013. Testing existing models for predicting hourly variation in fine fuel moisture in eucalypt forests. *For. Ecol. Manage.*, 306 202–215.
- Snyder, R.L., et al., 2006. A fuel dryness index for grassland fire-danger assessment. *Agric. For. Meteorol.* 139, 1–11.
- van Wagner, C.E., 1972. Equilibrium moisture contents of some fine forest fuels in Eastern Canada. In: Technical Report. Canadian Forest Service, Chalk River, Ontario.
- van Wagner, C.E., 1987. Development and Structure of the Canadian Forest Fire Weather Index System, Technical Report. Canadian Forestry Service, Ottawa, ON35.
- Viney, N., 1991. A review of fine fuel moisture modelling. *Int. J. Wildland Fire* 1, 215–234.
- Yebra, M., et al., 2013. A global review of remote sensing of live fuel moisture content for fire danger assessment: moving towards operational products. *Remote Sens. Environ.* 136, 455–468.
- Zhu, W., Lü, A., Jia, S., 2013. Estimation of daily maximum and minimum air temperature using MODIS land surface temperature products. *Remote Sens. Environ.* 130, 62–73.