

HWiNFO Sensors for Elgato Stream Deck

Software for people who care how their machines run.

Built by **Stephen Lawrensen**

HWiNFO Sensors puts live readings from HWiNFO on your Stream Deck: temperatures, clock speeds, fan RPM, usage and power, on Stream Deck keys and on the dials of the Stream Deck + and + XL. Free and open source.

[Get it on the Elgato Marketplace](#)

<https://marketplace.elgato.com/product/hwinfo-sensors-82436166-3d61-4527-9034-8fdf16d92c54>

[Setup guide](https://docs.slawrensen.com/hwinfo-streamdeck/getting-started.html)<https://docs.slawrensen.com/hwinfo-streamdeck/getting-started.html>

Windows 10 or later, x64 · Stream Deck app 6.9 or later · HWiNFO, free or Pro



- ① Amber: a reading past its warn threshold (a demo key)
- ② Red: past critical (also a demo key). Alert colours never change with the theme
- ③ Four readings on one key, each in its own colour
- ④ Touch strip: a readout per dial, with session min and max

The plugin on my Stream Deck + XL, photographed 25 July 2026. A photograph, not a render; the numbers are that machine's, not yours.

One instrument, shown the way you will use it.

Every key and dial face on this page is real output from the plugin's own renderer, taken from its documentation. The readings are fixed example values; this page does not read your machine.

How much fits on one key

A key shows one reading with a sparkline, bar or ring, or stacks two, three or four. Compare how legible each stays:

the small copy is roughly the size of a real key on a desktop monitor.

Show a key holding

CPU (Tctl/Tdie)

56.3

°C

enlarged

CPU (Tctl/Tdie)

56.3

°C

key size

One reading

Showslabel, value, unit, and a sparkline, bar or ring

Contrastvalue 21:1, label 5.5:1, unit 4.2:1 on the default theme

Presscycles current, min, max and average

CPU

56.3

°C

GPU

44.1

°C

enlarged

CPU

56.3

°C

GPU

44.1

°C

key size

Two readings

Shows two sensors stacked, each with its own label and stat

Good for pairs, such as CPU and GPU, or min and max

CCD1

54.5

°C

CCD2

47.9

°C

Core Max

59.4

°C

enlarged

CCD1

54.5

°C

CCD2

47.9

°C

Core Max

59.4

°C

key size

Three readings

Showscompact rows, labels left and values right

Good forrelated sensors read as a group



enlarged




key size


Four readings

Shows a 2×2 grid with a colour or label per cell

Trade-off the densest layout: values only, no sparkline

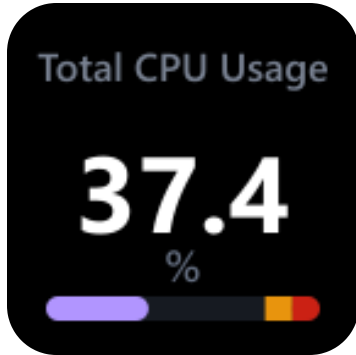


enlarged




key size

Bar

Shows the value inside its range, with the warn and critical zones marked

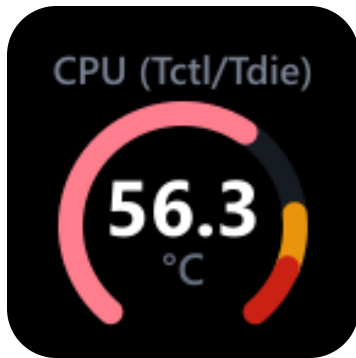

enlarged



key size


Ring

Shows the same range as a ring gauge

Example values, rendered by the plugin.


Seven themes, one alert language

Themes apply per key or to the whole deck. Paper is a high-contrast light theme for bright rooms and low vision. Set a warn and a critical value: past either one, the whole key turns amber or red, in the same two colours on every theme, so an alert is carried by the whole field changing, not by hue alone.

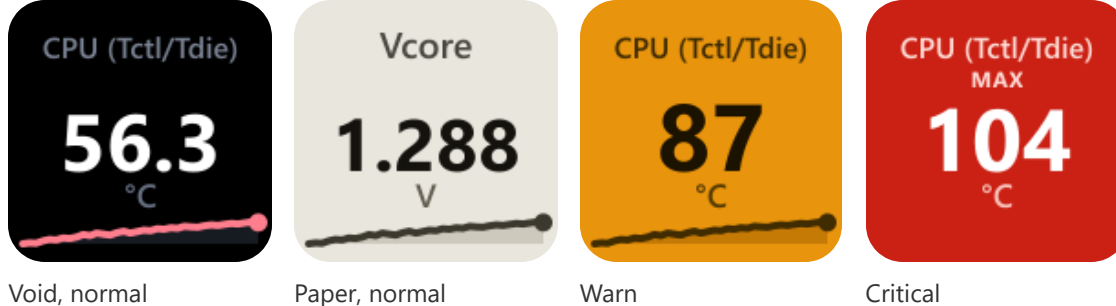

It says when it cannot read


If HWiNFO stops publishing, a key does not keep showing its last number. Frozen values become a "Not updating" screen after 15 seconds, and every other failure has its own screen that names the fix. [All status screens \(https://docs.slawrensen.com/hwinfo-streamdeck/status-screens.html\)](https://docs.slawrensen.com/hwinfo-streamdeck/status-screens.html)

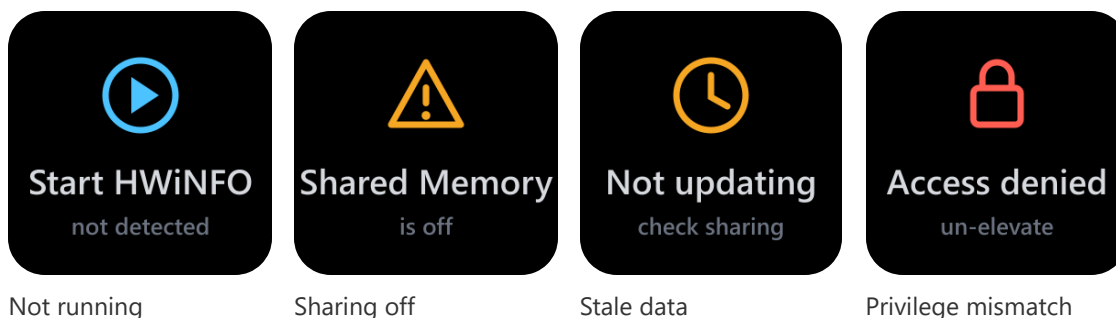

Dials on the Stream Deck + and + XL

Rotate to step through readings, push to reset the session min and max, touch to cycle the stat. A dial can also list its rotation set as two or three rows, and an HWiNFO Control key can drive dials from anywhere on the deck.



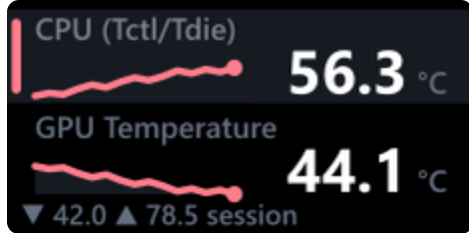

Install

- 1 **Install the plugin** from the Elgato Marketplace, or double-click the `.streamDeckPlugin` file from GitHub Releases.
- 2 **Run HWiNFO** and tick **Shared Memory Support** in its settings. Run HWiNFO and the Stream Deck app at the same privilege level: both elevated or both normal.
- 3 **Drag Sensor Reading onto a key** and pick a sensor from the list. The key goes live.

Free HWiNFO turns Shared Memory off after 12 hours.

With Gadget reporting enabled, the plugin falls back to it and switches back by itself. HWiNFO is a separate program by REALiX; the plugin does not bundle it.

Elgato Marketplace(<https://marketplace.elgato.com/product/hwinfo-sensors-82436166-3d61-4527-9034-8fdf16d92c54>)

GitHub release(<https://github.com/slawrensen/hwinfo-streamdeck/releases/latest>)



Specification

Release	1.6.0, September 2026
Requires	Windows 10 or later (x64), Stream Deck app 6.9 or later, HWiNFO with Shared Memory Support or Gadget reporting
Keys	Stream Deck models with screen keys; the Studio and Galleon 100 SD are untested
Dials	Stream Deck + and Stream Deck + XL

Verified on hardware	Stream Deck + XL. Other models are simulated against Elgato's SDK or listed with their limits: compatibility (https://docs.slawrensen.com/hwinfo-streamdeck/hardware.html)
Download	285 KB. The native bridge is unsigned; every GitHub release publishes SHA-256 hashes (how to check (https://github.com/slawrensen/hwinfo-streamdeck/blob/v1.6.0/SECURITY.md))
Network	none: the plugin's only connection is to the Stream Deck app on your PC
Licence	MIT, free, source on GitHub (https://github.com/slawrensen/hwinfo-streamdeck)



Help and support

Documentation every key and dial setting

FAQ HWiNFO free or Pro, privacy

Report a problem
GitHub Issues, answered in the open

Troubleshooting
when a key shows a status screen

Hardware compatibility
what is verified, and how

Report a security issue privately, through GitHub

How it is made, with the evidence.

Four habits from HWiNFO Sensors, each next to the place you can check it.

Say exactly how sure I am

Hardware support is published at four levels: physically verified, simulated against the SDK, verified by a user, or expected to work with stated limits. One device is claimed as physically verified, because one device was tested in hand.

[Compatibility](#)
[matrix](#)

[\(https://docs.slawrensen.com/hwinfo-streamdeck/hardware.html\)](https://docs.slawrensen.com/hwinfo-streamdeck/hardware.html)

Show the failure, not a stale number

Every failure state has its own screen that names the cause and the fix, so a frozen value does not sit on a key as if it were live: after 15 seconds without an update, the key says so.



[Status](#) [\(https://docs.slawrensen.com/hwinfo-streamdeck/status-screens.html\)](https://docs.slawrensen.com/hwinfo-streamdeck/status-screens.html)

Measure, and say how

One shared-memory poll of 548 live readings, copied and decoded, takes 8.5 μ s on average over 1,000 runs on my machine. The performance log names the harness behind each figure.

[Performance](#) [\(https://github.com/slawrensen/hwinfo-streamdeck/blob/v1.6.0/PERF.md\)](https://github.com/slawrensen/hwinfo-streamdeck/blob/v1.6.0/PERF.md)
[log](#)

Make the unsigned part checkable

The native bridge has no code-signing certificate, so every release since 1.4.0 publishes SHA-256 hashes. A GitHub download matches them byte for byte; Marketplace copies are repackaged by Elgato. Version 1.6.0: 57fdf219...

[1.6.0 release](#) [\(https://github.com/slawrensen/hwinfo-streamdeck/releases/tag/v1.6.0\)](https://github.com/slawrensen/hwinfo-streamdeck/releases/tag/v1.6.0)
[notes](#)

Stephen Lawrensen

Systems engineer. "I build tools I needed and ship them."

[GitHub](https://github.com/slawrensen) docs.slawrensen.com [\(https://docs.slawrensen.com/\)](https://docs.slawrensen.com/)

slawrensen is the name I publish that work under. HWiNFO Sensors is the first public release: I design it, write it, test it on my own Stream Deck +

XL, document it, and answer its issues. I am its only maintainer.

It is a ground-up TypeScript rewrite on Elgato's official SDK, inspired by [shayne's original Go plugin](https://github.com/shayne/hwinfo-streamdeck) (<https://github.com/shayne/hwinfo-streamdeck>); no code is shared ([credits](https://github.com/slawrensen/hwinfo-streamdeck/blob/main/NOTICE.md) (<https://github.com/slawrensen/hwinfo-streamdeck/blob/main/NOTICE.md>)).

Questions, bugs and ideas go through [GitHub Issues](https://github.com/slawrensen/hwinfo-streamdeck/issues) (<https://github.com/slawrensen/hwinfo-streamdeck/issues>), where they are answered in the open.



© 2026 Stephen Lawrensen

[Docs](https://docs.slawrensen.com/hwinfo-streamdeck/)(<https://docs.slawrensen.com/hwinfo-streamdeck/>)

[Marketplace](https://marketplace.elgato.com/product/hwinfo-sensors-82436166-3d61-4527-9034-8fdf16d92c54)(<https://marketplace.elgato.com/product/hwinfo-sensors-82436166-3d61-4527-9034-8fdf16d92c54>)

[Source](https://github.com/slawrensen/hwinfo-streamdeck)(<https://github.com/slawrensen/hwinfo-streamdeck>) [Issues](https://github.com/slawrensen/hwinfo-streamdeck/issues)(<https://github.com/slawrensen/hwinfo-streamdeck/issues>)

[GitHub](https://github.com/slawrensen)(<https://github.com/slawrensen>)

This website is static HTML and images from one origin, with no analytics, cookies, trackers or third-party requests. It is hosted on Cloudflare Pages, so your request, including your IP address, reaches Cloudflare as it would reach any host, and Cloudflare asks browsers to report failed connections to it (Network Error Logging). [Site source](https://github.com/slawrensen/slawrensen-site) (<https://github.com/slawrensen/slawrensen-site>)

Not affiliated with, endorsed by, or sponsored by REALiX, Elgato or Corsair. "HWiNFO" is a trademark of REALiX, s.r.o. "Stream Deck" and "Elgato" are trademarks of Corsair Memory, Inc. All product names and trademarks are the property of their respective owners.